



Test Condition: LTLV, Test Mode: GSM, GPRS, EGPRS, Test Band: GSM900, DCS1800**Test Data****Clause 4.2.1 Transmitter-Frequency error and phase error**

Band	Channel	Frequency (MHz)	PCL	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	5	Frequency Error (Hz)	18.37	-88.02	88.02	PASS
GSM900	975	880.2	5	RMS Phase Error (Degree)	0.48	0	5	PASS
GSM900	975	880.2	5	Peak Phase Error (Degree)	1.41	0	20	PASS
GSM900	60	902	5	Frequency Error (Hz)	17.24	-90.2	90.2	PASS
GSM900	60	902	5	RMS Phase Error (Degree)	0.50	0	5	PASS
GSM900	60	902	5	Peak Phase Error (Degree)	1.47	0	20	PASS
GSM900	124	914.8	5	Frequency Error (Hz)	18.63	-91.48	91.48	PASS
GSM900	124	914.8	5	RMS Phase Error (Degree)	0.60	0	5	PASS
GSM900	124	914.8	5	Peak Phase Error (Degree)	1.76	0	20	PASS
DCS1800	512	1710.2	0	Frequency Error (Hz)	24.28	-171.02	171.02	PASS
DCS1800	512	1710.2	0	RMS Phase Error (Degree)	0.66	0	5	PASS
DCS1800	512	1710.2	0	Peak Phase Error (Degree)	2.44	0	20	PASS
DCS1800	700	1747.8	0	Frequency Error (Hz)	28.15	-174.78	174.78	PASS
DCS1800	700	1747.8	0	RMS Phase Error (Degree)	0.73	0	5	PASS
DCS1800	700	1747.8	0	Peak Phase Error (Degree)	3.68	0	20	PASS
DCS1800	885	1784.8	0	Frequency Error (Hz)	30.96	-178.48	178.48	PASS
DCS1800	885	1784.8	0	RMS Phase Error (Degree)	0.65	0	5	PASS
DCS1800	885	1784.8	0	Peak Phase Error (Degree)	2.01	0	20	PASS


GSM900 Channel=124 PCL=5.png

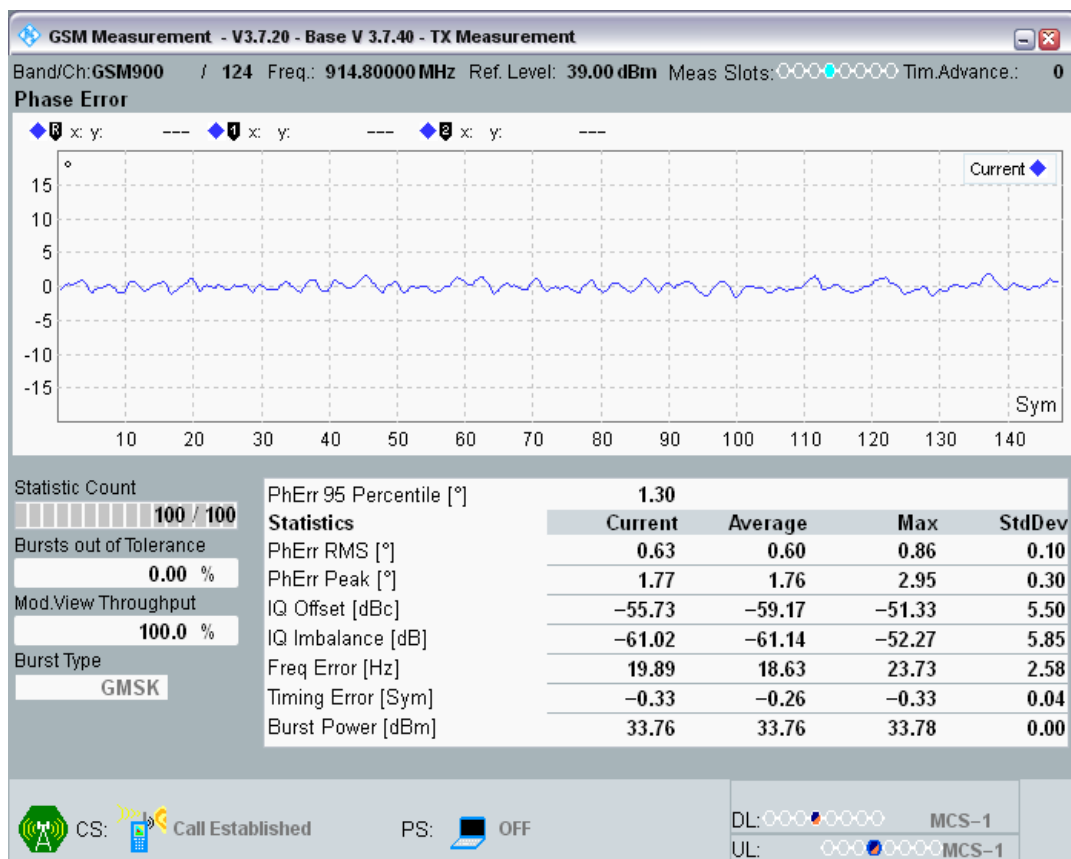


GSM900 Channel=60 PCL=5.png

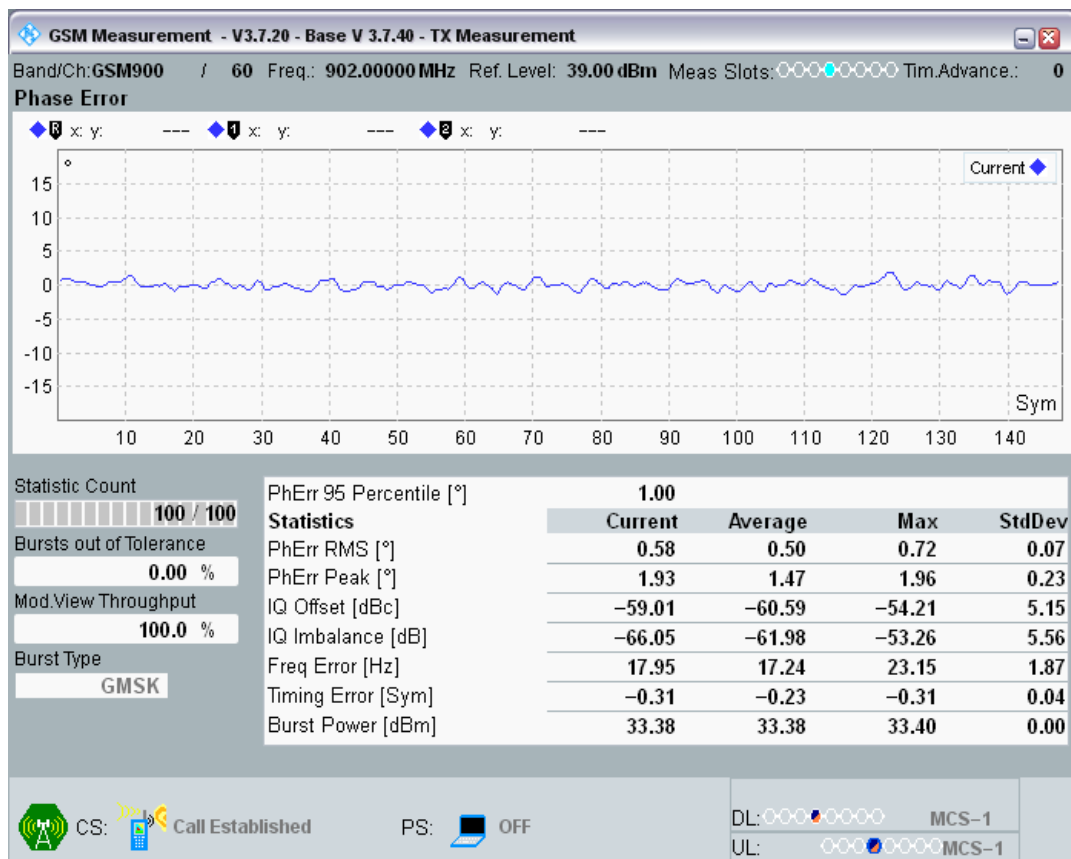


GSM900 Channel=975 PCL=5.png

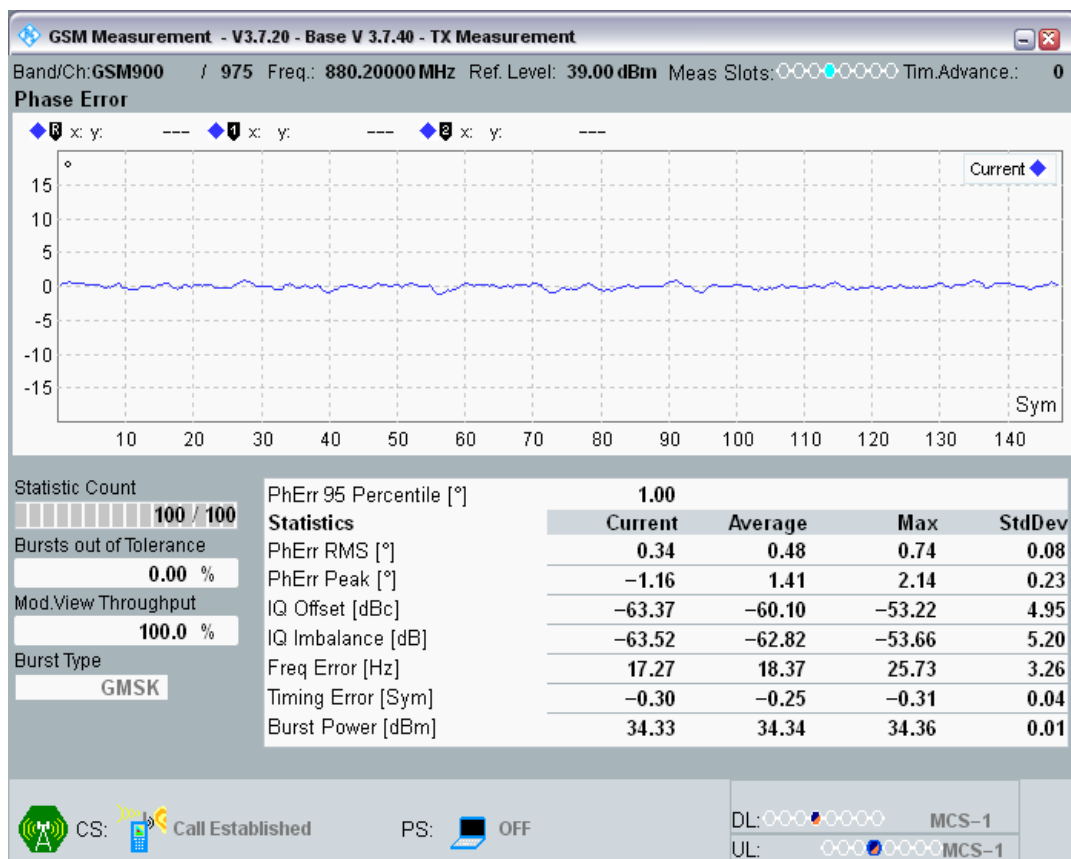


DCS1800 Channel=512 PCL=0.png

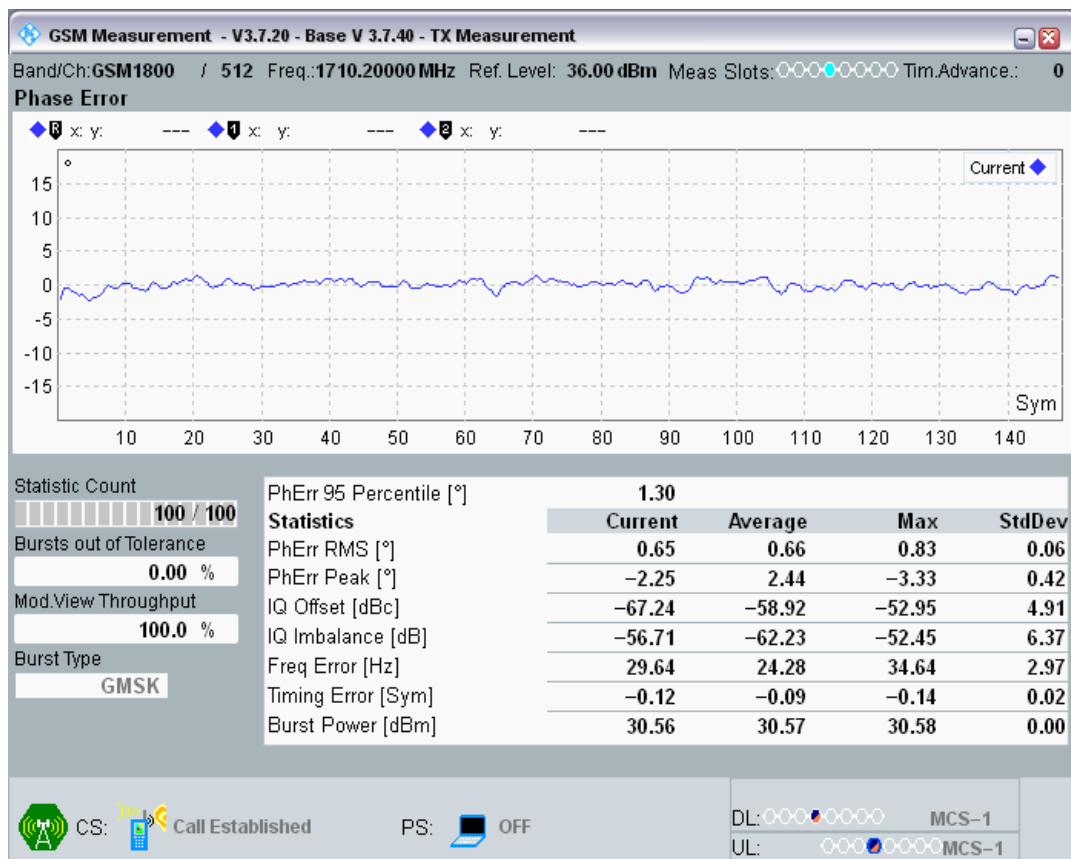

DCS1800 Channel=700 PCL=0.png

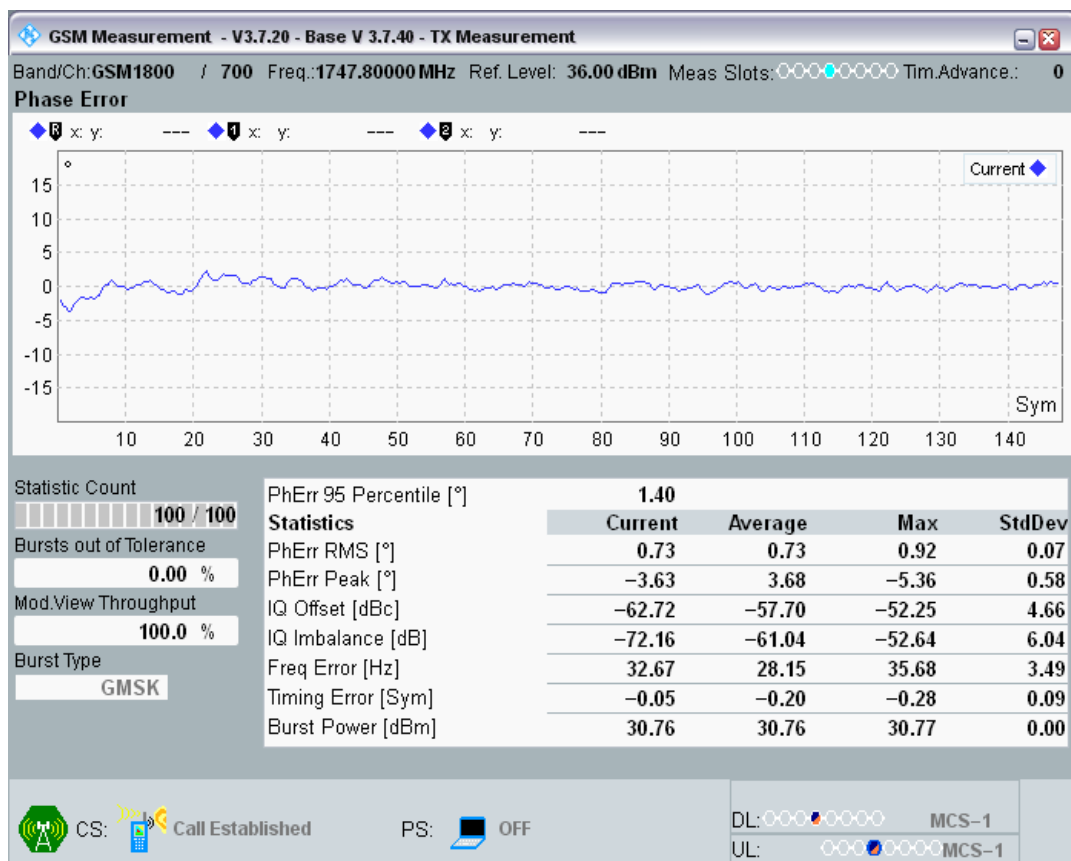

DCS1800 Channel=885 PCL=0.png

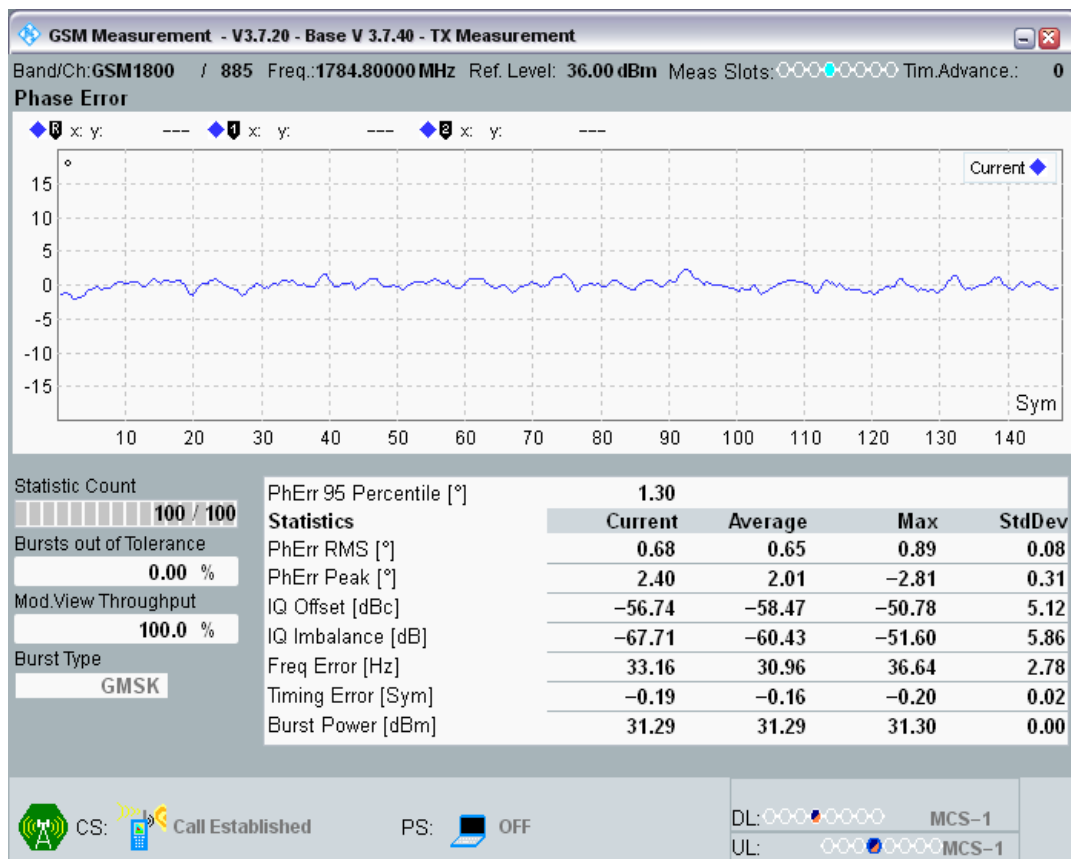


## Clause 4.2.2 Transmitter-Frequency error under multi path and interference


## conditions

Band	Type	Channel	Frequency (MHz)	PCL	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
DCS1800	RA130	512	1710.2	0	30.74	-400	400	PASS
DCS1800	RA130	700	1747.8	0	30.48	-400	400	PASS
DCS1800	RA130	885	1784.8	0	31.35	-400	400	PASS
DCS1800	HT100	512	1710.2	0	29.41	-350	350	PASS
DCS1800	HT100	700	1747.8	0	30.48	-350	350	PASS
DCS1800	HT100	885	1784.8	0	31.74	-350	350	PASS
DCS1800	TU50	512	1710.2	0	28.15	-260	260	PASS
DCS1800	TU50	700	1747.8	0	29.80	-260	260	PASS
DCS1800	TU50	885	1784.8	0	31.19	-260	260	PASS
DCS1800	TU1_5	512	1710.2	0	26.93	-320	320	PASS
DCS1800	TU1_5	700	1747.8	0	30.19	-320	320	PASS
DCS1800	TU1_5	885	1784.8	0	33.80	-320	320	PASS
GSM900	RA250	975	880.2	5	19.02	-300	300	PASS
GSM900	RA250	60	902	5	20.40	-300	300	PASS
GSM900	RA250	124	914.8	5	17.76	-300	300	PASS
GSM900	HT100	975	880.2	5	17.05	-180	180	PASS
GSM900	HT100	60	902	5	18.44	-180	180	PASS
GSM900	HT100	124	914.8	5	17.24	-180	180	PASS
GSM900	TU50	975	880.2	5	17.79	-160	160	PASS
GSM900	TU50	60	902	5	18.02	-160	160	PASS
GSM900	TU50	124	914.8	5	17.01	-160	160	PASS
GSM900	TU3	975	880.2	5	18.82	-230	230	PASS
GSM900	TU3	60	902	5	19.11	-230	230	PASS
GSM900	TU3	124	914.8	5	18.18	-230	230	PASS


DCS1800 Channel=512 PCL=0 HT100.png

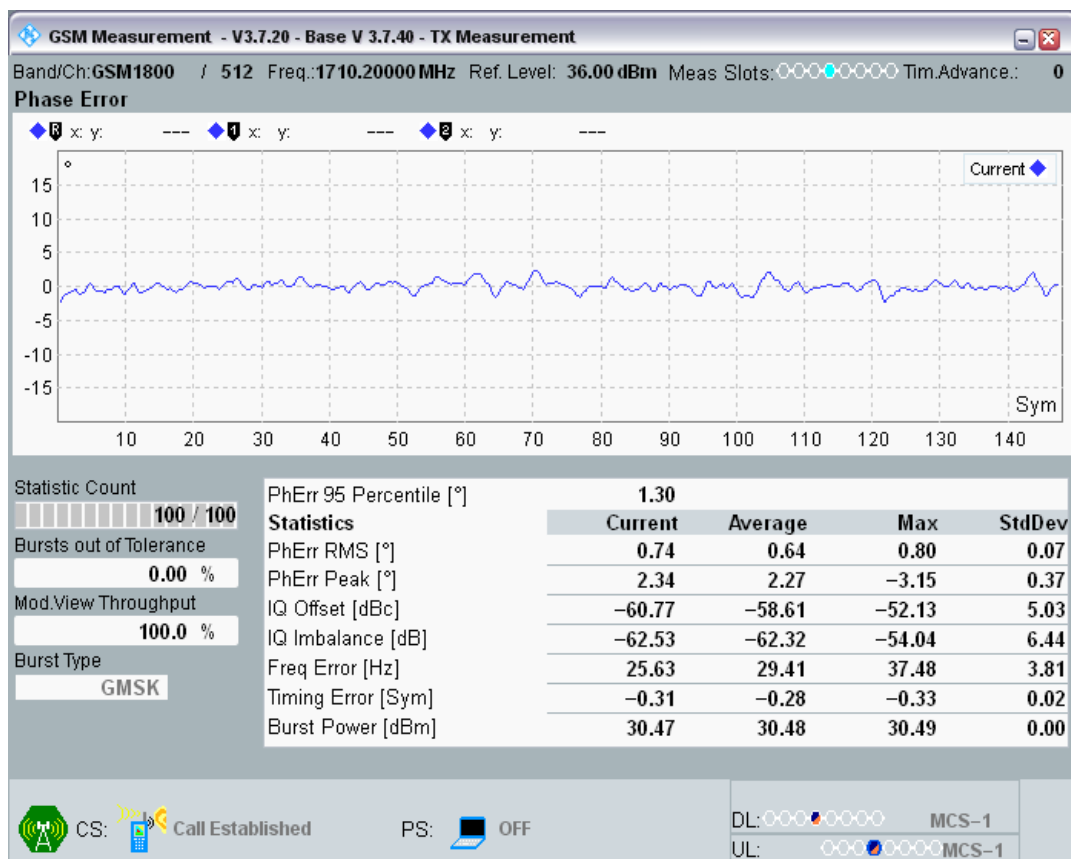


DCS1800 Channel=512 PCL=0 RA130.png

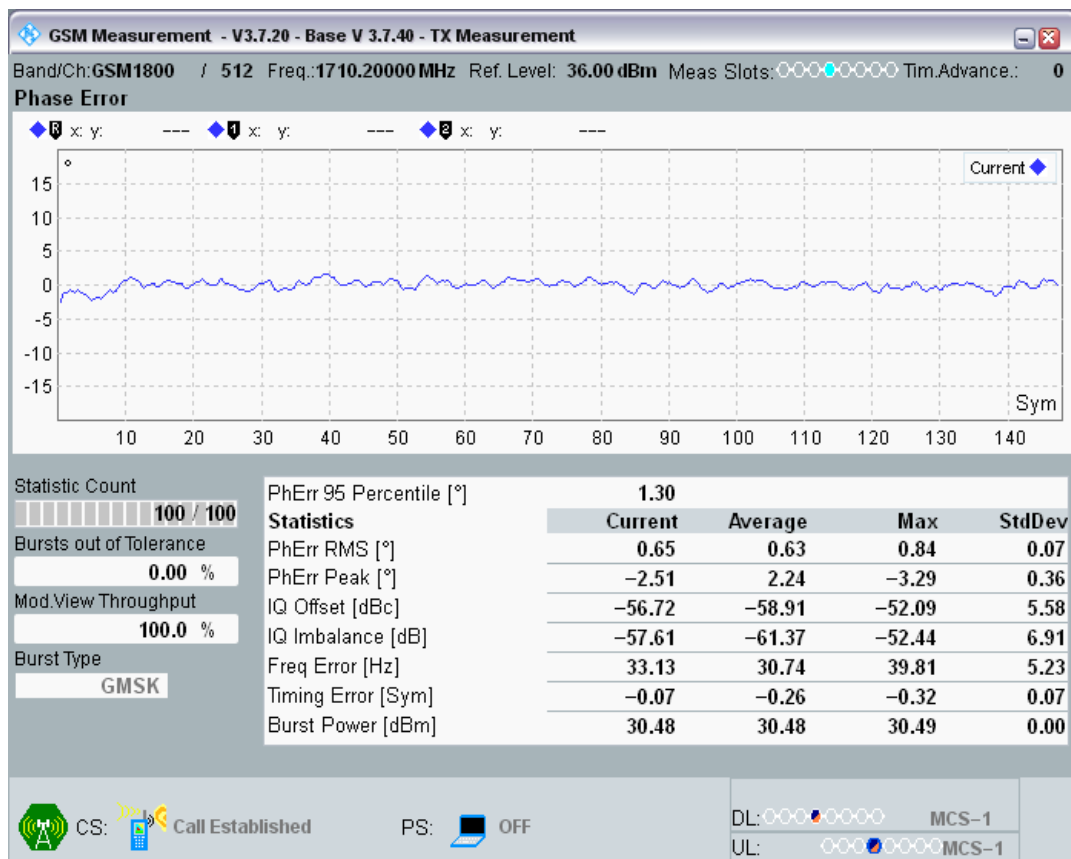


DCS1800 Channel=512 PCL=0 TU1\_5.png

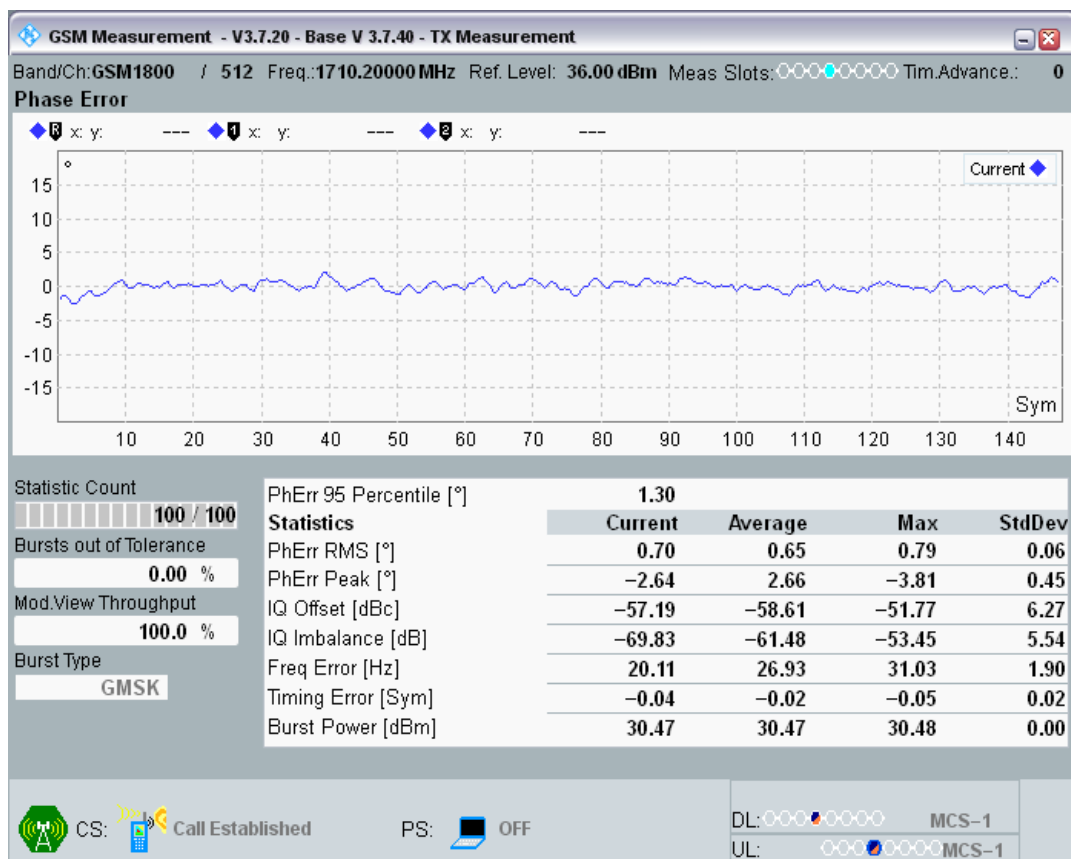


DCS1800 Channel=512 PCL=0 TU50.png

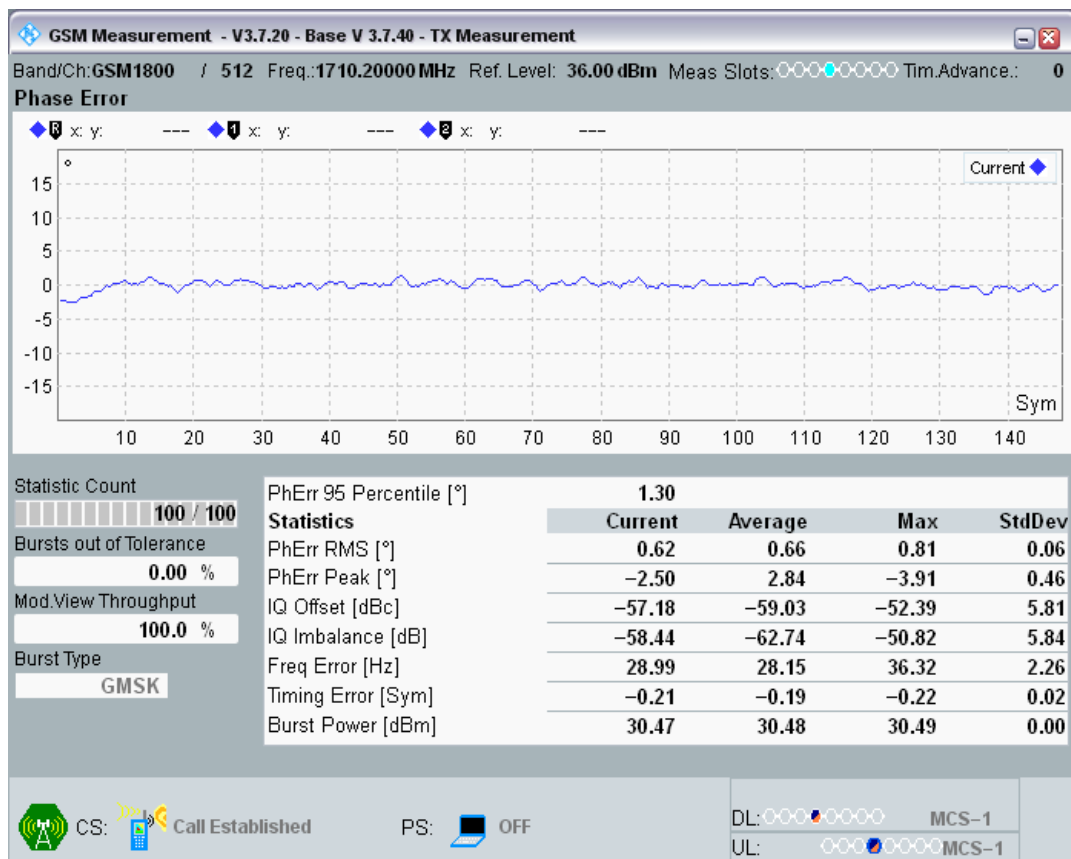

DCS1800 Channel=700 PCL=0 HT100.png

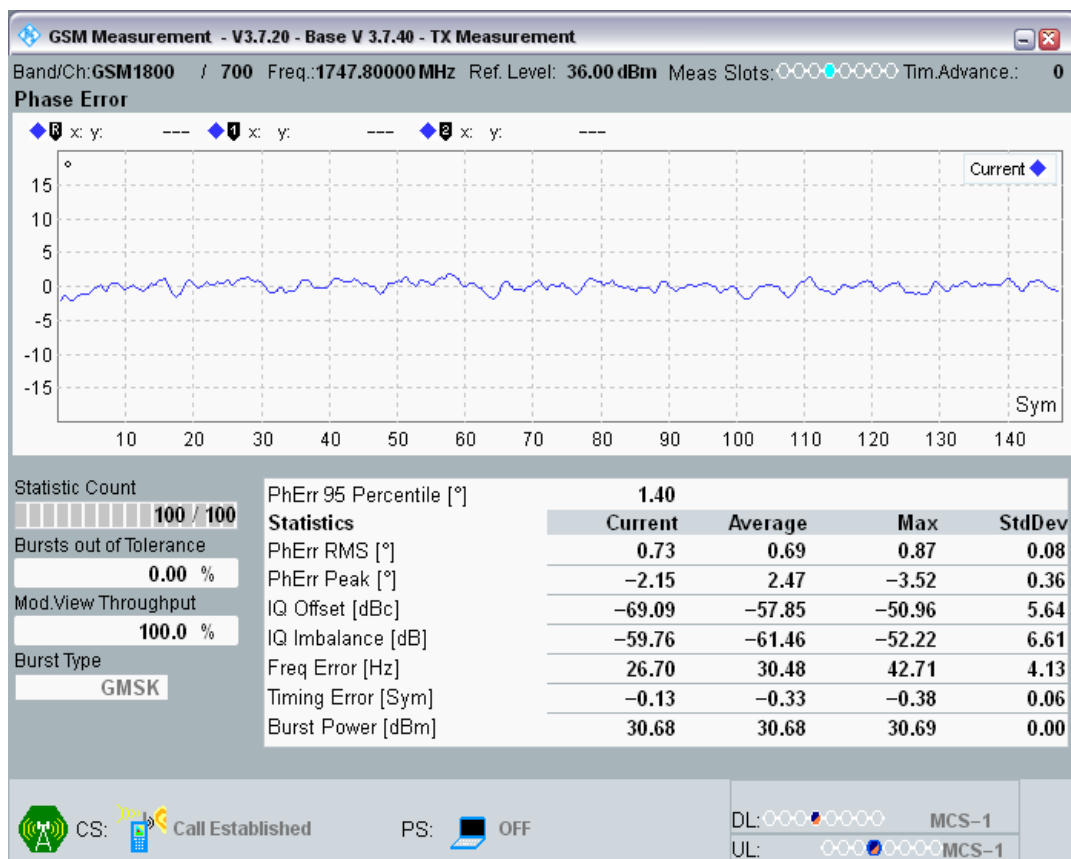


DCS1800 Channel=700 PCL=0 RA130.png

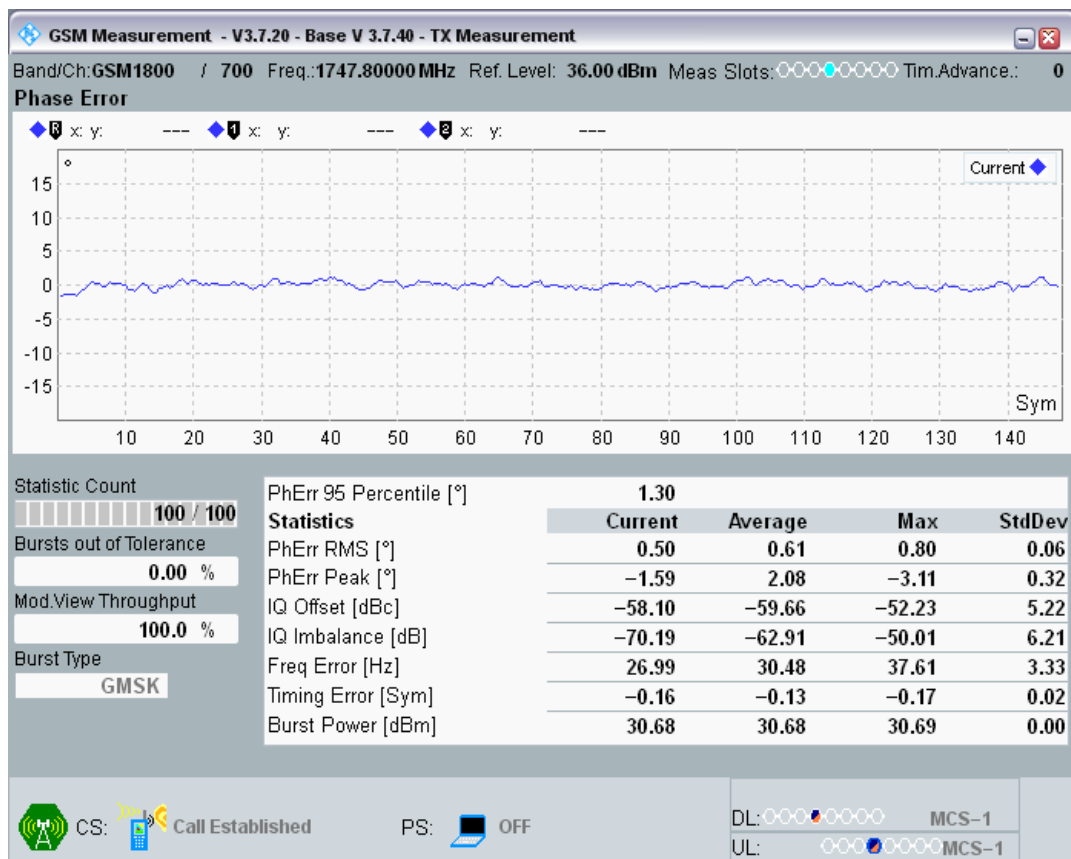


DCS1800 Channel=700 PCL=0 TU1\_5.png




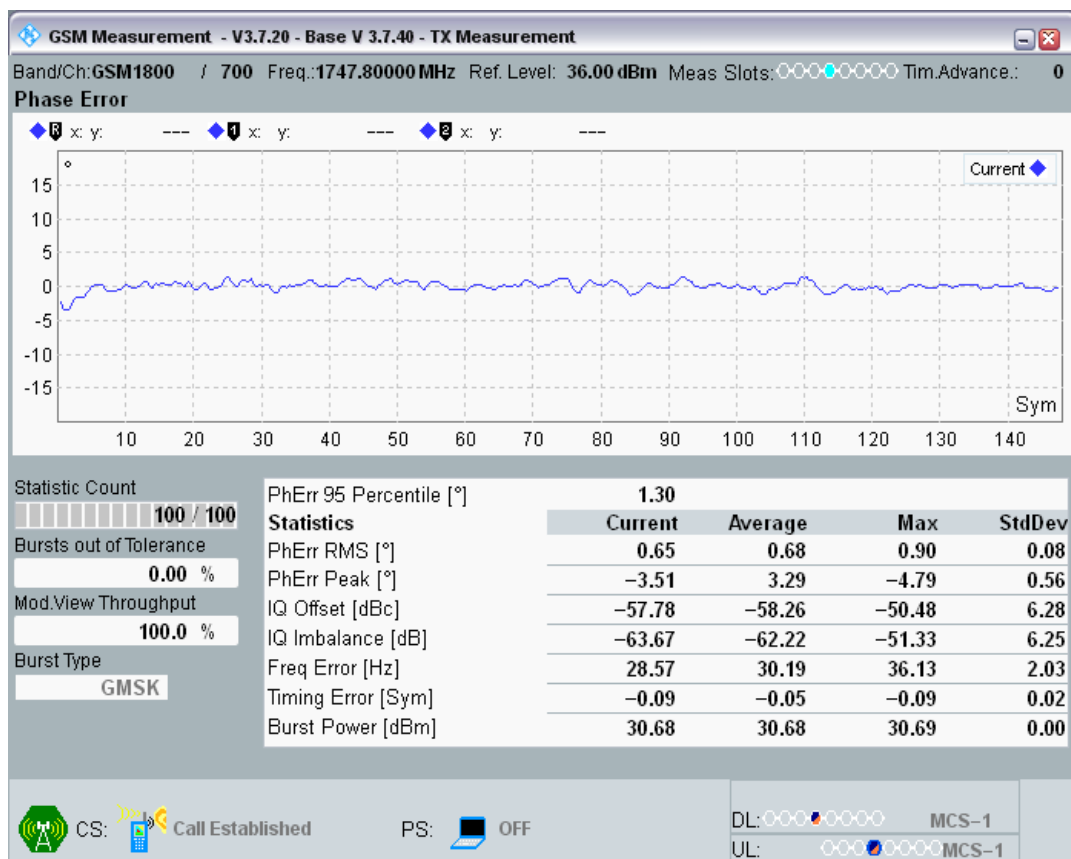


DCS1800 Channel=700 PCL=0 TU50.png

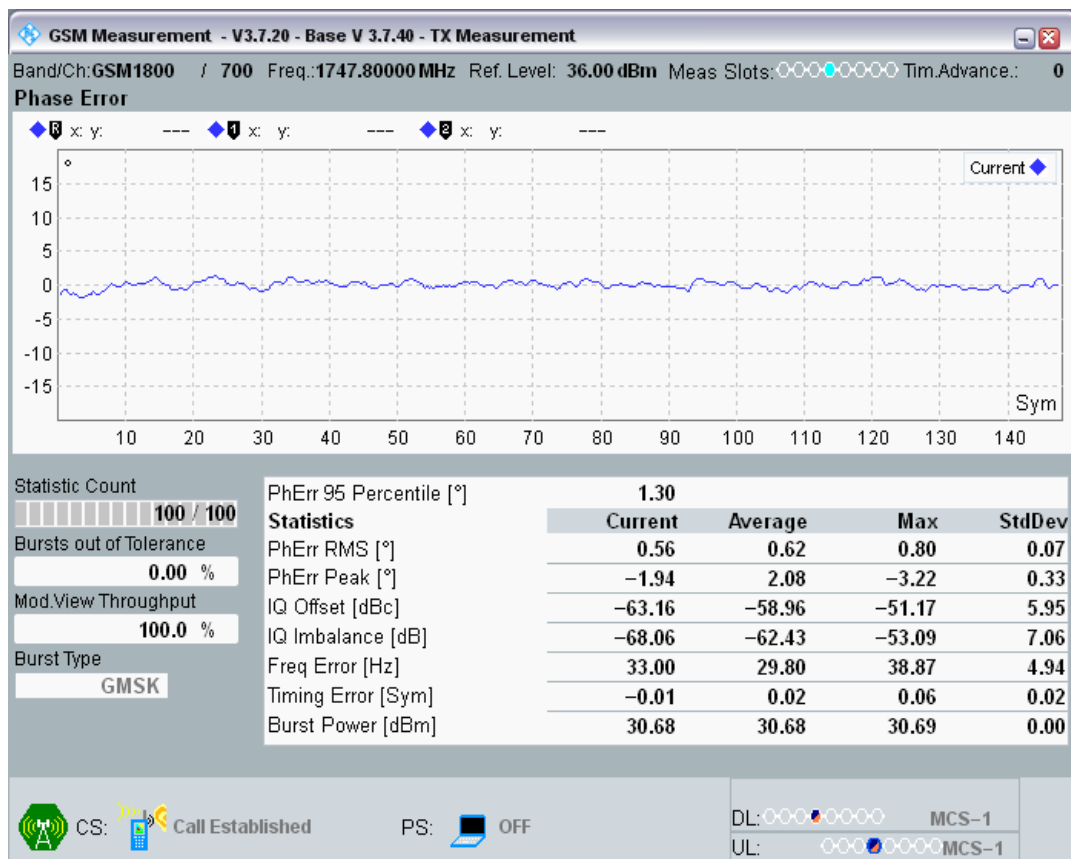


DCS1800 Channel=885 PCL=0 HT100.png

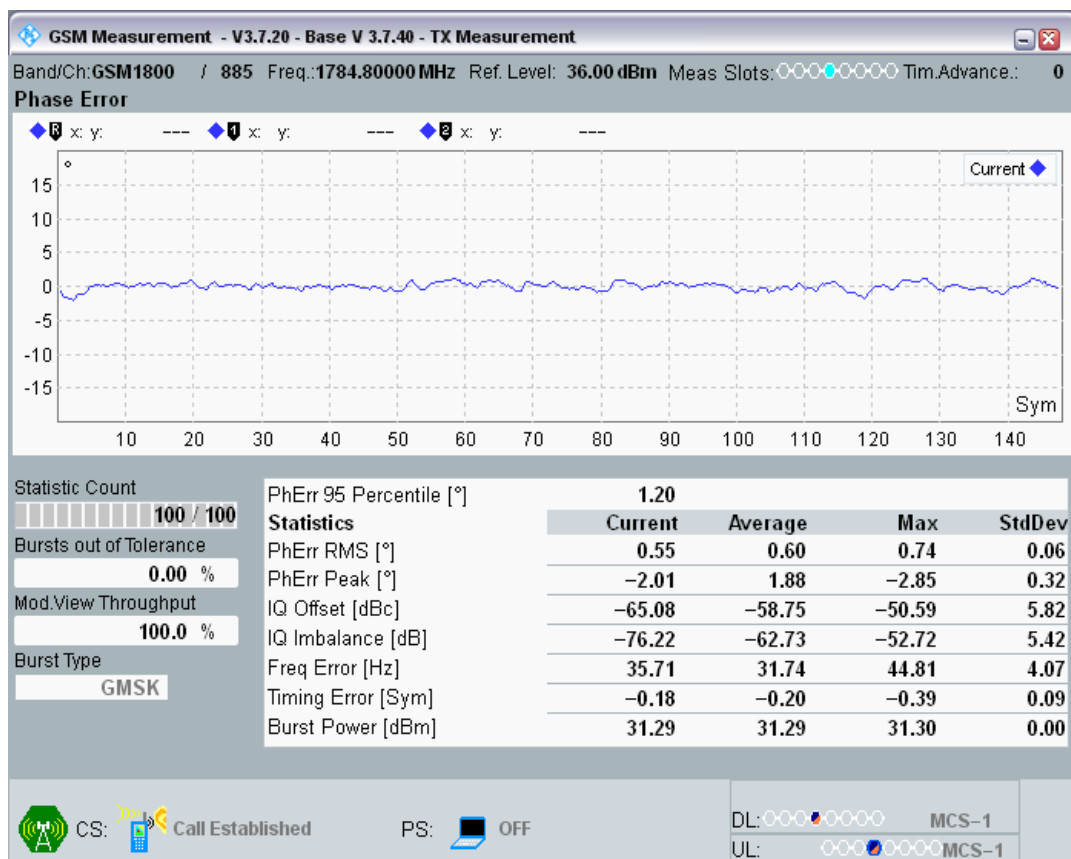


DCS1800 Channel=885 PCL=0 RA130.png

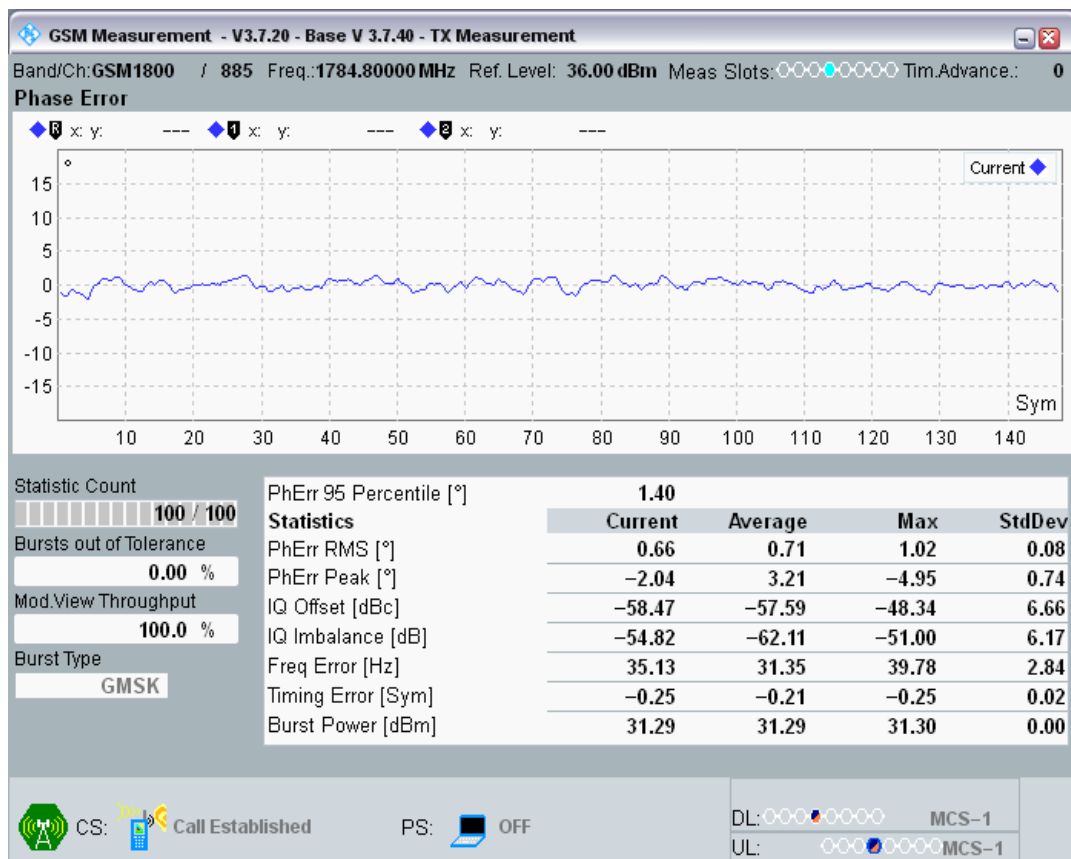


DCS1800 Channel=885 PCL=0 TU1\_5.png

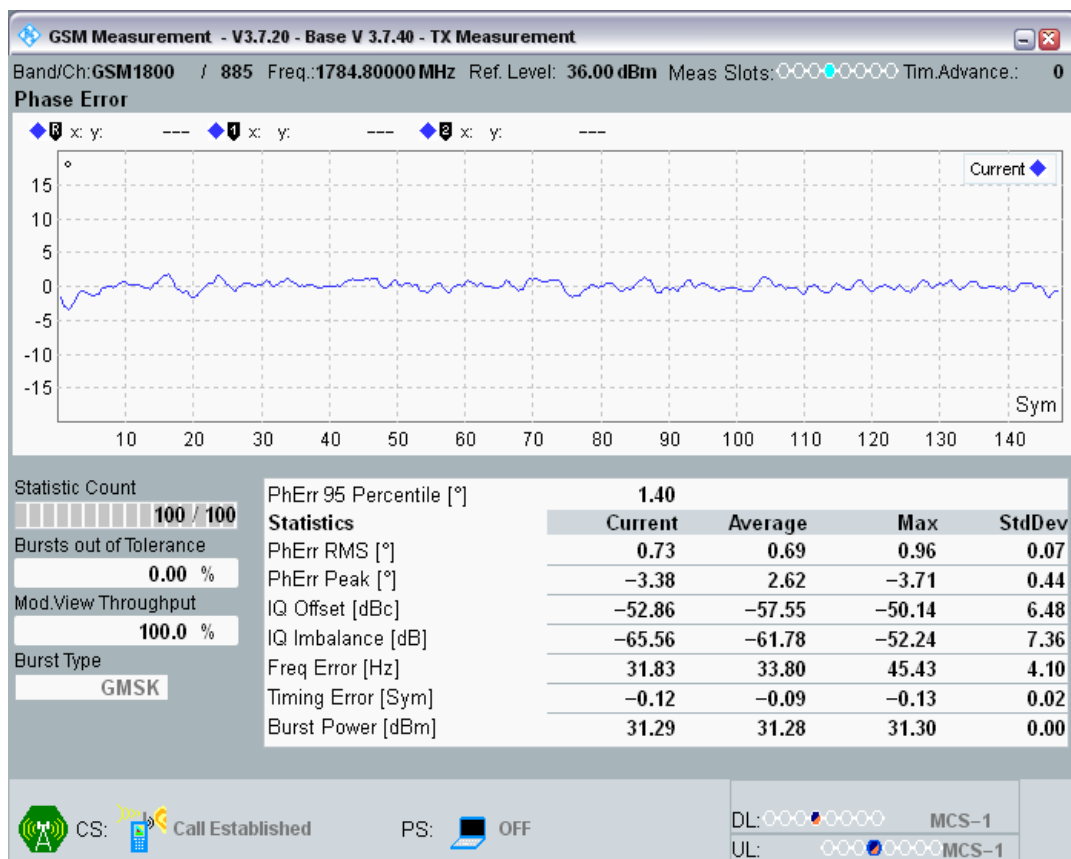


DCS1800 Channel=885 PCL=0 TU50.png

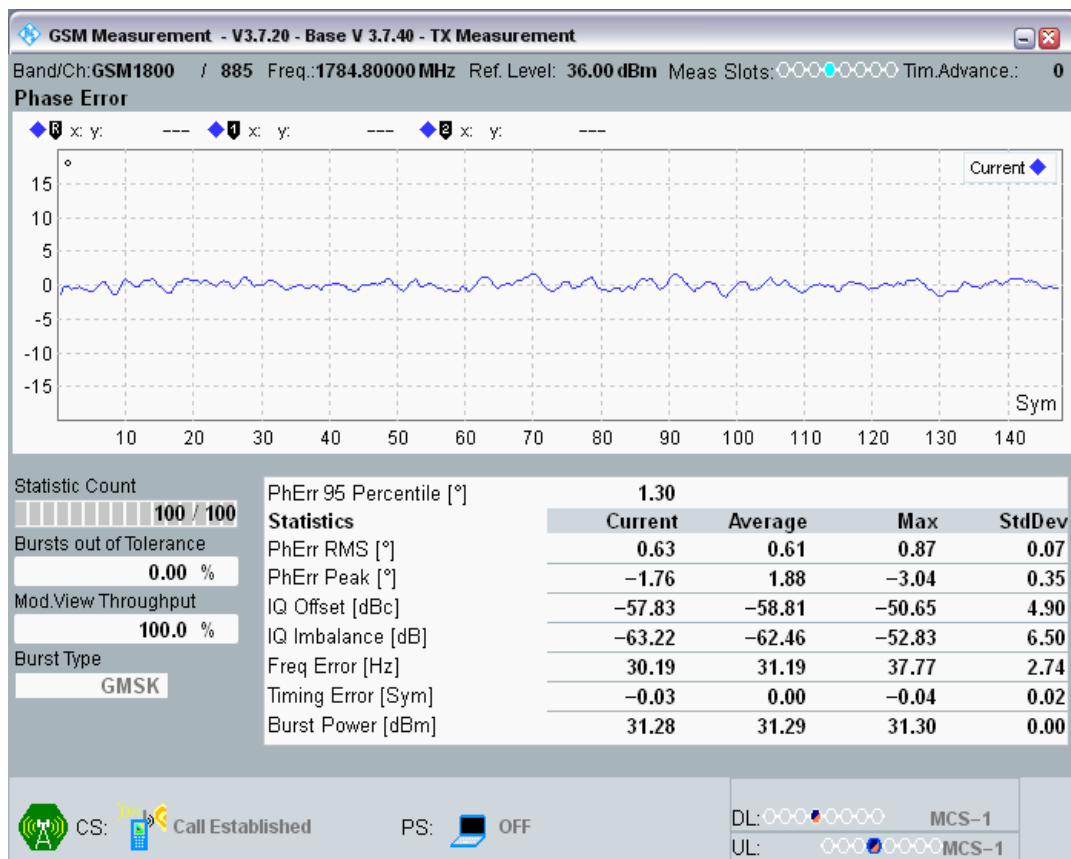


GSM900 Channel=124 PCL=5 HT100.png

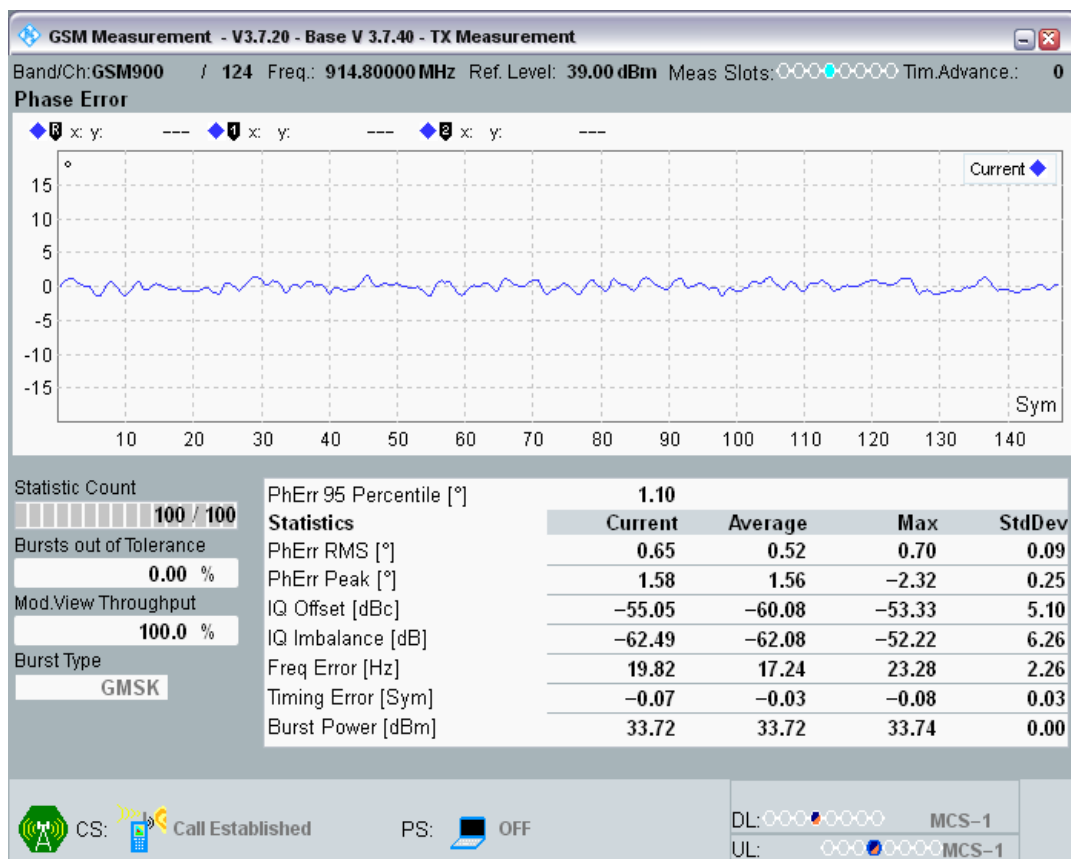


GSM900 Channel=124 PCL=5 RA250.png

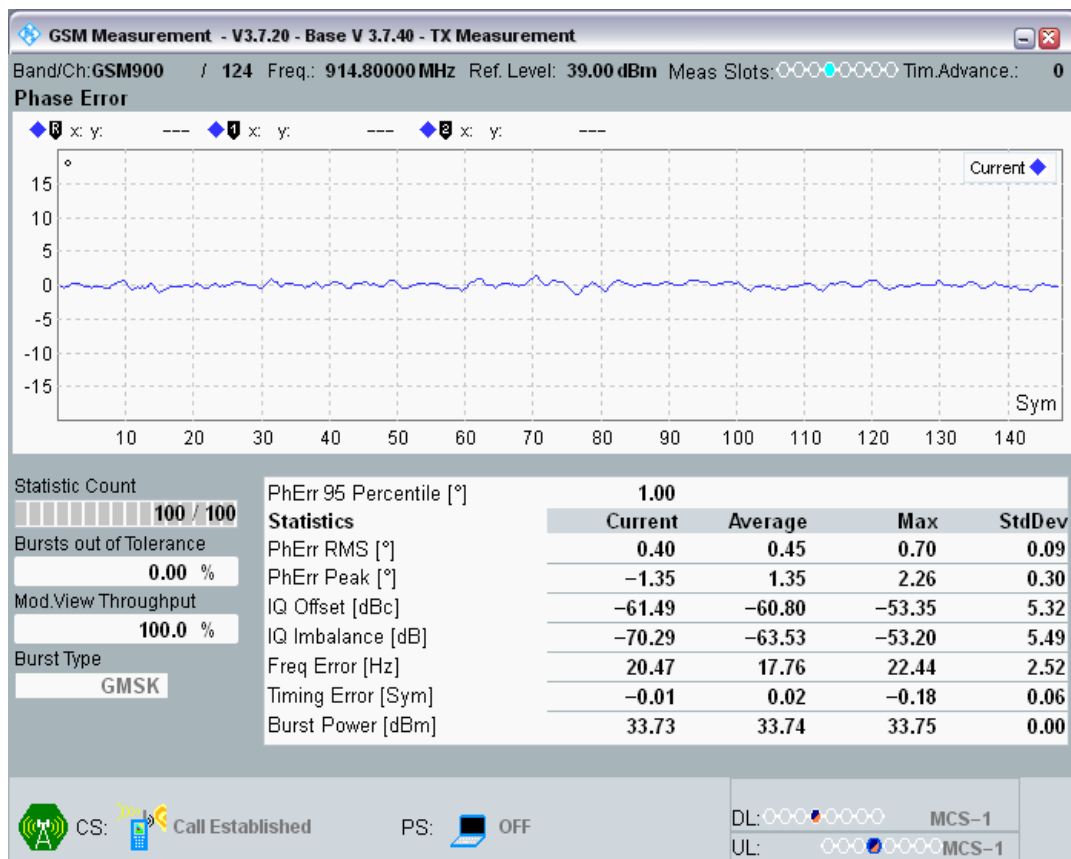


GSM900 Channel=124 PCL=5 TU3.png

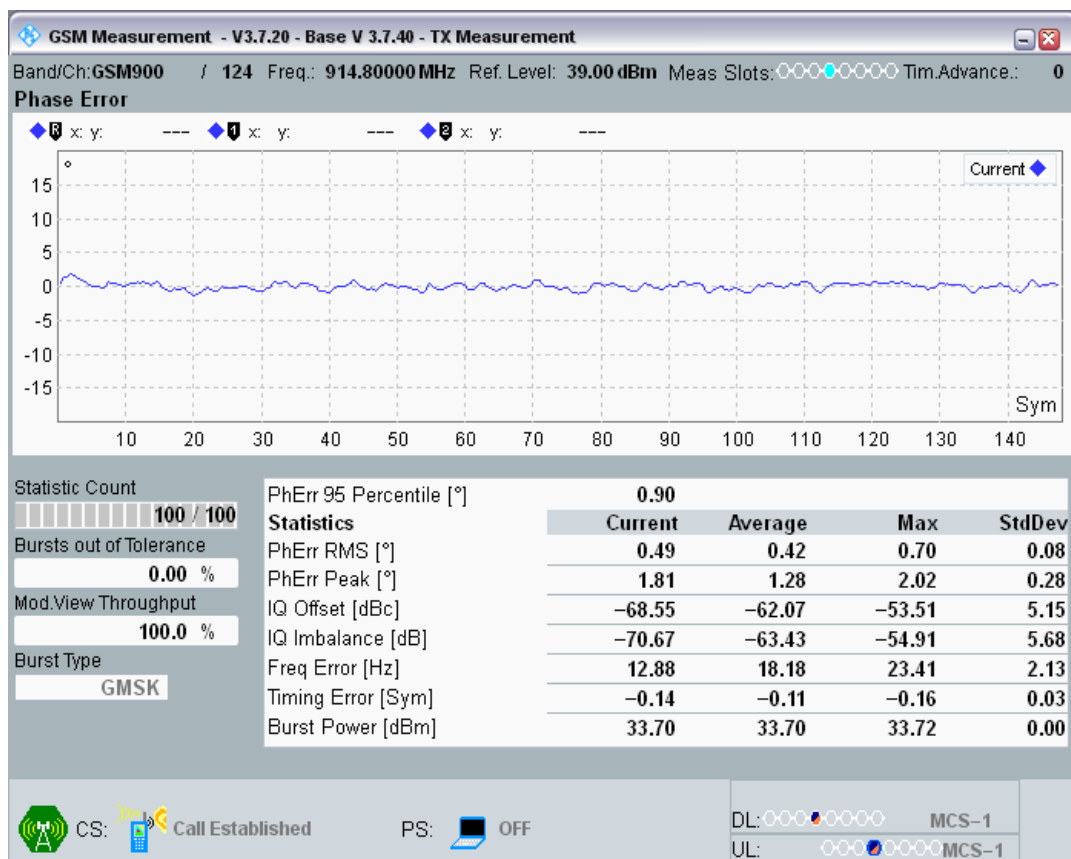


GSM900 Channel=124 PCL=5 TU50.png

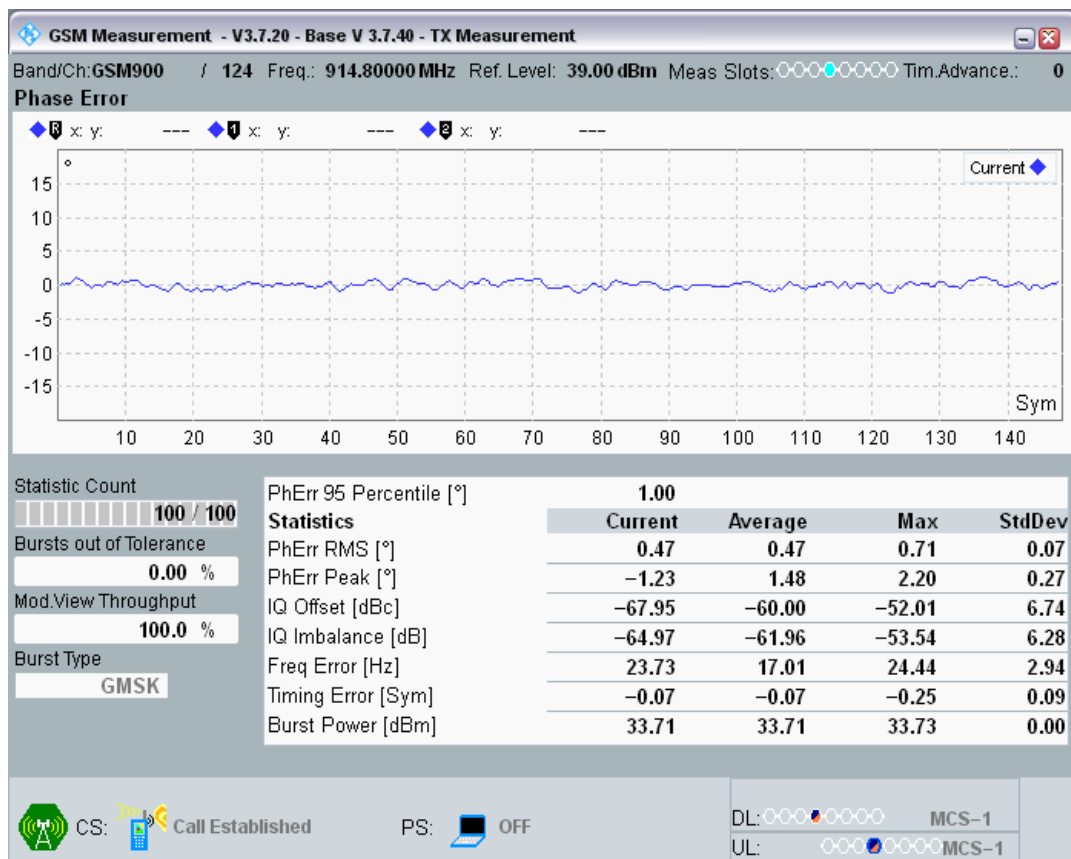


GSM900 Channel=60 PCL=5 HT100.png

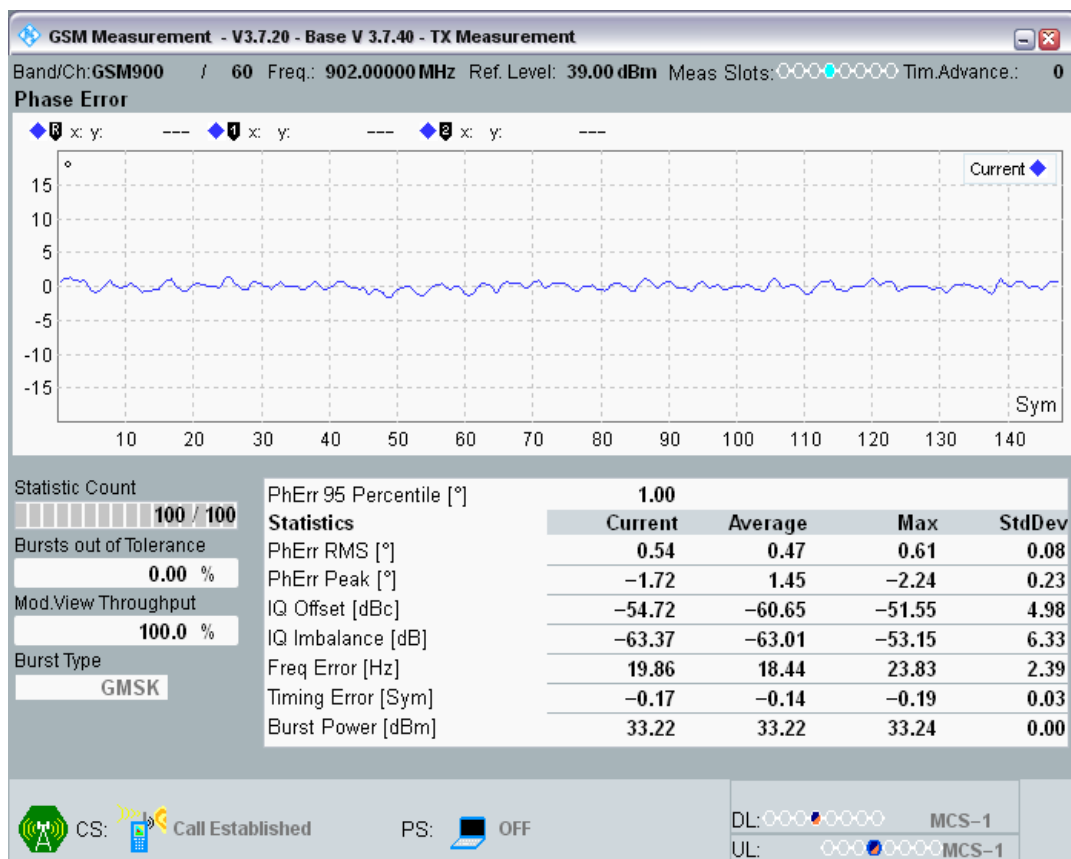


GSM900 Channel=60 PCL=5 RA250.png

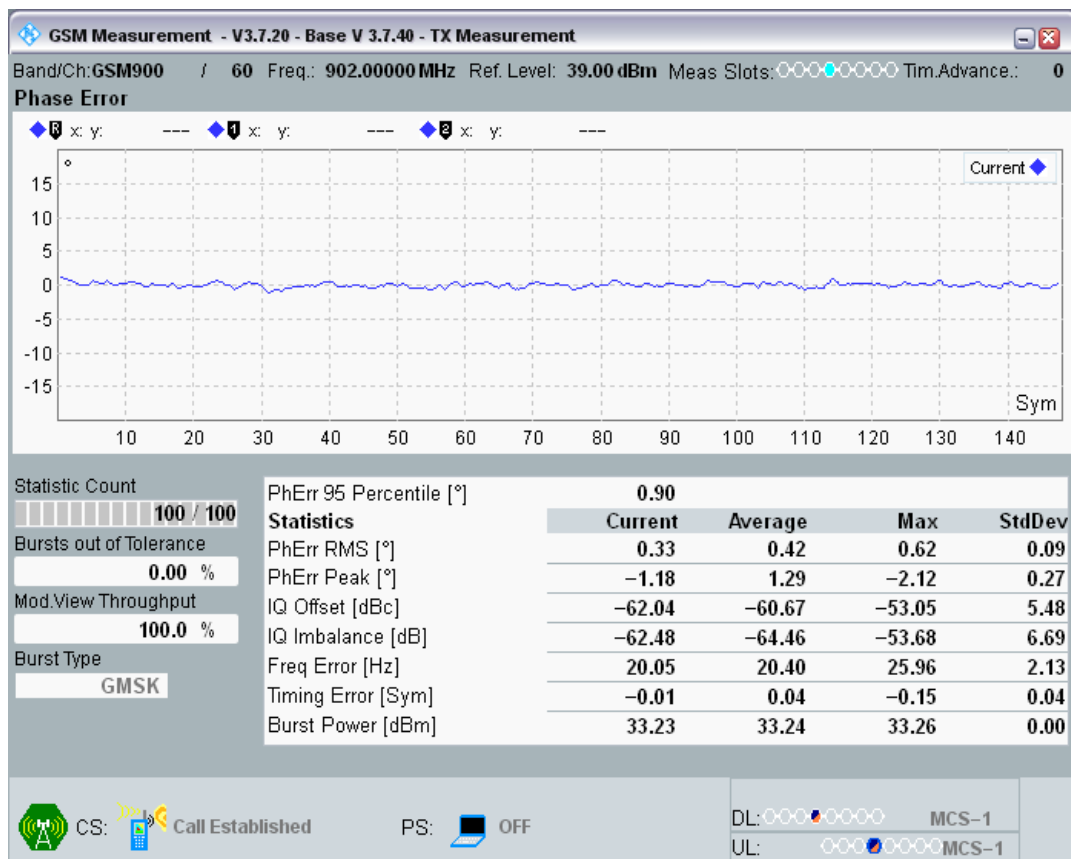

GSM900 Channel=60 PCL=5 TU3.png

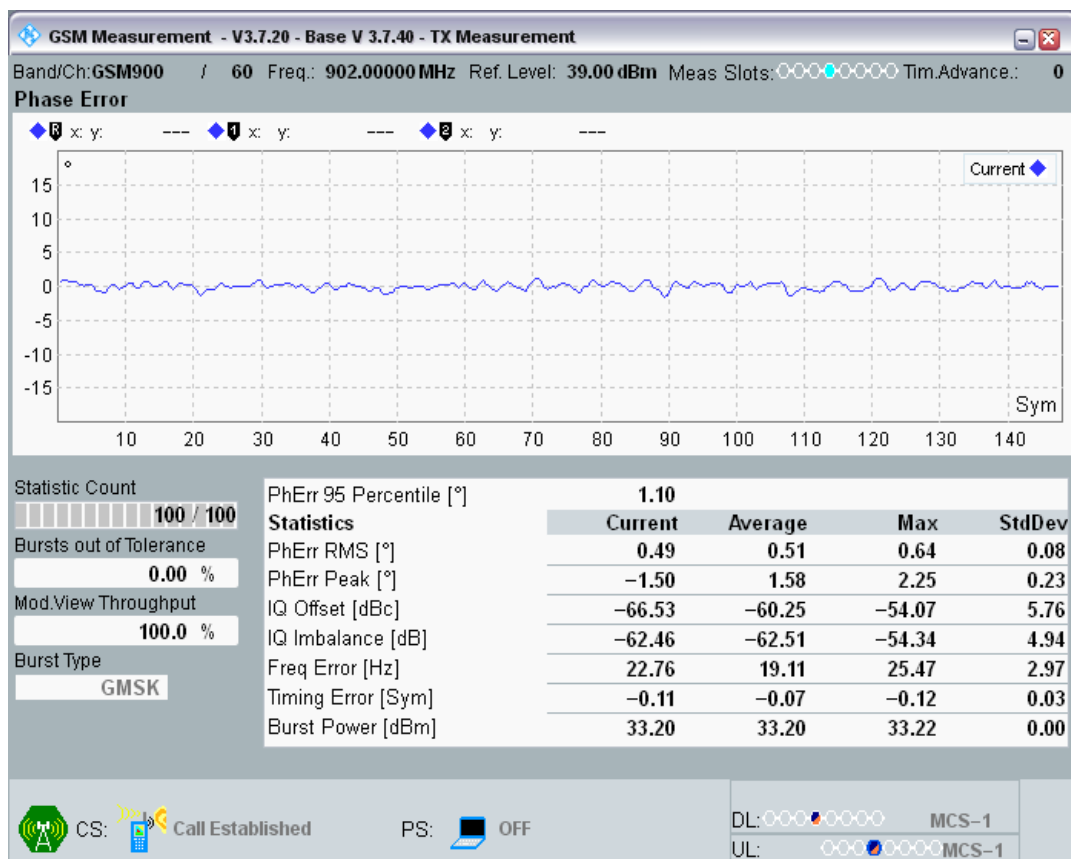


GSM900 Channel=60 PCL=5 TU50.png

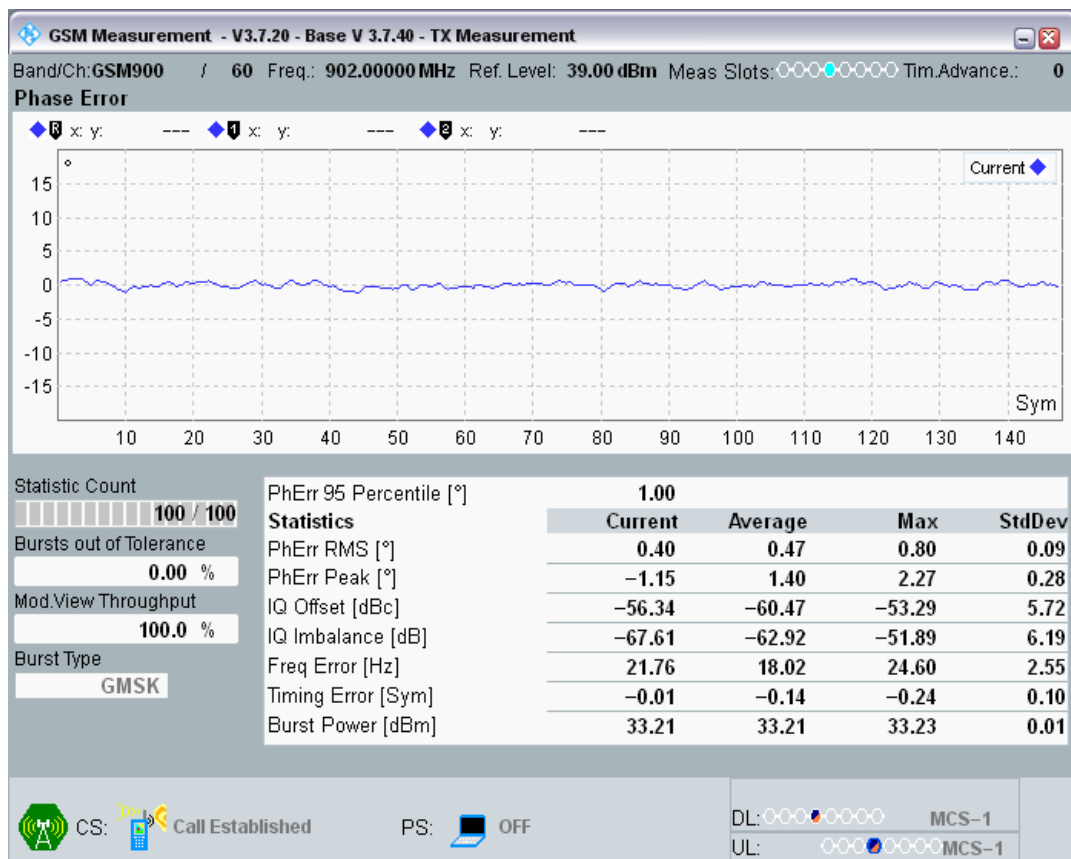


GSM900 Channel=975 PCL=5 HT100.png



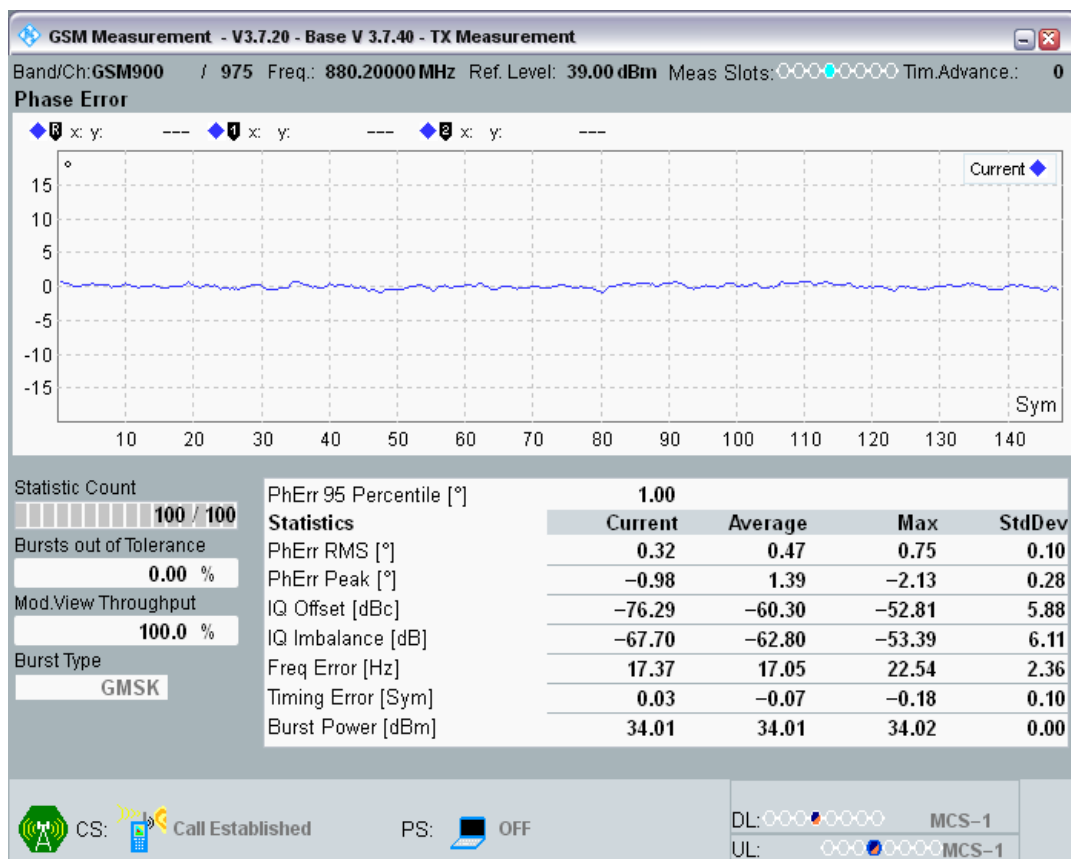

GSM900 Channel=975 PCL=5 RA250.png

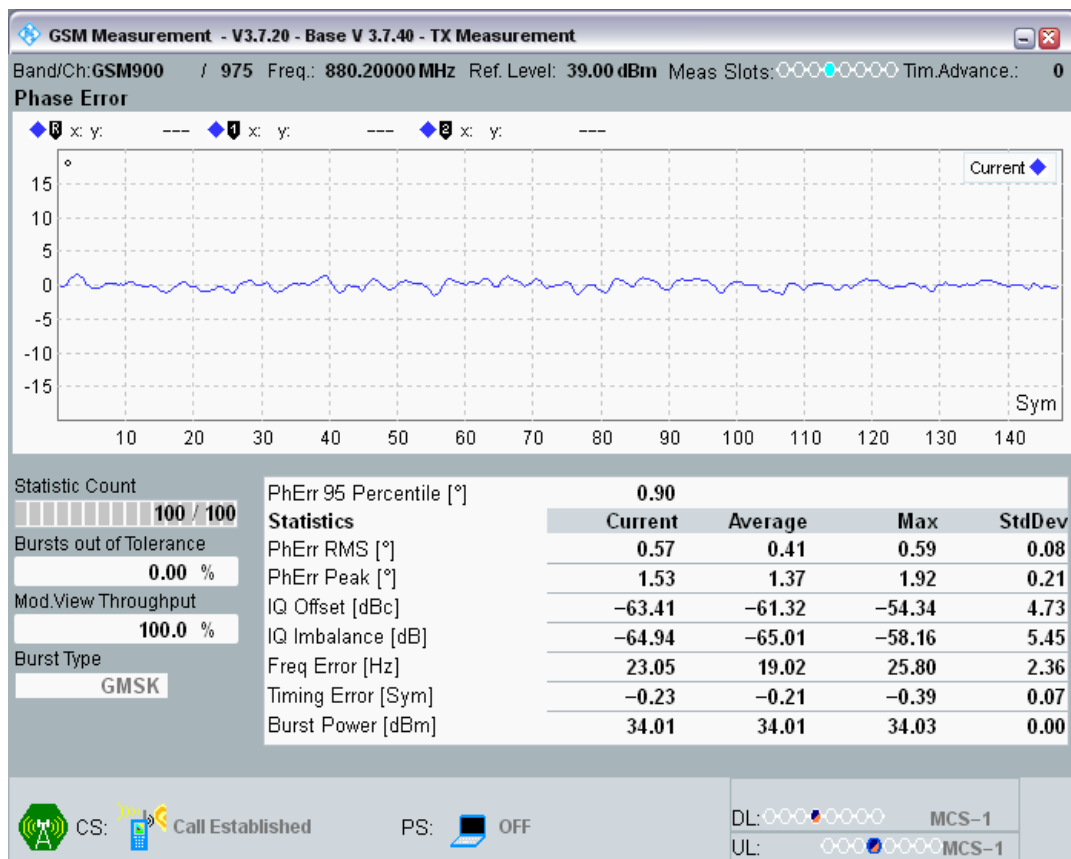


GSM900 Channel=975 PCL=5 TU3.png





GSM900 Channel=975 PCL=5 TU50.png

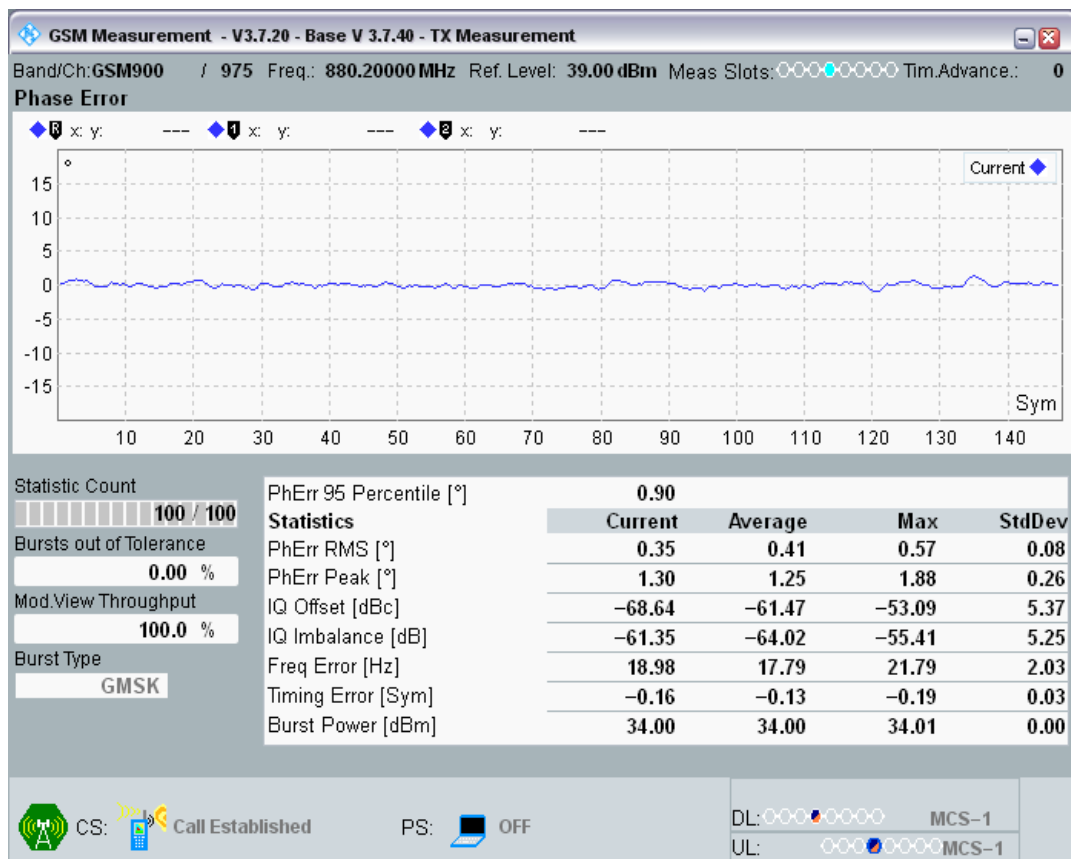

### Clause 4.2.5 Transmitter output power and burst timing

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: CCISE2008044

Band	Channel	Frequency (MHz)	PCL	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
DCS1800	512	1710.2	0	Power	30.43066	28	32	PASS
DCS1800	512	1710.2	0	PvT	-	-	-	PASS
DCS1800	512	1710.2	1	Power	28.43143	25	31	PASS
DCS1800	512	1710.2	1	PvT	-	-	-	PASS
DCS1800	512	1710.2	2	Power	26.46594	23	29	PASS
DCS1800	512	1710.2	2	PvT	-	-	-	PASS
DCS1800	512	1710.2	3	Power	24.43915	21	27	PASS
DCS1800	512	1710.2	3	PvT	-	-	-	PASS
DCS1800	512	1710.2	4	Power	22.45184	19	25	PASS
DCS1800	512	1710.2	4	PvT	-	-	-	PASS
DCS1800	512	1710.2	5	Power	20.46509	17	23	PASS
DCS1800	512	1710.2	5	PvT	-	-	-	PASS
DCS1800	512	1710.2	6	Power	18.45975	15	21	PASS
DCS1800	512	1710.2	6	PvT	-	-	-	PASS
DCS1800	512	1710.2	7	Power	16.57886	13	19	PASS
DCS1800	512	1710.2	7	PvT	-	-	-	PASS
DCS1800	512	1710.2	8	Power	14.6413	11	17	PASS
DCS1800	512	1710.2	8	PvT	-	-	-	PASS
DCS1800	512	1710.2	9	Power	12.60187	8	16	PASS
DCS1800	512	1710.2	9	PvT	-	-	-	PASS
DCS1800	512	1710.2	10	Power	10.75958	6	14	PASS
DCS1800	512	1710.2	10	PvT	-	-	-	PASS
DCS1800	512	1710.2	11	Power	8.866669	4	12	PASS
DCS1800	512	1710.2	11	PvT	-	-	-	PASS
DCS1800	512	1710.2	12	Power	6.802795	2	10	PASS
DCS1800	512	1710.2	12	PvT	-	-	-	PASS
DCS1800	512	1710.2	13	Power	5.422607	0	8	PASS
DCS1800	512	1710.2	13	PvT	-	-	-	PASS
DCS1800	512	1710.2	14	Power	2.950775	-3	7	PASS
DCS1800	512	1710.2	14	PvT	-	-	-	PASS
DCS1800	512	1710.2	15	Power	1.101868	-5	5	PASS
DCS1800	512	1710.2	15	PvT	-	-	-	PASS
DCS1800	700	1747.8	0	Power	30.66492	28	32	PASS
DCS1800	700	1747.8	0	PvT	-	-	-	PASS
DCS1800	700	1747.8	1	Power	28.67239	25	31	PASS
DCS1800	700	1747.8	1	PvT	-	-	-	PASS
DCS1800	700	1747.8	2	Power	26.69016	23	29	PASS
DCS1800	700	1747.8	2	PvT	-	-	-	PASS
DCS1800	700	1747.8	3	Power	24.69519	21	27	PASS
DCS1800	700	1747.8	3	PvT	-	-	-	PASS
DCS1800	700	1747.8	4	Power	22.68961	19	25	PASS
DCS1800	700	1747.8	4	PvT	-	-	-	PASS


DCS1800	700	1747.8	5	Power	20.70224	17	23	PASS
DCS1800	700	1747.8	5	PvT	-	-	-	PASS
DCS1800	700	1747.8	6	Power	18.65903	15	21	PASS
DCS1800	700	1747.8	6	PvT	-	-	-	PASS
DCS1800	700	1747.8	7	Power	16.75955	13	19	PASS
DCS1800	700	1747.8	7	PvT	-	-	-	PASS
DCS1800	700	1747.8	8	Power	14.83145	11	17	PASS
DCS1800	700	1747.8	8	PvT	-	-	-	PASS
DCS1800	700	1747.8	9	Power	12.86542	8	16	PASS
DCS1800	700	1747.8	9	PvT	-	-	-	PASS
DCS1800	700	1747.8	10	Power	10.88617	6	14	PASS
DCS1800	700	1747.8	10	PvT	-	-	-	PASS
DCS1800	700	1747.8	11	Power	8.910034	4	12	PASS
DCS1800	700	1747.8	11	PvT	-	-	-	PASS
DCS1800	700	1747.8	12	Power	6.839203	2	10	PASS
DCS1800	700	1747.8	12	PvT	-	-	-	PASS
DCS1800	700	1747.8	13	Power	5.363007	0	8	PASS
DCS1800	700	1747.8	13	PvT	-	-	-	PASS
DCS1800	700	1747.8	14	Power	2.774963	-3	7	PASS
DCS1800	700	1747.8	14	PvT	-	-	-	PASS
DCS1800	700	1747.8	15	Power	0.7826843	-5	5	PASS
DCS1800	700	1747.8	15	PvT	-	-	-	PASS
DCS1800	885	1784.8	0	Power	31.24585	28	32	PASS
DCS1800	885	1784.8	0	PvT	-	-	-	PASS
DCS1800	885	1784.8	1	Power	29.2016	25	31	PASS
DCS1800	885	1784.8	1	PvT	-	-	-	PASS
DCS1800	885	1784.8	2	Power	27.15158	23	29	PASS
DCS1800	885	1784.8	2	PvT	-	-	-	PASS
DCS1800	885	1784.8	3	Power	25.16946	21	27	PASS
DCS1800	885	1784.8	3	PvT	-	-	-	PASS
DCS1800	885	1784.8	4	Power	23.15497	19	25	PASS
DCS1800	885	1784.8	4	PvT	-	-	-	PASS
DCS1800	885	1784.8	5	Power	21.1474	17	23	PASS
DCS1800	885	1784.8	5	PvT	-	-	-	PASS
DCS1800	885	1784.8	6	Power	19.09799	15	21	PASS
DCS1800	885	1784.8	6	PvT	-	-	-	PASS
DCS1800	885	1784.8	7	Power	17.16595	13	19	PASS
DCS1800	885	1784.8	7	PvT	-	-	-	PASS
DCS1800	885	1784.8	8	Power	15.18445	11	17	PASS
DCS1800	885	1784.8	8	PvT	-	-	-	PASS
DCS1800	885	1784.8	9	Power	13.18622	8	16	PASS
DCS1800	885	1784.8	9	PvT	-	-	-	PASS
DCS1800	885	1784.8	10	Power	11.15411	6	14	PASS

DCS1800	885	1784.8	10	PvT	-	-	-	PASS
DCS1800	885	1784.8	11	Power	9.096558	4	12	PASS
DCS1800	885	1784.8	11	PvT	-	-	-	PASS
DCS1800	885	1784.8	12	Power	6.886536	2	10	PASS
DCS1800	885	1784.8	12	PvT	-	-	-	PASS
DCS1800	885	1784.8	13	Power	5.345001	0	8	PASS
DCS1800	885	1784.8	13	PvT	-	-	-	PASS
DCS1800	885	1784.8	14	Power	2.504333	-3	7	PASS
DCS1800	885	1784.8	14	PvT	-	-	-	PASS
DCS1800	885	1784.8	15	Power	0.2651978	-5	5	PASS
DCS1800	885	1784.8	15	PvT	-	-	-	PASS
GSM900	975	880.2	5	Power	34.11313	31	35	PASS
GSM900	975	880.2	5	PvT	-	-	-	PASS
GSM900	975	880.2	6	Power	32.41962	28	34	PASS
GSM900	975	880.2	6	PvT	-	-	-	PASS
GSM900	975	880.2	7	Power	30.51205	26	32	PASS
GSM900	975	880.2	7	PvT	-	-	-	PASS
GSM900	975	880.2	8	Power	28.54156	24	30	PASS
GSM900	975	880.2	8	PvT	-	-	-	PASS
GSM900	975	880.2	9	Power	26.54474	22	28	PASS
GSM900	975	880.2	9	PvT	-	-	-	PASS
GSM900	975	880.2	10	Power	24.51404	20	26	PASS
GSM900	975	880.2	10	PvT	-	-	-	PASS
GSM900	975	880.2	11	Power	22.44958	18	24	PASS
GSM900	975	880.2	11	PvT	-	-	-	PASS
GSM900	975	880.2	12	Power	20.48053	16	22	PASS
GSM900	975	880.2	12	PvT	-	-	-	PASS
GSM900	975	880.2	13	Power	18.44855	14	20	PASS
GSM900	975	880.2	13	PvT	-	-	-	PASS
GSM900	975	880.2	14	Power	16.49304	12	18	PASS
GSM900	975	880.2	14	PvT	-	-	-	PASS
GSM900	975	880.2	15	Power	14.34796	10	16	PASS
GSM900	975	880.2	15	PvT	-	-	-	PASS
GSM900	975	880.2	16	Power	12.34967	6	16	PASS
GSM900	975	880.2	16	PvT	-	-	-	PASS
GSM900	975	880.2	17	Power	10.26517	4	14	PASS
GSM900	975	880.2	17	PvT	-	-	-	PASS
GSM900	975	880.2	18	Power	7.846283	2	12	PASS
GSM900	975	880.2	18	PvT	-	-	-	PASS
GSM900	975	880.2	19	Power	5.805542	0	10	PASS
GSM900	975	880.2	19	PvT	-	-	-	PASS
GSM900	60	902	5	Power	33.27615	31	35	PASS
GSM900	60	902	5	PvT	-	-	-	PASS


GSM900	60	902	6	Power	31.54391	28	34	PASS
GSM900	60	902	6	PvT	-	-	-	PASS
GSM900	60	902	7	Power	29.54498	26	32	PASS
GSM900	60	902	7	PvT	-	-	-	PASS
GSM900	60	902	8	Power	27.54453	24	30	PASS
GSM900	60	902	8	PvT	-	-	-	PASS
GSM900	60	902	9	Power	25.53809	22	28	PASS
GSM900	60	902	9	PvT	-	-	-	PASS
GSM900	60	902	10	Power	23.49179	20	26	PASS
GSM900	60	902	10	PvT	-	-	-	PASS
GSM900	60	902	11	Power	21.46838	18	24	PASS
GSM900	60	902	11	PvT	-	-	-	PASS
GSM900	60	902	12	Power	19.49271	16	22	PASS
GSM900	60	902	12	PvT	-	-	-	PASS
GSM900	60	902	13	Power	17.44586	14	20	PASS
GSM900	60	902	13	PvT	-	-	-	PASS
GSM900	60	902	14	Power	15.43884	12	18	PASS
GSM900	60	902	14	PvT	-	-	-	PASS
GSM900	60	902	15	Power	13.49863	10	16	PASS
GSM900	60	902	15	PvT	-	-	-	PASS
GSM900	60	902	16	Power	11.50345	6	16	PASS
GSM900	60	902	16	PvT	-	-	-	PASS
GSM900	60	902	17	Power	9.45929	4	14	PASS
GSM900	60	902	17	PvT	-	-	-	PASS
GSM900	60	902	18	Power	7.060547	2	12	PASS
GSM900	60	902	18	PvT	-	-	-	PASS
GSM900	60	902	19	Power	5.114716	0	10	PASS
GSM900	60	902	19	PvT	-	-	-	PASS
GSM900	124	914.8	5	Power	33.70111	31	35	PASS
GSM900	124	914.8	5	PvT	-	-	-	PASS
GSM900	124	914.8	6	Power	31.96655	28	34	PASS
GSM900	124	914.8	6	PvT	-	-	-	PASS
GSM900	124	914.8	7	Power	29.98114	26	32	PASS
GSM900	124	914.8	7	PvT	-	-	-	PASS
GSM900	124	914.8	8	Power	27.99905	24	30	PASS
GSM900	124	914.8	8	PvT	-	-	-	PASS
GSM900	124	914.8	9	Power	26.01965	22	28	PASS
GSM900	124	914.8	9	PvT	-	-	-	PASS
GSM900	124	914.8	10	Power	23.92313	20	26	PASS
GSM900	124	914.8	10	PvT	-	-	-	PASS
GSM900	124	914.8	11	Power	21.89359	18	24	PASS
GSM900	124	914.8	11	PvT	-	-	-	PASS
GSM900	124	914.8	12	Power	19.84918	16	22	PASS

GSM900	124	914.8	12	PvT	-	-	-	PASS
GSM900	124	914.8	13	Power	17.785	14	20	PASS
GSM900	124	914.8	13	PvT	-	-	-	PASS
GSM900	124	914.8	14	Power	15.67566	12	18	PASS
GSM900	124	914.8	14	PvT	-	-	-	PASS
GSM900	124	914.8	15	Power	13.90958	10	16	PASS
GSM900	124	914.8	15	PvT	-	-	-	PASS
GSM900	124	914.8	16	Power	11.85266	6	16	PASS
GSM900	124	914.8	16	PvT	-	-	-	PASS
GSM900	124	914.8	17	Power	9.778015	4	14	PASS
GSM900	124	914.8	17	PvT	-	-	-	PASS
GSM900	124	914.8	18	Power	7.192596	2	12	PASS
GSM900	124	914.8	18	PvT	-	-	-	PASS
GSM900	124	914.8	19	Power	5.02887	0	10	PASS
GSM900	124	914.8	19	PvT	-	-	-	PASS


DCS1800 Channel=512 PCL=0.png

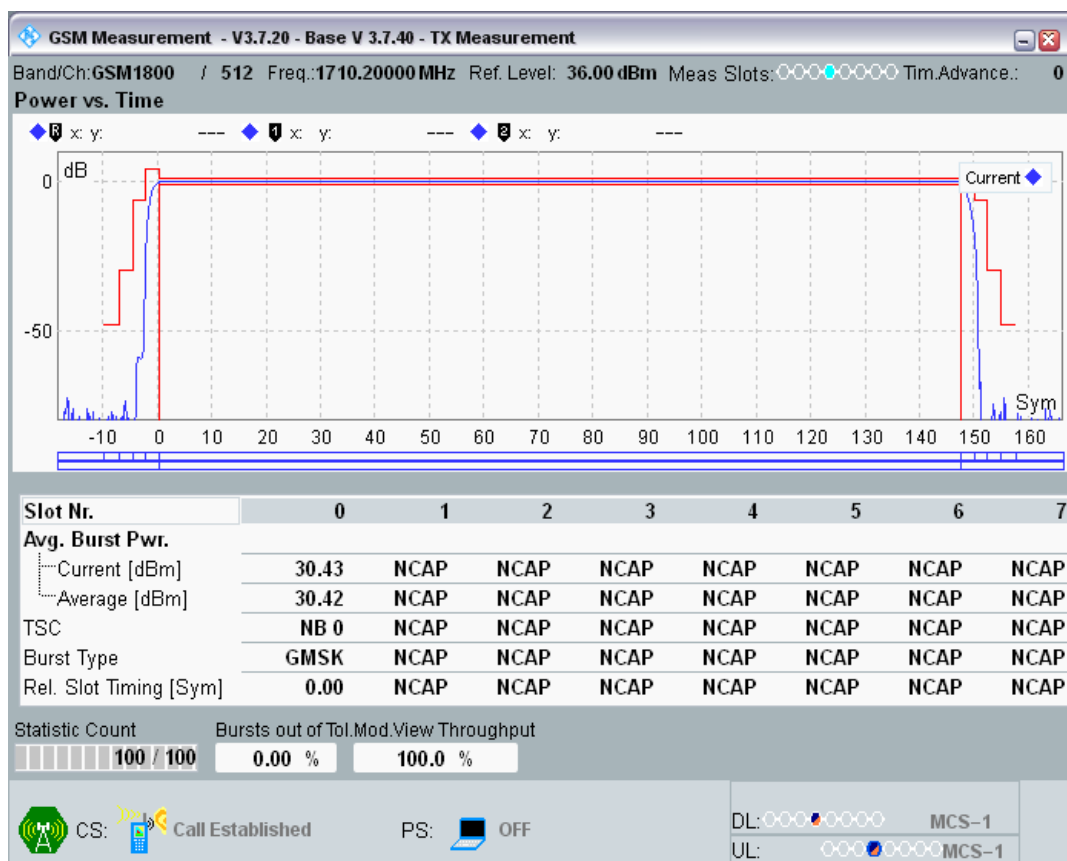


DCS1800 Channel=512 PCL=15.png

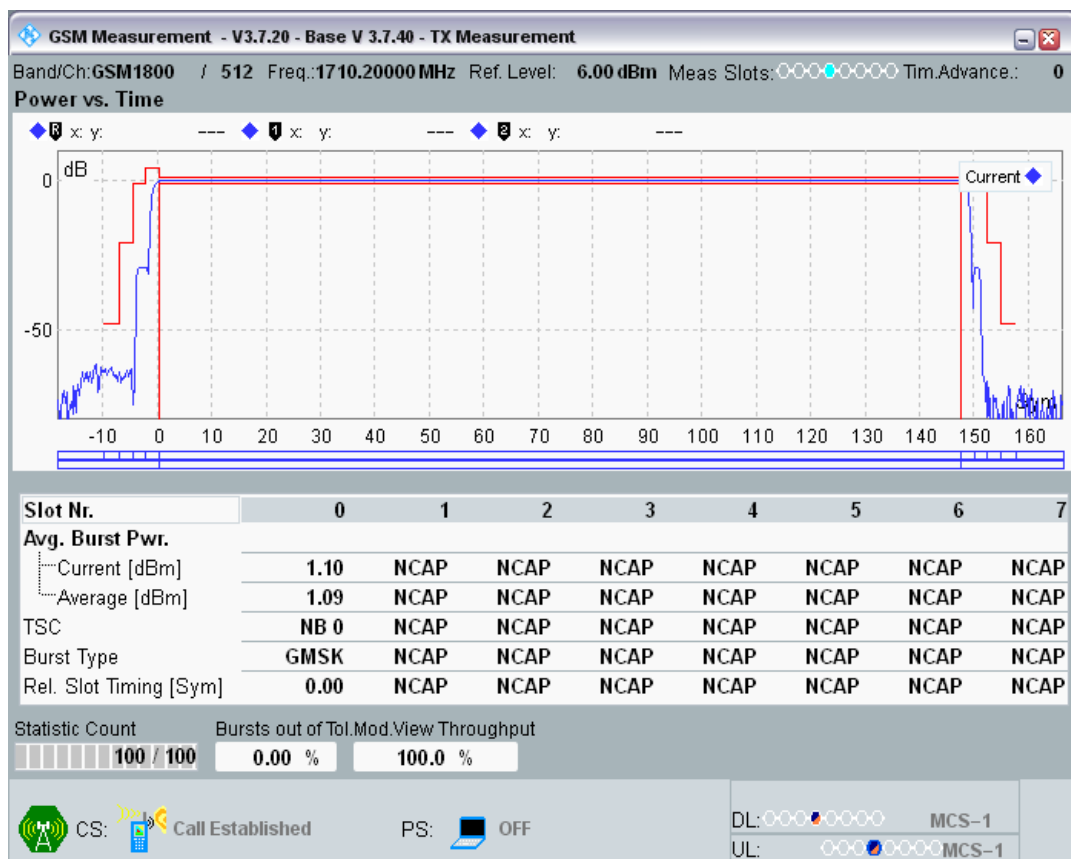


DCS1800 Channel=700 PCL=0.png

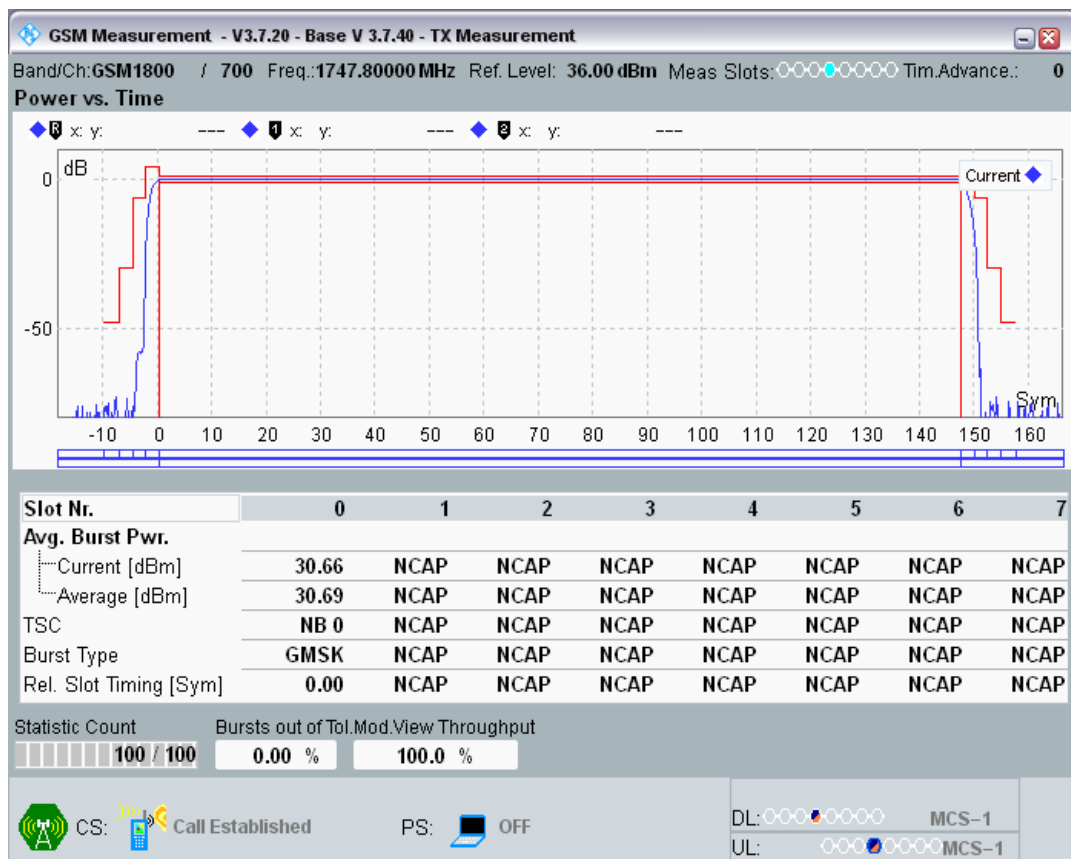

DCS1800 Channel=700 PCL=15.png

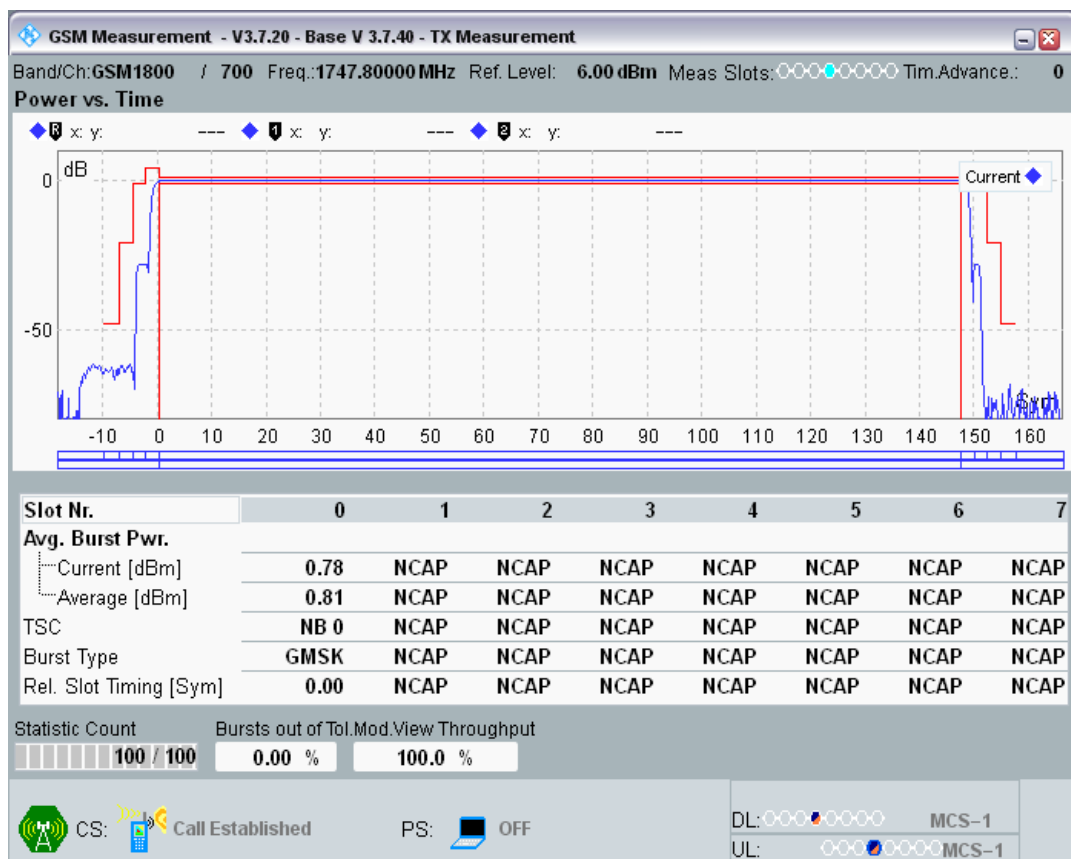


DCS1800 Channel=885 PCL=0.png

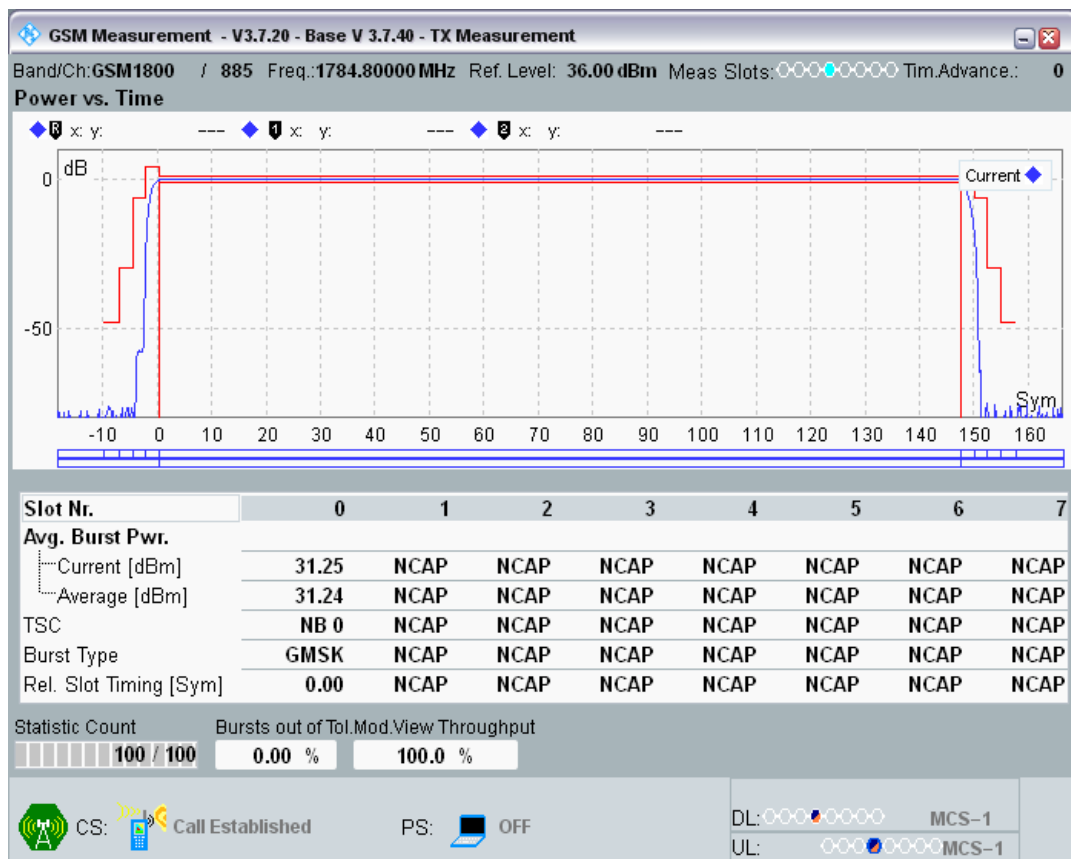


DCS1800 Channel=885 PCL=15.png




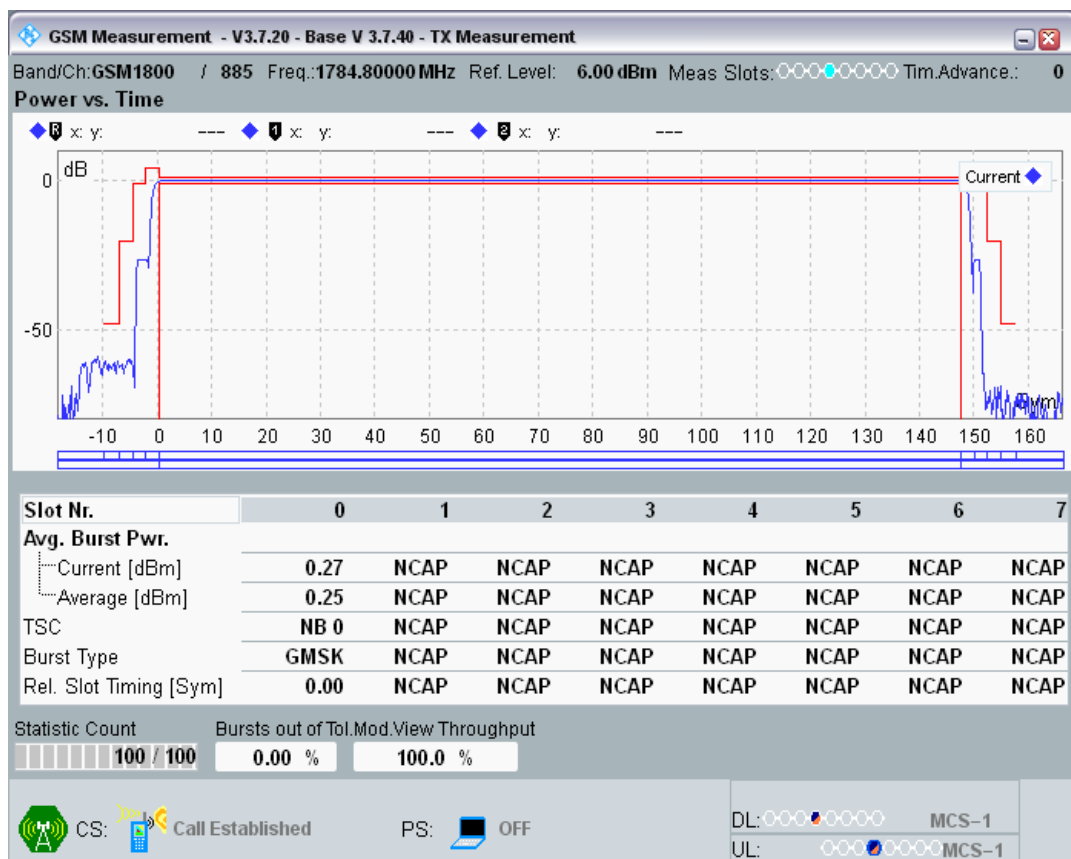


GSM900 Channel=124 PCL=19.png

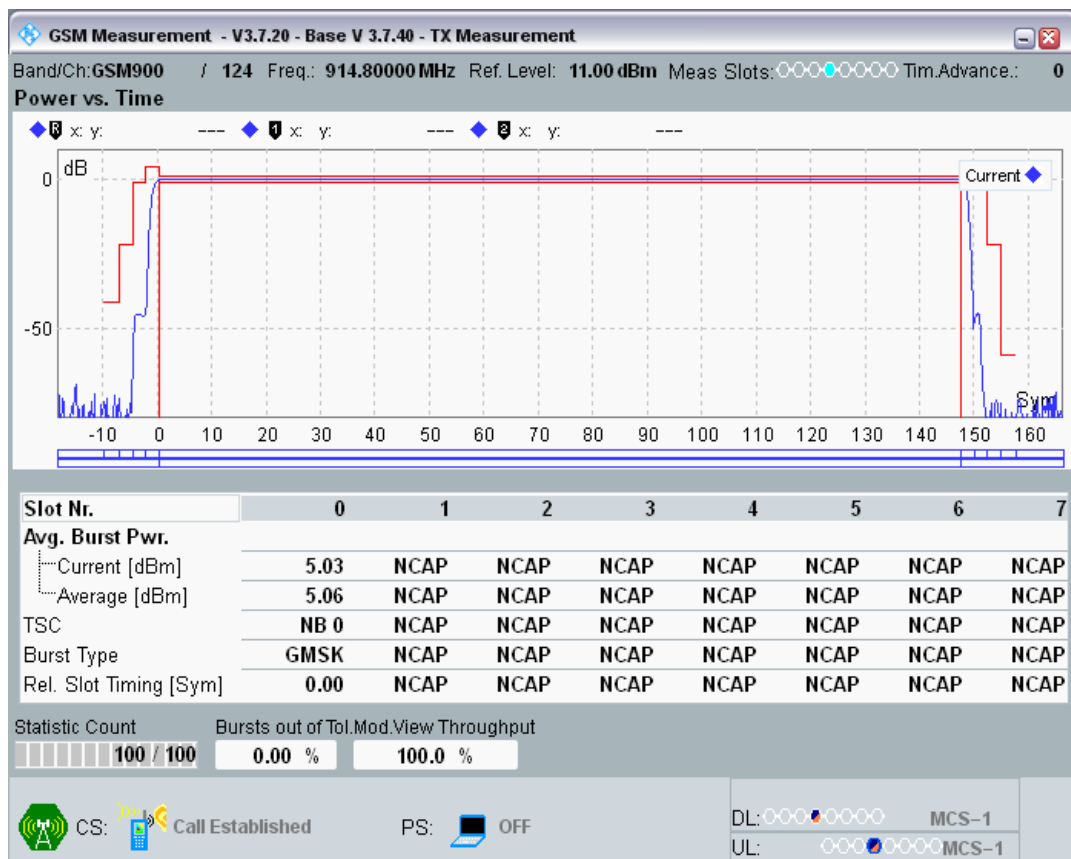


GSM900 Channel=124 PCL=5.png

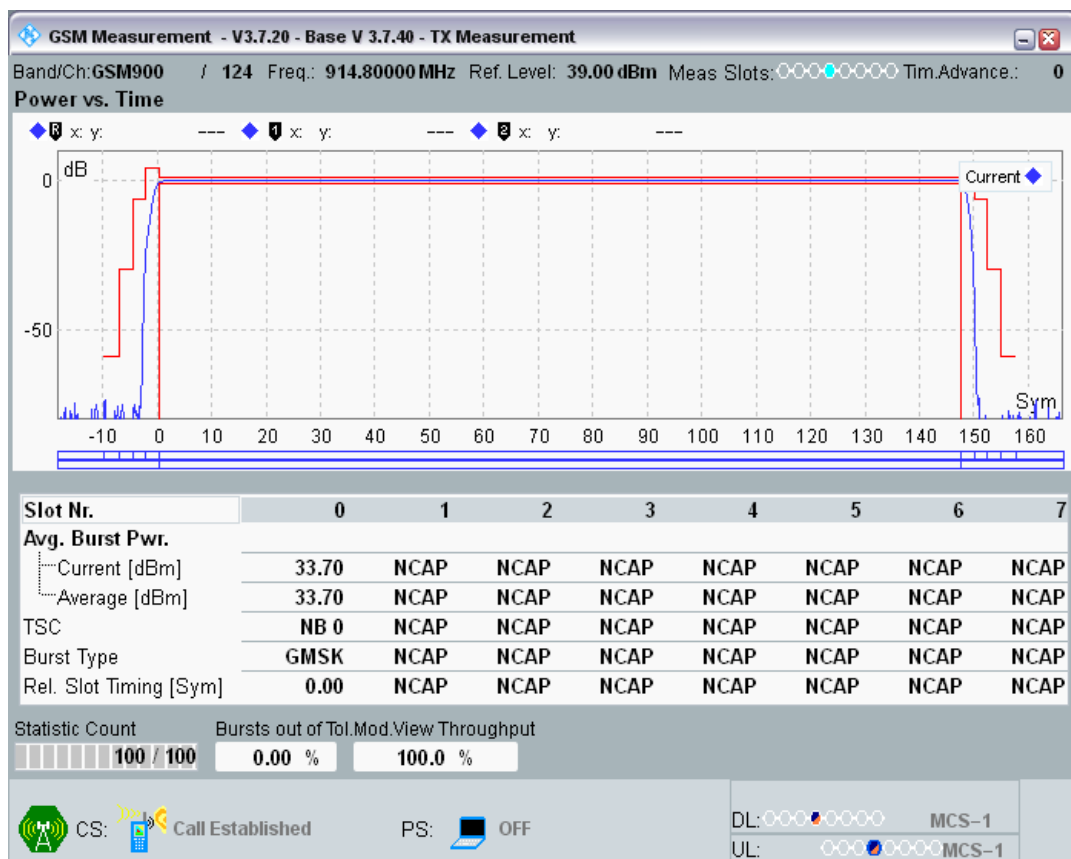


GSM900 Channel=60 PCL=19.png

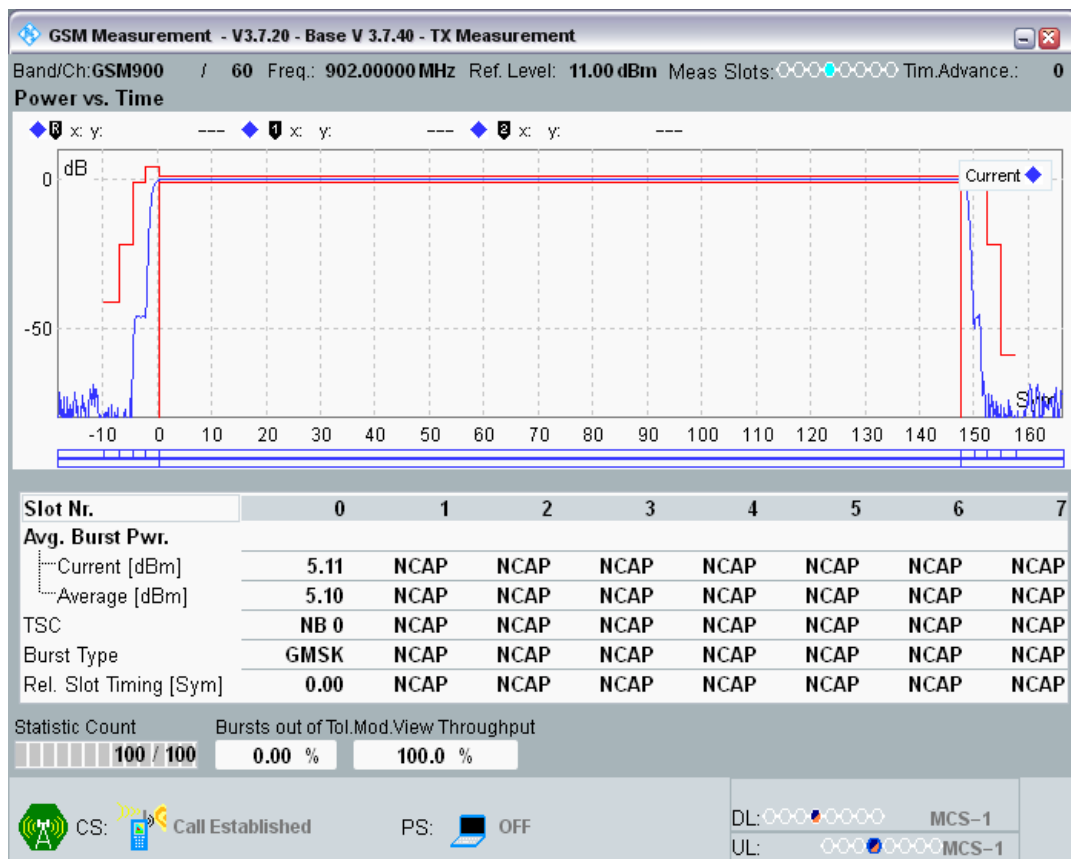


GSM900 Channel=60 PCL=5.png

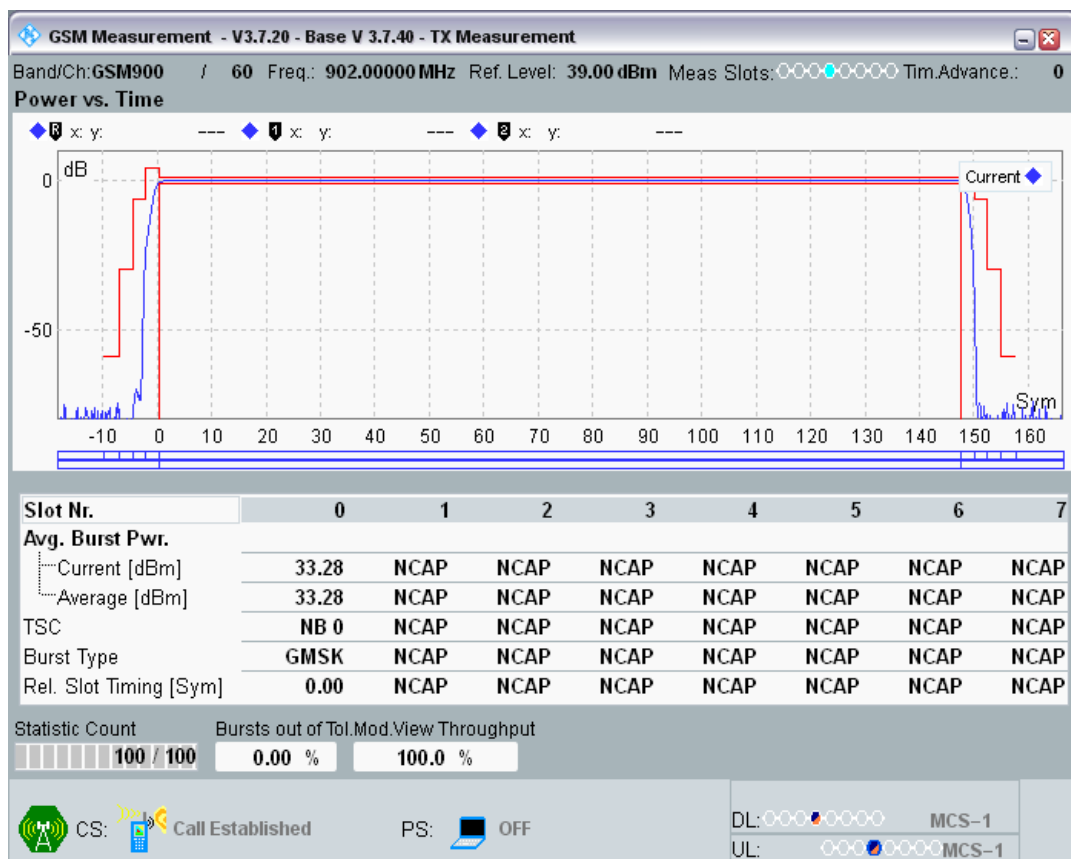

GSM900 Channel=975 PCL=19.png

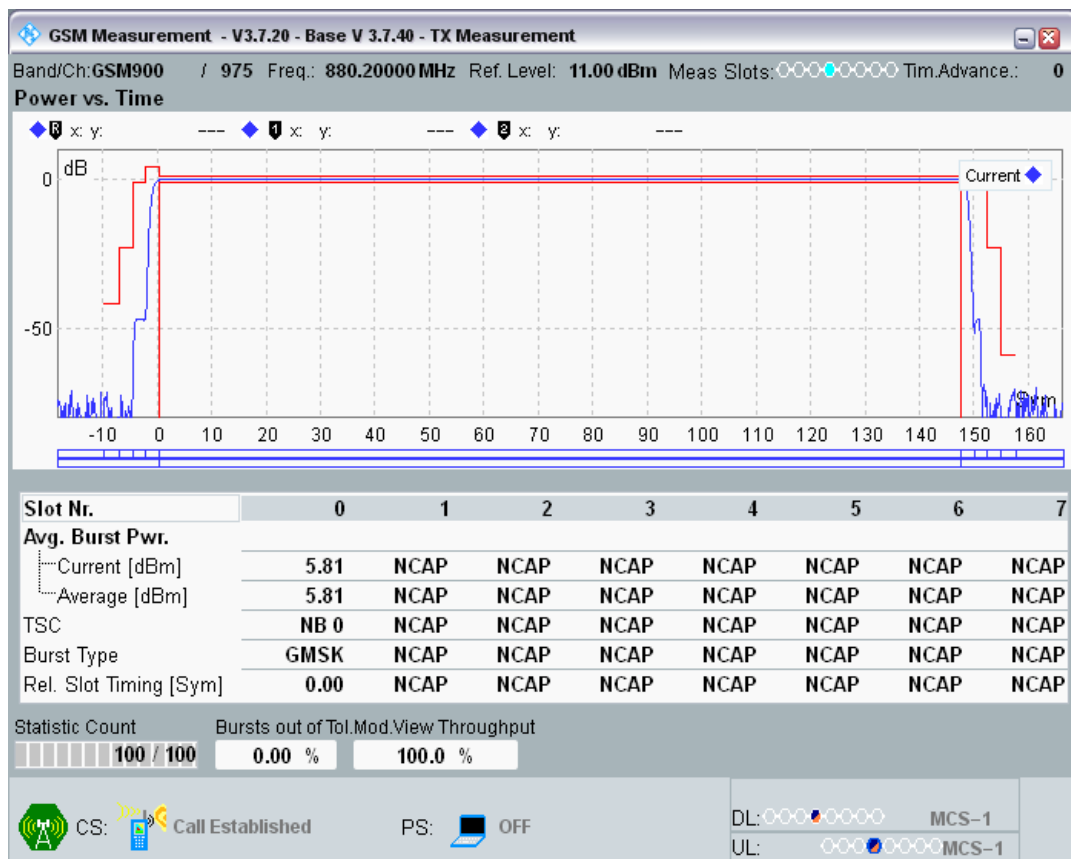

GSM900 Channel=975 PCL=5.png

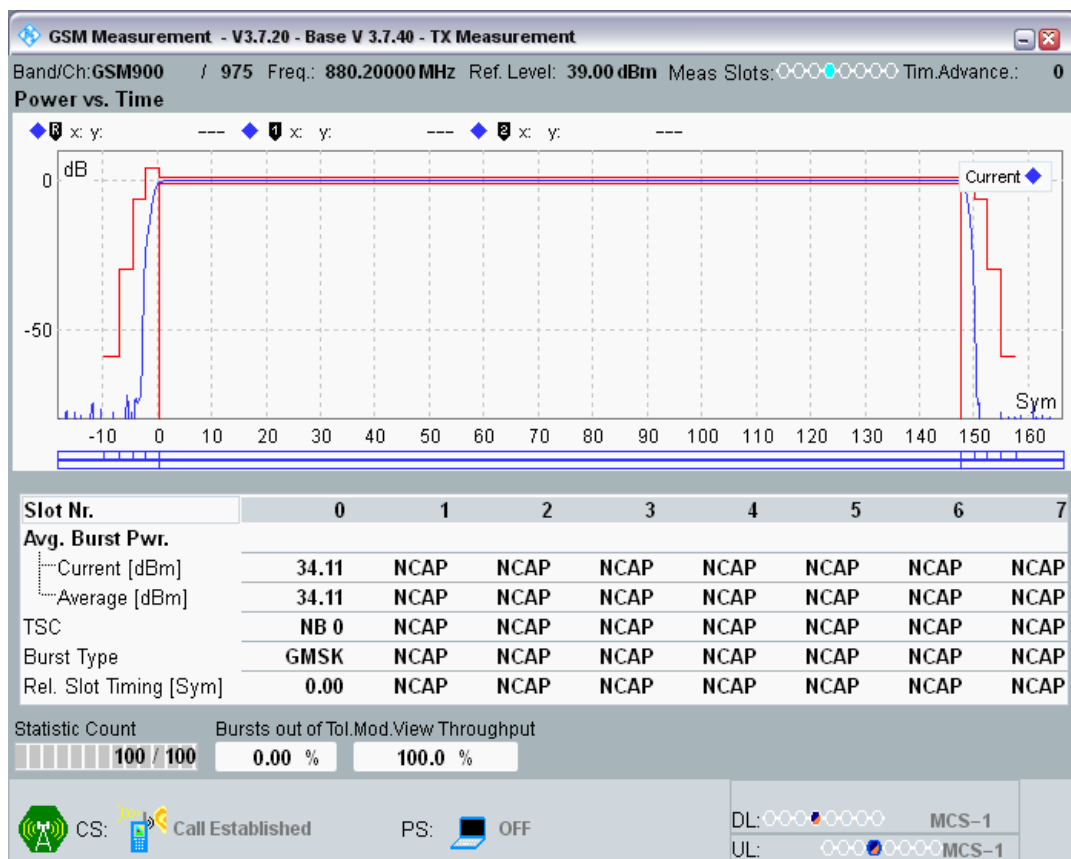

### Clause 4.2.6 Transmitter-Modulation Spectrum

Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-81.23	-60	-58.58	-56	PASS
DCS1800	512	1710.2	0	-1600 KHz	-80.81	-60	-58.16	-56	PASS
DCS1800	512	1710.2	0	-1400 KHz	-79.97	-60	-57.32	-56	PASS
DCS1800	512	1710.2	0	-1200 KHz	-79.14	-60	-56.50	-56	PASS
DCS1800	512	1710.2	0	-1000 KHz	-77.99	-60	-55.34	-56	PASS
DCS1800	512	1710.2	0	-800 KHz	-76.44	-60	-53.80	-56	PASS
DCS1800	512	1710.2	0	-600 KHz	-73.99	-60	-51.35	-56	PASS
DCS1800	512	1710.2	0	-400 KHz	-68.58	-60	-45.94	-36	PASS
DCS1800	512	1710.2	0	-250 KHz	-41.13	-33	-18.48	-36	PASS
DCS1800	512	1710.2	0	-200 KHz	-36.86	-30	-14.22	-36	PASS

				KHz					
DCS1800	512	1710.2	0	-100 KHz	-8.94	0.5	13.71	-36	PASS
DCS1800	512	1710.2	0	100 KHz	-8.88	0.5	13.77	-36	PASS
DCS1800	512	1710.2	0	200 KHz	-36.92	-30	-14.27	-36	PASS
DCS1800	512	1710.2	0	250 KHz	-40.92	-33	-18.27	-36	PASS
DCS1800	512	1710.2	0	400 KHz	-68.77	-60	-46.12	-36	PASS
DCS1800	512	1710.2	0	600 KHz	-74.16	-60	-51.51	-56	PASS
DCS1800	512	1710.2	0	800 KHz	-76.32	-60	-53.67	-56	PASS
DCS1800	512	1710.2	0	1000 KHz	-78.12	-60	-55.47	-56	PASS
DCS1800	512	1710.2	0	1200 KHz	-79.27	-60	-56.62	-56	PASS
DCS1800	512	1710.2	0	1400 KHz	-79.93	-60	-57.29	-56	PASS
DCS1800	512	1710.2	0	1600 KHz	-81.00	-60	-58.35	-56	PASS
DCS1800	512	1710.2	0	1800 KHz	-81.43	-60	-58.79	-56	PASS
DCS1800	700	1747.8	0	-1800 KHz	-81.01	-60	-58.42	-56	PASS
DCS1800	700	1747.8	0	-1600 KHz	-80.70	-60	-58.12	-56	PASS
DCS1800	700	1747.8	0	-1400 KHz	-80.07	-60	-57.48	-56	PASS
DCS1800	700	1747.8	0	-1200 KHz	-79.18	-60	-56.60	-56	PASS
DCS1800	700	1747.8	0	-1000 KHz	-77.98	-60	-55.40	-56	PASS
DCS1800	700	1747.8	0	-800 KHz	-76.36	-60	-53.77	-56	PASS
DCS1800	700	1747.8	0	-600 KHz	-73.86	-60	-51.27	-56	PASS
DCS1800	700	1747.8	0	-400 KHz	-68.37	-60	-45.79	-36	PASS
DCS1800	700	1747.8	0	-250 KHz	-40.76	-33	-18.17	-36	PASS
DCS1800	700	1747.8	0	-200 KHz	-36.35	-30	-13.76	-36	PASS
DCS1800	700	1747.8	0	-100 KHz	-8.69	0.5	13.89	-36	PASS
DCS1800	700	1747.8	0	100 KHz	-8.52	0.5	14.06	-36	PASS
DCS1800	700	1747.8	0	200 KHz	-36.50	-30	-13.91	-36	PASS

DCS1800	700	1747.8	0	250 KHz	-40.74	-33	-18.15	-36	PASS
DCS1800	700	1747.8	0	400 KHz	-68.24	-60	-45.66	-36	PASS
DCS1800	700	1747.8	0	600 KHz	-74.02	-60	-51.44	-56	PASS
DCS1800	700	1747.8	0	800 KHz	-76.19	-60	-53.60	-56	PASS
DCS1800	700	1747.8	0	1000 KHz	-78.12	-60	-55.53	-56	PASS
DCS1800	700	1747.8	0	1200 KHz	-78.75	-60	-56.17	-56	PASS
DCS1800	700	1747.8	0	1400 KHz	-79.77	-60	-57.18	-56	PASS
DCS1800	700	1747.8	0	1600 KHz	-80.63	-60	-58.04	-56	PASS
DCS1800	700	1747.8	0	1800 KHz	-81.05	-60	-58.46	-56	PASS
DCS1800	885	1784.8	0	-1800 KHz	-81.30	-60	-58.12	-56	PASS
DCS1800	885	1784.8	0	-1600 KHz	-80.92	-60	-57.74	-56	PASS
DCS1800	885	1784.8	0	-1400 KHz	-80.26	-60	-57.08	-56	PASS
DCS1800	885	1784.8	0	-1200 KHz	-79.11	-60	-55.93	-56	PASS
DCS1800	885	1784.8	0	-1000 KHz	-77.91	-60	-54.73	-56	PASS
DCS1800	885	1784.8	0	-800 KHz	-76.10	-60	-52.92	-56	PASS
DCS1800	885	1784.8	0	-600 KHz	-73.59	-60	-50.41	-56	PASS
DCS1800	885	1784.8	0	-400 KHz	-68.22	-60	-45.04	-36	PASS
DCS1800	885	1784.8	0	-250 KHz	-40.92	-33	-17.74	-36	PASS
DCS1800	885	1784.8	0	-200 KHz	-36.32	-30	-13.14	-36	PASS
DCS1800	885	1784.8	0	-100 KHz	-8.55	0.5	14.63	-36	PASS
DCS1800	885	1784.8	0	100 KHz	-8.73	0.5	14.45	-36	PASS
DCS1800	885	1784.8	0	200 KHz	-36.59	-30	-13.42	-36	PASS
DCS1800	885	1784.8	0	250 KHz	-40.67	-33	-17.49	-36	PASS
DCS1800	885	1784.8	0	400 KHz	-68.52	-60	-45.35	-36	PASS
DCS1800	885	1784.8	0	600 KHz	-73.78	-60	-50.60	-56	PASS
DCS1800	885	1784.8	0	800 KHz	-76.16	-60	-52.98	-56	PASS
DCS1800	885	1784.8	0	1000 KHz	-78.16	-60	-54.98	-56	PASS


				KHz					
DCS1800	885	1784.8	0	1200 KHz	-79.01	-60	-55.83	-56	PASS
DCS1800	885	1784.8	0	1400 KHz	-80.09	-60	-56.91	-56	PASS
DCS1800	885	1784.8	0	1600 KHz	-81.01	-60	-57.83	-56	PASS
DCS1800	885	1784.8	0	1800 KHz	-81.12	-60	-57.95	-56	PASS
GSM900	975	880.2	5	-1800 KHz	-82.54	-60	-56.35	-51	PASS
GSM900	975	880.2	5	-1600 KHz	-82.39	-60	-56.21	-51	PASS
GSM900	975	880.2	5	-1400 KHz	-81.50	-60	-55.32	-51	PASS
GSM900	975	880.2	5	-1200 KHz	-80.76	-60	-54.57	-51	PASS
GSM900	975	880.2	5	-1000 KHz	-79.67	-60	-53.48	-51	PASS
GSM900	975	880.2	5	-800 KHz	-78.23	-60	-52.05	-51	PASS
GSM900	975	880.2	5	-600 KHz	-75.88	-60	-49.69	-51	PASS
GSM900	975	880.2	5	-400 KHz	-70.49	-60	-44.30	-36	PASS
GSM900	975	880.2	5	-250 KHz	-41.21	-33	-15.02	-36	PASS
GSM900	975	880.2	5	-200 KHz	-36.58	-30	-10.39	-36	PASS
GSM900	975	880.2	5	-100 KHz	-8.55	0.5	17.64	-36	PASS
GSM900	975	880.2	5	100 KHz	-8.51	0.5	17.68	-36	PASS
GSM900	975	880.2	5	200 KHz	-36.68	-30	-10.49	-36	PASS
GSM900	975	880.2	5	250 KHz	-41.02	-33	-14.84	-36	PASS
GSM900	975	880.2	5	400 KHz	-70.57	-60	-44.38	-36	PASS
GSM900	975	880.2	5	600 KHz	-75.97	-60	-49.79	-51	PASS
GSM900	975	880.2	5	800 KHz	-78.16	-60	-51.98	-51	PASS
GSM900	975	880.2	5	1000 KHz	-80.16	-60	-53.97	-51	PASS
GSM900	975	880.2	5	1200 KHz	-80.67	-60	-54.49	-51	PASS
GSM900	975	880.2	5	1400 KHz	-81.39	-60	-55.21	-51	PASS

GSM900	975	880.2	5	1600 KHz	-82.24	-60	-56.05	-51	PASS
GSM900	975	880.2	5	1800 KHz	-82.35	-60	-56.17	-51	PASS
GSM900	60	902	5	-1800 KHz	-82.33	-60	-56.99	-51	PASS
GSM900	60	902	5	-1600 KHz	-82.00	-60	-56.66	-51	PASS
GSM900	60	902	5	-1400 KHz	-81.29	-60	-55.95	-51	PASS
GSM900	60	902	5	-1200 KHz	-80.66	-60	-55.32	-51	PASS
GSM900	60	902	5	-1000 KHz	-79.52	-60	-54.18	-51	PASS
GSM900	60	902	5	-800 KHz	-78.09	-60	-52.75	-51	PASS
GSM900	60	902	5	-600 KHz	-75.96	-60	-50.62	-51	PASS
GSM900	60	902	5	-400 KHz	-70.71	-60	-45.36	-36	PASS
GSM900	60	902	5	-250 KHz	-41.24	-33	-15.90	-36	PASS
GSM900	60	902	5	-200 KHz	-36.75	-30	-11.41	-36	PASS
GSM900	60	902	5	-100 KHz	-8.91	0.5	16.44	-36	PASS
GSM900	60	902	5	100 KHz	-8.75	0.5	16.60	-36	PASS
GSM900	60	902	5	200 KHz	-36.82	-30	-11.48	-36	PASS
GSM900	60	902	5	250 KHz	-41.11	-33	-15.77	-36	PASS
GSM900	60	902	5	400 KHz	-70.70	-60	-45.36	-36	PASS
GSM900	60	902	5	600 KHz	-76.12	-60	-50.78	-51	PASS
GSM900	60	902	5	800 KHz	-78.34	-60	-53.00	-51	PASS
GSM900	60	902	5	1000 KHz	-79.36	-60	-54.02	-51	PASS
GSM900	60	902	5	1200 KHz	-80.43	-60	-55.08	-51	PASS
GSM900	60	902	5	1400 KHz	-81.01	-60	-55.67	-51	PASS
GSM900	60	902	5	1600 KHz	-82.13	-60	-56.79	-51	PASS
GSM900	60	902	5	1800 KHz	-82.19	-60	-56.84	-51	PASS
GSM900	124	914.8	5	-1800 KHz	-81.19	-60	-55.56	-51	PASS




				KHz					
GSM900	124	914.8	5	-1600 KHz	-82.52	-60	-56.89	-51	PASS
GSM900	124	914.8	5	-1400 KHz	-81.50	-60	-55.87	-51	PASS
GSM900	124	914.8	5	-1200 KHz	-81.12	-60	-55.49	-51	PASS
GSM900	124	914.8	5	-1000 KHz	-79.87	-60	-54.24	-51	PASS
GSM900	124	914.8	5	-800 KHz	-78.46	-60	-52.83	-51	PASS
GSM900	124	914.8	5	-600 KHz	-76.23	-60	-50.60	-51	PASS
GSM900	124	914.8	5	-400 KHz	-70.85	-60	-45.22	-36	PASS
GSM900	124	914.8	5	-250 KHz	-40.92	-33	-15.29	-36	PASS
GSM900	124	914.8	5	-200 KHz	-36.58	-30	-10.95	-36	PASS
GSM900	124	914.8	5	-100 KHz	-8.63	0.5	17.00	-36	PASS
GSM900	124	914.8	5	100 KHz	-8.30	0.5	17.33	-36	PASS
GSM900	124	914.8	5	200 KHz	-36.61	-30	-10.99	-36	PASS
GSM900	124	914.8	5	250 KHz	-40.87	-33	-15.24	-36	PASS
GSM900	124	914.8	5	400 KHz	-70.72	-60	-45.10	-36	PASS
GSM900	124	914.8	5	600 KHz	-76.62	-60	-50.99	-51	PASS
GSM900	124	914.8	5	800 KHz	-78.68	-60	-53.05	-51	PASS
GSM900	124	914.8	5	1000 KHz	-80.23	-60	-54.60	-51	PASS
GSM900	124	914.8	5	1200 KHz	-80.85	-60	-55.22	-51	PASS
GSM900	124	914.8	5	1400 KHz	-81.18	-60	-55.56	-51	PASS
GSM900	124	914.8	5	1600 KHz	-82.35	-60	-56.72	-51	PASS
GSM900	124	914.8	5	1800 KHz	-81.43	-60	-55.81	-51	PASS


DCS1800 Channel=512 PCL=0.png

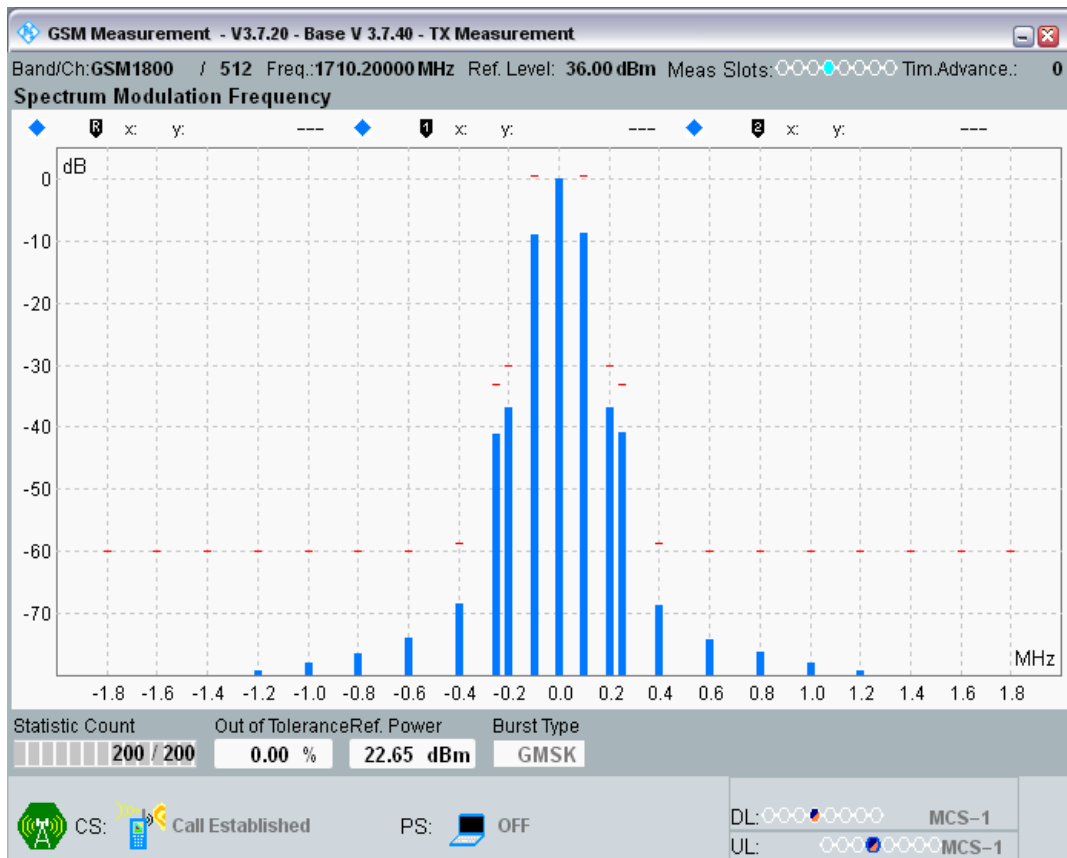


DCS1800 Channel=700 PCL=0.png

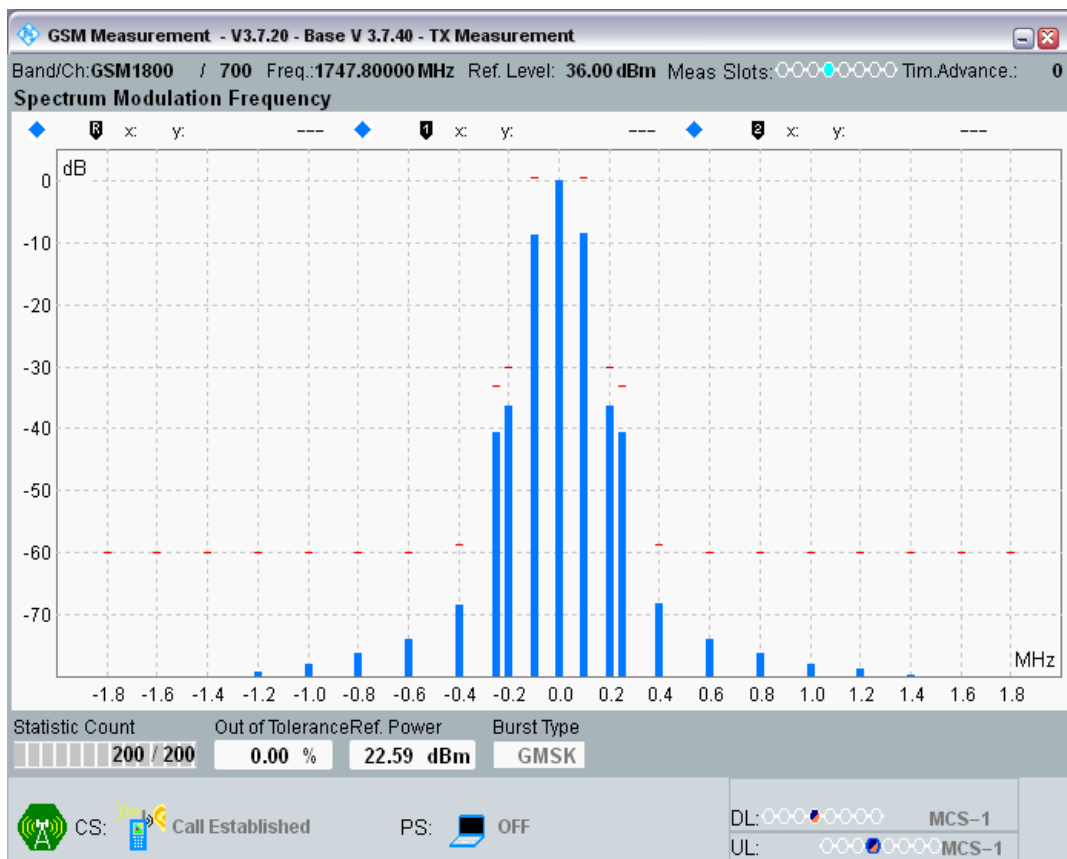


DCS1800 Channel=885 PCL=0.png

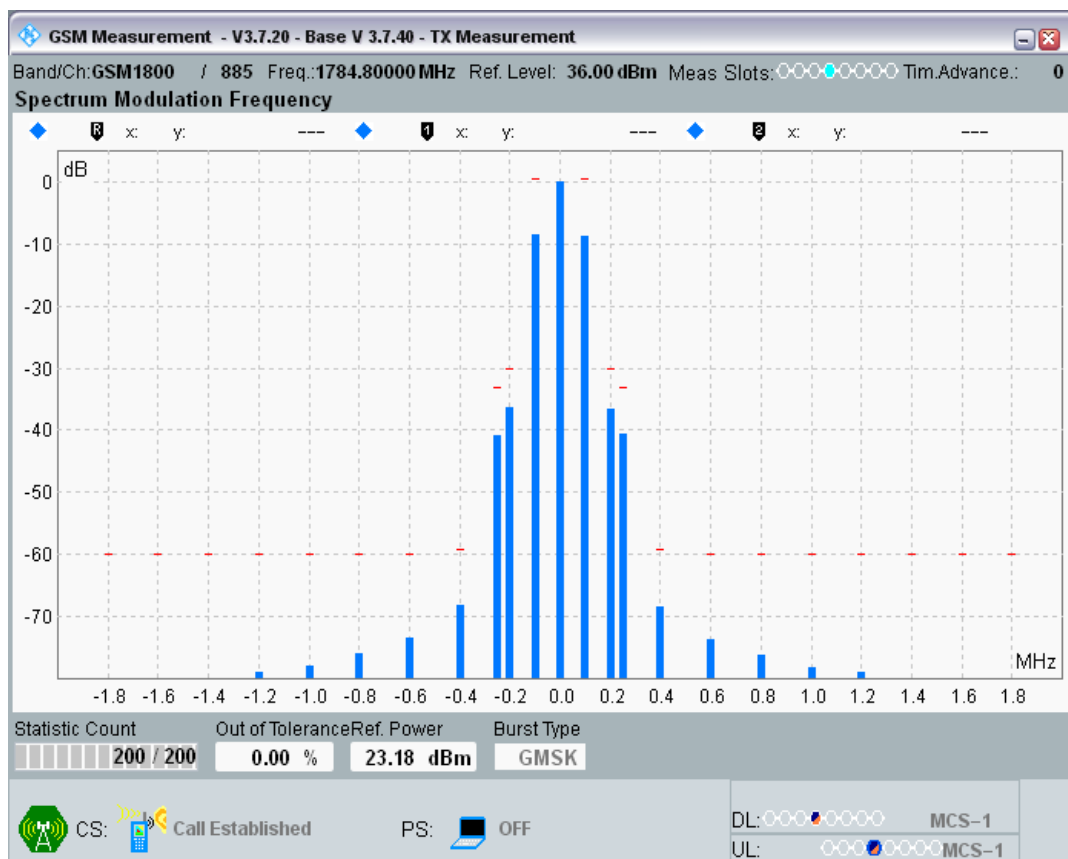


GSM900 Channel=124 PCL=5.png

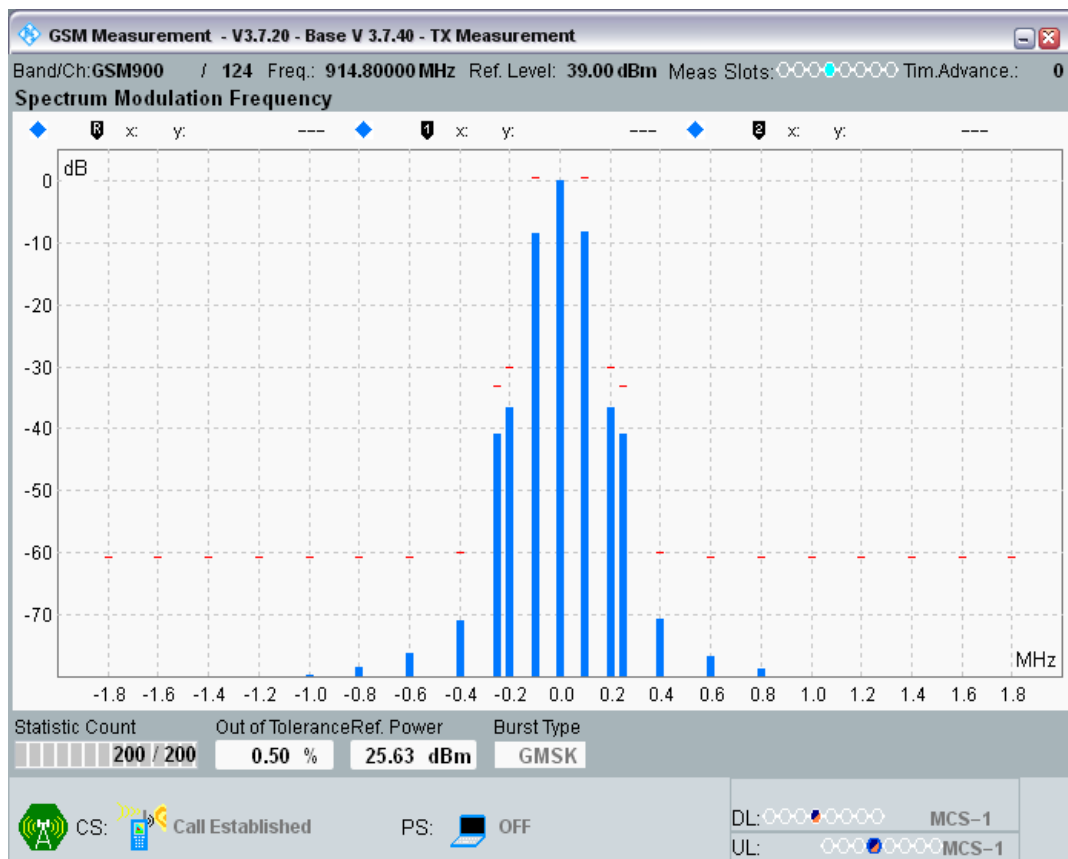

GSM900 Channel=60 PCL=5.png

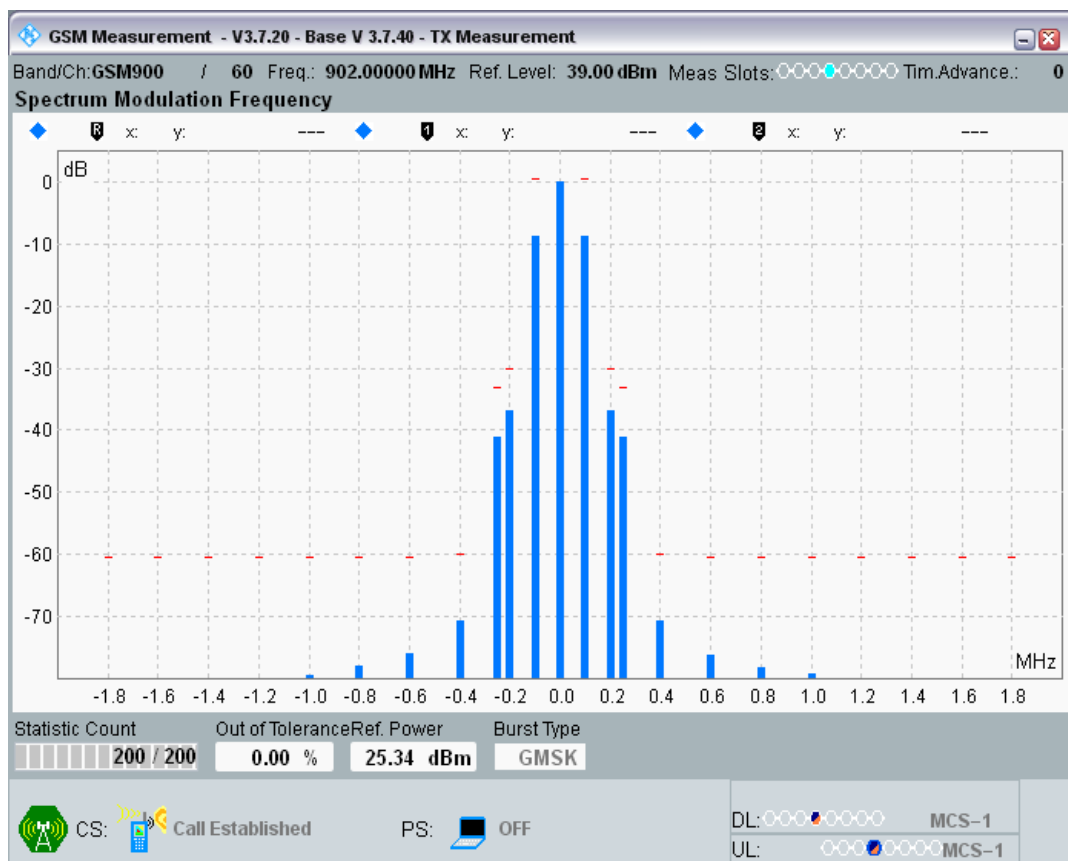

GSM900 Channel=975 PCL=5.png

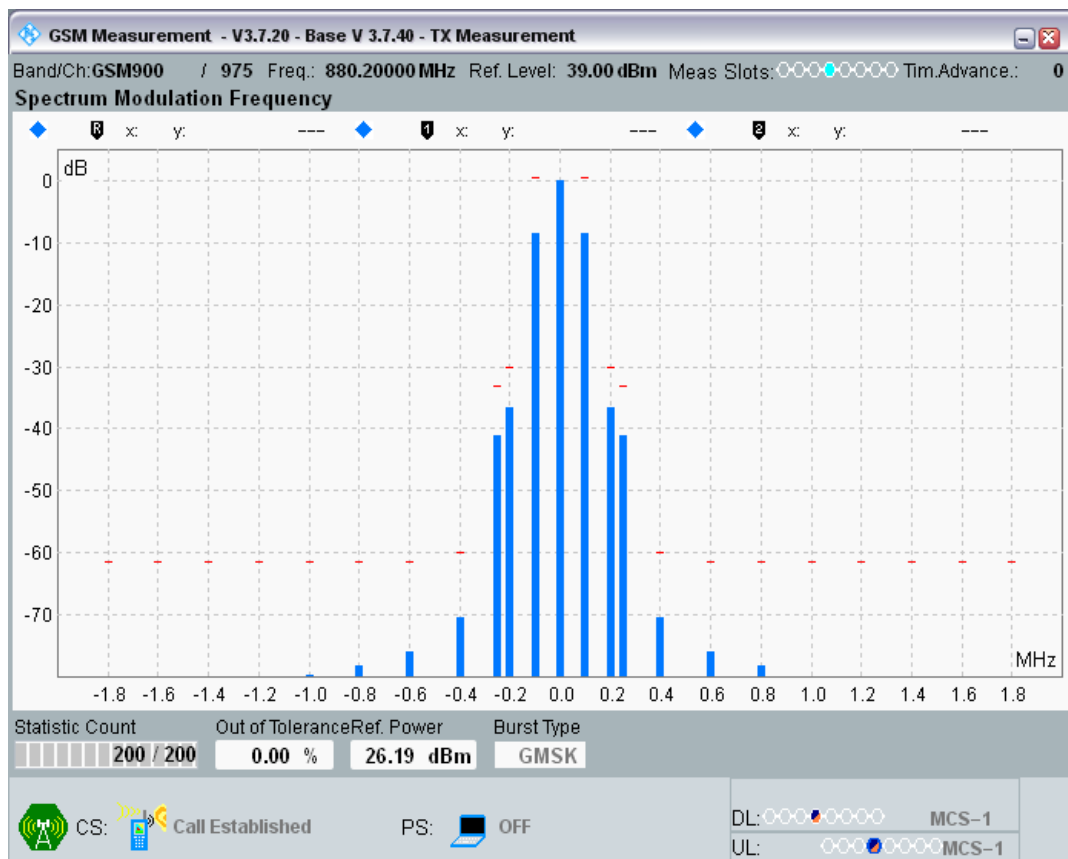

## Clause 4.2.6 Transmitter-Switching Spectrum


Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: CCISE2008044


Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-44.39	-27	PASS
DCS1800	512	1710.2	0	-1200 KHz	-39.40	-24	PASS
DCS1800	512	1710.2	0	-600 KHz	-32.87	-24	PASS
DCS1800	512	1710.2	0	-400 KHz	-32.25	-22	PASS
DCS1800	512	1710.2	0	400 KHz	-27.97	-22	PASS
DCS1800	512	1710.2	0	600 KHz	-33.39	-24	PASS
DCS1800	512	1710.2	0	1200 KHz	-39.55	-24	PASS
DCS1800	512	1710.2	0	1800 KHz	-45.29	-27	PASS
DCS1800	700	1747.8	0	-1800 KHz	-44.38	-27	PASS
DCS1800	700	1747.8	0	-1200 KHz	-40.95	-24	PASS
DCS1800	700	1747.8	0	-600 KHz	-32.71	-24	PASS
DCS1800	700	1747.8	0	-400 KHz	-29.53	-22	PASS
DCS1800	700	1747.8	0	400 KHz	-28.66	-22	PASS
DCS1800	700	1747.8	0	600 KHz	-31.57	-24	PASS
DCS1800	700	1747.8	0	1200 KHz	-39.80	-24	PASS
DCS1800	700	1747.8	0	1800 KHz	-43.51	-27	PASS
DCS1800	885	1784.8	0	-1800 KHz	-44.60	-27	PASS
DCS1800	885	1784.8	0	-1200 KHz	-40.42	-24	PASS
DCS1800	885	1784.8	0	-600 KHz	-32.01	-24	PASS
DCS1800	885	1784.8	0	-400 KHz	-30.22	-22	PASS
DCS1800	885	1784.8	0	400 KHz	-29.29	-22	PASS
DCS1800	885	1784.8	0	600 KHz	-30.96	-24	PASS
DCS1800	885	1784.8	0	1200 KHz	-38.84	-24	PASS
DCS1800	885	1784.8	0	1800 KHz	-44.73	-27	PASS
GSM900	975	880.2	5	-1800 KHz	-45.58	-24	PASS
GSM900	975	880.2	5	-1200 KHz	-43.24	-21	PASS
GSM900	975	880.2	5	-600 KHz	-38.63	-21	PASS
GSM900	975	880.2	5	-400 KHz	-29.54	-19	PASS
GSM900	975	880.2	5	400 KHz	-29.70	-19	PASS
GSM900	975	880.2	5	600 KHz	-39.35	-21	PASS
GSM900	975	880.2	5	1200 KHz	-43.69	-21	PASS
GSM900	975	880.2	5	1800 KHz	-45.62	-24	PASS
GSM900	60	902	5	-1800 KHz	-46.41	-24	PASS
GSM900	60	902	5	-1200 KHz	-44.15	-21	PASS
GSM900	60	902	5	-600 KHz	-40.63	-21	PASS
GSM900	60	902	5	-400 KHz	-31.03	-19	PASS
GSM900	60	902	5	400 KHz	-32.20	-19	PASS
GSM900	60	902	5	600 KHz	-39.57	-21	PASS
GSM900	60	902	5	1200 KHz	-42.59	-21	PASS
GSM900	60	902	5	1800 KHz	-45.49	-24	PASS
GSM900	124	914.8	5	-1800 KHz	-44.23	-24	PASS
GSM900	124	914.8	5	-1200 KHz	-44.82	-21	PASS

GSM900	124	914.8	5	-600 KHz	-39.46	-21	PASS
GSM900	124	914.8	5	-400 KHz	-30.32	-19	PASS
GSM900	124	914.8	5	400 KHz	-32.49	-19	PASS
GSM900	124	914.8	5	600 KHz	-39.79	-21	PASS
GSM900	124	914.8	5	1200 KHz	-44.24	-21	PASS
GSM900	124	914.8	5	1800 KHz	-45.51	-24	PASS


DCS1800 Channel=512 PCL=0.png

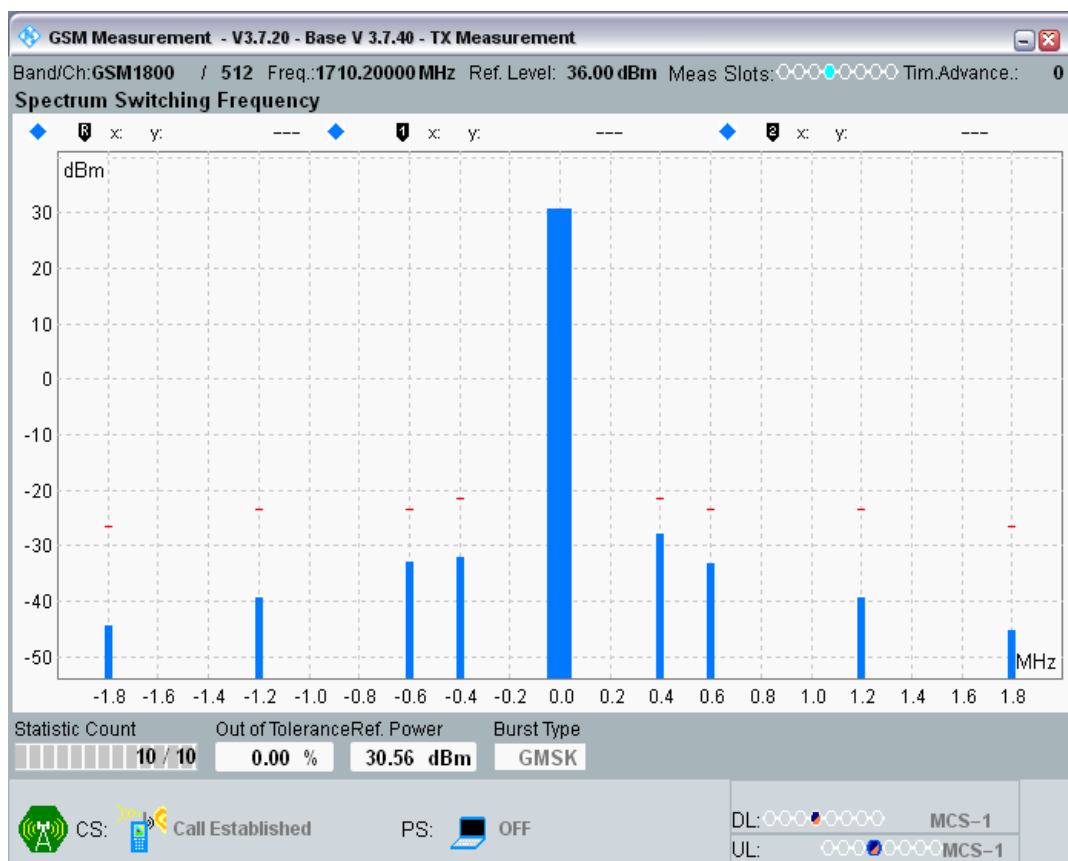


DCS1800 Channel=700 PCL=0.png

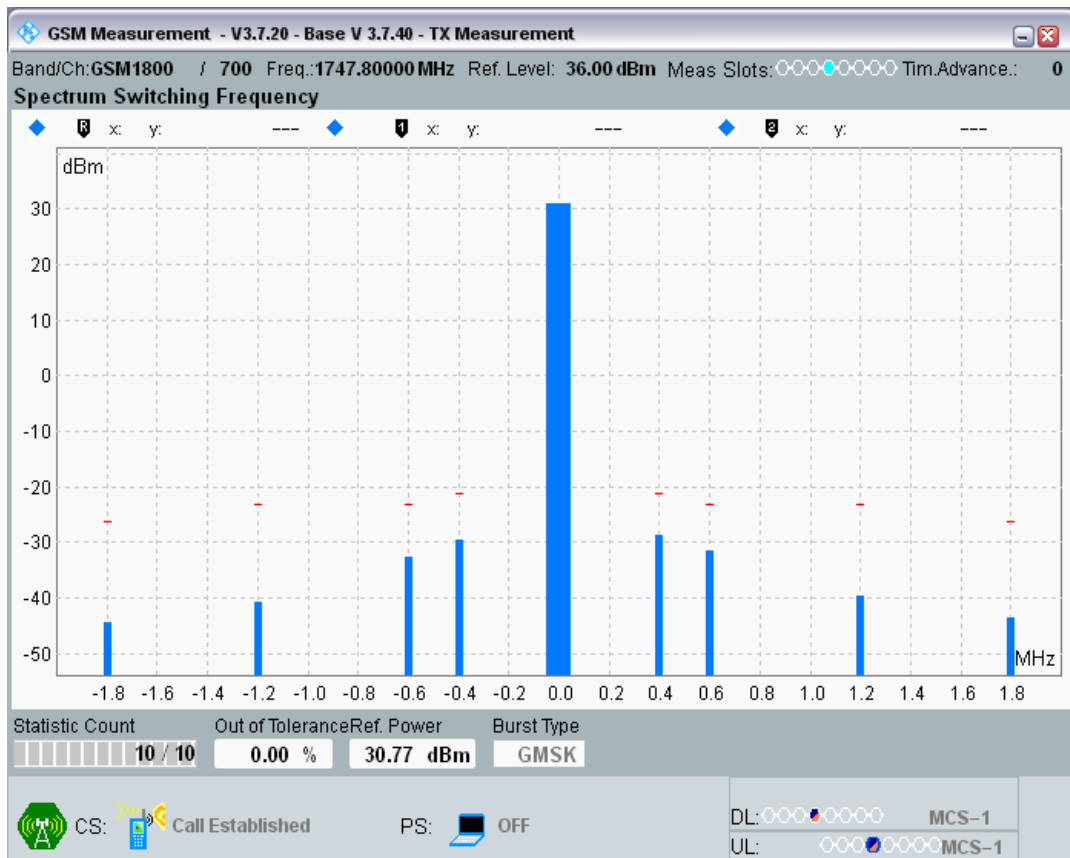


DCS1800 Channel=885 PCL=0.png

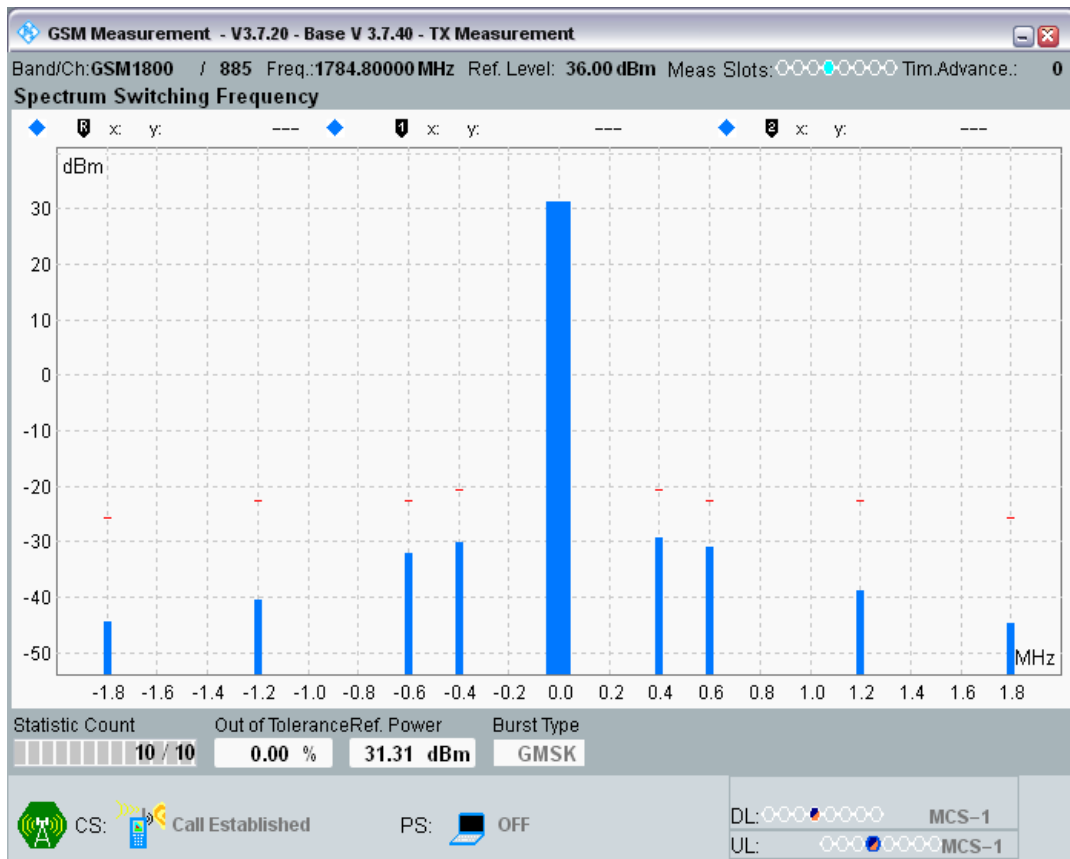

GSM900 Channel=124 PCL=5.png

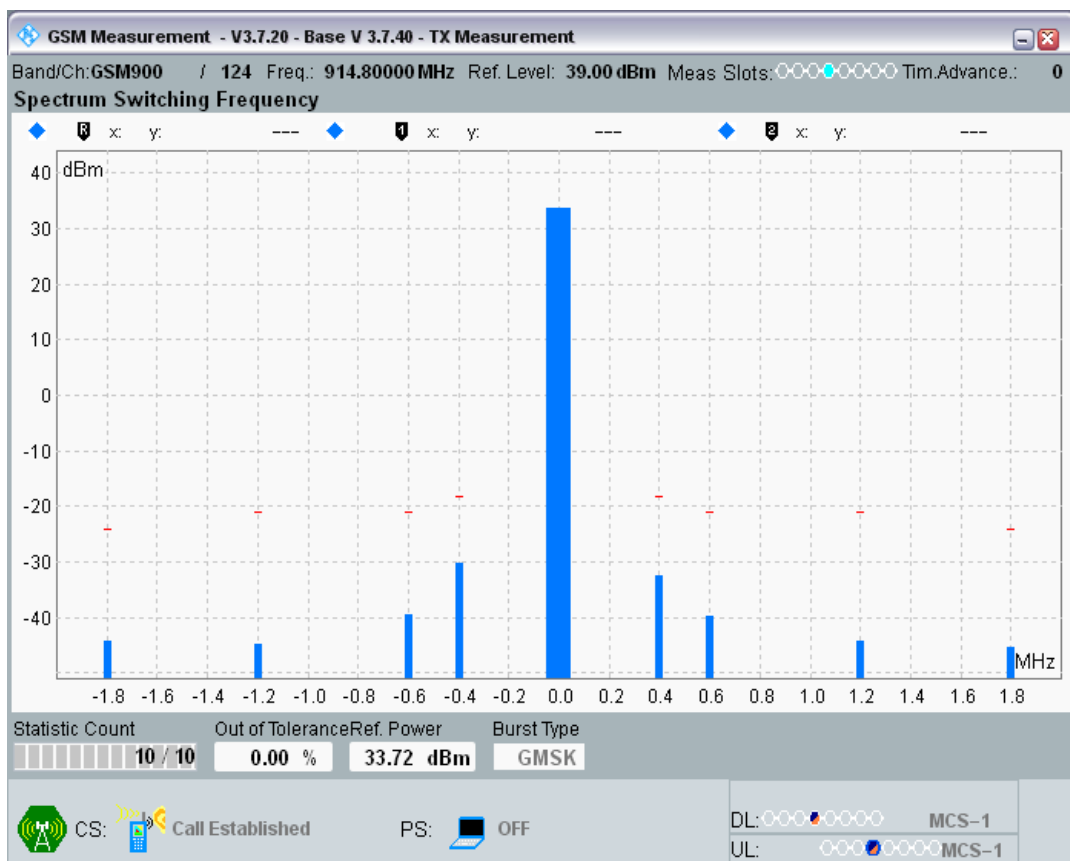


GSM900 Channel=60 PCL=5.png

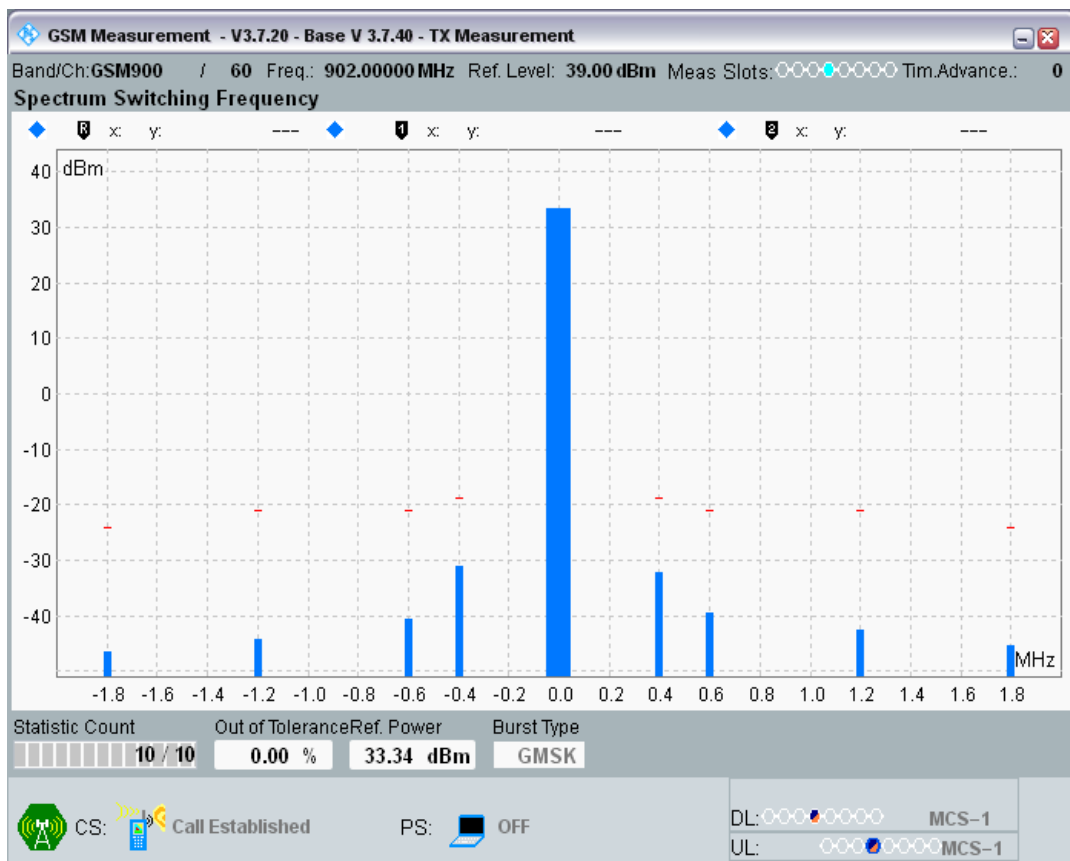

GSM900 Channel=975 PCL=5.png



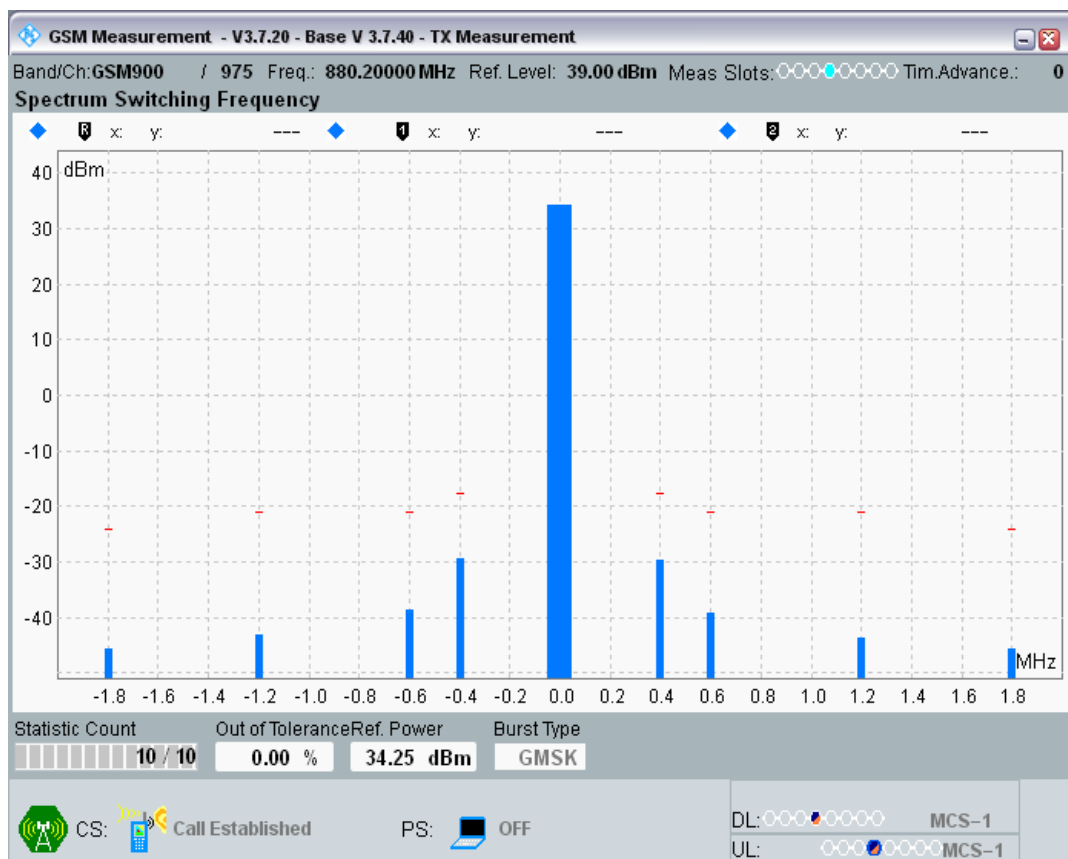


## Clause 4.2.12 Conducted spurious emissions - MS allocated a channel

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.13	-64.78	-36	PASS
DCS1800	700	1747.8	0	50MHz - 500MHz	100	203.3	-78.96	-36	PASS
DCS1800	700	1747.8	0	500MHz - 1000MHz	3000	997.5	-63.11	-36	PASS
DCS1800	700	1747.8	0	1000MHz - 1680MHz	3000	1661.64	-64.71	-30	PASS
DCS1800	700	1747.8	0	1680MHz - 1690MHz	1000	1687.81	-60.03	-30	PASS
DCS1800	700	1747.8	0	1690MHz - 1700MHz	300	1693.11	-66.24	-30	PASS
DCS1800	700	1747.8	0	1700MHz - 1710MHz	100	1706.8	-76.12	-30	PASS
DCS1800	700	1747.8	0	1785MHz - 1795MHz	100	1791.7	-74.87	-30	PASS
DCS1800	700	1747.8	0	1795MHz - 1805MHz	300	1802.81	-70.69	-30	PASS
DCS1800	700	1747.8	0	1800MHz - 4000MHz	3000	3496.2	-41.28	-30	PASS
DCS1800	700	1747.8	0	4000MHz - 8738.08299MHz	3000	8738.08299	-41.53	-30	PASS

				12750MHz					
DCS1800	700	1747.8	0	1710MHz - 1741.8MHz	100	1740.6234	-55.39	-30	PASS
DCS1800	700	1747.8	0	1741.8MHz - 1746MHz	30	1744.866	-57.20	-30	PASS
DCS1800	700	1747.8	0	1749.6MHz - 1753.8MHz	30	1749.6462	-48.46	-30	PASS
DCS1800	700	1747.8	0	1753.8MHz - 1785MHz	100	1781.9424	-56.16	-30	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.13	-80.52	-36	PASS
GSM900	60	902	5	50MHz - 500MHz	100	480	-91.73	-36	PASS
GSM900	60	902	5	500MHz - 850MHz	3000	703.35	-74.56	-36	PASS
GSM900	60	902	5	850MHz - 860MHz	1000	858.57	-73.89	-36	PASS
GSM900	60	902	5	860MHz - 870MHz	300	860.05	-78.91	-30	PASS
GSM900	60	902	5	870MHz - 880MHz	100	874.76	-90.77	-36	PASS
GSM900	60	902	5	915MHz - 925MHz	100	921.42	-90.74	-36	PASS
GSM900	60	902	5	960MHz - 1000MHz	3000	965.16	-71.87	-36	PASS
GSM900	60	902	5	1000MHz - 2000MHz	3000	1804	-47.82	-30	PASS
GSM900	60	902	5	2000MHz - 12750MHz	3000	2705.065587	-47.85	-30	PASS
GSM900	60	902	5	880MHz - 896MHz	100	885.552	-57.25	-36	PASS
GSM900	60	902	5	896MHz - 900.2MHz	30	898.9652	-56.26	-36	PASS
GSM900	60	902	5	903.8MHz - 908MHz	30	903.8756	-52.21	-36	PASS
GSM900	60	902	5	908MHz - 915MHz	100	909.351	-55.88	-36	PASS


DCS1800 Channel=700 PCL=0.png

## Conducted spurious emissions

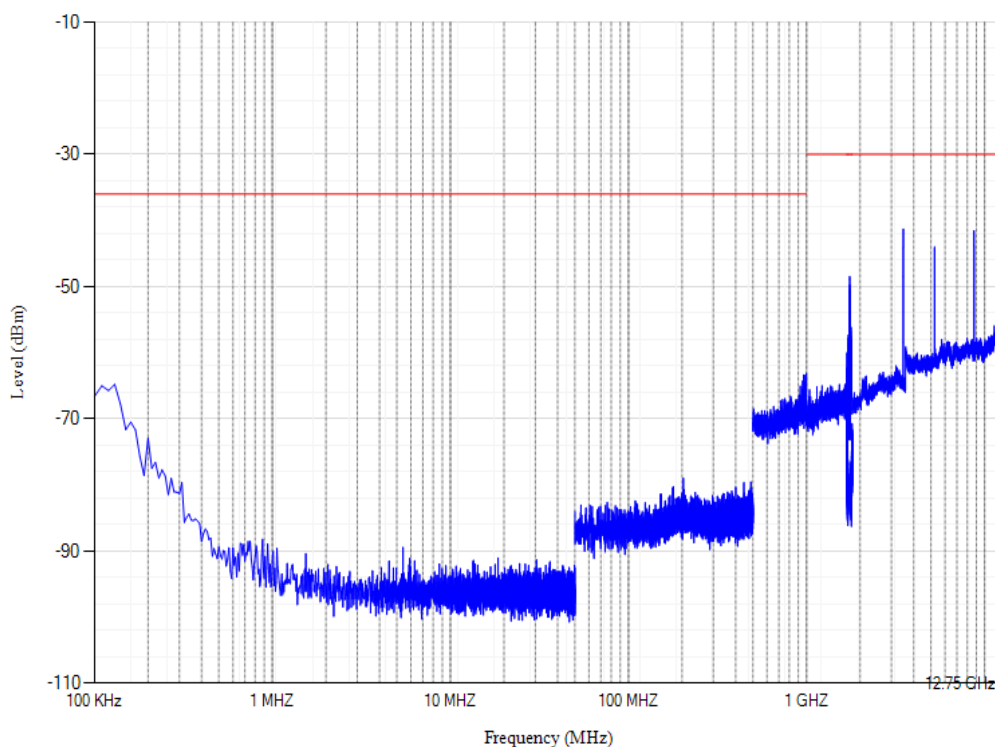

GSM900 Channel=60 PCL=5.png

## Conducted spurious emissions

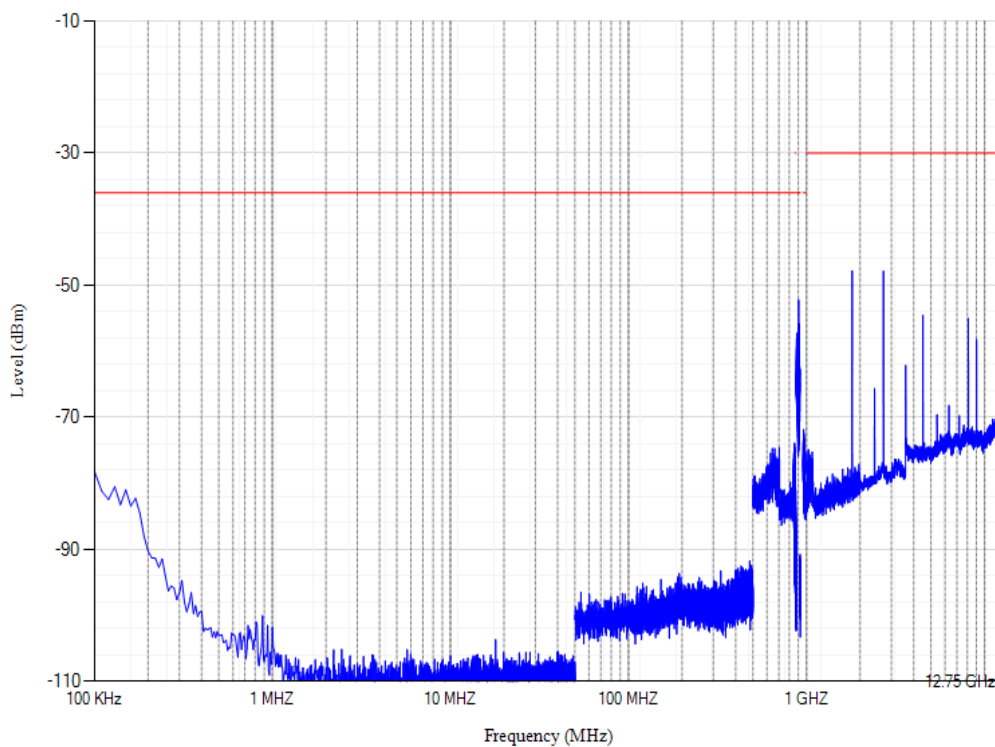


## Clause 4.2.13 Conducted spurious emission - MS in idle mode

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.11	-63.22	-57	PASS
DCS1800	700	1747.8	0	50MHz - 880MHz	100	866.6	-77.22	-57	PASS
DCS1800	700	1747.8	0	880MHz - 915MHz	100	905.865	-76.91	-59	PASS
DCS1800	700	1747.8	0	915MHz - 1000MHz	100	947.555	-77.32	-57	PASS
DCS1800	700	1747.8	0	1000MHz - 1710MHz	100	1612.4	-76.20	-47	PASS
DCS1800	700	1747.8	0	1710MHz - 1785MHz	100	1734.825	-75.58	-53	PASS
DCS1800	700	1747.8	0	1785MHz - 12750MHz	100	12109.91813	-66.96	-47	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.13	-65.13	-57	PASS
GSM900	60	902	5	50MHz - 880MHz	100	873.2	-79.09	-57	PASS
GSM900	60	902	5	880MHz - 915MHz	100	887.07	-77.89	-59	PASS
GSM900	60	902	5	915MHz - 1000MHz	100	995.24	-78.30	-57	PASS
GSM900	60	902	5	1000MHz - 1710MHz	100	1704.2	-76.40	-47	PASS
GSM900	60	902	5	1710MHz - 1785MHz	100	1727.775	-77.45	-53	PASS
GSM900	60	902	5	1785MHz - 12750MHz	100	12492.87075	-67.88	-47	PASS


DCS1800 Channel=700 PCL=0.png

## Conducted spurious emissions

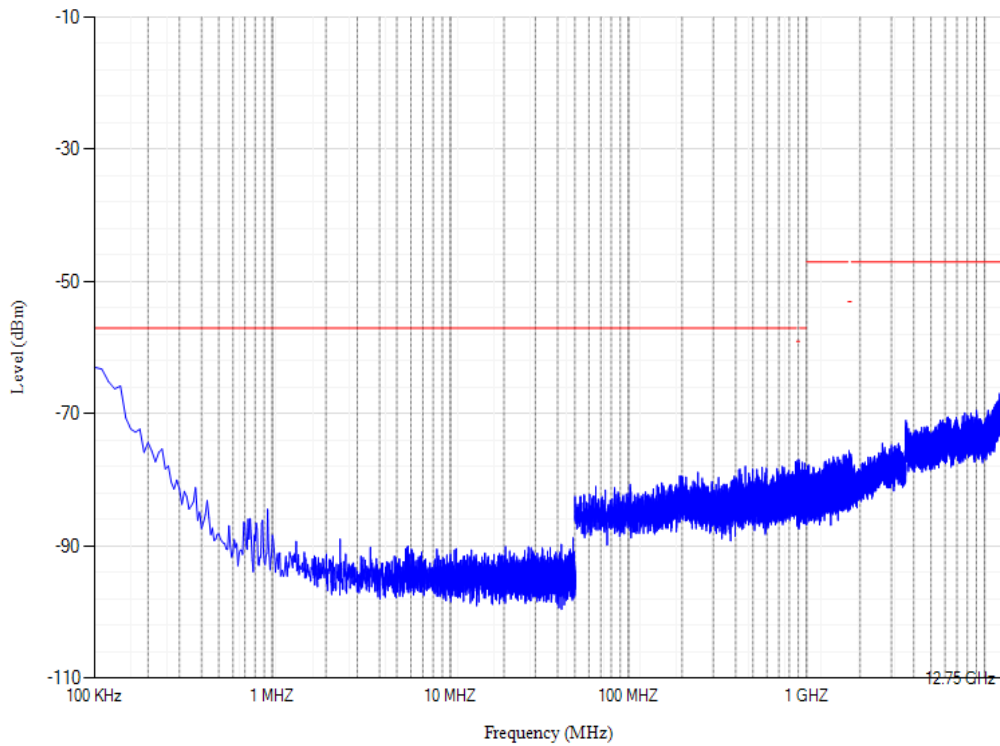

GSM900 Channel=60 PCL=5.png


## Conducted spurious emissions

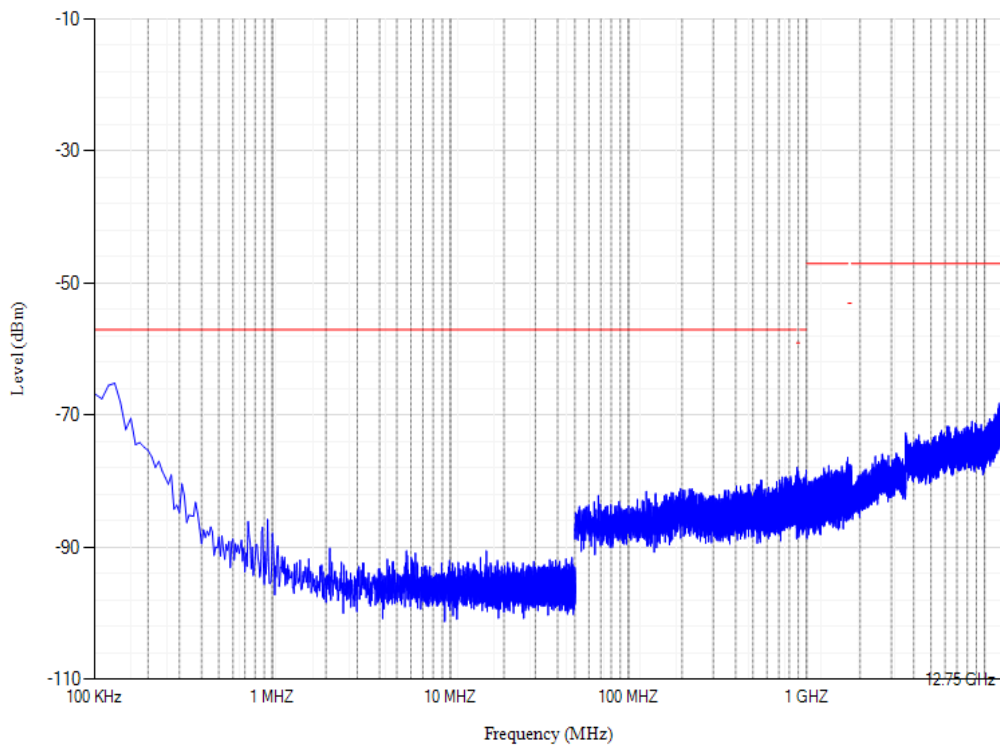


## Clause 4.2.4 Frequency error and phase error in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	3;3;3;3	Frequency Error (Hz)	17.11	-88.02	88.02	PASS
GSM900	975	880.2	3;3;3;3	RMS Phase Error (Degree)	0.44	0	5	PASS
GSM900	975	880.2	3;3;3;3	Peak Phase Error (Degree)	1.33	0	20	PASS
GSM900	60	902	3;3;3;3	Frequency Error (Hz)	19.53	-90.2	90.2	PASS
GSM900	60	902	3;3;3;3	RMS Phase Error (Degree)	0.53	0	5	PASS
GSM900	60	902	3;3;3;3	Peak Phase Error (Degree)	1.73	0	20	PASS
GSM900	124	914.8	3;3;3;3	Frequency Error (Hz)	15.11	-91.48	91.48	PASS
GSM900	124	914.8	3;3;3;3	RMS Phase Error (Degree)	0.47	0	5	PASS
GSM900	124	914.8	3;3;3;3	Peak Phase Error (Degree)	1.41	0	20	PASS
DCS1800	512	1710.2	3;3;3;3	Frequency Error (Hz)	24.38	-171.02	171.02	PASS
DCS1800	512	1710.2	3;3;3;3	RMS Phase Error (Degree)	0.66	0	5	PASS
DCS1800	512	1710.2	3;3;3;3	Peak Phase Error (Degree)	2.34	0	20	PASS
DCS1800	700	1747.8	3;3;3;3	Frequency Error (Hz)	27.44	-174.78	174.78	PASS
DCS1800	700	1747.8	3;3;3;3	RMS Phase Error (Degree)	0.61	0	5	PASS
DCS1800	700	1747.8	3;3;3;3	Peak Phase Error (Degree)	2.28	0	20	PASS
DCS1800	885	1784.8	3;3;3;3	Frequency Error (Hz)	25.12	-178.48	178.48	PASS
DCS1800	885	1784.8	3;3;3;3	RMS Phase Error (Degree)	0.60	0	5	PASS
DCS1800	885	1784.8	3;3;3;3	Peak Phase Error (Degree)	1.82	0	20	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

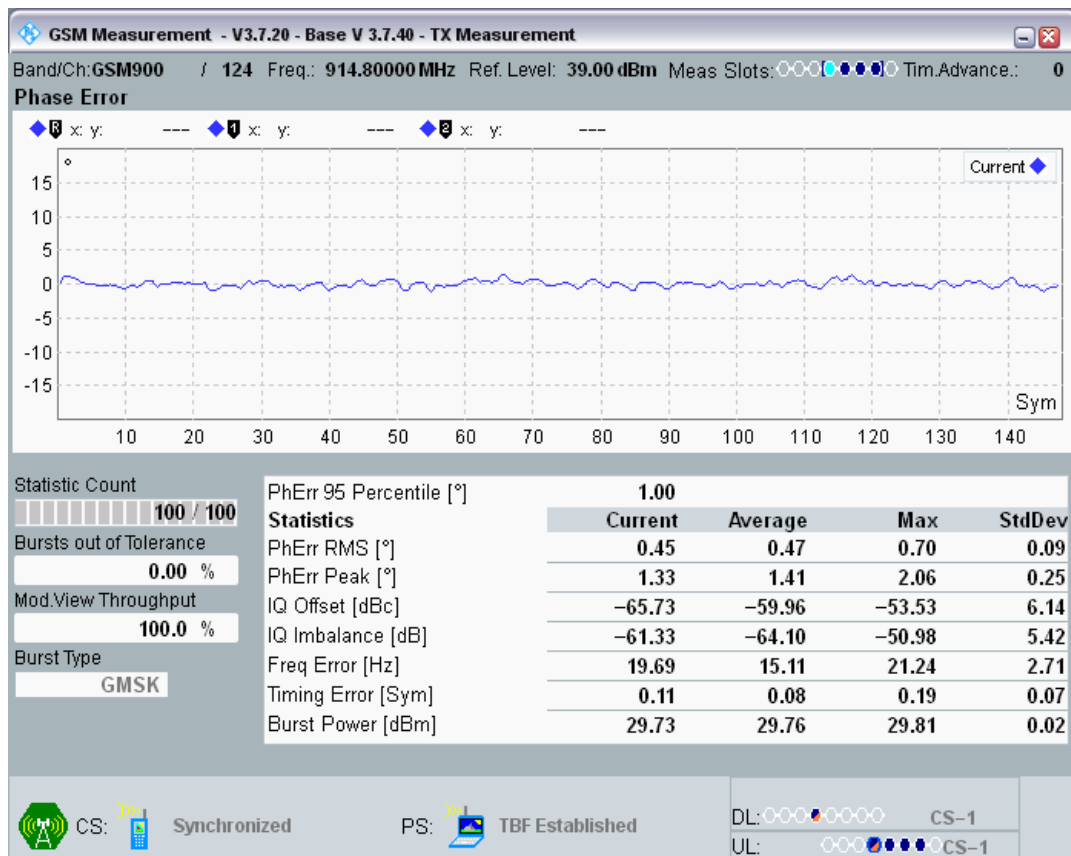


GSM900 Channel=60 Gamma=3;3;3;3.png

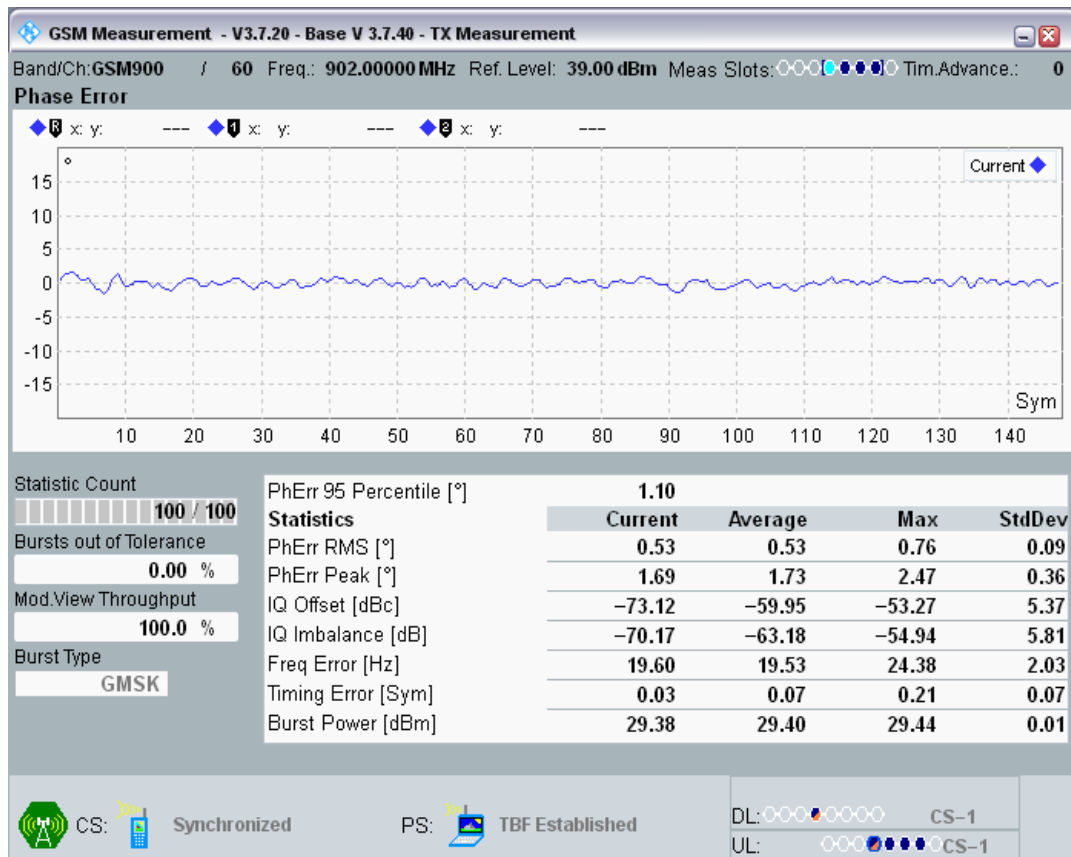


GSM900 Channel=975 Gamma=3;3;3;3.png

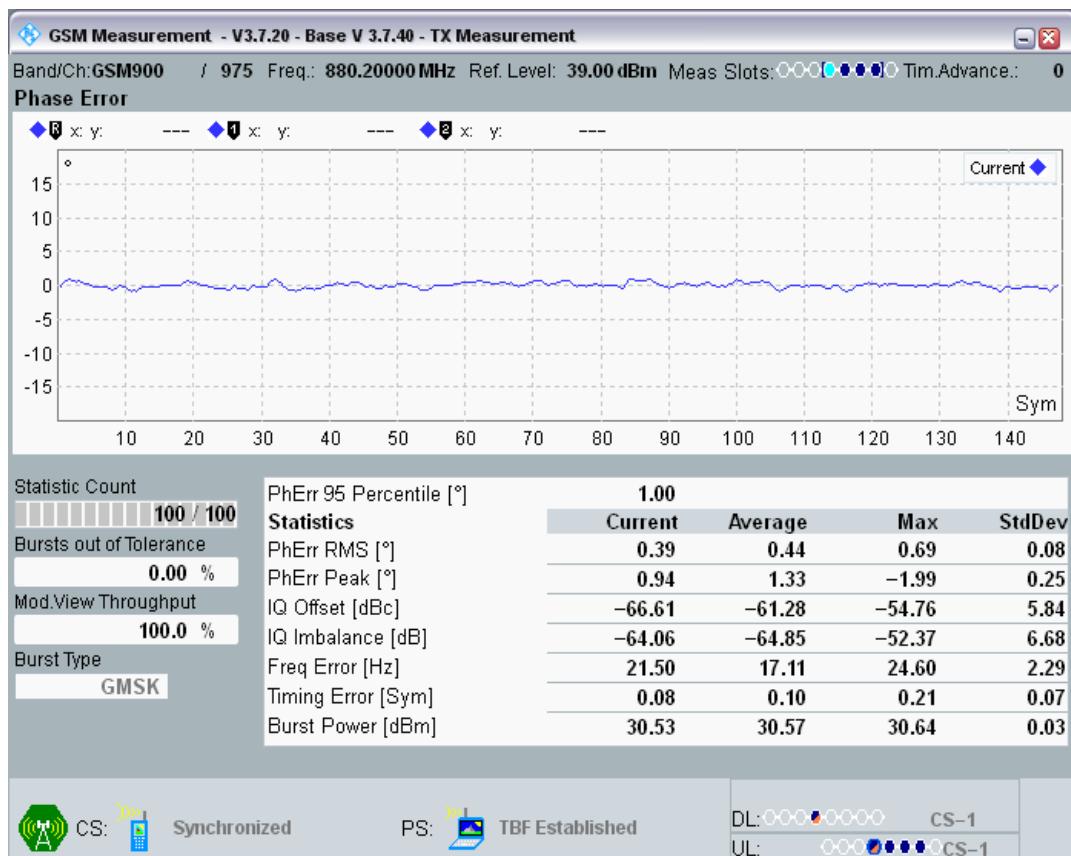

DCS1800 Channel=512 Gamma=3;3;3;3.png

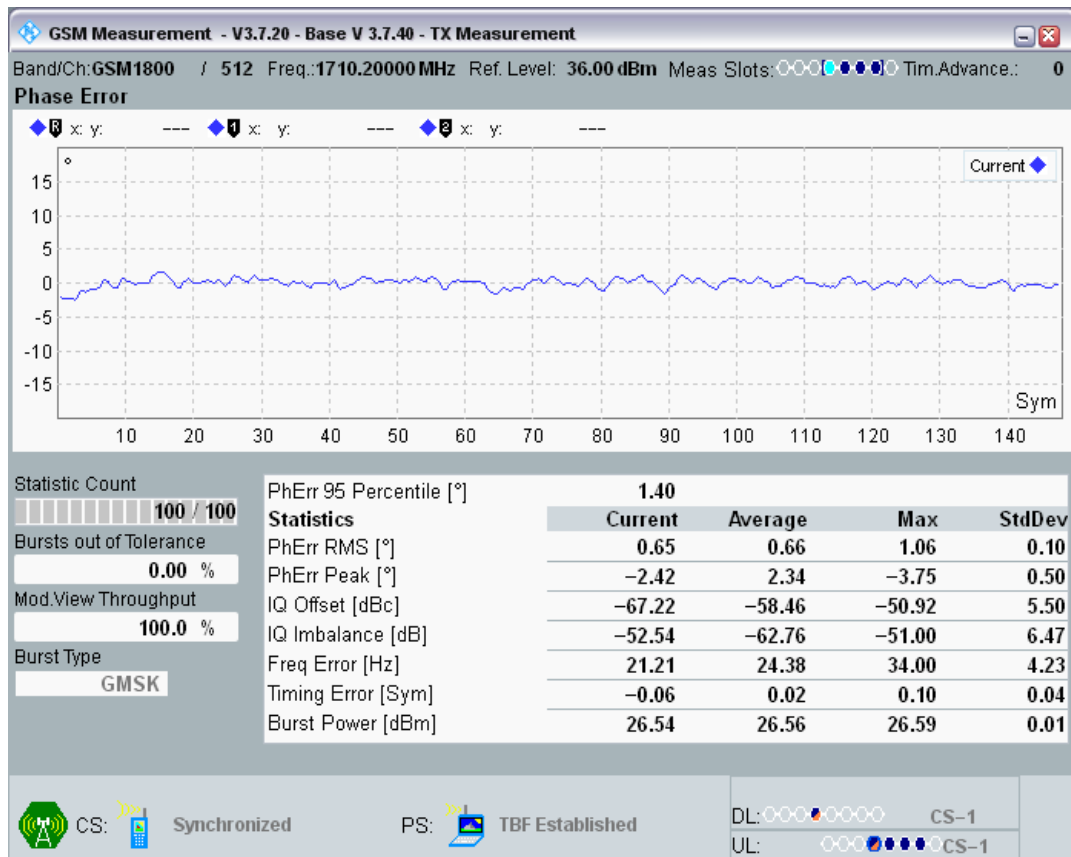


DCS1800 Channel=700 Gamma=3;3;3;3.png

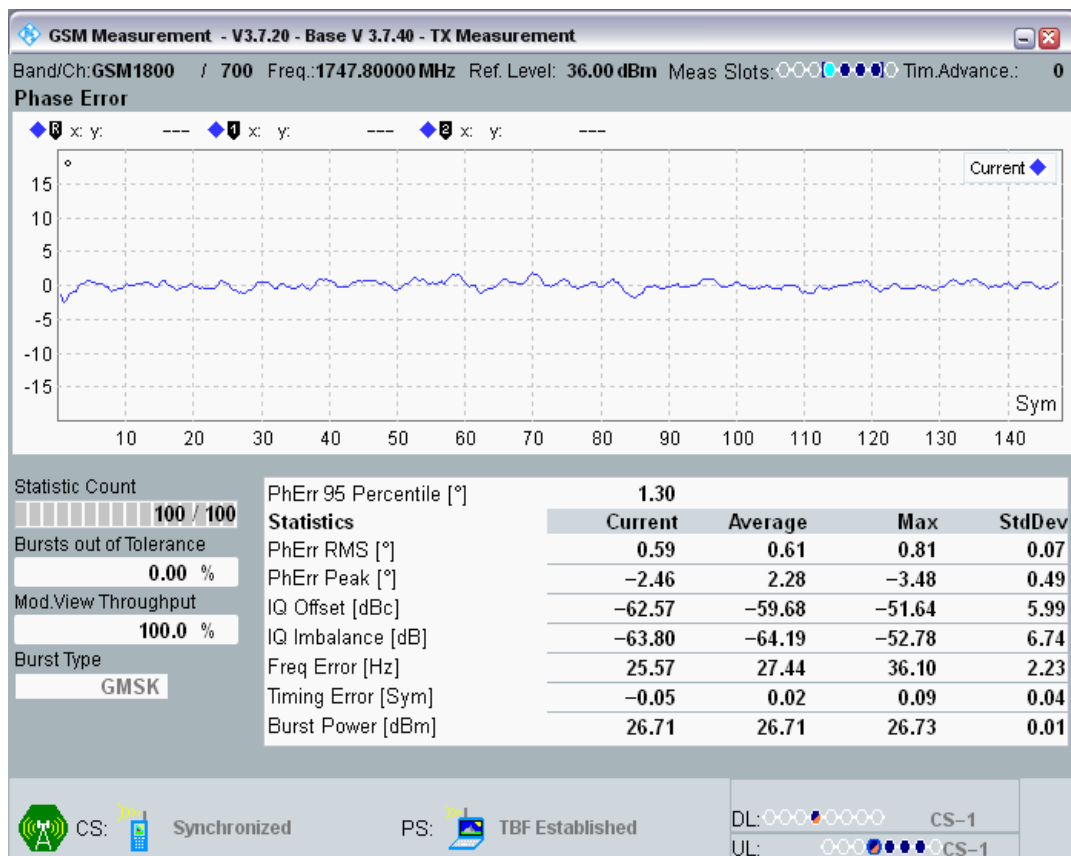



DCS1800 Channel=885 Gamma=3;3;3;3.png

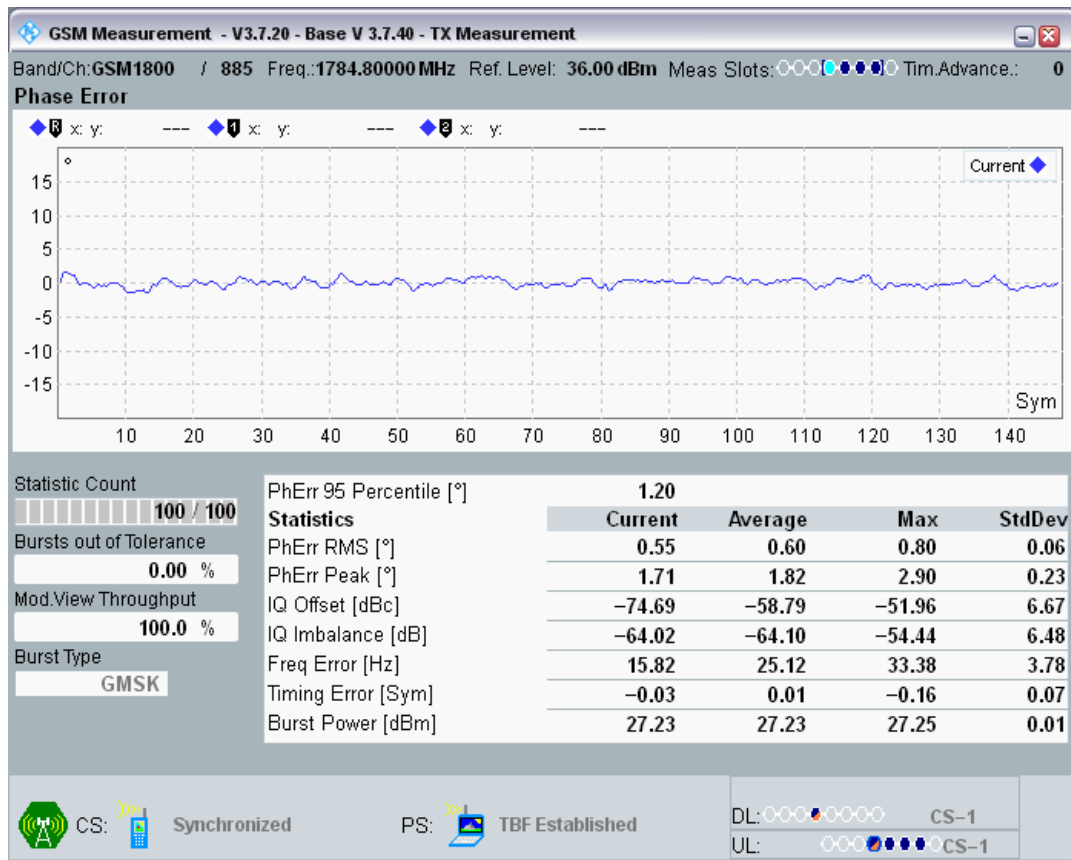

### Clause 4.2.10 Transmitter output power in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low (dBm)	Limit high (dBm)	Limit	Verdict
GSM900	975	880.2	3;3;3;3	PvT	-	-	-		PASS
GSM900	975	880.2	3;3;3;3	Power @ slot1	30.20255	25	32		PASS
GSM900	975	880.2	3;3;3;3	Power @ slot2	30.19928	25	32		PASS
GSM900	975	880.2	3;3;3;3	Power @ slot3	30.16479	25	32		PASS
GSM900	975	880.2	3;3;3;3	Power @ slot4	30.17404	25	32		PASS
GSM900	975	880.2	4;4;4;4	PvT	-	-	-		PASS
GSM900	975	880.2	4;4;4;4	Power @ slot1	30.26733	24	33		PASS
GSM900	975	880.2	4;4;4;4	Power @ slot2	30.22241	24	33		PASS
GSM900	975	880.2	4;4;4;4	Power @ slot3	30.21579	24	33		PASS
GSM900	975	880.2	4;4;4;4	Power @ slot4	30.21002	24	33		PASS

GSM900	975	880.2	5;5;5;5	PvT	-	-	-	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot1	30.1994	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot2	30.18448	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot3	30.17004	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot4	30.14182	24	32	PASS
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	28.29626	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	28.3042	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	28.28604	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	28.26678	24	30	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	26.42926	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	26.42291	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot3	26.41638	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot4	26.4082	22	28	PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	24.39865	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	24.40326	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	24.38272	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	24.39633	20	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	22.35223	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	22.40616	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	22.40866	18	24	PASS

GSM900	975	880.2	9;9;9;9	Power slot4	@	22.40936	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT		-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power slot1	@	20.38977	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot2	@	20.38232	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot3	@	20.38306	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot4	@	20.37988	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT		-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power slot1	@	18.34756	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot2	@	18.35956	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot3	@	18.35645	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot4	@	18.35297	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT		-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power slot1	@	16.35703	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot2	@	16.36496	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot3	@	16.36026	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot4	@	16.36725	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT		-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power slot1	@	14.21524	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot2	@	14.2312	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot3	@	14.22839	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot4	@	14.22119	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT		-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power slot1	@	12.30499	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot2	@	12.31808	6	16	PASS

GSM900	975	880.2	14;14;14;14	Power slot3	@	12.30783	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot4	@	12.29037	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT		-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power slot1	@	10.37888	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot2	@	10.37418	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot3	@	10.37585	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot4	@	10.37109	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT		-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power slot1	@	8.184692	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot2	@	8.167114	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot3	@	8.163544	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot4	@	8.139893	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT		-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power slot1	@	6.353851	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot2	@	6.334198	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot3	@	6.335083	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot4	@	6.289276	0	10	PASS
GSM900	60	902	3;3;3;3	PvT		-	-	-	PASS
GSM900	60	902	3;3;3;3	Power slot1	@	29.3197	25	32	PASS
GSM900	60	902	3;3;3;3	Power slot2	@	29.2962	25	32	PASS
GSM900	60	902	3;3;3;3	Power slot3	@	29.29404	25	32	PASS
GSM900	60	902	3;3;3;3	Power slot4	@	29.27972	25	32	PASS
GSM900	60	902	4;4;4;4	PvT		-	-	-	PASS
GSM900	60	902	4;4;4;4	Power slot1	@	29.25031	24	33	PASS

GSM900	60	902	4;4;4;4	Power slot2	@	29.21613	24	33	PASS
GSM900	60	902	4;4;4;4	Power slot3	@	29.20288	24	33	PASS
GSM900	60	902	4;4;4;4	Power slot4	@	29.19223	24	33	PASS
GSM900	60	902	5;5;5;5	PvT		-	-	-	PASS
GSM900	60	902	5;5;5;5	Power slot1	@	29.16986	24	32	PASS
GSM900	60	902	5;5;5;5	Power slot2	@	29.14664	24	32	PASS
GSM900	60	902	5;5;5;5	Power slot3	@	29.14481	24	32	PASS
GSM900	60	902	5;5;5;5	Power slot4	@	29.13092	24	32	PASS
GSM900	60	902	6;6;6;6	PvT		-	-	-	PASS
GSM900	60	902	6;6;6;6	Power slot1	@	27.2778	24	30	PASS
GSM900	60	902	6;6;6;6	Power slot2	@	27.27002	24	30	PASS
GSM900	60	902	6;6;6;6	Power slot3	@	27.2496	24	30	PASS
GSM900	60	902	6;6;6;6	Power slot4	@	27.24466	24	30	PASS
GSM900	60	902	7;7;7;7	PvT		-	-	-	PASS
GSM900	60	902	7;7;7;7	Power slot1	@	25.33228	22	28	PASS
GSM900	60	902	7;7;7;7	Power slot2	@	25.32132	22	28	PASS
GSM900	60	902	7;7;7;7	Power slot3	@	25.3186	22	28	PASS
GSM900	60	902	7;7;7;7	Power slot4	@	25.31995	22	28	PASS
GSM900	60	902	8;8;8;8	PvT		-	-	-	PASS
GSM900	60	902	8;8;8;8	Power slot1	@	23.31638	20	26	PASS
GSM900	60	902	8;8;8;8	Power slot2	@	23.30872	20	26	PASS
GSM900	60	902	8;8;8;8	Power slot3	@	23.30026	20	26	PASS
GSM900	60	902	8;8;8;8	Power slot4	@	23.31168	20	26	PASS
GSM900	60	902	9;9;9;9	PvT		-	-	-	PASS

GSM900	60	902	9;9;9;9	Power slot1	@	21.3089	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot2	@	21.31418	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot3	@	21.29938	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot4	@	21.32019	18	24	PASS
GSM900	60	902	10;10;10;10	PvT		-	-	-	PASS
GSM900	60	902	10;10;10;10	Power slot1	@	19.34552	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot2	@	19.34927	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot3	@	19.33209	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot4	@	19.34232	16	22	PASS
GSM900	60	902	11;11;11;11	PvT		-	-	-	PASS
GSM900	60	902	11;11;11;11	Power slot1	@	17.3009	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot2	@	17.315	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot3	@	17.31241	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot4	@	17.3259	14	20	PASS
GSM900	60	902	12;12;12;12	PvT		-	-	-	PASS
GSM900	60	902	12;12;12;12	Power slot1	@	15.3002	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot2	@	15.31226	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot3	@	15.30997	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot4	@	15.29749	12	18	PASS
GSM900	60	902	13;13;13;13	PvT		-	-	-	PASS
GSM900	60	902	13;13;13;13	Power slot1	@	13.37042	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot2	@	13.37064	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot3	@	13.36484	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot4	@	13.37436	10	16	PASS

				slot4				
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Power @ slot1	11.44049	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot2	11.44461	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot3	11.42838	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot4	11.4469	6	16	PASS
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Power @ slot1	9.531525	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot2	9.526093	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot3	9.5177	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot4	9.523682	4	14	PASS
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Power @ slot1	7.374115	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot2	7.355499	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot3	7.35318	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot4	7.343353	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power @ slot1	5.599609	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot2	5.546509	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot3	5.519043	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot4	5.503662	0	10	PASS
GSM900	124	914.8	3;3;3;3	PvT	-	-	-	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot1	29.74438	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot2	29.71384	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @	29.70844	25	32	PASS

				slot3				
GSM900	124	914.8	3;3;3;3	Power @ slot4	29.68906	25	32	PASS
GSM900	124	914.8	4;4;4;4	PvT	-	-	-	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot1	29.65292	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot2	29.64578	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot3	29.6185	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot4	29.59702	24	33	PASS
GSM900	124	914.8	5;5;5;5	PvT	-	-	-	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot1	29.53168	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot2	29.51828	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot3	29.49625	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot4	29.48712	24	32	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot1	27.65997	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot2	27.65097	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot3	27.62735	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot4	27.63858	24	30	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	25.79483	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot2	25.78537	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot3	25.76205	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	25.77481	22	28	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	23.73181	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @	23.72165	20	26	PASS



				slot2				
GSM900	124	914.8	8;8;8;8	Power @ slot3	23.72662	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	23.72046	20	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	21.70245	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	21.72104	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	21.70163	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	21.69812	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	19.65402	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	19.65375	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	19.66299	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	19.64511	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	17.60315	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	17.59262	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	17.5943	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	17.60205	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	15.48166	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	15.48608	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	15.47784	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	15.47256	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @	13.7074	10	16	PASS

				slot1				
GSM900	124	914.8	13;13;13;13	Power @ slot2	13.72864	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	13.70645	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	13.70944	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	11.72873	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	11.71512	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	11.71289	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	11.72308	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	9.80542	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	9.788605	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	9.800079	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot4	9.788391	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	7.441925	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	7.406586	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot3	7.417206	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot4	7.413513	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot1	5.559601	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot2	5.546783	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot3	5.517914	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot4	5.51413	0	10	PASS

DCS1800	512	1710.2	3;3;3;3	PvT	-	-	-	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot1	26.33353	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot2	26.33456	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot3	26.32275	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot4	26.32874	22	29	PASS
DCS1800	512	1710.2	4;4;4;4	PvT	-	-	-	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot1	26.32861	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot2	26.33746	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot3	26.30835	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot4	26.32901	21	30	PASS
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot1	26.36349	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot2	26.34372	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot3	26.3598	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot4	26.33899	21	29	PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	24.32858	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	24.32571	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	24.3226	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	24.32733	21	27	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	22.34692	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	22.36786	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	22.35208	19	25	PASS

DCS1800	512	1710.2	7;7;7;7	Power slot4	@	22.36487	19	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot1	@	20.39511	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot2	@	20.40674	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot3	@	20.41235	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot4	@	20.4162	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power slot1	@	18.36981	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power slot2	@	18.45352	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power slot3	@	18.4335	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power slot4	@	18.42786	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power slot1	@	16.47415	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power slot2	@	16.47656	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power slot3	@	16.49808	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power slot4	@	16.48285	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot1	@	14.55792	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot2	@	14.55328	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot3	@	14.57147	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot4	@	14.58319	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot1	@	12.52792	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot2	@	12.52979	8	16	PASS

DCS1800	512	1710.2	12;12;12;12	Power slot3	@	12.53717	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot4	@	12.55121	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT		-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot1	@	10.69653	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot2	@	10.70703	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot3	@	10.73831	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot4	@	10.73441	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT		-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot1	@	8.797333	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot2	@	8.841736	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot3	@	8.819611	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot4	@	8.836945	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT		-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot1	@	6.792786	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot2	@	6.80661	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot3	@	6.805786	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot4	@	6.807373	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT		-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot1	@	5.438019	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot2	@	5.43158	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot3	@	5.458313	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot4	@	5.451691	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT		-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot1	@	3.027435	-3	7	PASS

DCS1800	512	1710.2	17;17;17;17	Power slot2	@	3.042938	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot3	@	3.038788	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot4	@	3.050903	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT		-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot1	@	1.227295	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot2	@	1.229492	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot3	@	1.229767	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot4	@	1.209198	-5	5	PASS
DCS1800	700	1747.8	3;3;3;3	PvT		-	-	-	PASS
DCS1800	700	1747.8	3;3;3;3	Power slot1	@	26.6246	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power slot2	@	26.61694	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power slot3	@	26.62265	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power slot4	@	26.61057	22	29	PASS
DCS1800	700	1747.8	4;4;4;4	PvT		-	-	-	PASS
DCS1800	700	1747.8	4;4;4;4	Power slot1	@	26.59213	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power slot2	@	26.56821	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power slot3	@	26.57422	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power slot4	@	26.5632	21	30	PASS
DCS1800	700	1747.8	5;5;5;5	PvT		-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot1	@	26.59766	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot2	@	26.60056	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot3	@	26.56744	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot4	@	26.58301	21	29	PASS
DCS1800	700	1747.8	6;6;6;6	PvT		-	-	-	PASS

DCS1800	700	1747.8	6;6;6;6	Power slot1	@	24.5752	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot2	@	24.59662	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot3	@	24.59875	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot4	@	24.57974	21	27	PASS
DCS1800	700	1747.8	7;7;7;7	PvT		-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot1	@	22.60461	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot2	@	22.59555	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot3	@	22.6254	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot4	@	22.62274	19	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT		-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot1	@	20.61066	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot2	@	20.60434	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot3	@	20.62015	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot4	@	20.60895	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT		-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot1	@	18.58105	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot2	@	18.65237	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot3	@	18.65945	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot4	@	18.65802	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT		-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot1	@	16.67804	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot2	@	16.69611	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot3	@	16.69452	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot4	@	16.71045	13	19	PASS

				slot4				
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	14.74448	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	14.76996	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	14.78241	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	14.77768	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	12.78415	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	12.79861	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	12.82416	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	12.82565	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot1	10.81934	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot2	10.84644	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	10.85141	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	10.8385	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	8.870605	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	8.883392	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	8.882324	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	8.881836	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	6.823425	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot2	6.827545	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @	6.85202	2	10	PASS



				slot3				
DCS1800	700	1747.8	15;15;15;15	Power @ slot4	6.858643	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot1	5.409393	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot2	5.413666	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot3	5.44342	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot4	5.435242	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	2.861816	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	2.881104	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot3	2.858063	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	2.863281	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot1	0.9515686	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	0.9429932	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	0.9576416	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	0.9665527	-5	5	PASS
DCS1800	885	1784.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot1	27.17621	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot2	27.17694	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot3	27.1665	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot4	27.14697	22	29	PASS
DCS1800	885	1784.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot1	27.12427	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @	27.12665	21	30	PASS


				slot2				
DCS1800	885	1784.8	4;4;4;4	Power @ slot3	27.12	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot4	27.11917	21	30	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	27.06763	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	27.06793	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	27.07288	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	27.05283	21	29	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	25.06821	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	25.0824	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	25.08411	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	25.07761	21	27	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	23.0723	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	23.06717	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	23.07001	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	23.06735	19	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	21.04791	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	21.05936	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	21.05161	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	21.05124	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @	19.01074	15	21	PASS

				slot1				
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	19.03906	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	19.03729	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	19.03098	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	17.06439	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	17.07559	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	17.08817	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	17.09662	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	15.09863	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	15.12799	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	15.11719	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	15.11276	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	13.07385	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	13.10281	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	13.0947	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	13.11441	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	11.06976	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	11.0798	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	11.1059	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	11.10739	6	14	PASS


DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	9.04184	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	9.057037	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	9.07605	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot4	9.064667	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	6.880035	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot2	6.902405	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot3	6.917328	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot4	6.917114	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot1	5.404572	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot2	5.401947	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot3	5.412415	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot4	5.39978	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot1	2.608704	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot2	2.61972	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot3	2.63974	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot4	2.622955	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot1	0.4732361	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot2	0.4521179	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot3	0.473938	-5	5	PASS

DCS1800	885	1784.8	18;18;18;18	Power slot4	@	0.4760742	-5	5	PASS
---------	-----	--------	-------------	-------------	---	-----------	----	---	------

GSM900 Channel=124 Gamma=17;17;17;17.png

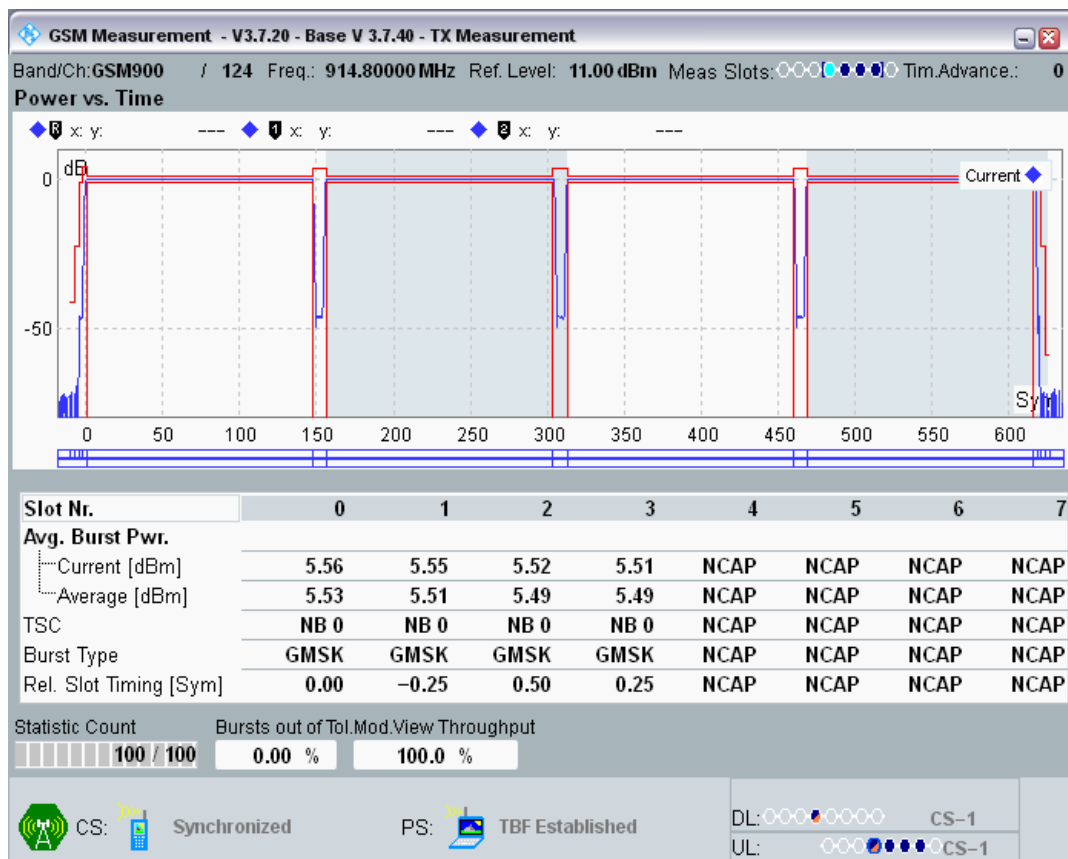


GSM900 Channel=124 Gamma=3;3;3;3.png

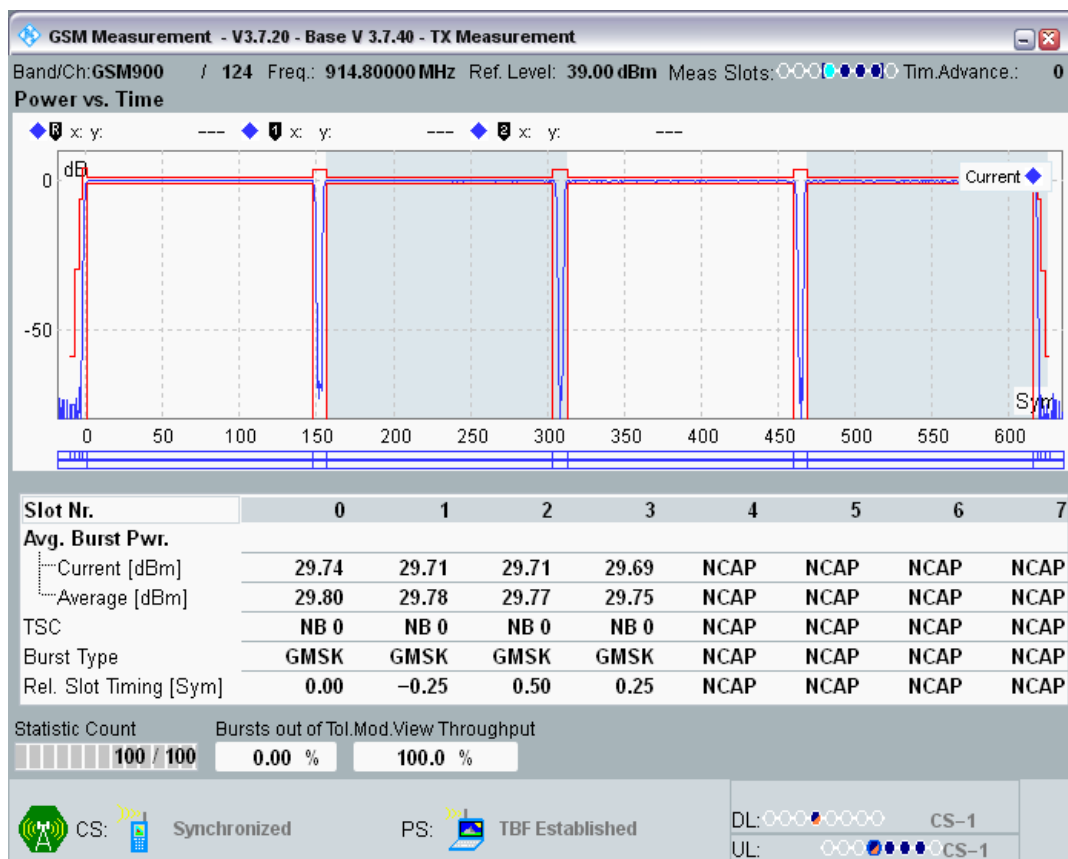

GSM900 Channel=60 Gamma=17;17;17;17.png




GSM900 Channel=60 Gamma=3;3;3;3.png

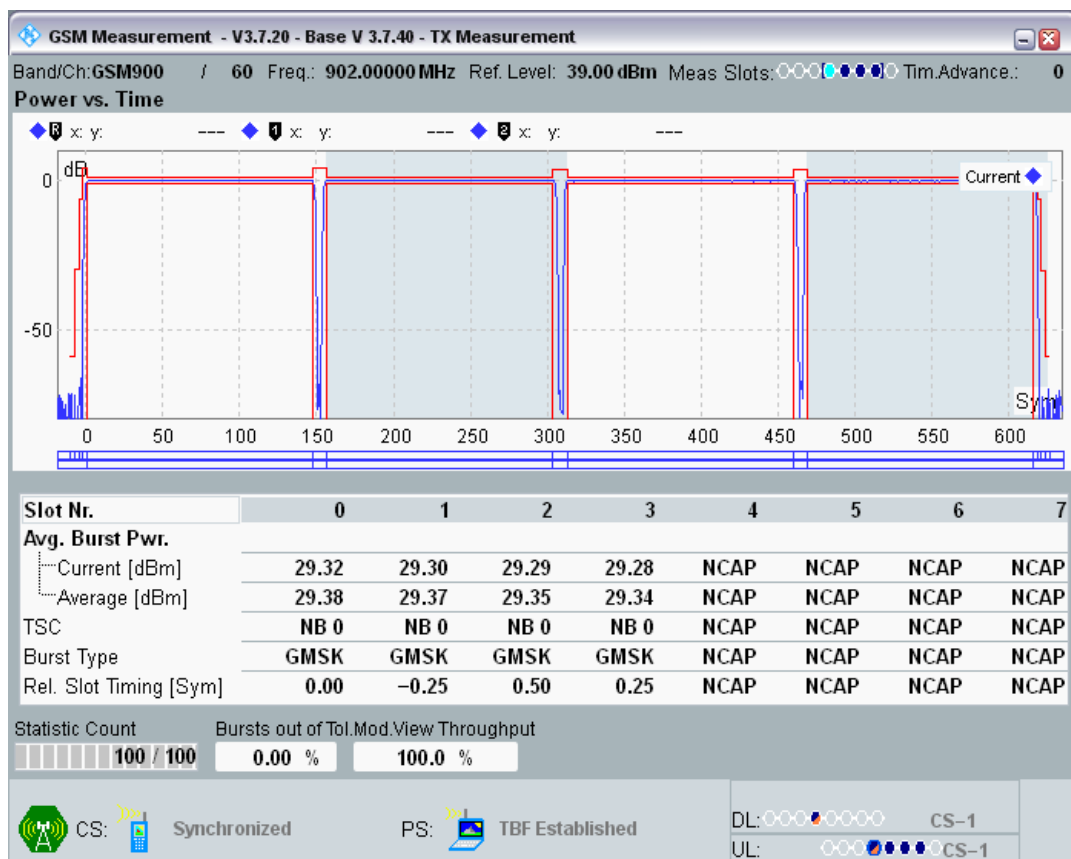

GSM900 Channel=975 Gamma=17;17;17;17.png



GSM900 Channel=975 Gamma=3;3;3;3.png

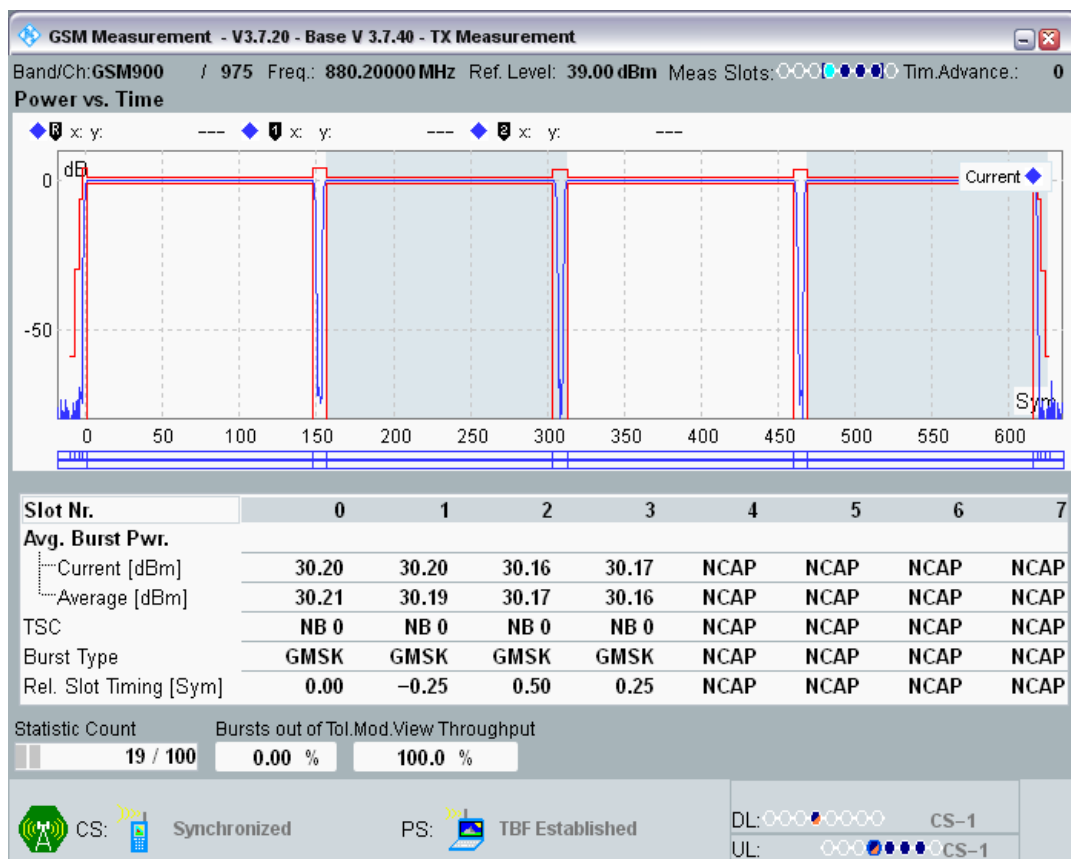


DCS1800 Channel=512 Gamma=18;18;18;18.png




DCS1800 Channel=512 Gamma=3;3;3;3.png




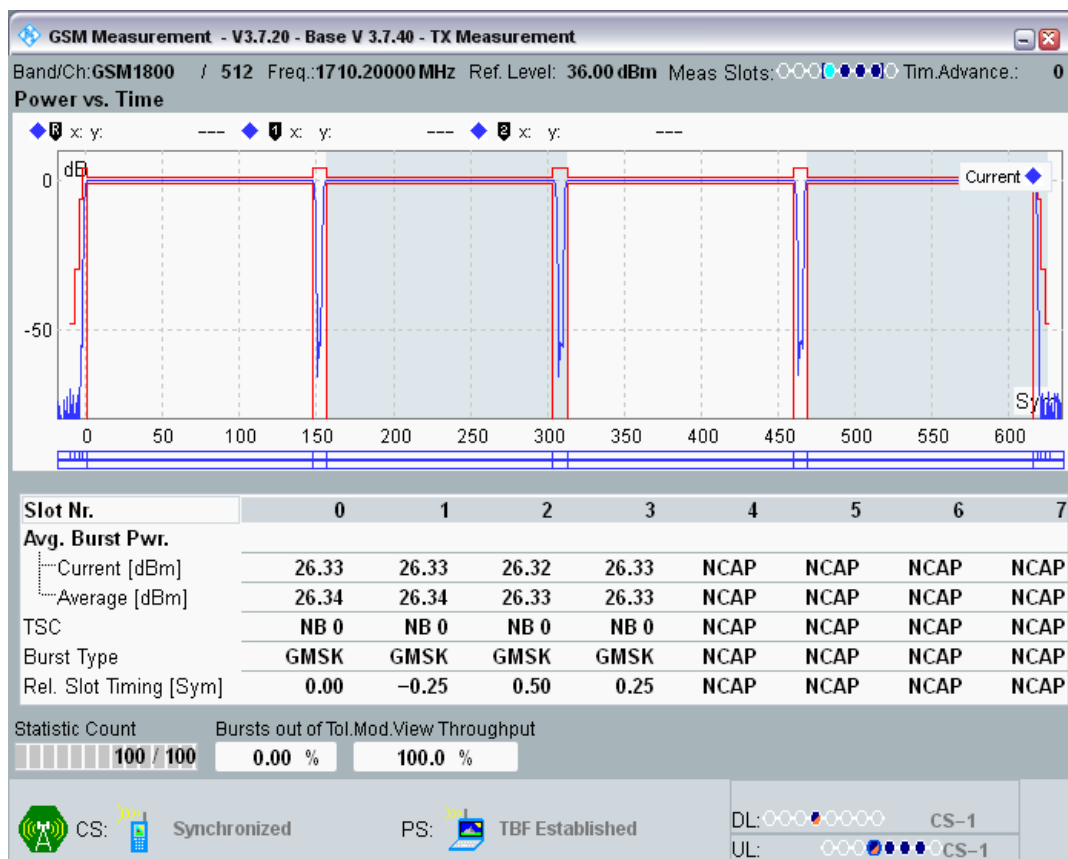

DCS1800 Channel=700 Gamma=18;18;18;18.png

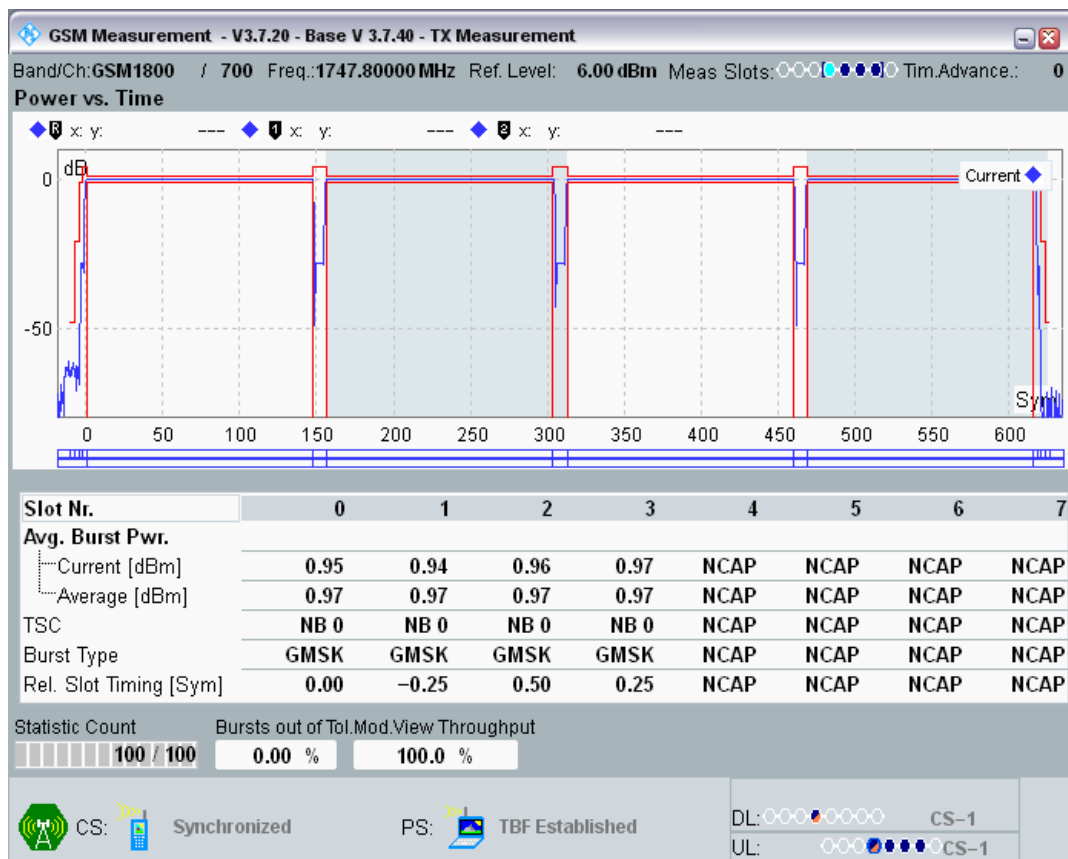


DCS1800 Channel=700 Gamma=3;3;3;3.png

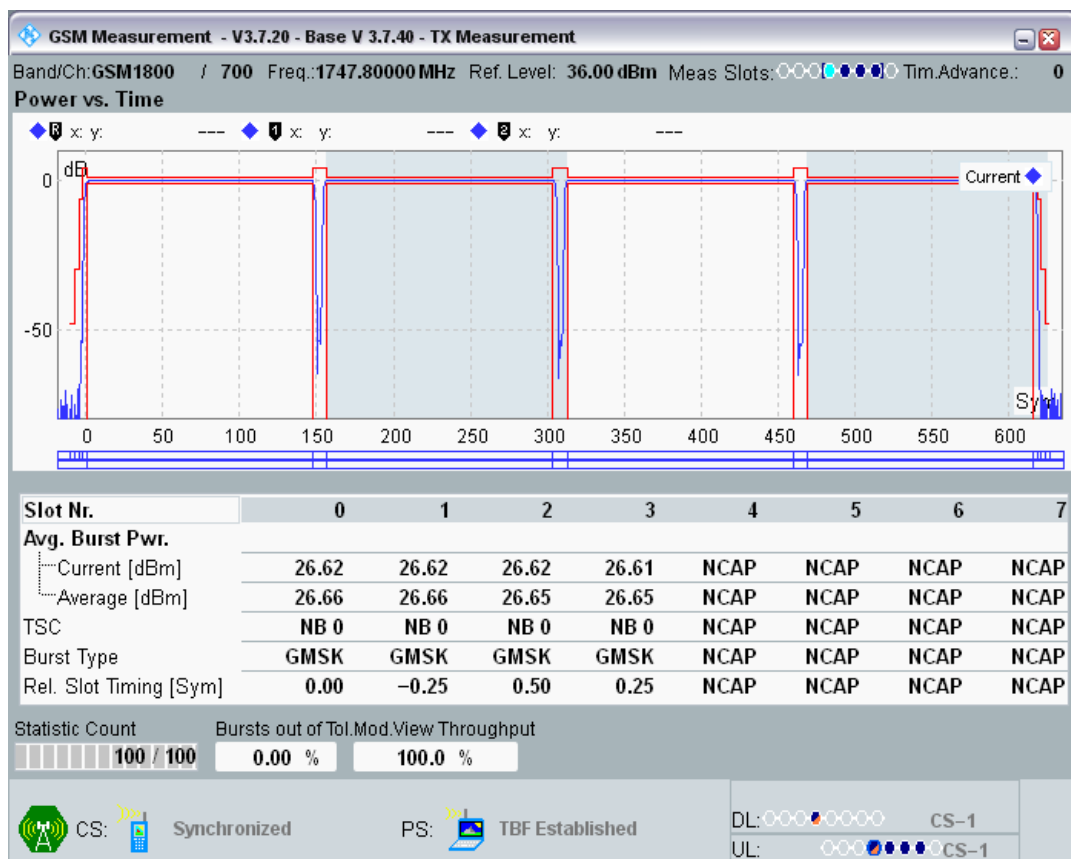

DCS1800 Channel=885 Gamma=18;18;18;18.png



DCS1800 Channel=885 Gamma=3;3;3;3.png

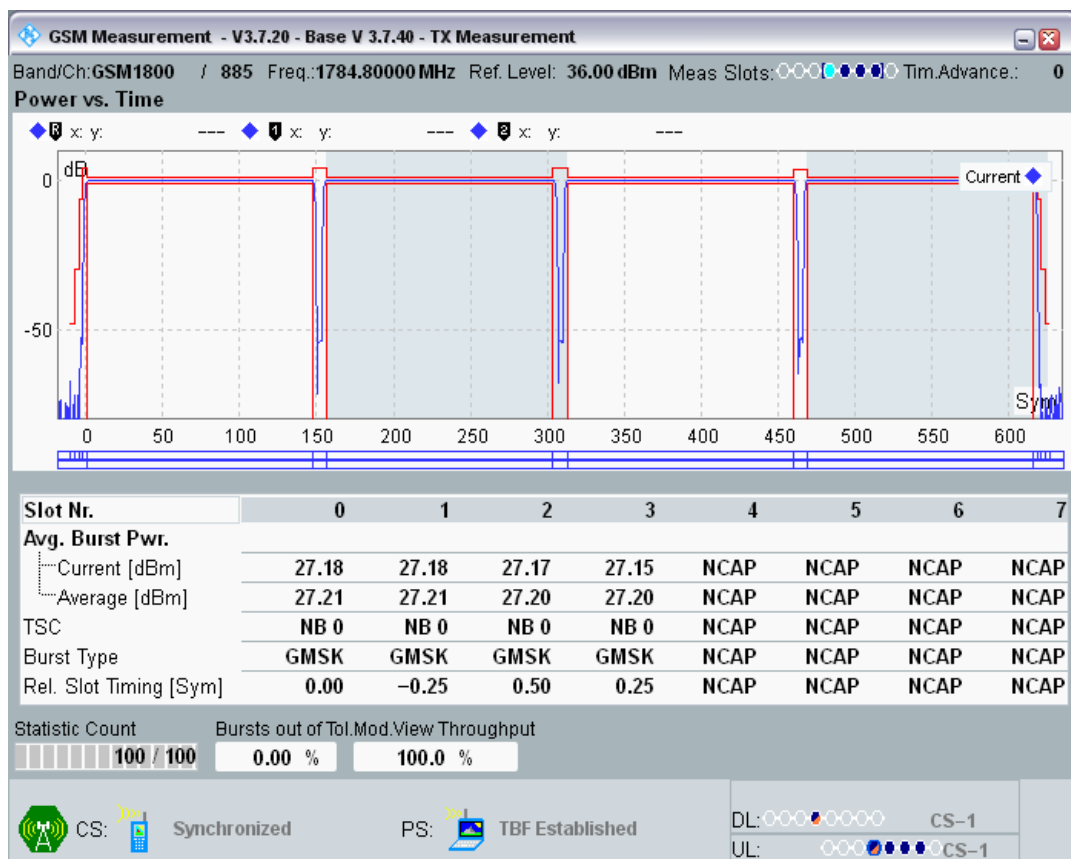

#### Clause 4.2.11 Modulation Spectrum in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-80.67	-60	-58.28	-51	PASS
GSM900	975	880.2	3;3;3;3	-1600 KHz	-80.42	-60	-58.03	-51	PASS
GSM900	975	880.2	3;3;3;3	-1400 KHz	-79.91	-60	-57.52	-51	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-79.15	-60	-56.76	-51	PASS
GSM900	975	880.2	3;3;3;3	-1000 KHz	-78.86	-60	-56.46	-51	PASS
GSM900	975	880.2	3;3;3;3	-800 KHz	-77.24	-60	-54.85	-51	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-75.50	-60	-53.10	-51	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-70.44	-60	-48.05	-36	PASS
GSM900	975	880.2	3;3;3;3	-250 KHz	-40.72	-33	-18.33	-36	PASS
GSM900	975	880.2	3;3;3;3	-200 KHz	-36.66	-30	-14.27	-36	PASS

				KHz					
GSM900	975	880.2	3;3;3;3	-100 KHz	-8.62	0.5	13.77	-36	PASS
GSM900	975	880.2	3;3;3;3	100 KHz	-8.46	0.5	13.94	-36	PASS
GSM900	975	880.2	3;3;3;3	200 KHz	-36.47	-30	-14.07	-36	PASS
GSM900	975	880.2	3;3;3;3	250 KHz	-40.94	-33	-18.55	-36	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-70.56	-60	-48.16	-36	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-75.38	-60	-52.98	-51	PASS
GSM900	975	880.2	3;3;3;3	800 KHz	-77.05	-60	-54.66	-51	PASS
GSM900	975	880.2	3;3;3;3	1000 KHz	-79.06	-60	-56.67	-51	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-78.94	-60	-56.55	-51	PASS
GSM900	975	880.2	3;3;3;3	1400 KHz	-79.44	-60	-57.05	-51	PASS
GSM900	975	880.2	3;3;3;3	1600 KHz	-80.65	-60	-58.26	-51	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-81.02	-60	-58.63	-51	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-80.11	-60	-58.82	-51	PASS
GSM900	60	902	3;3;3;3	-1600 KHz	-80.06	-60	-58.78	-51	PASS
GSM900	60	902	3;3;3;3	-1400 KHz	-79.03	-60	-57.74	-51	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-78.87	-60	-57.58	-51	PASS
GSM900	60	902	3;3;3;3	-1000 KHz	-78.50	-60	-57.22	-51	PASS
GSM900	60	902	3;3;3;3	-800 KHz	-77.23	-60	-55.94	-51	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-75.55	-60	-54.27	-51	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-70.30	-60	-49.02	-36	PASS
GSM900	60	902	3;3;3;3	-250 KHz	-40.96	-33	-19.68	-36	PASS
GSM900	60	902	3;3;3;3	-200 KHz	-36.88	-30	-15.59	-36	PASS
GSM900	60	902	3;3;3;3	-100 KHz	-8.62	0.5	12.67	-36	PASS
GSM900	60	902	3;3;3;3	100 KHz	-8.68	0.5	12.60	-36	PASS
GSM900	60	902	3;3;3;3	200 KHz	-36.92	-30	-15.64	-36	PASS

GSM900	60	902	3;3;3;3	250 KHz	-40.93	-33	-19.65	-36	PASS
GSM900	60	902	3;3;3;3	400 KHz	-70.31	-60	-49.03	-36	PASS
GSM900	60	902	3;3;3;3	600 KHz	-75.25	-60	-53.97	-51	PASS
GSM900	60	902	3;3;3;3	800 KHz	-77.36	-60	-56.07	-51	PASS
GSM900	60	902	3;3;3;3	1000 KHz	-78.46	-60	-57.18	-51	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-78.76	-60	-57.48	-51	PASS
GSM900	60	902	3;3;3;3	1400 KHz	-78.75	-60	-57.47	-51	PASS
GSM900	60	902	3;3;3;3	1600 KHz	-80.28	-60	-59.00	-51	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-80.03	-60	-58.75	-51	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-79.59	-60	-57.96	-51	PASS
GSM900	124	914.8	3;3;3;3	-1600 KHz	-80.42	-60	-58.79	-51	PASS
GSM900	124	914.8	3;3;3;3	-1400 KHz	-79.73	-60	-58.11	-51	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-79.64	-60	-58.02	-51	PASS
GSM900	124	914.8	3;3;3;3	-1000 KHz	-78.94	-60	-57.31	-51	PASS
GSM900	124	914.8	3;3;3;3	-800 KHz	-77.71	-60	-56.08	-51	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-75.51	-60	-53.89	-51	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-70.62	-60	-49.00	-36	PASS
GSM900	124	914.8	3;3;3;3	-250 KHz	-40.71	-33	-19.08	-36	PASS
GSM900	124	914.8	3;3;3;3	-200 KHz	-36.68	-30	-15.05	-36	PASS
GSM900	124	914.8	3;3;3;3	-100 KHz	-8.74	0.5	12.89	-36	PASS
GSM900	124	914.8	3;3;3;3	100 KHz	-8.76	0.5	12.87	-36	PASS
GSM900	124	914.8	3;3;3;3	200 KHz	-36.75	-30	-15.12	-36	PASS
GSM900	124	914.8	3;3;3;3	250 KHz	-40.70	-33	-19.07	-36	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-70.41	-60	-48.78	-36	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-75.47	-60	-53.84	-51	PASS
GSM900	124	914.8	3;3;3;3	800 KHz	-77.66	-60	-56.03	-51	PASS
GSM900	124	914.8	3;3;3;3	1000 KHz	-79.12	-60	-57.50	-51	PASS


				KHz					
GSM900	124	914.8	3;3;3;3	1200 KHz	-78.90	-60	-57.27	-51	PASS
GSM900	124	914.8	3;3;3;3	1400 KHz	-79.48	-60	-57.86	-51	PASS
GSM900	124	914.8	3;3;3;3	1600 KHz	-80.19	-60	-58.56	-51	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-79.74	-60	-58.11	-51	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-79.41	-60	-60.85	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1600 KHz	-79.21	-60	-60.65	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1400 KHz	-78.74	-60	-60.18	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-77.77	-60	-59.21	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1000 KHz	-76.76	-60	-58.20	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-800 KHz	-75.77	-60	-57.21	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-73.43	-60	-54.87	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-68.64	-60	-50.08	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-250 KHz	-40.98	-33	-22.42	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-200 KHz	-36.72	-30	-18.16	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-100 KHz	-8.77	0.5	9.79	-36	PASS
DCS1800	512	1710.2	3;3;3;3	100 KHz	-8.64	0.5	9.92	-36	PASS
DCS1800	512	1710.2	3;3;3;3	200 KHz	-36.71	-30	-18.15	-36	PASS
DCS1800	512	1710.2	3;3;3;3	250 KHz	-41.02	-33	-22.46	-36	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-68.46	-60	-49.90	-36	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-73.42	-60	-54.86	-56	PASS
DCS1800	512	1710.2	3;3;3;3	800 KHz	-75.48	-60	-56.92	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1000 KHz	-77.02	-60	-58.46	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-77.91	-60	-59.35	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1400 KHz	-78.32	-60	-59.76	-56	PASS

DCS1800	512	1710.2	3;3;3;3	1600 KHz	-79.24	-60	-60.68	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-79.33	-60	-60.77	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-79.03	-60	-60.43	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1600 KHz	-79.59	-60	-60.99	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1400 KHz	-78.50	-60	-59.90	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-78.19	-60	-59.59	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1000 KHz	-76.95	-60	-58.35	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-800 KHz	-75.75	-60	-57.15	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-73.37	-60	-54.77	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-68.19	-60	-49.59	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-250 KHz	-40.90	-33	-22.30	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-200 KHz	-36.65	-30	-18.05	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-100 KHz	-8.74	0.5	9.86	-36	PASS
DCS1800	700	1747.8	3;3;3;3	100 KHz	-8.43	0.5	10.17	-36	PASS
DCS1800	700	1747.8	3;3;3;3	200 KHz	-36.55	-30	-17.95	-36	PASS
DCS1800	700	1747.8	3;3;3;3	250 KHz	-40.98	-33	-22.38	-36	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-68.06	-60	-49.46	-36	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-73.66	-60	-55.06	-56	PASS
DCS1800	700	1747.8	3;3;3;3	800 KHz	-75.54	-60	-56.94	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1000 KHz	-77.32	-60	-58.72	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-77.70	-60	-59.10	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1400 KHz	-78.22	-60	-59.62	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1600 KHz	-79.27	-60	-60.67	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-79.13	-60	-60.53	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1800	-79.88	-60	-60.53	-56	PASS


				KHz					
DCS1800	885	1784.8	3;3;3;3	-1600 KHz	-79.72	-60	-60.37	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1400 KHz	-79.05	-60	-59.70	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-77.97	-60	-58.62	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1000 KHz	-77.32	-60	-57.97	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-800 KHz	-75.67	-60	-56.32	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-73.71	-60	-54.36	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-68.06	-60	-48.71	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-250 KHz	-40.93	-33	-21.58	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-200 KHz	-36.88	-30	-17.53	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-100 KHz	-8.87	0.5	10.48	-36	PASS
DCS1800	885	1784.8	3;3;3;3	100 KHz	-9.02	0.5	10.33	-36	PASS
DCS1800	885	1784.8	3;3;3;3	200 KHz	-36.71	-30	-17.36	-36	PASS
DCS1800	885	1784.8	3;3;3;3	250 KHz	-41.10	-33	-21.75	-36	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-68.22	-60	-48.87	-36	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-73.64	-60	-54.29	-56	PASS
DCS1800	885	1784.8	3;3;3;3	800 KHz	-75.79	-60	-56.44	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1000 KHz	-77.36	-60	-58.01	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-77.94	-60	-58.59	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1400 KHz	-78.50	-60	-59.15	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1600 KHz	-79.77	-60	-60.42	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-80.17	-60	-60.82	-56	PASS

GSM900 Channel=124 Gamma=3;3;3;3.png




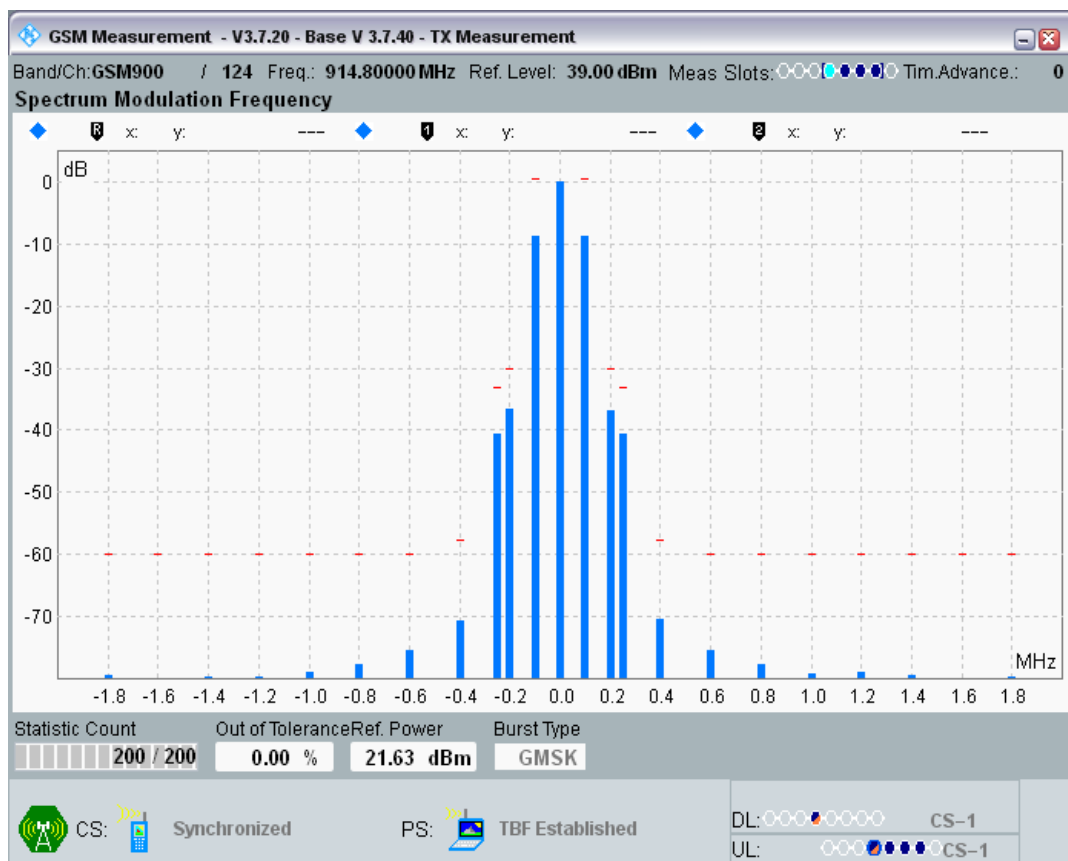


GSM900 Channel=60 Gamma=3;3;3;3.png

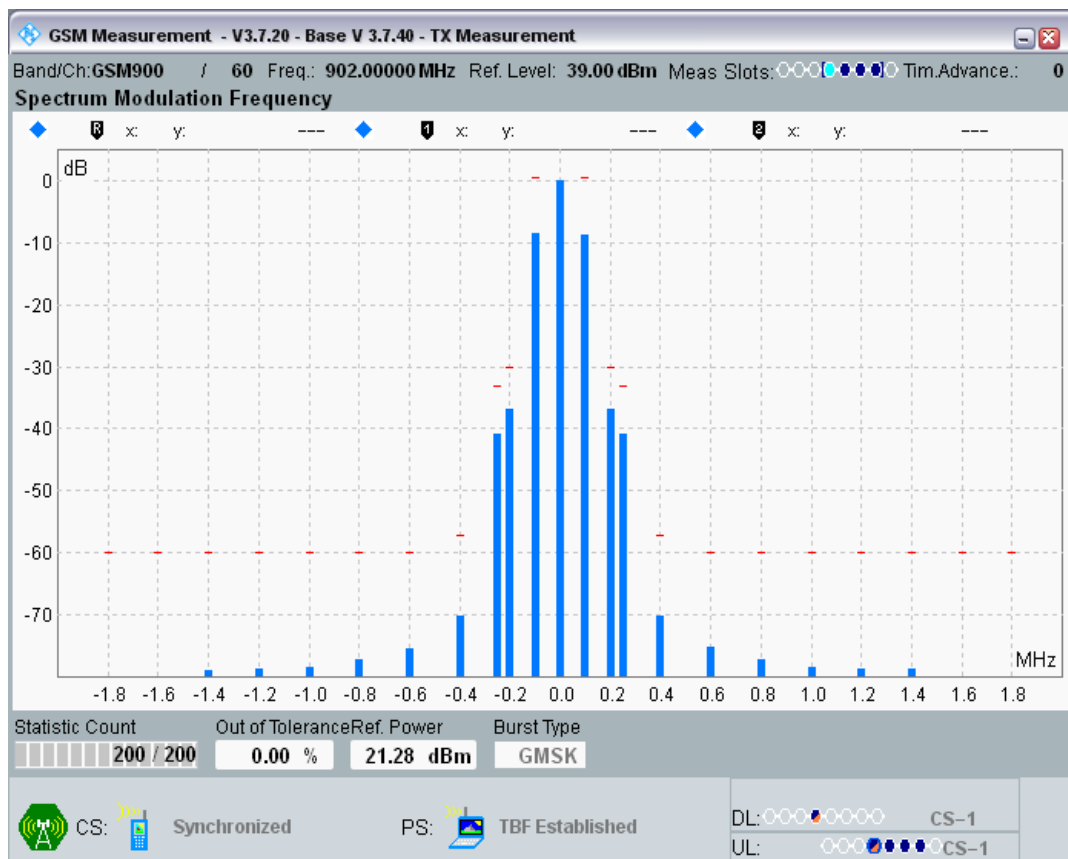


GSM900 Channel=975 Gamma=3;3;3;3.png

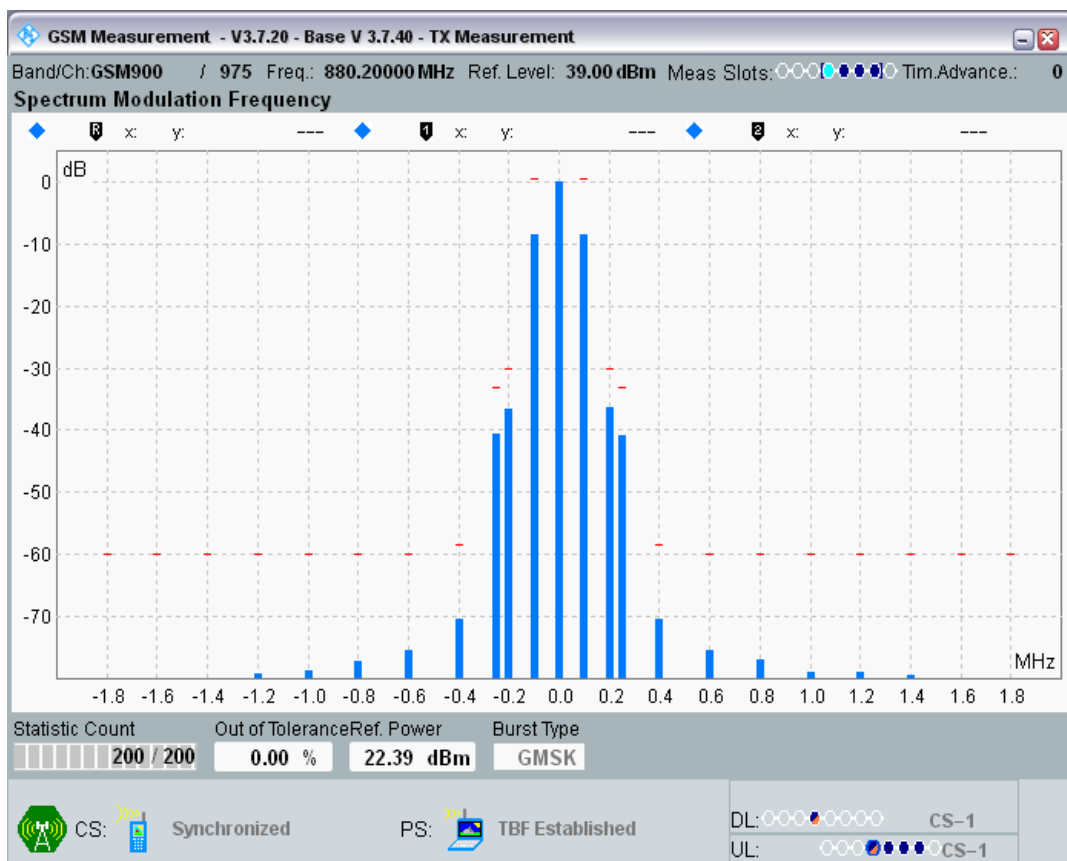


DCS1800 Channel=512 Gamma=3;3;3;3.png

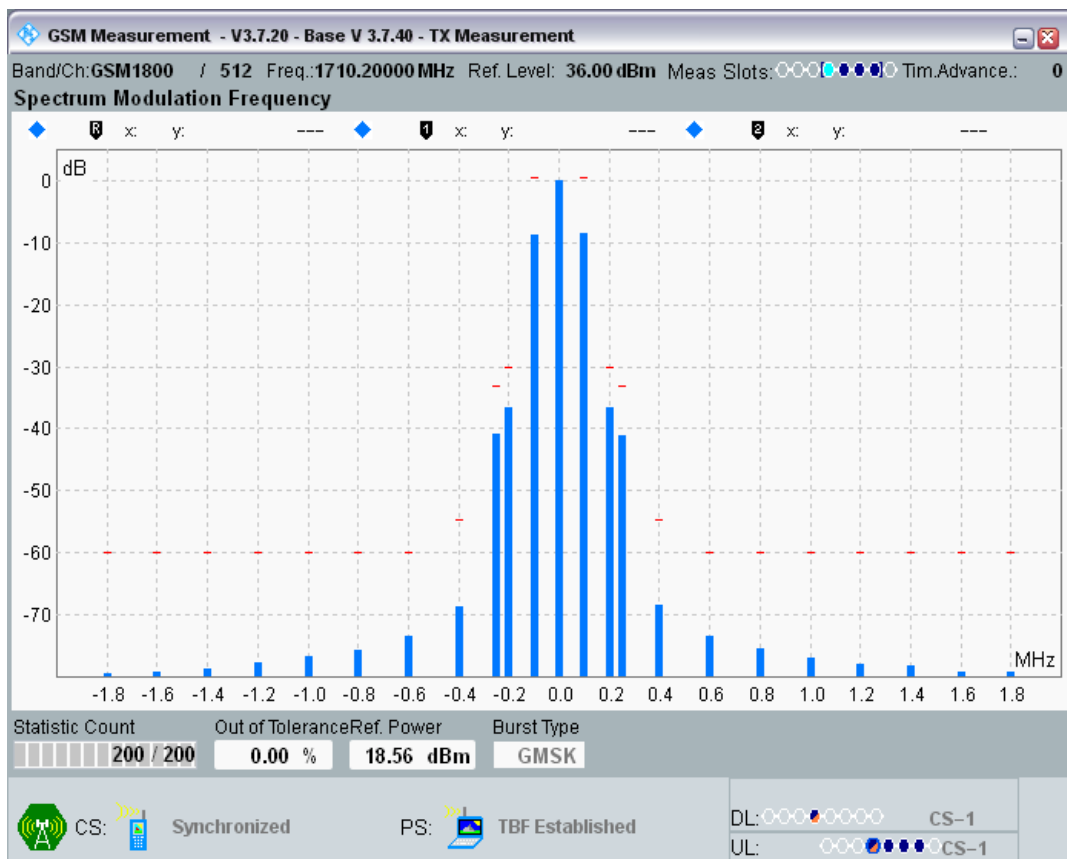

DCS1800 Channel=700 Gamma=3;3;3;3.png

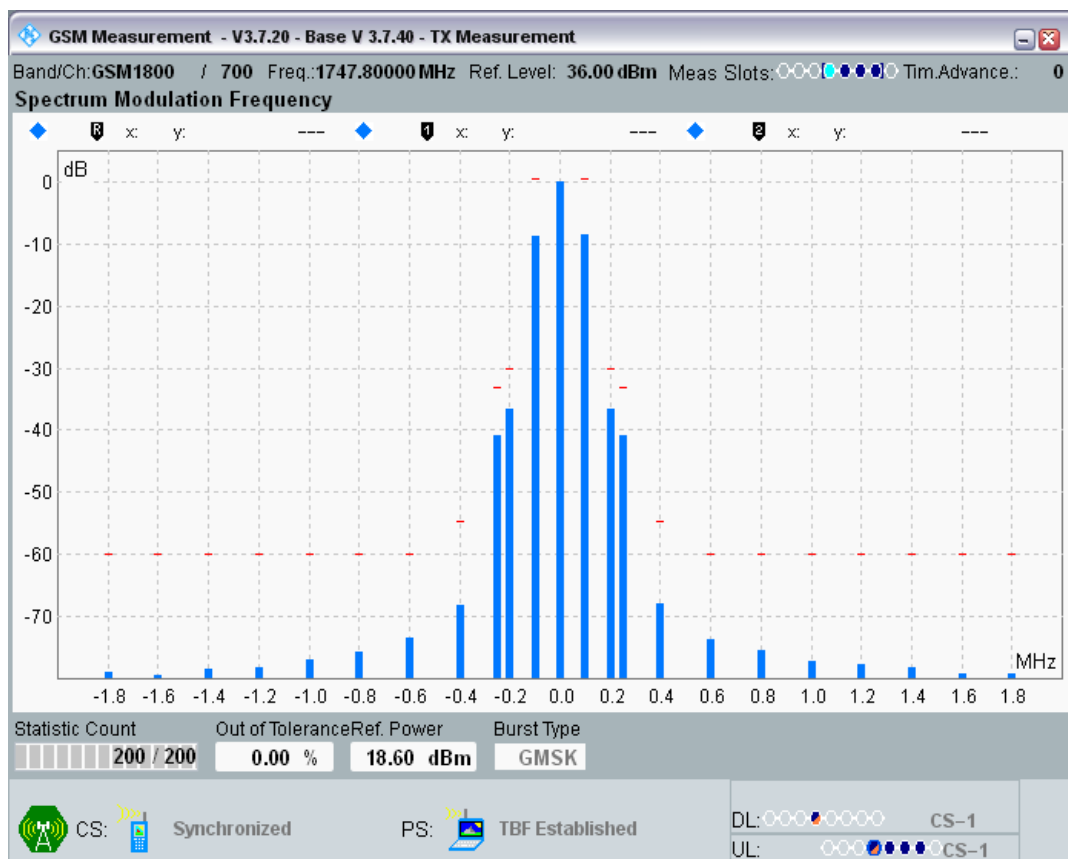

DCS1800 Channel=885 Gamma=3;3;3;3.png

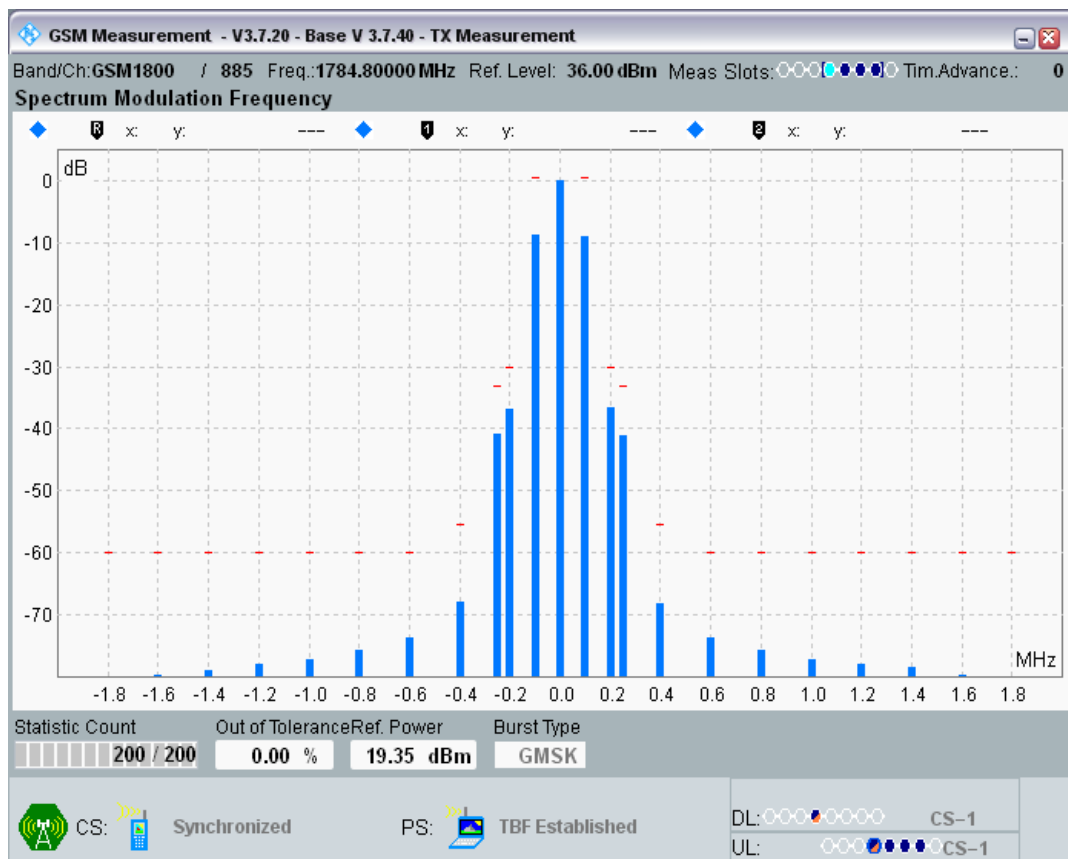

## Clause 4.2.11 Switching Spectrum in GPRS multi slot configuration


Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: CCISE2008044


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-45.15	-24	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-40.05	-21	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-30.84	-21	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-26.17	-19	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-27.28	-19	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-27.77	-21	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-38.75	-21	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-45.62	-24	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-46.28	-24	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-40.66	-21	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-31.48	-21	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-26.09	-19	PASS
GSM900	60	902	3;3;3;3	400 KHz	-28.04	-19	PASS
GSM900	60	902	3;3;3;3	600 KHz	-28.65	-21	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-40.05	-21	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-46.73	-24	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-45.20	-24	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-40.59	-21	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-30.63	-21	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-26.98	-19	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-29.03	-19	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-27.85	-21	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-38.97	-21	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-46.38	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-49.34	-27	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-44.16	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-37.88	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-32.44	-22	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-27.45	-22	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-35.02	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-42.93	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-49.01	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-48.26	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-44.23	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-36.84	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-32.72	-22	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-28.31	-22	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-33.63	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-43.17	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-49.09	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-49.68	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-44.45	-24	PASS

DCS1800	885	1784.8	3;3;3;3	-600 KHz	-36.84	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-32.21	-22	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-28.50	-22	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-32.72	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-41.73	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-48.25	-27	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

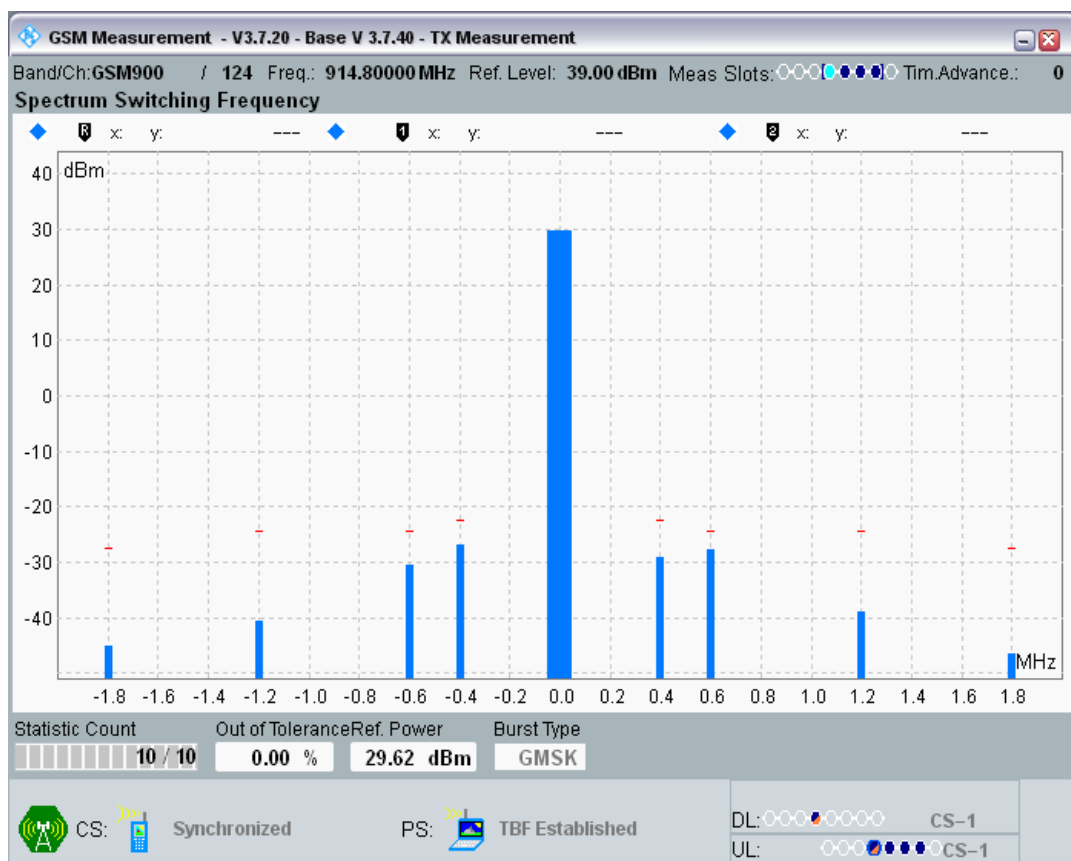


GSM900 Channel=60 Gamma=3;3;3;3.png

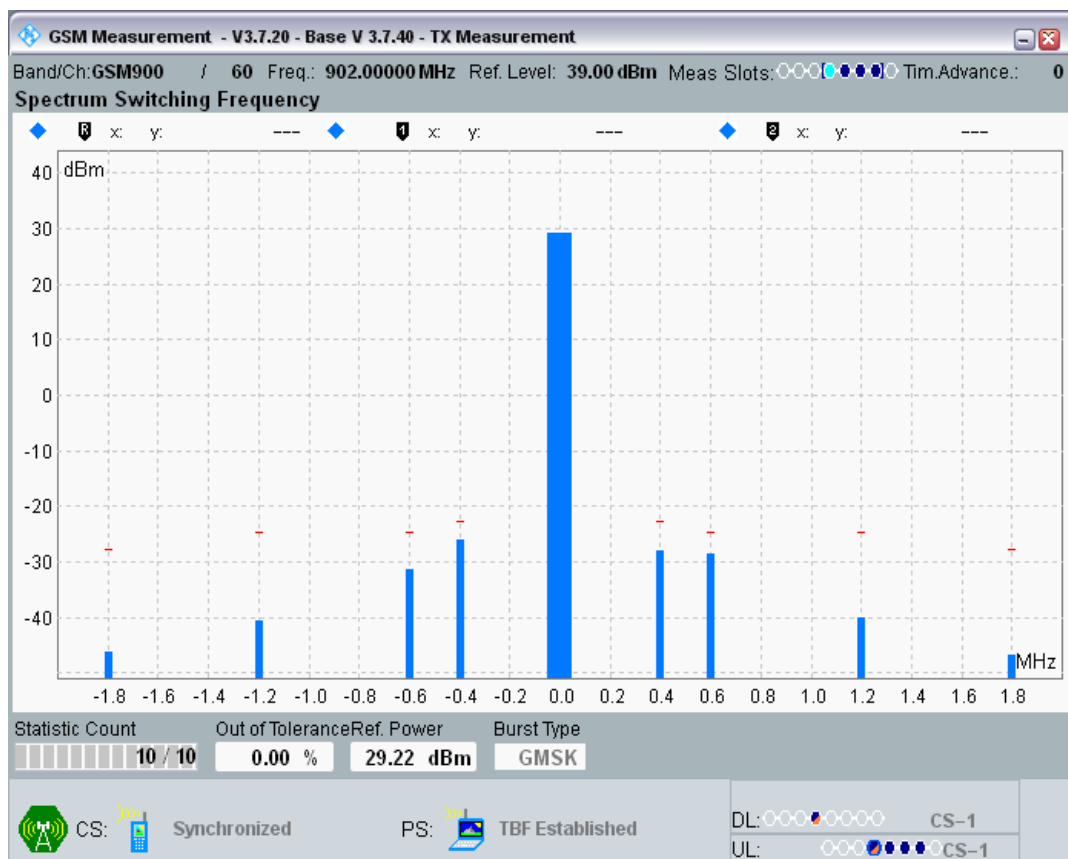


GSM900 Channel=975 Gamma=3;3;3;3.png

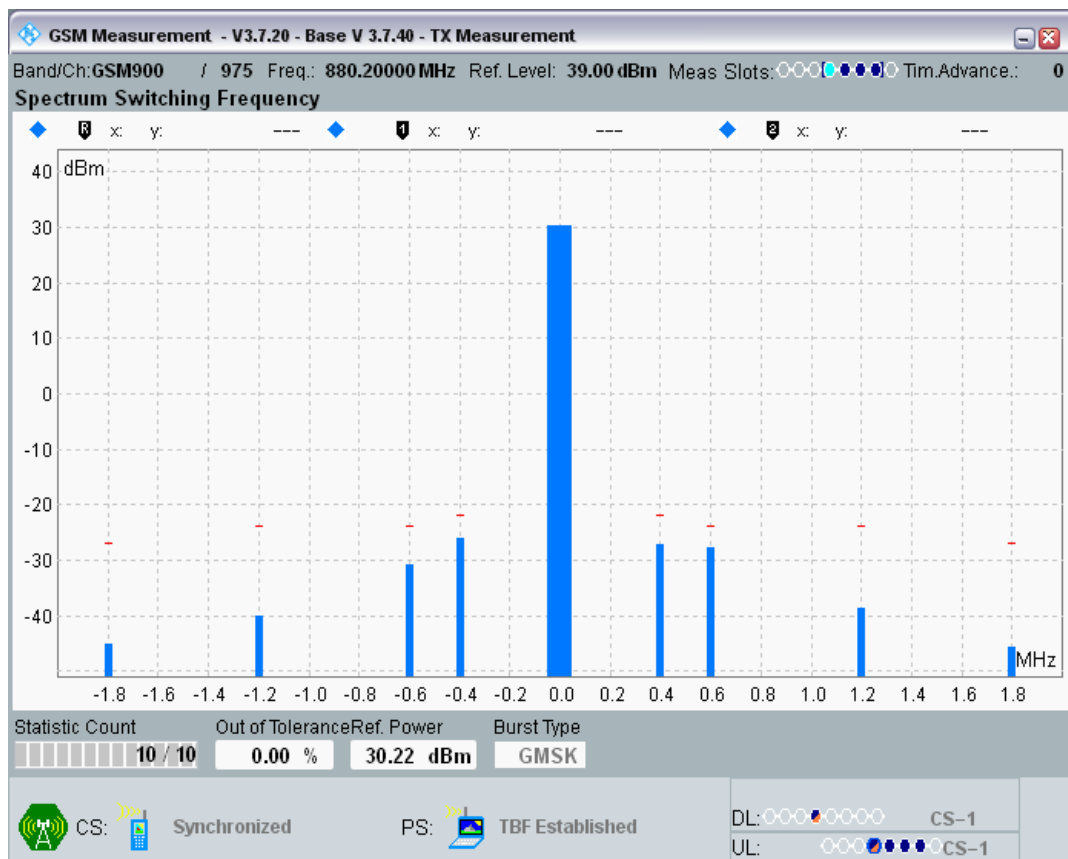


DCS1800 Channel=512 Gamma=3;3;3;3.png

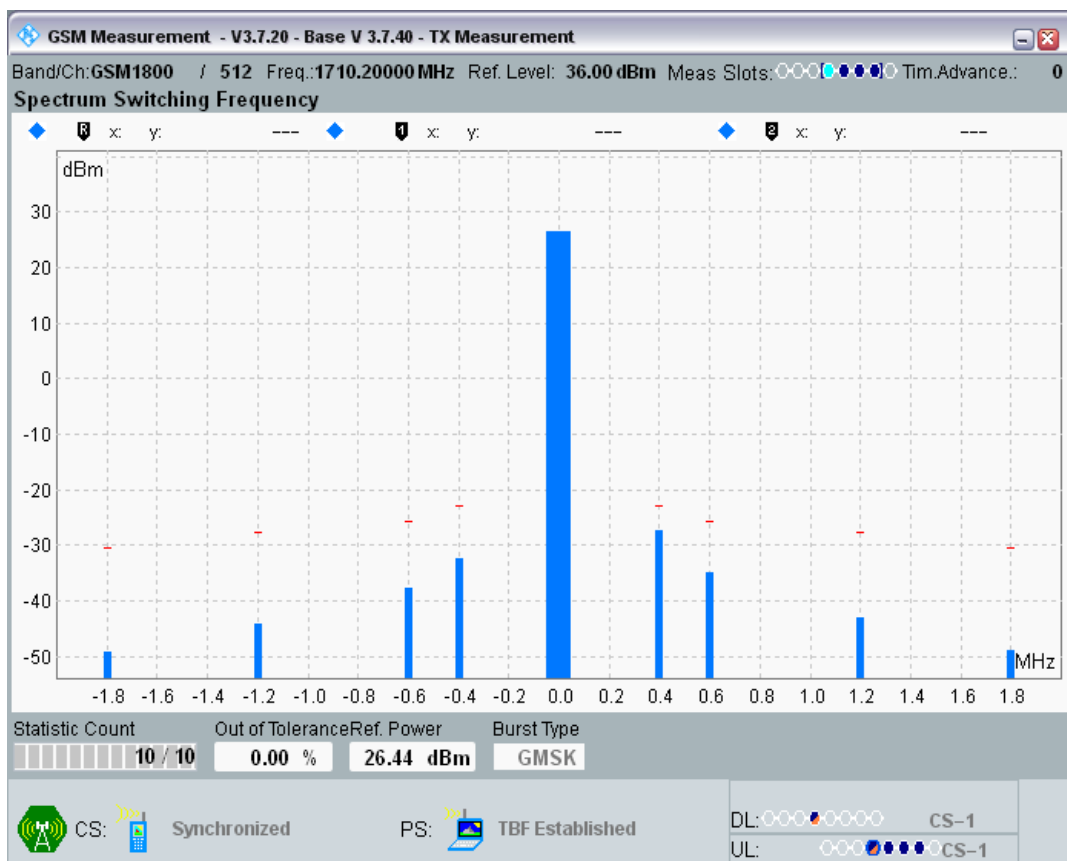

DCS1800 Channel=700 Gamma=3;3;3;3.png

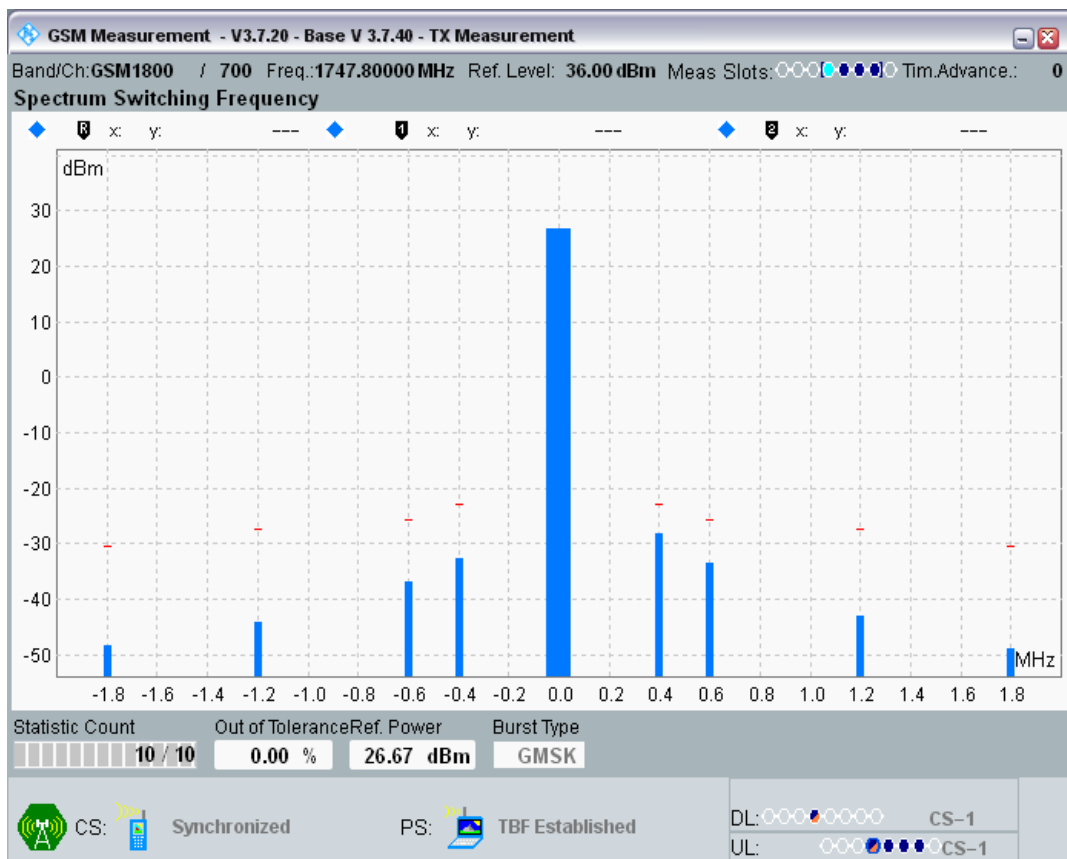

DCS1800 Channel=885 Gamma=3;3;3;3.png

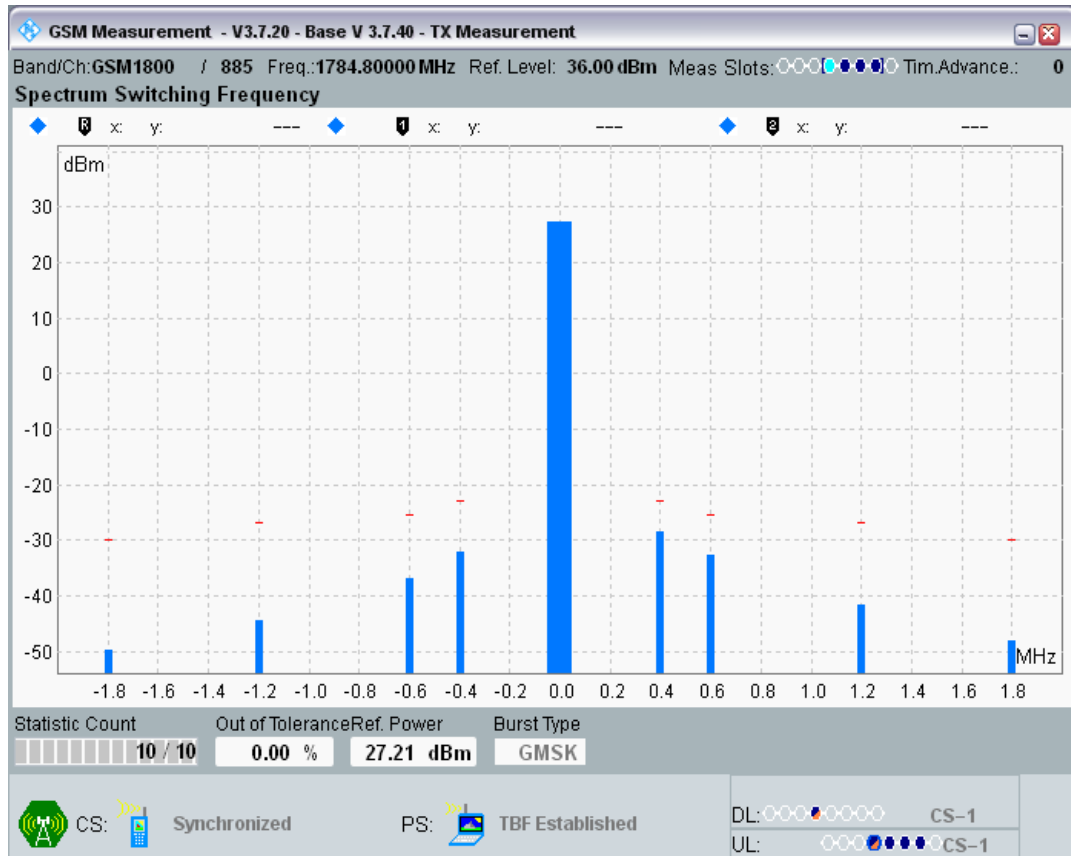


#### Clause 4.2.26 Frequency error and Modulation accuracy in EGPRS Configuration


Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	6;6;6;6	Frequency Error (Hz)	14.27	-88.02	88.02	PASS
GSM900	975	880.2	6;6;6;6	RMS EVM (%)	3.16	0	9	PASS
GSM900	975	880.2	6;6;6;6	Peak EVM (%)	9.52	0	30	PASS
GSM900	60	902	6;6;6;6	Frequency Error (Hz)	16.59	-90.2	90.2	PASS
GSM900	60	902	6;6;6;6	RMS EVM (%)	3.30	0	9	PASS
GSM900	60	902	6;6;6;6	Peak EVM (%)	9.92	0	30	PASS
GSM900	124	914.8	6;6;6;6	Frequency Error (Hz)	15.66	-91.48	91.48	PASS
GSM900	124	914.8	6;6;6;6	RMS EVM (%)	3.02	0	9	PASS
GSM900	124	914.8	6;6;6;6	Peak EVM (%)	8.95	0	30	PASS
DCS1800	512	1710.2	5;5;5;5	Frequency Error (Hz)	17.47	-171.02	171.02	PASS
DCS1800	512	1710.2	5;5;5;5	RMS EVM (%)	1.86	0	9	PASS
DCS1800	512	1710.2	5;5;5;5	Peak EVM (%)	5.69	0	30	PASS
DCS1800	700	1747.8	5;5;5;5	Frequency Error (Hz)	16.37	-174.78	174.78	PASS
DCS1800	700	1747.8	5;5;5;5	RMS EVM (%)	2.05	0	9	PASS
DCS1800	700	1747.8	5;5;5;5	Peak EVM (%)	6.56	0	30	PASS
DCS1800	885	1784.8	5;5;5;5	Frequency Error (Hz)	22.76	-178.48	178.48	PASS
DCS1800	885	1784.8	5;5;5;5	RMS EVM (%)	2.18	0	9	PASS
DCS1800	885	1784.8	5;5;5;5	Peak EVM (%)	6.99	0	30	PASS

GSM900 Channel=124 Gamma=6;6;6;6.png




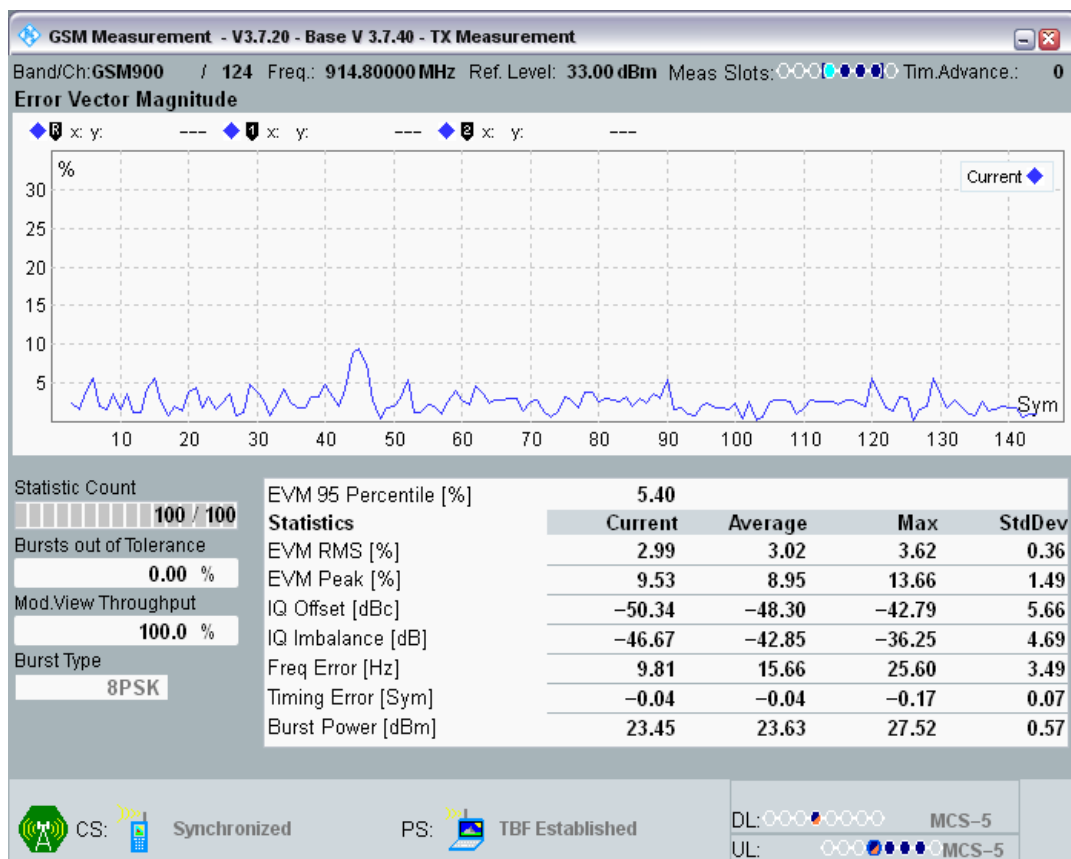


GSM900 Channel=60 Gamma=6;6;6;6.png

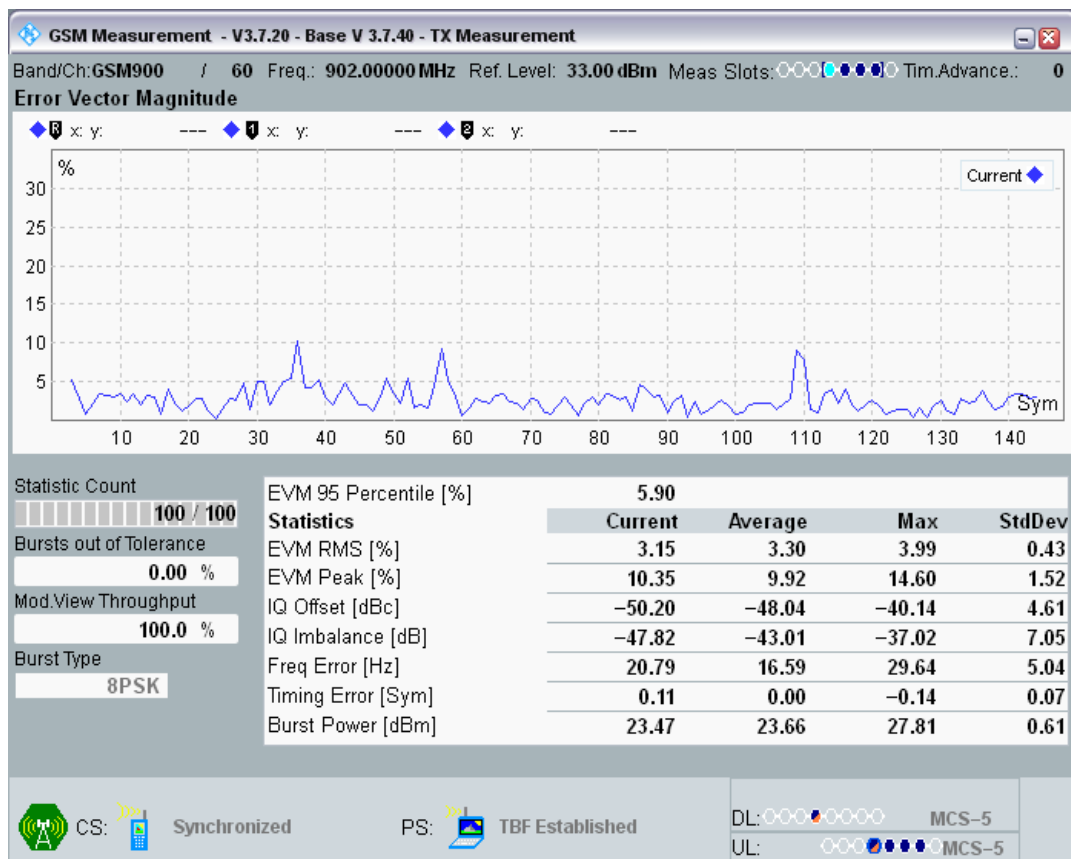


GSM900 Channel=975 Gamma=6;6;6;6.png

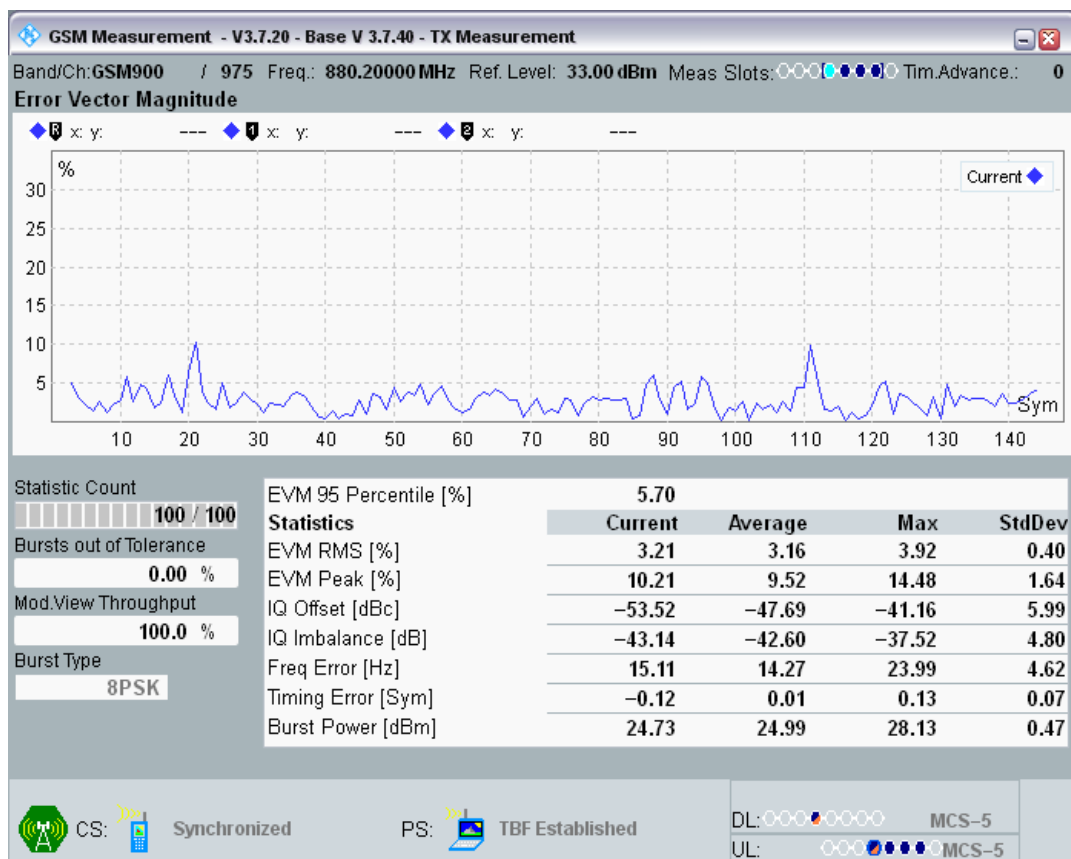


DCS1800 Channel=512 Gamma=5;5;5;5.png

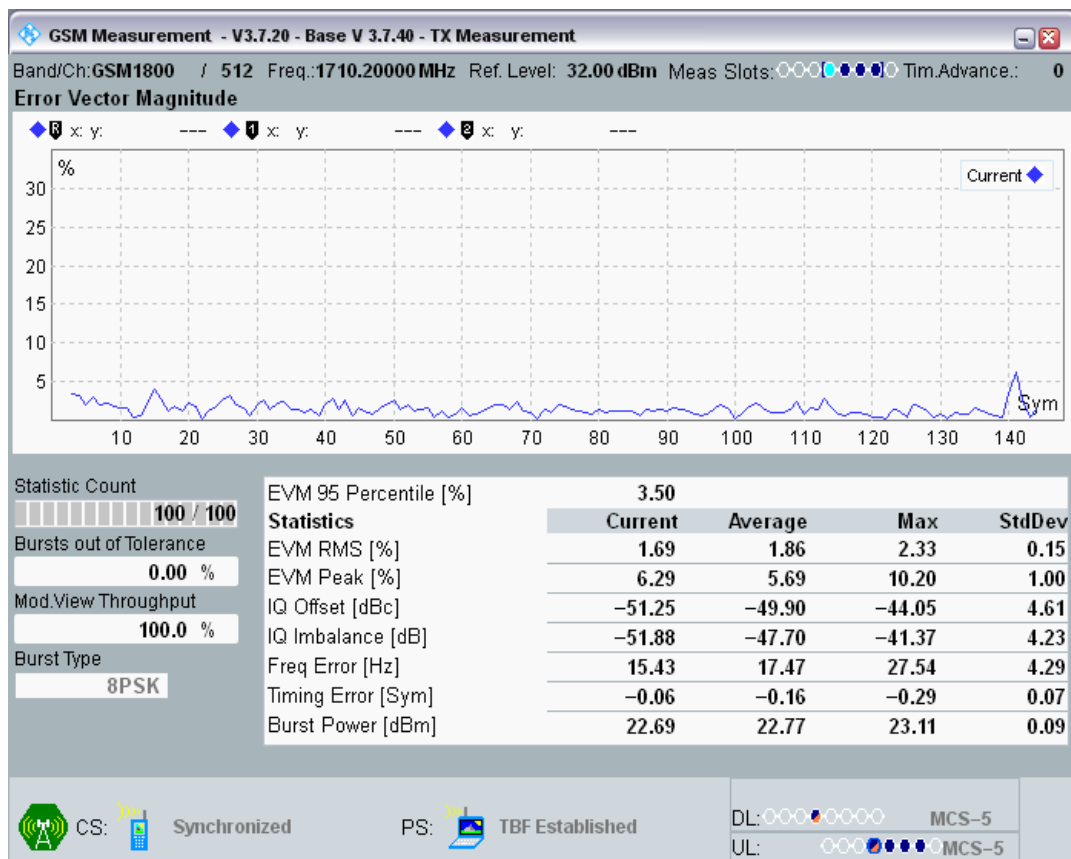

DCS1800 Channel=700 Gamma=5;5;5;5.png

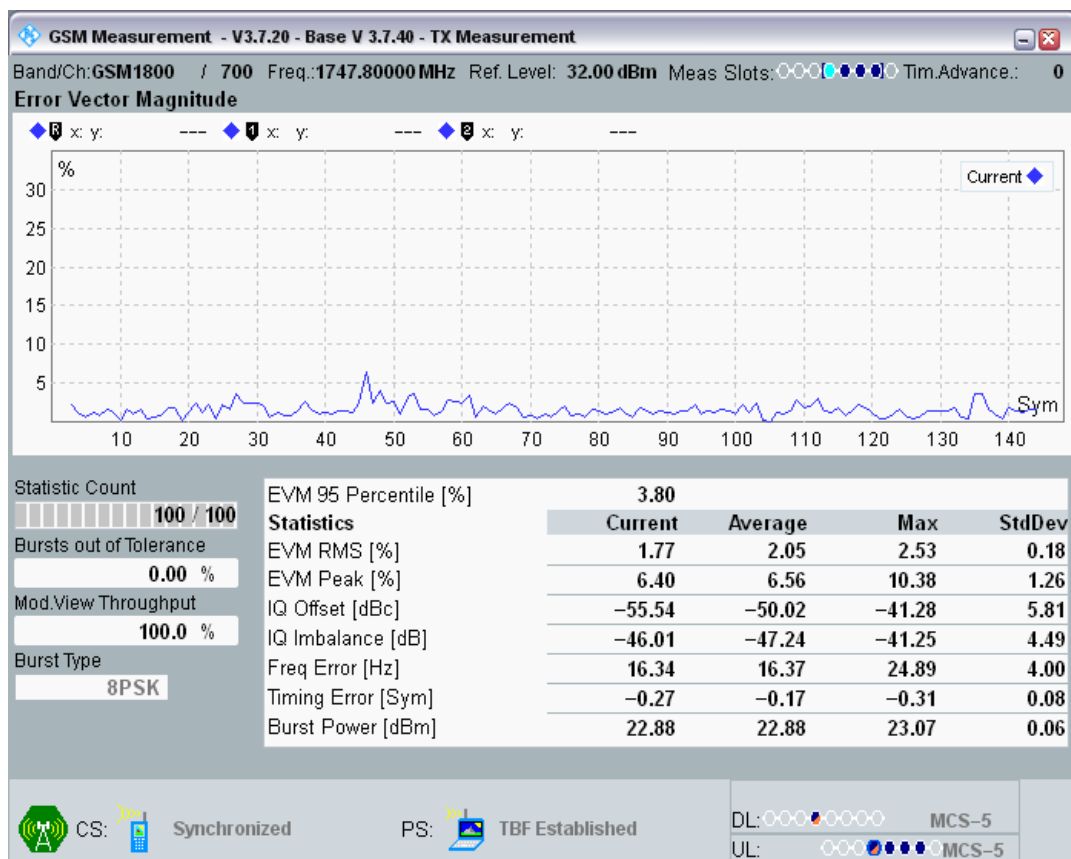

DCS1800 Channel=885 Gamma=5;5;5;5.png

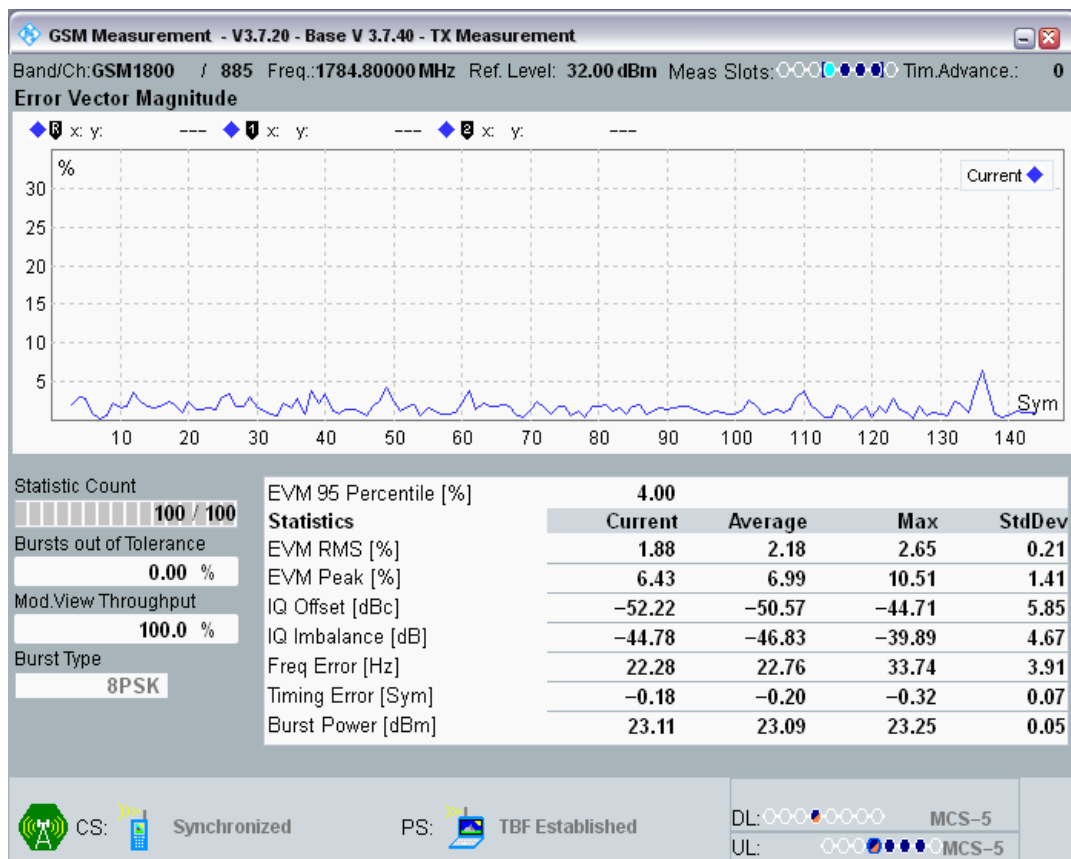


## Clause 4.2.27 Frequency error under multipath and interference conditions in EGPRS


## Configuration

Band	Type	Channel	Frequency (MHz)	Gamma	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
GSM900	RA250	975	880.2	6;6;6;6	14.33	-300	300	PASS
GSM900	RA250	60	902	6;6;6;6	15.11	-300	300	PASS
GSM900	RA250	124	914.8	6;6;6;6	12.66	-300	300	PASS
GSM900	HT100	975	880.2	6;6;6;6	14.37	-180	180	PASS
GSM900	HT100	60	902	6;6;6;6	14.66	-180	180	PASS
GSM900	HT100	124	914.8	6;6;6;6	12.79	-180	180	PASS
GSM900	TU50	975	880.2	6;6;6;6	13.20	-160	160	PASS
GSM900	TU50	60	902	6;6;6;6	13.27	-160	160	PASS
GSM900	TU50	124	914.8	6;6;6;6	13.04	-160	160	PASS
GSM900	TU3	975	880.2	6;6;6;6	11.91	-230	230	PASS
GSM900	TU3	60	902	6;6;6;6	12.56	-230	230	PASS
GSM900	TU3	124	914.8	6;6;6;6	12.62	-230	230	PASS
DCS1800	RA130	512	1710.2	5;5;5;5	15.08	-400	400	PASS
DCS1800	RA130	700	1747.8	5;5;5;5	17.40	-400	400	PASS
DCS1800	RA130	885	1784.8	5;5;5;5	19.05	-400	400	PASS
DCS1800	HT100	512	1710.2	5;5;5;5	13.95	-350	350	PASS
DCS1800	HT100	700	1747.8	5;5;5;5	14.79	-350	350	PASS
DCS1800	HT100	885	1784.8	5;5;5;5	18.08	-350	350	PASS
DCS1800	TU50	512	1710.2	5;5;5;5	16.76	-260	260	PASS
DCS1800	TU50	700	1747.8	5;5;5;5	21.66	-260	260	PASS
DCS1800	TU50	885	1784.8	5;5;5;5	18.85	-260	260	PASS
DCS1800	TU1_5	512	1710.2	5;5;5;5	15.56	-320	320	PASS
DCS1800	TU1_5	700	1747.8	5;5;5;5	16.43	-320	320	PASS
DCS1800	TU1_5	885	1784.8	5;5;5;5	22.21	-320	320	PASS


GSM900 Channel=124 Gamma=6;6;6;6 HT100.png

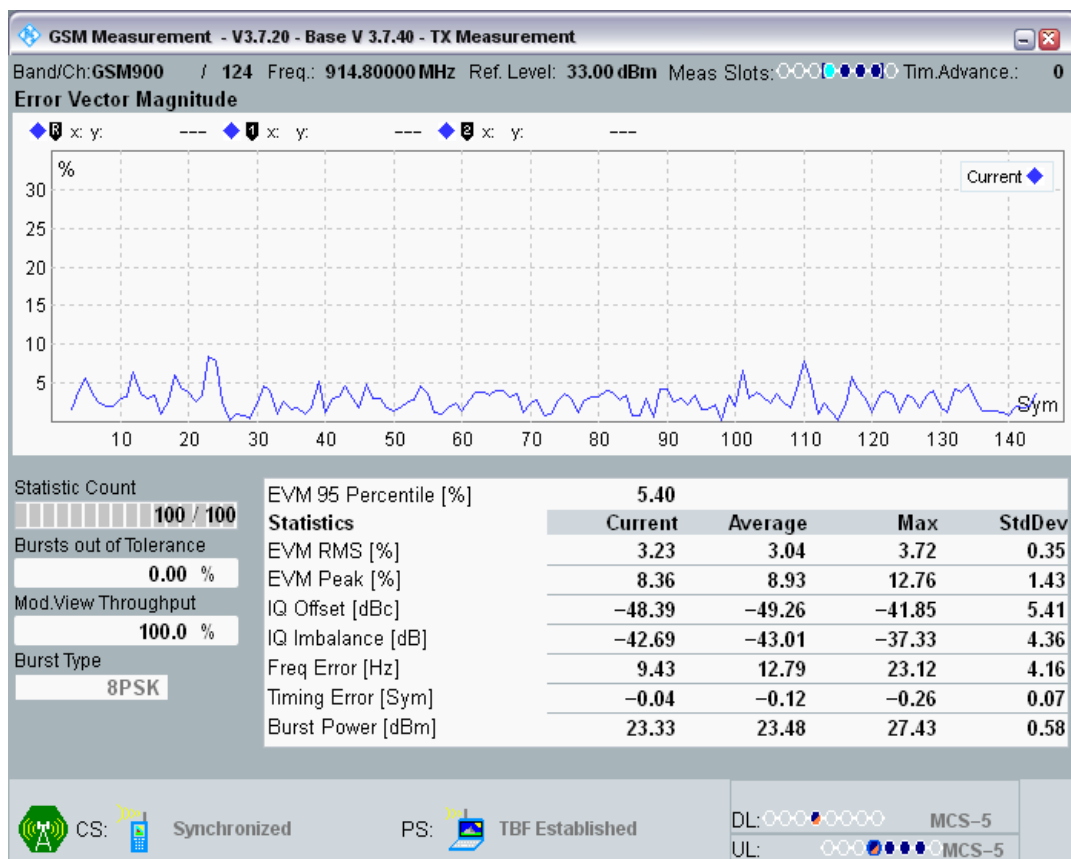


GSM900 Channel=124 Gamma=6;6;6;6 RA250.png

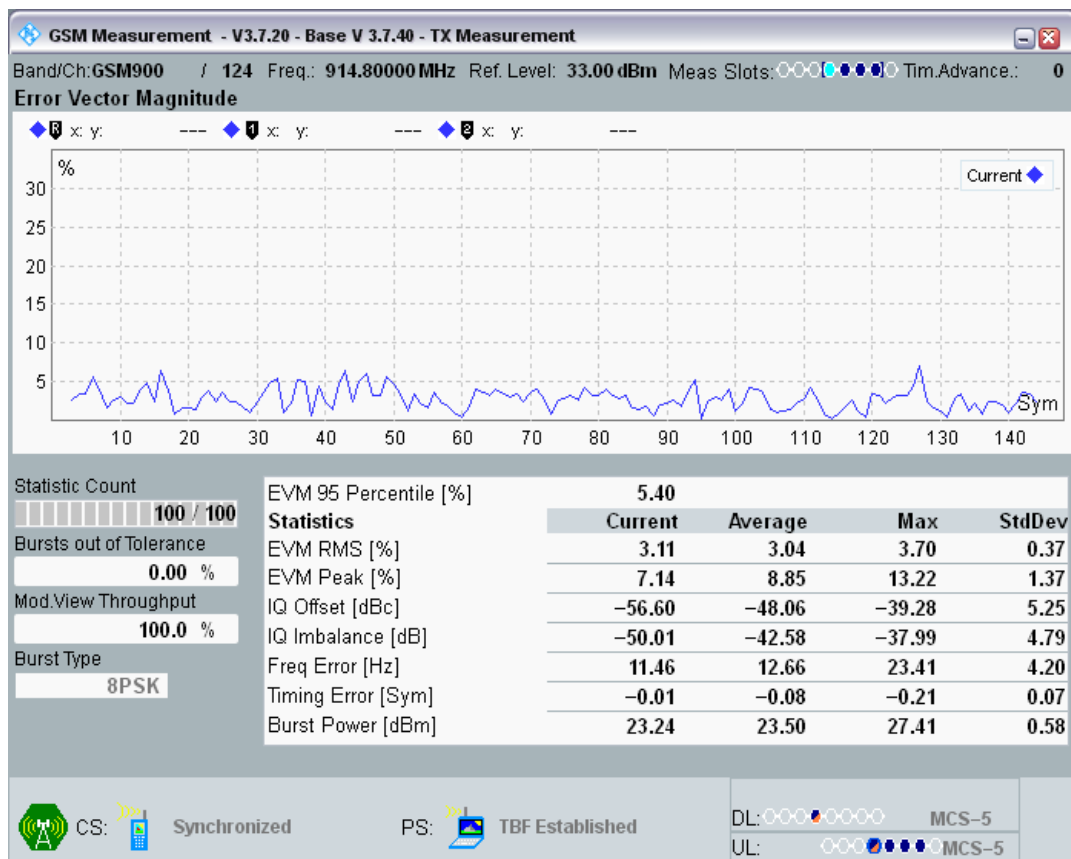


GSM900 Channel=124 Gamma=6;6;6;6 TU3.png

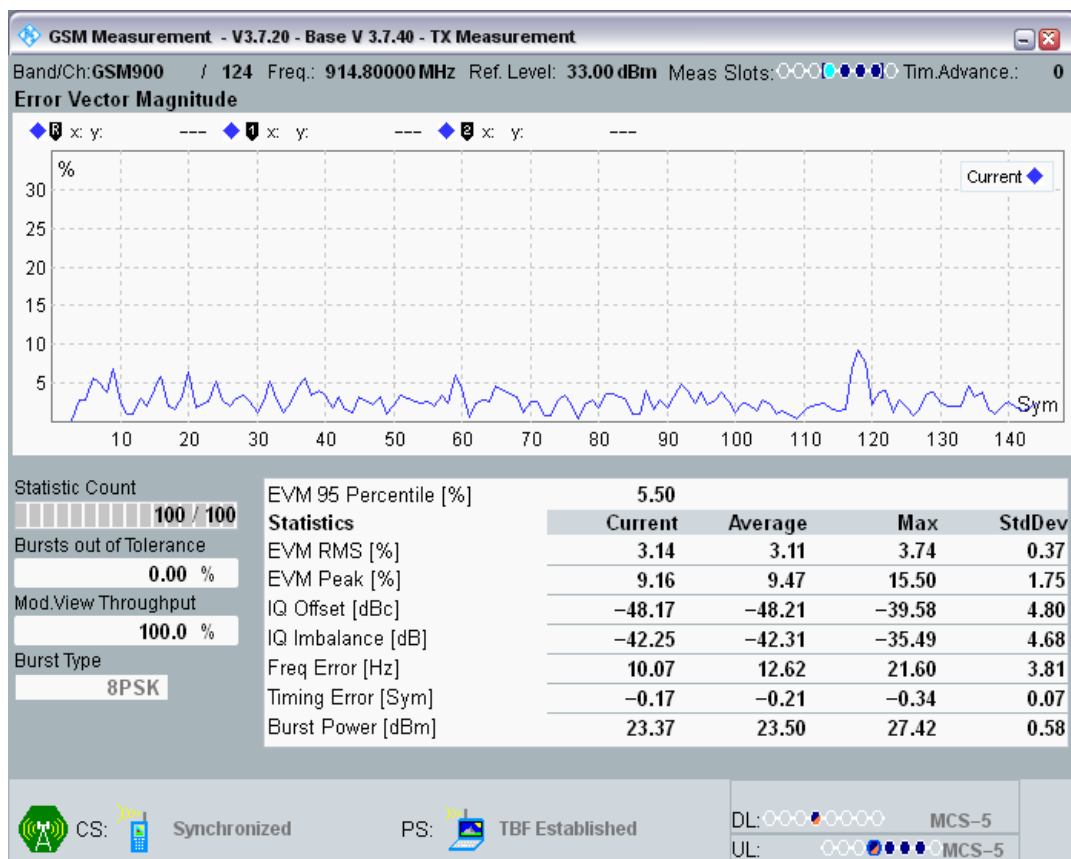


GSM900 Channel=124 Gamma=6;6;6;6 TU50.png

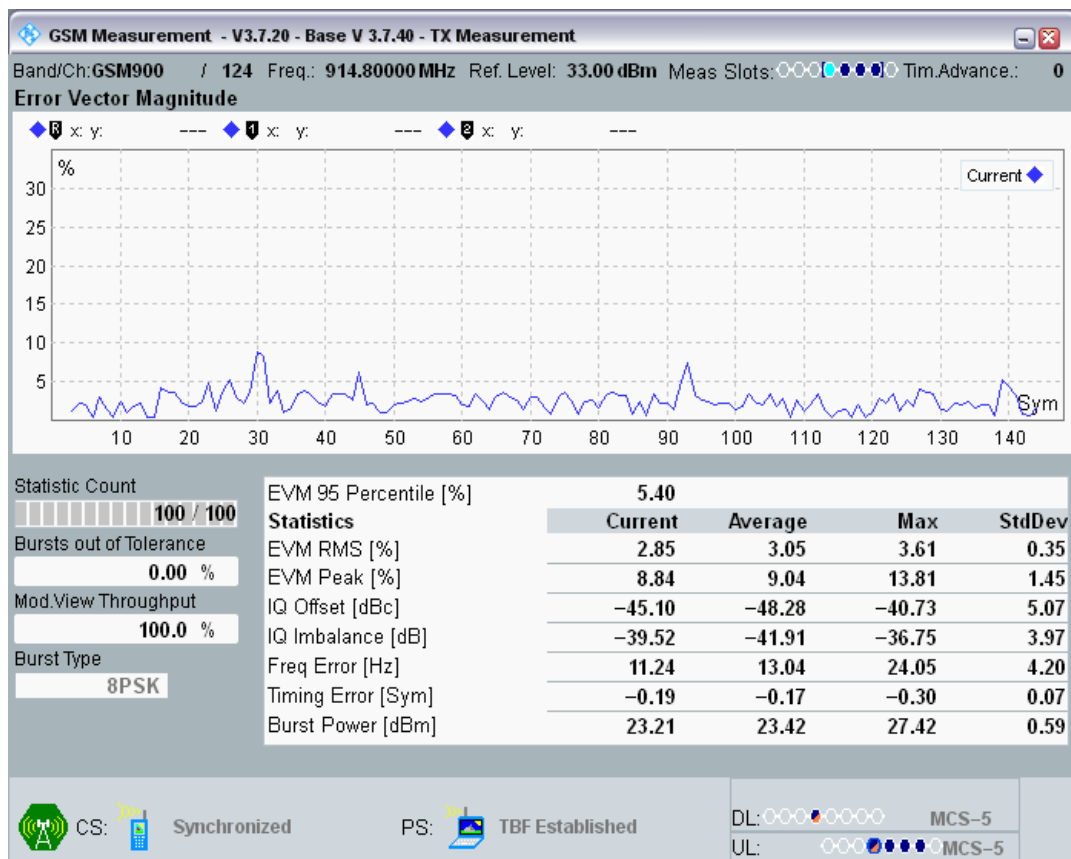

GSM900 Channel=60 Gamma=6;6;6;6 HT100.png

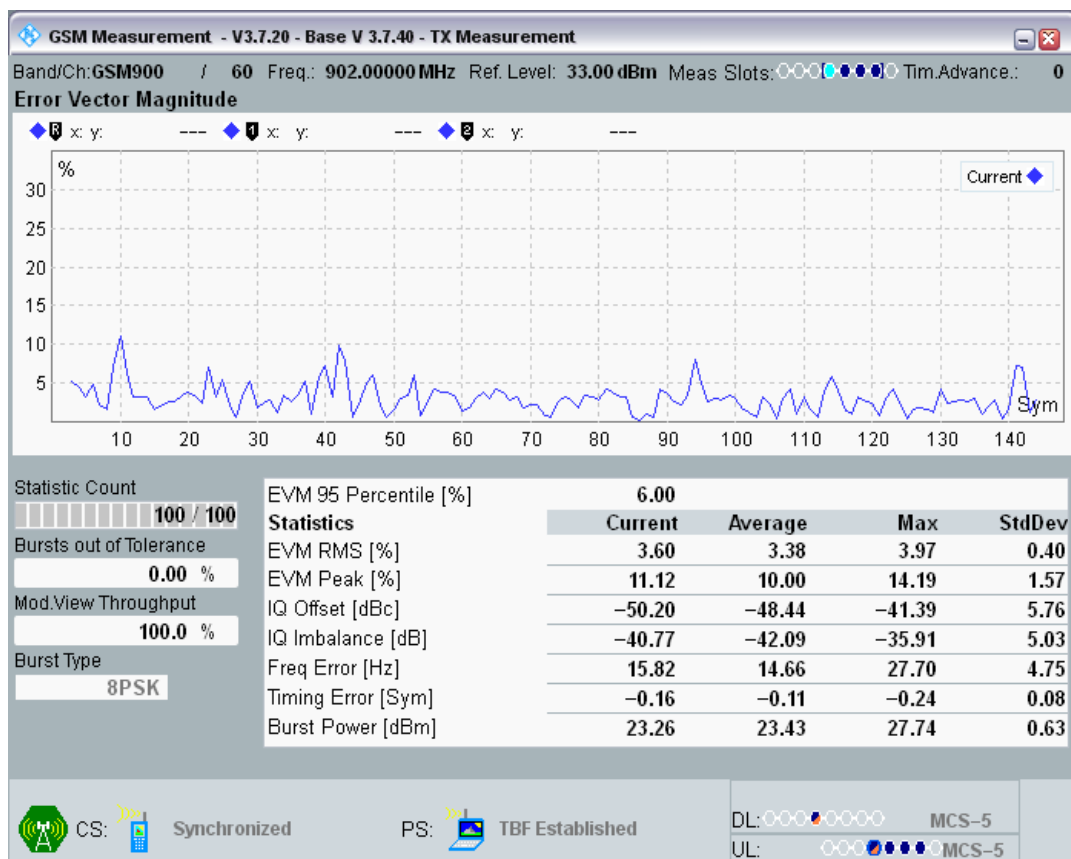


GSM900 Channel=60 Gamma=6;6;6;6 RA250.png

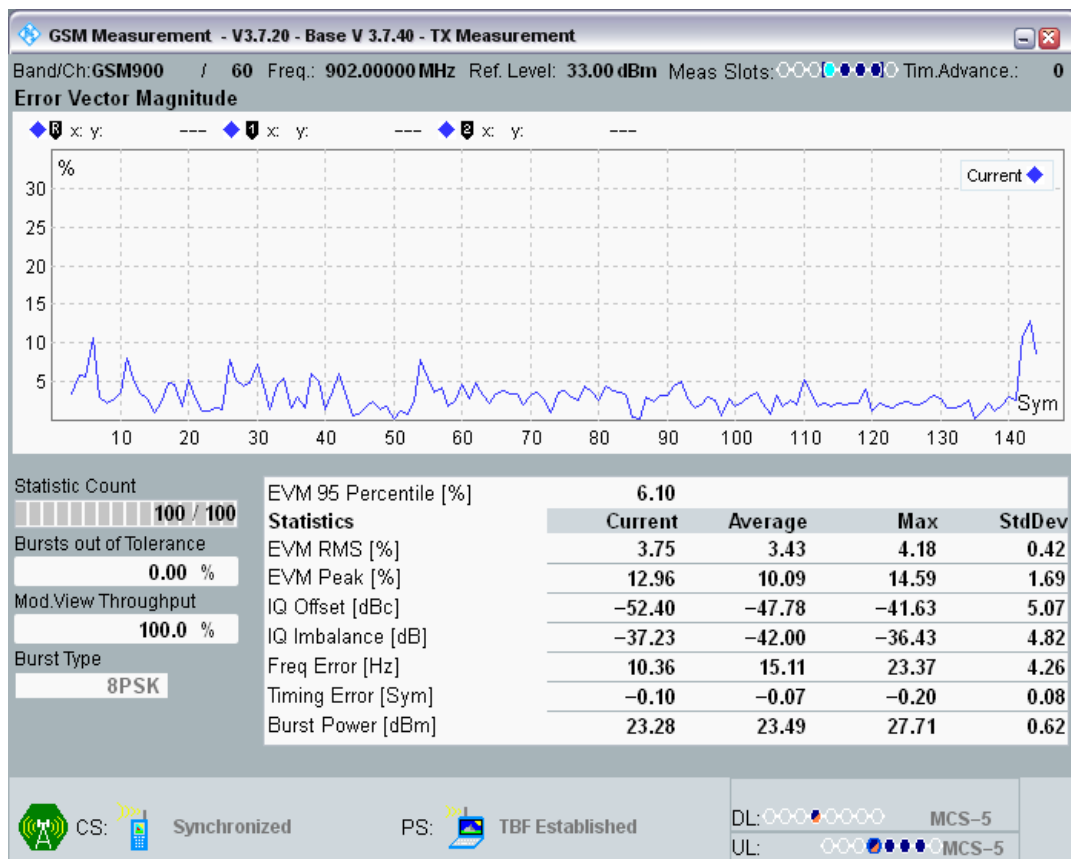


GSM900 Channel=60 Gamma=6;6;6;6 TU3.png



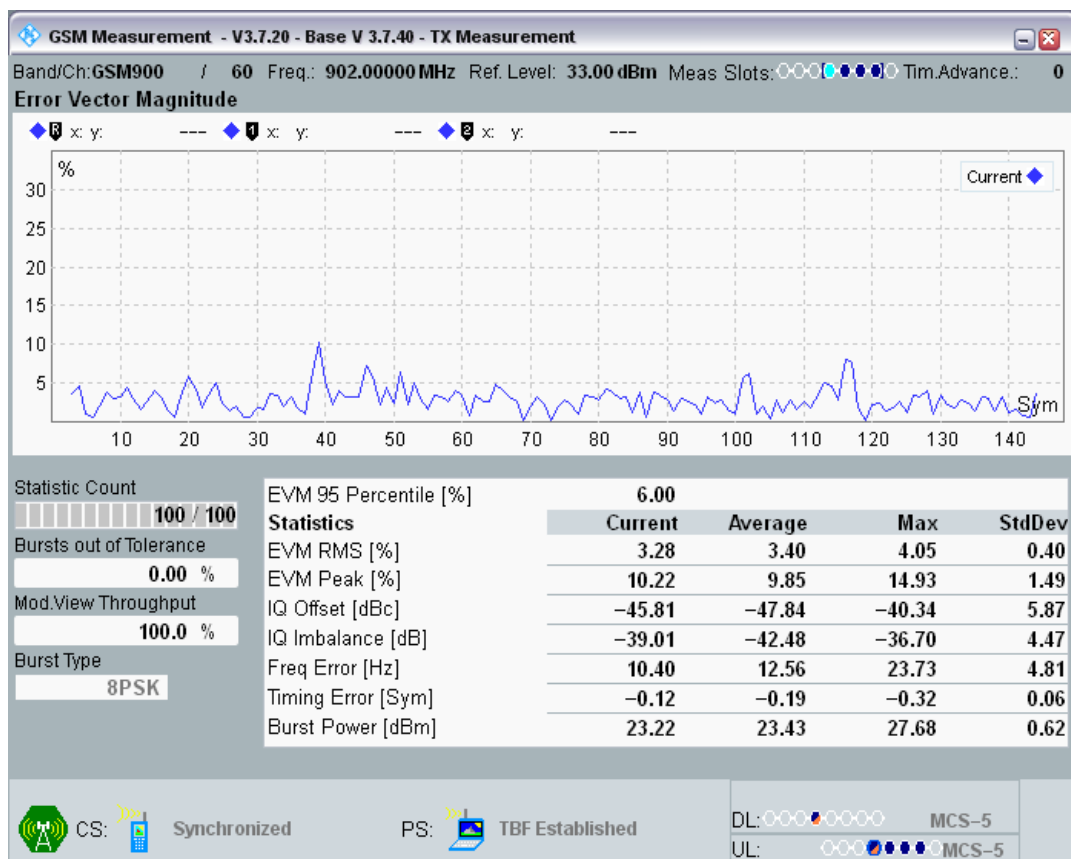


GSM900 Channel=60 Gamma=6;6;6;6 TU50.png

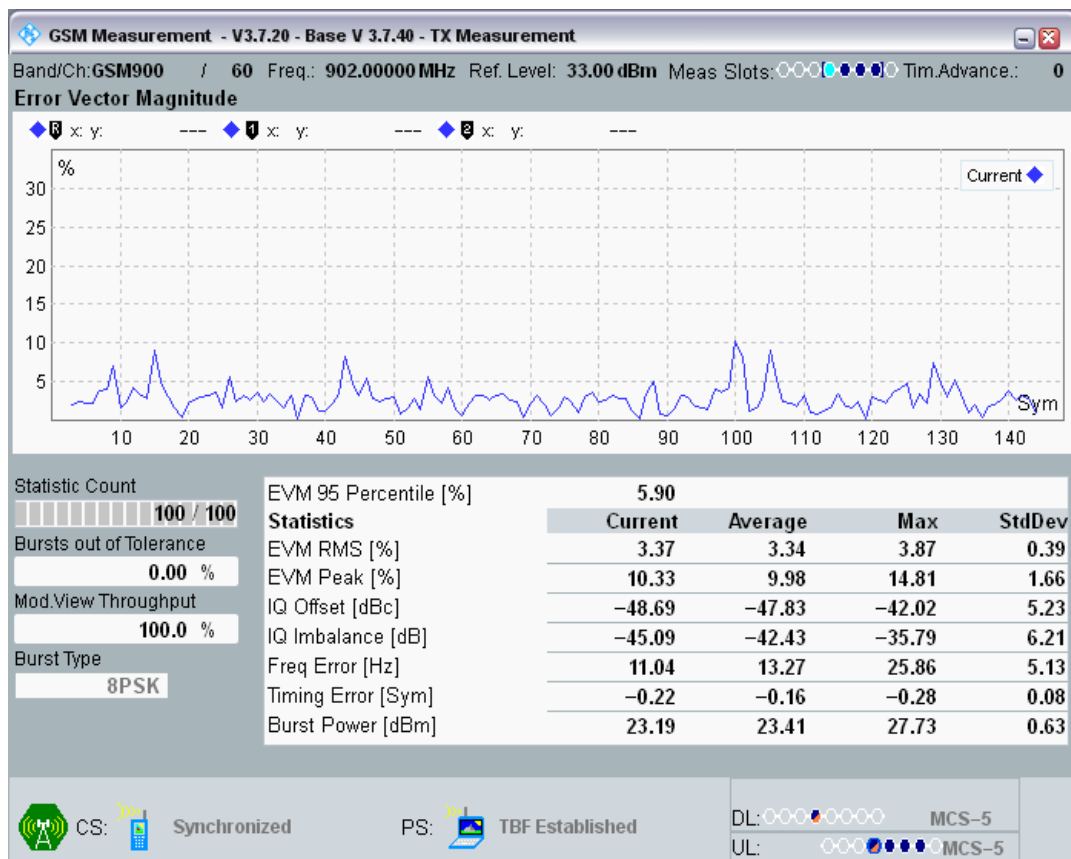


GSM900 Channel=975 Gamma=6;6;6;6 HT100.png




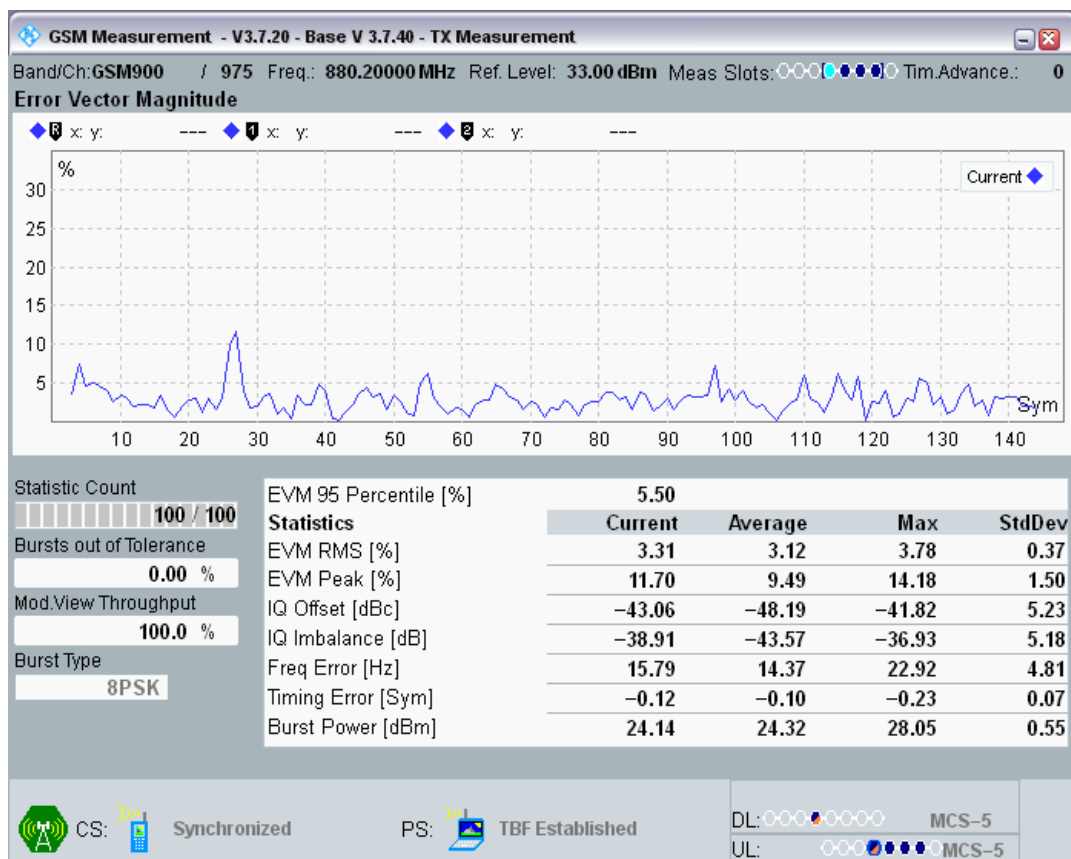


GSM900 Channel=975 Gamma=6;6;6;6 RA250.png

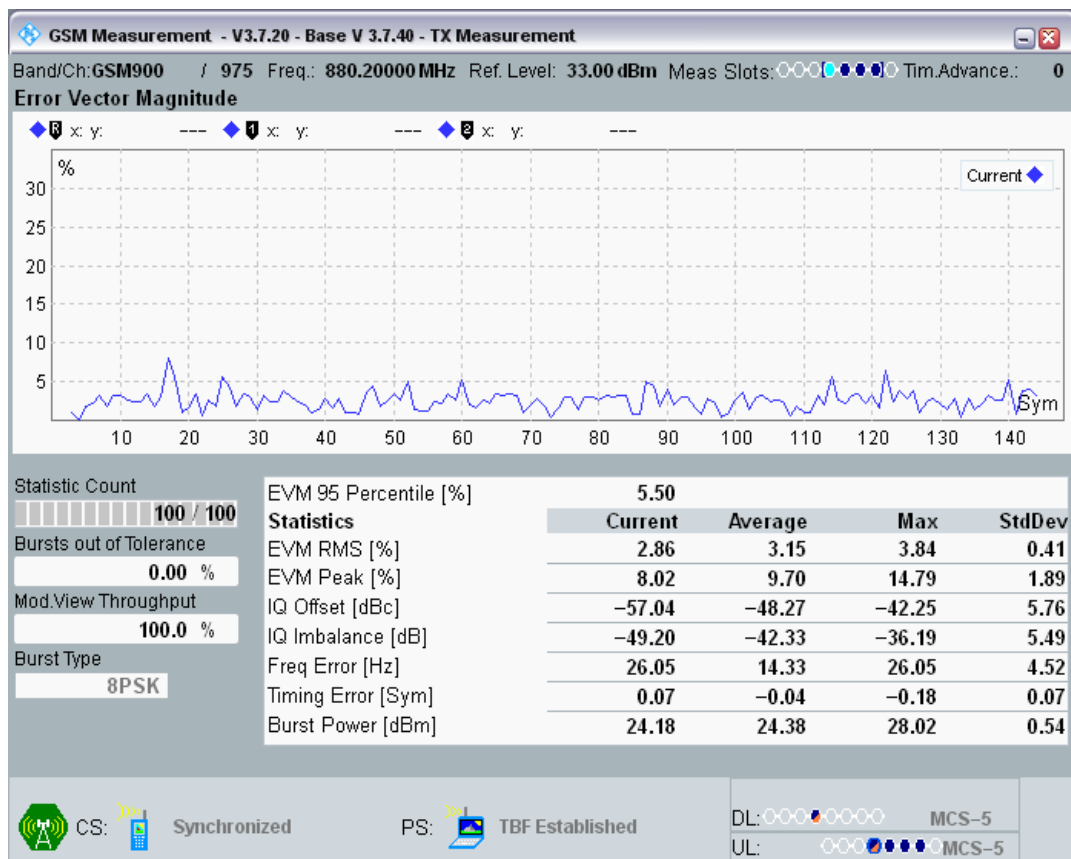


GSM900 Channel=975 Gamma=6;6;6;6 TU3.png

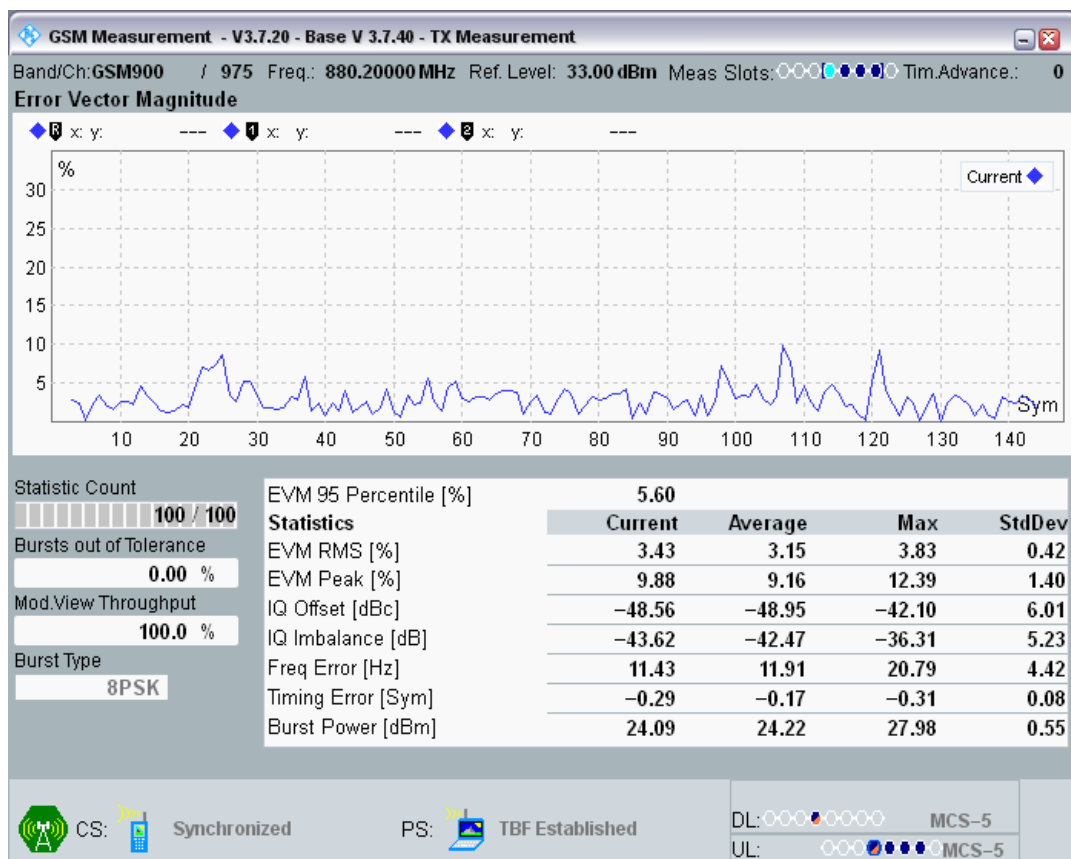


GSM900 Channel=975 Gamma=6;6;6;6 TU50.png

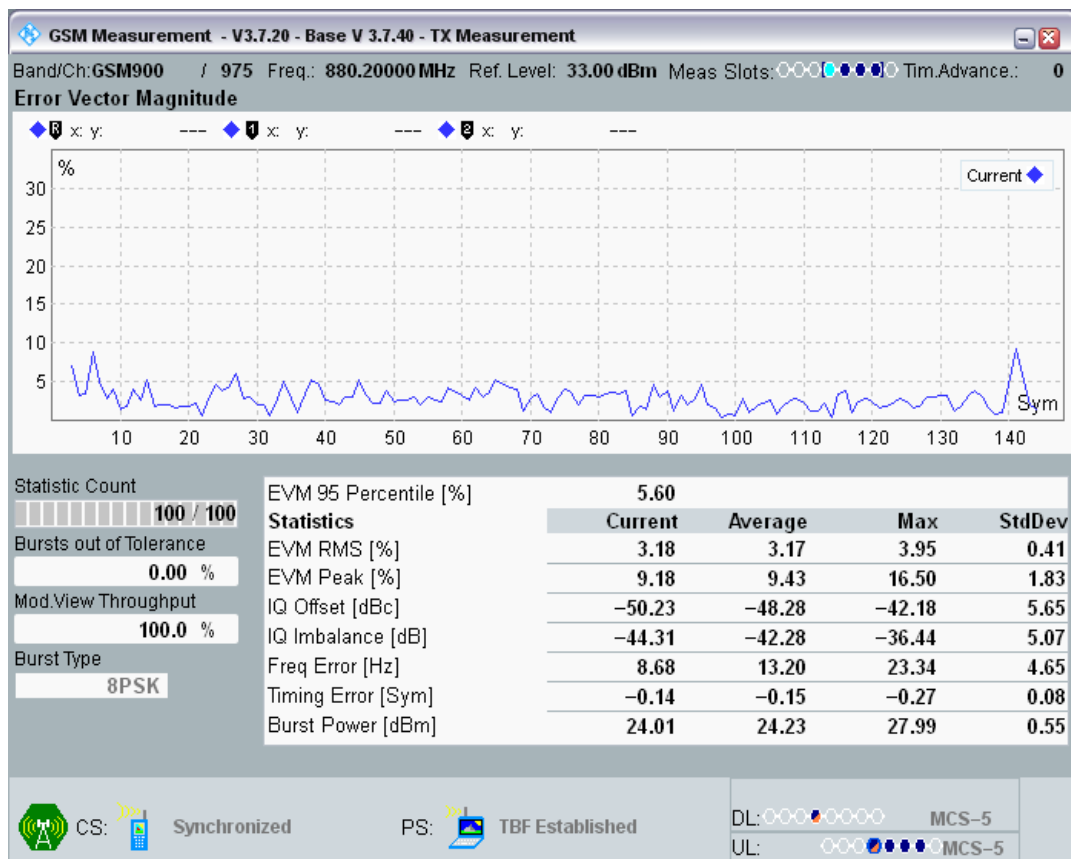


DCS1800 Channel=512 Gamma=5;5;5;5 HT100.png

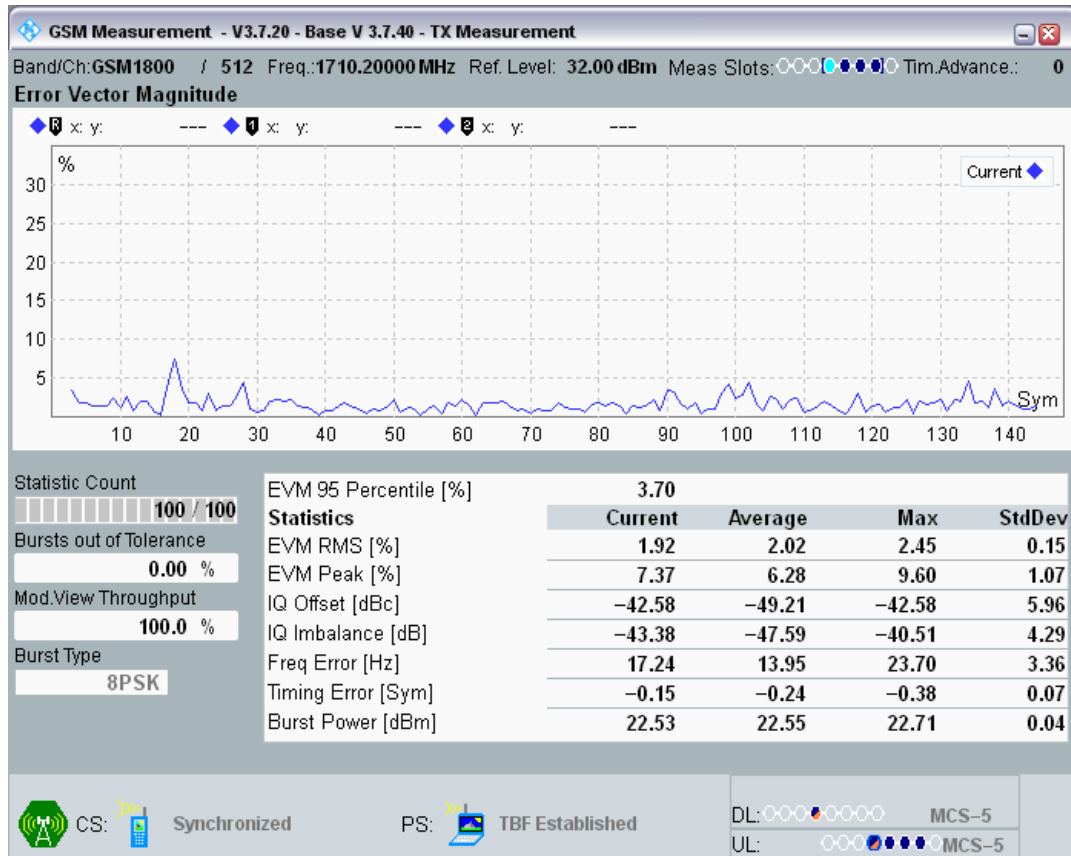


DCS1800 Channel=512 Gamma=5;5;5;5 RA130.png

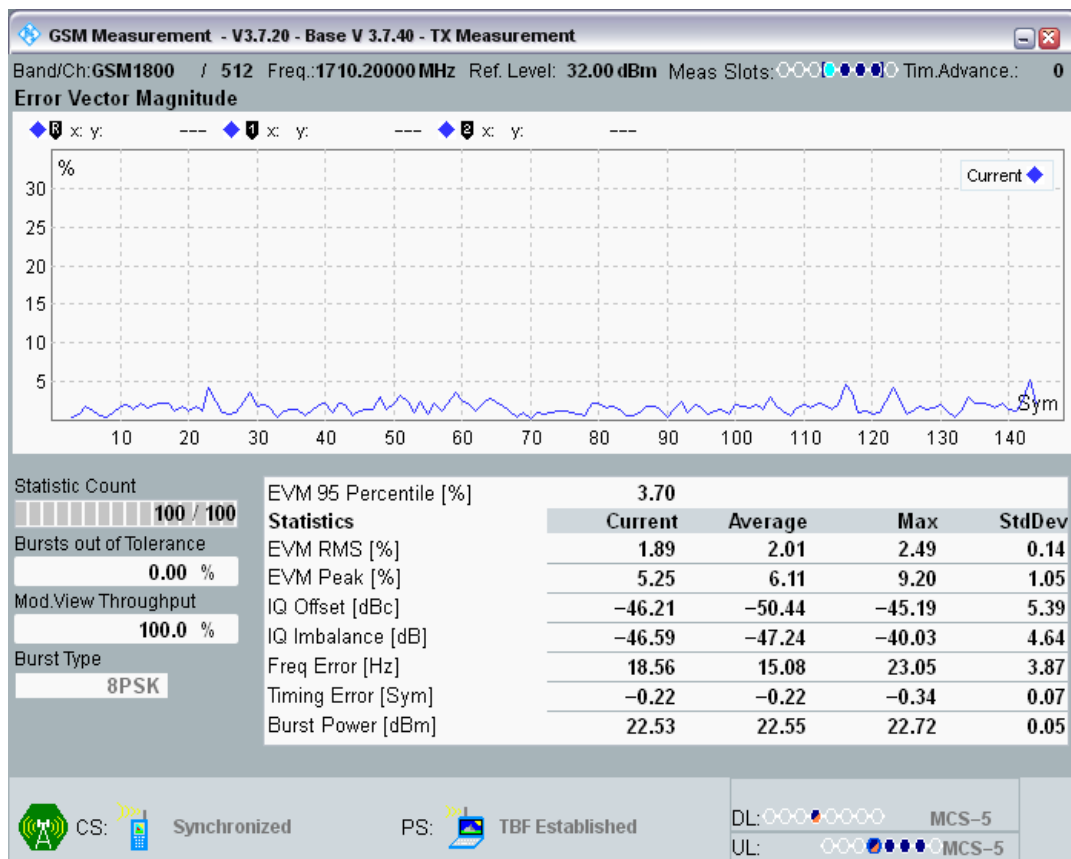


DCS1800 Channel=512 Gamma=5;5;5;5 TU1\_5.png

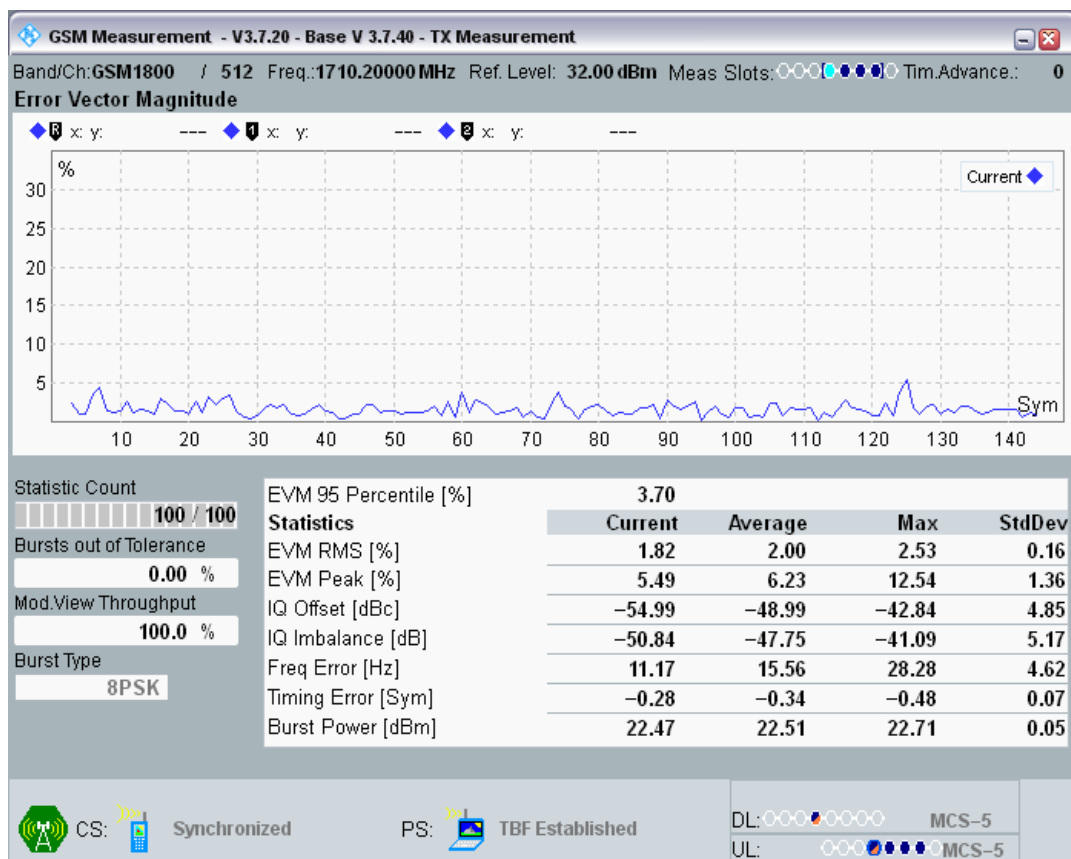


DCS1800 Channel=512 Gamma=5;5;5;5 TU50.png

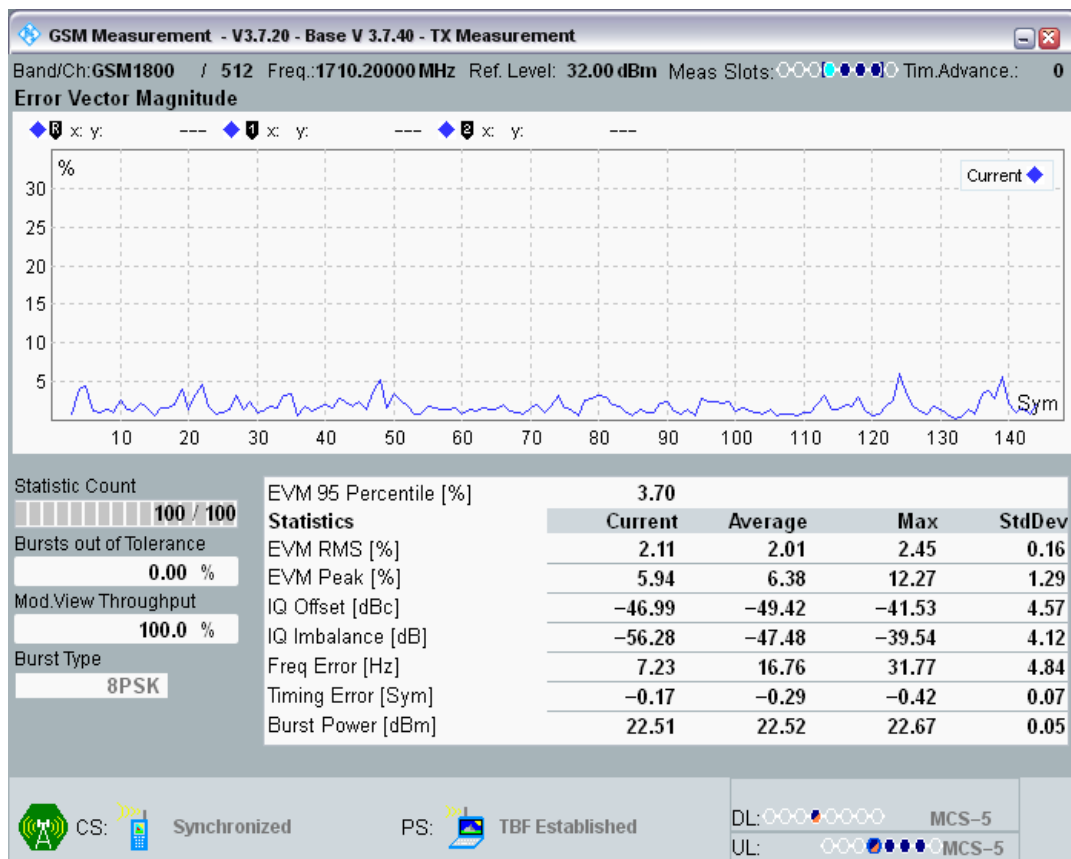


DCS1800 Channel=700 Gamma=5;5;5;5 HT100.png

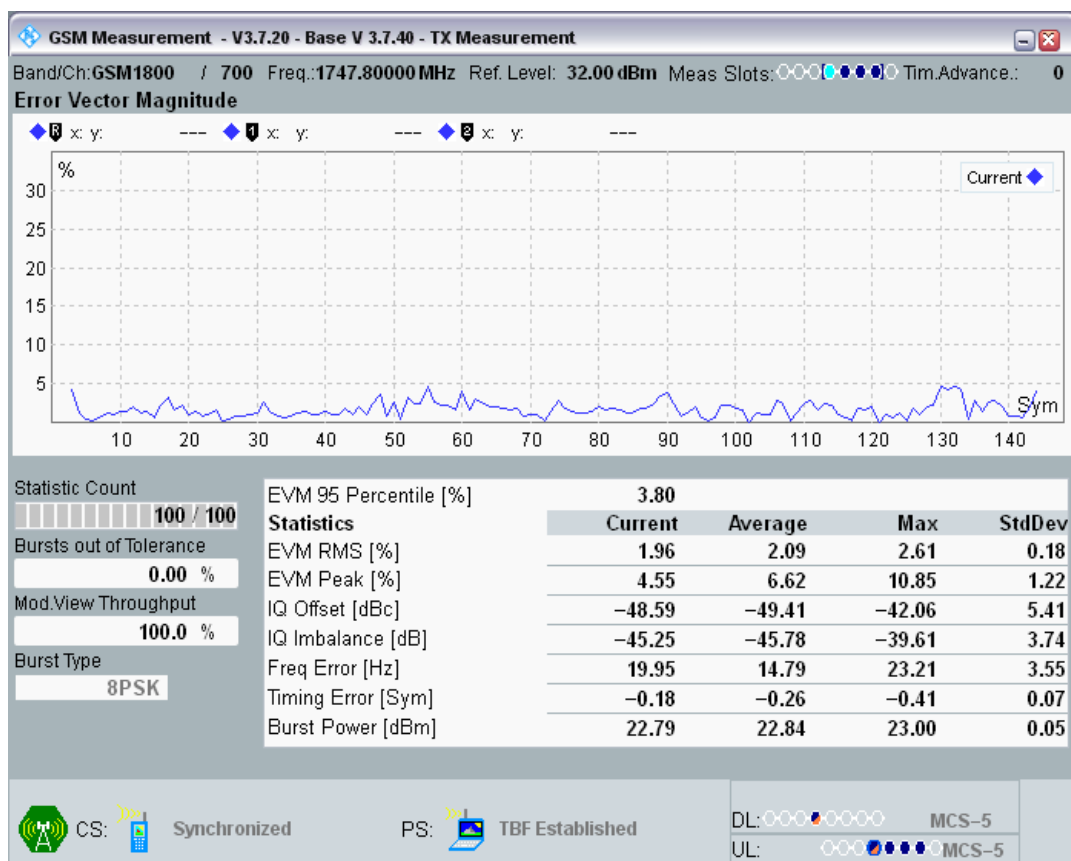


DCS1800 Channel=700 Gamma=5;5;5;5 RA130.png

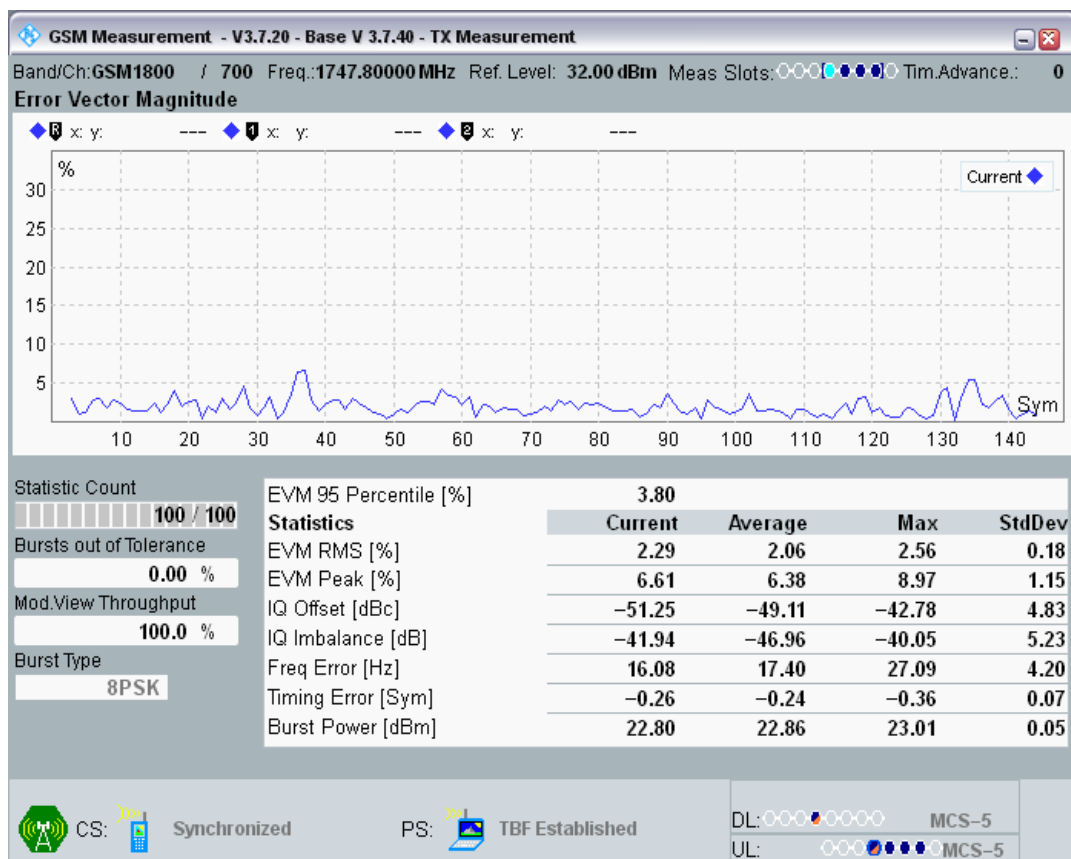


DCS1800 Channel=700 Gamma=5;5;5;5 TU1\_5.png

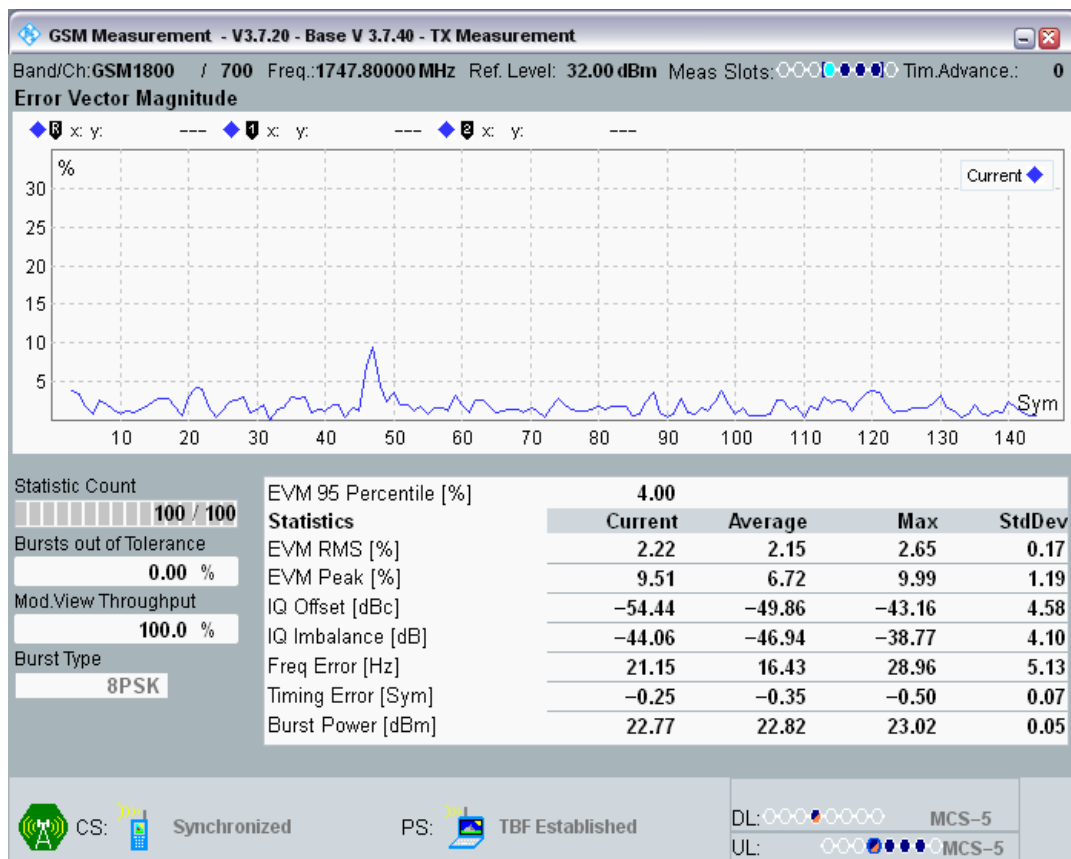


DCS1800 Channel=700 Gamma=5;5;5;5 TU50.png

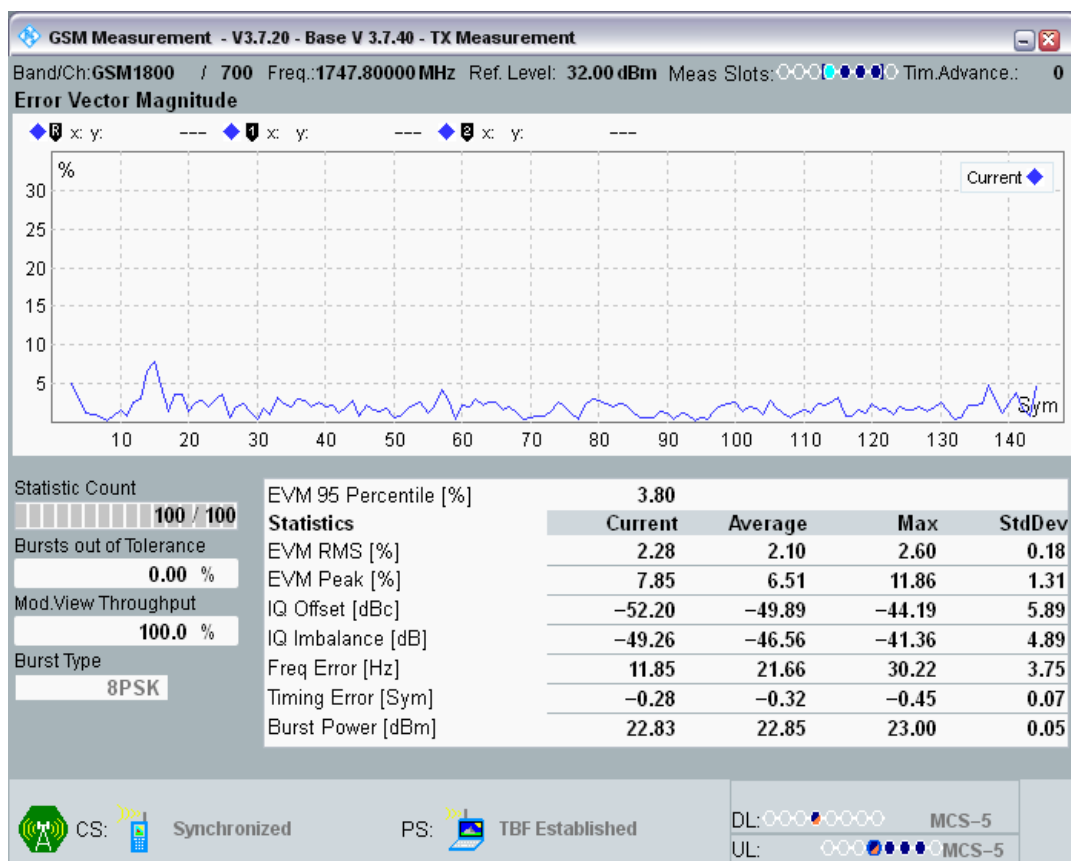

DCS1800 Channel=885 Gamma=5;5;5;5 HT100.png

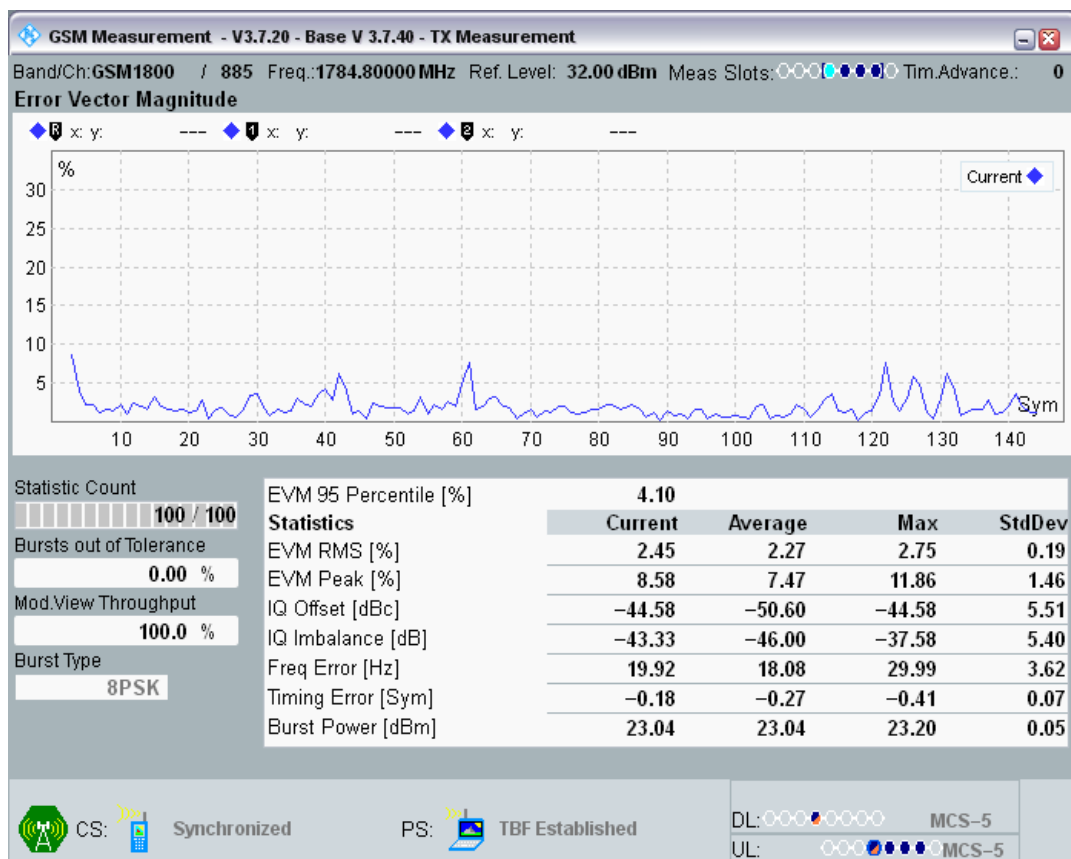


DCS1800 Channel=885 Gamma=5;5;5;5 RA130.png

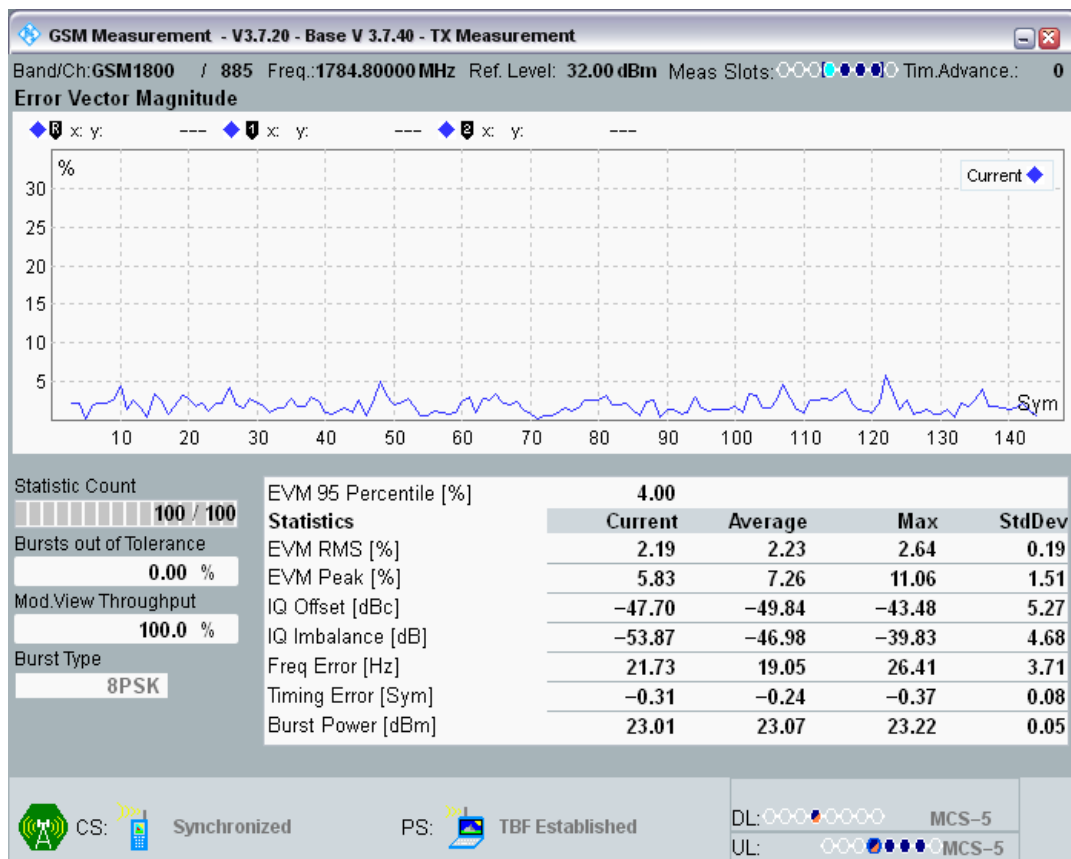




DCS1800 Channel=885 Gamma=5;5;5;5 TU1\_5.png

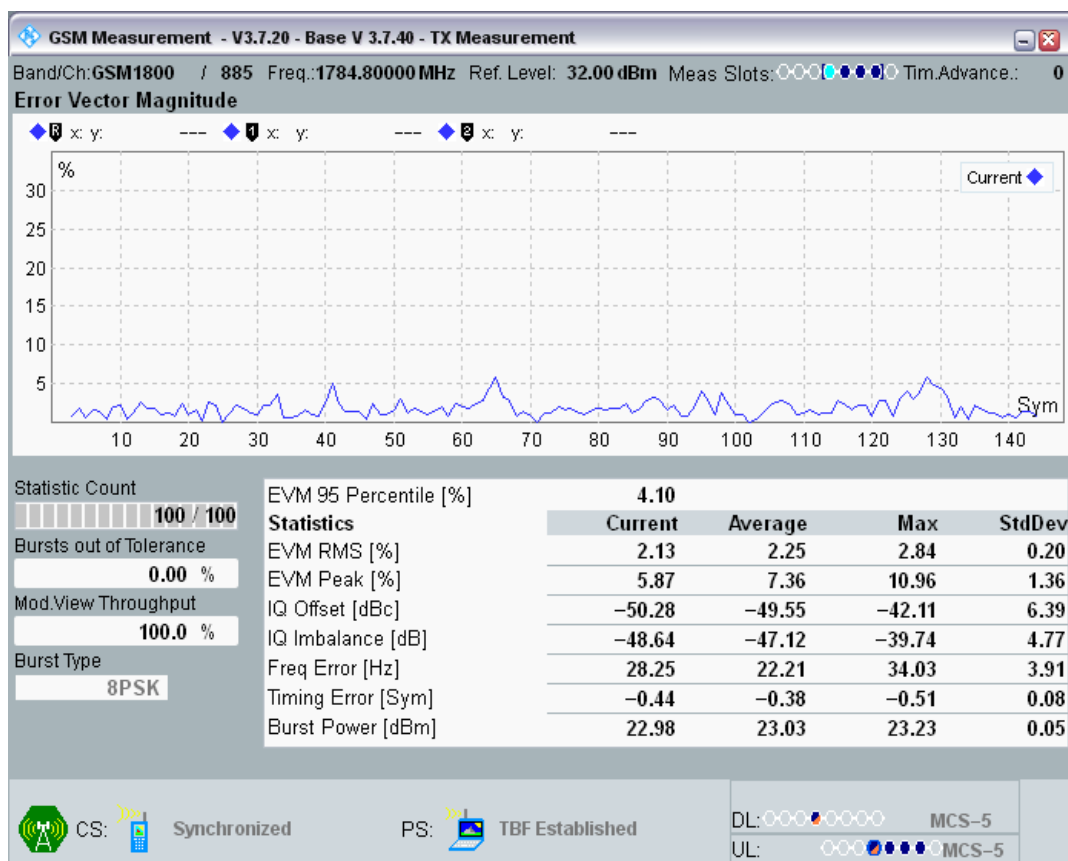

DCS1800 Channel=885 Gamma=5;5;5;5 TU50.png

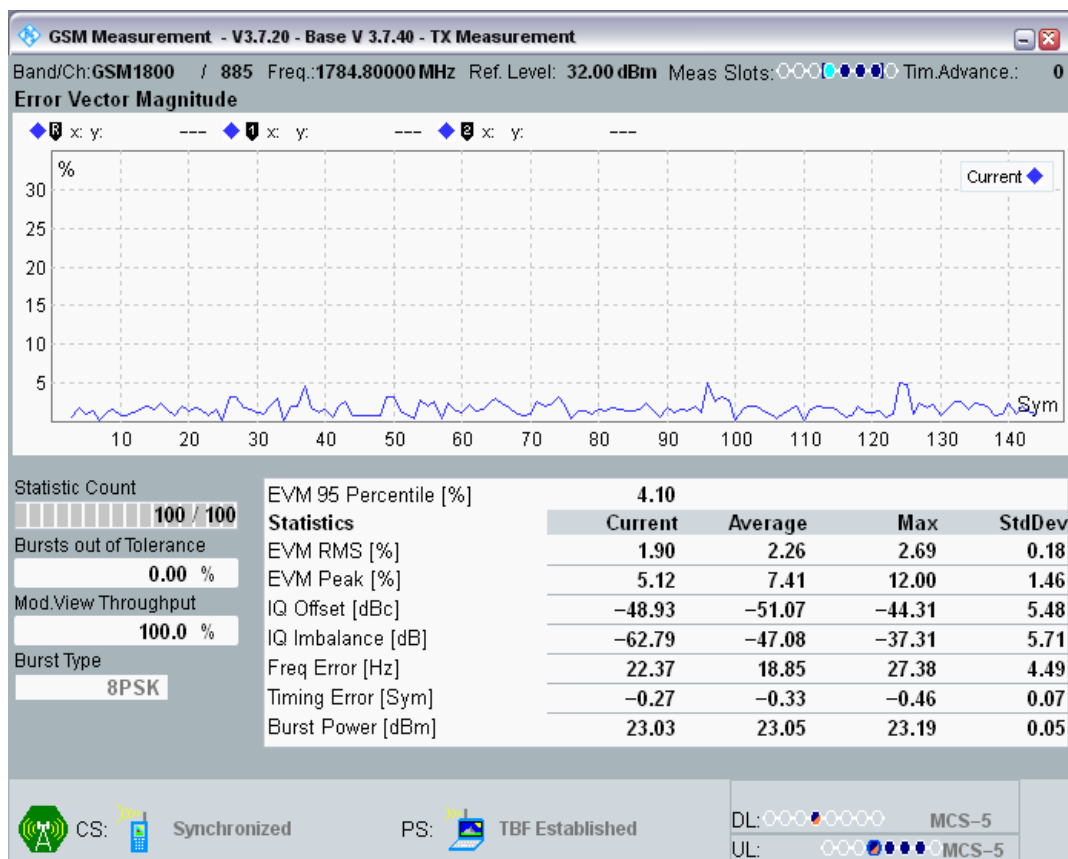

## Clause 4.2.28 EGPRS Transmitter output power

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low (dBm)	Limit	high (dBm)	Limit	Verdict
GSM900	975	880.2	6;6;6;6	PvT	-	-		-		PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	24.49771	18		27		PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	24.18112	18		27		PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	23.70392	18		27		PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	24.19943	18		27		PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-		-		PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	22.71405	18		27		PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	22.04749	18		27		PASS
GSM900	975	880.2	7;7;7;7	Power @ slot3	22.4928	18		27		PASS
GSM900	975	880.2	7;7;7;7	Power @ slot4	21.63382	18		27		PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-		-		PASS

GSM900	975	880.2	8;8;8;8	Power slot1	@	21.50299	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power slot2	@	21.40817	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power slot3	@	21.17734	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power slot4	@	21.28171	18	26	PASS
GSM900	975	880.2	9;9;9;9	PvT		-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power slot1	@	20.60538	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power slot2	@	20.70645	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power slot3	@	20.37711	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power slot4	@	19.77402	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT		-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power slot1	@	19.68143	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot2	@	19.00928	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot3	@	19.13489	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot4	@	18.74179	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT		-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power slot1	@	16.68692	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot2	@	16.3186	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot3	@	15.83704	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot4	@	15.80566	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT		-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power slot1	@	14.67145	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot2	@	14.10452	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot3	@	13.98825	12	18	PASS

GSM900	975	880.2	12;12;12;12	Power slot4	@	13.43765	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power slot1	@	12.26727	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot2	@	12.08646	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot3	@	11.37509	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot4	@	11.85971	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power slot1	@	10.02835	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot2	@	9.380646	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot3	@	9.38092	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot4	@	8.978607	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT	-	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power slot1	@	8.339325	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot2	@	7.744659	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot3	@	7.700195	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot4	@	7.429108	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power slot1	@	5.835785	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot2	@	5.420898	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot3	@	5.407928	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot4	@	4.759033	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT	-	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power slot1	@	3.375732	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power	@	3.74353	0	10	PASS

				slot2				
GSM900	975	880.2	17;17;17;17	Power @ slot3	3.585876	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	3.177277	0	10	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	23.38641	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	22.84912	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	22.8819	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot4	22.43048	18	27	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	21.79419	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	21.27475	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot3	20.52805	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot4	21.12158	18	27	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	20.87552	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	20.53922	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	20.52939	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	20.52731	18	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS
GSM900	60	902	9;9;9;9	Power @ slot1	19.58969	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot2	19.521	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot3	19.43069	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot4	19.06918	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS

GSM900	60	902	10;10;10;10	Power slot1	@	18.06735	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot2	@	17.76526	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot3	@	17.60217	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot4	@	17.55746	16	22	PASS
GSM900	60	902	11;11;11;11	PvT		-	-	-	PASS
GSM900	60	902	11;11;11;11	Power slot1	@	15.64044	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot2	@	15.48038	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot3	@	15.25226	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot4	@	15.34692	14	20	PASS
GSM900	60	902	12;12;12;12	PvT		-	-	-	PASS
GSM900	60	902	12;12;12;12	Power slot1	@	14.09875	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot2	@	13.95963	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot3	@	13.34937	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot4	@	13.20419	12	18	PASS
GSM900	60	902	13;13;13;13	PvT		-	-	-	PASS
GSM900	60	902	13;13;13;13	Power slot1	@	11.25992	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot2	@	11.09525	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot3	@	10.92725	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot4	@	10.86798	10	16	PASS
GSM900	60	902	14;14;14;14	PvT		-	-	-	PASS
GSM900	60	902	14;14;14;14	Power slot1	@	9.149445	6	16	PASS
GSM900	60	902	14;14;14;14	Power slot2	@	8.500793	6	16	PASS
GSM900	60	902	14;14;14;14	Power slot3	@	8.837646	6	16	PASS

GSM900	60	902	14;14;14;14	Power slot4	@	8.491882	6	16	PASS
GSM900	60	902	15;15;15;15	PvT		-	-	-	PASS
GSM900	60	902	15;15;15;15	Power slot1	@	7.223999	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot2	@	7.180786	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot3	@	6.408966	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot4	@	6.72229	4	14	PASS
GSM900	60	902	16;16;16;16	PvT		-	-	-	PASS
GSM900	60	902	16;16;16;16	Power slot1	@	5.025543	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot2	@	4.828033	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot3	@	4.627899	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot4	@	4.44162	2	12	PASS
GSM900	60	902	17;17;17;17	PvT		-	-	-	PASS
GSM900	60	902	17;17;17;17	Power slot1	@	3.064148	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot2	@	2.954529	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot3	@	2.124908	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot4	@	2.57959	0	10	PASS
GSM900	124	914.8	6;6;6;6	PvT		-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power slot1	@	23.01541	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power slot2	@	23.46579	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power slot3	@	22.68219	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power slot4	@	22.71234	18	27	PASS
GSM900	124	914.8	7;7;7;7	PvT		-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power slot1	@	22.1084	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power slot2	@	21.72333	18	27	PASS

				slot2				
GSM900	124	914.8	7;7;7;7	Power @ slot3	21.27802	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	21.15671	18	27	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	21.29022	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot2	20.8779	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot3	20.42319	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	19.87753	18	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	19.72754	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	18.76569	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	19.30484	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	19.12564	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	18.73819	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	17.86026	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	18.39557	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	17.76303	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	15.91946	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	15.8454	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	15.94049	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	15.20493	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS



GSM900	124	914.8	12;12;12;12	Power slot1	@	14.36124	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power slot2	@	14.14935	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power slot3	@	13.76682	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power slot4	@	13.36014	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT		-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power slot1	@	11.31738	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power slot2	@	10.87372	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power slot3	@	10.84192	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power slot4	@	10.93277	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT		-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power slot1	@	9.042328	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power slot2	@	8.619354	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power slot3	@	8.307739	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power slot4	@	8.385101	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT		-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power slot1	@	6.812561	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power slot2	@	6.536743	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power slot3	@	6.46817	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power slot4	@	6.256714	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT		-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power slot1	@	5.270966	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power slot2	@	5.143372	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power slot3	@	4.486908	2	12	PASS

GSM900	124	914.8	16;16;16;16	Power slot4	@	4.130798	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power slot1	@	2.872864	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot2	@	2.479126	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot3	@	2.191711	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot4	@	2.200623	0	10	PASS
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot1	@	22.43463	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot2	@	22.47989	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot3	@	22.10785	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot4	@	22.04691	16	26	PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot1	@	23.28055	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot2	@	22.88895	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot3	@	22.38388	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot4	@	22.54538	17	26	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power slot1	@	21.48877	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power slot2	@	21.6041	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power slot3	@	21.13428	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power slot4	@	20.98367	17	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot1	@	18.8504	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot1	@	19.24429	17	23	PASS

				slot2				
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	18.53406	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	18.33017	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	17.50778	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	16.508	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	17.11078	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	16.46539	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot1	15.45581	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot2	14.49359	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	14.77753	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	14.69632	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	13.16342	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	12.76074	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	12.39606	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot4	12.42609	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot1	11.02722	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot2	11.01349	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot3	10.71896	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot4	10.60834	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT	-	-	-	PASS

DCS1800	512	1710.2	13;13;13;13	Power slot1	@	8.837799	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot2	@	9.011963	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot3	@	8.623657	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot4	@	8.286804	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT		-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot1	@	6.926147	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot2	@	6.783569	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot3	@	7.02002	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot4	@	6.317413	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT		-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot1	@	4.867737	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot2	@	4.321106	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot3	@	4.059296	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot4	@	4.564789	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT		-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot1	@	2.589264	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot2	@	1.921692	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot3	@	1.764862	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot4	@	1.703186	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT		-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot1	@	0.4494324	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot2	@	0.2972412	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot3	@	-0.1427917	-3	7	PASS

DCS1800	512	1710.2	17;17;17;17	Power slot4	@	-0.07901001	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT		-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot1	@	-1.750854	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot2	@	-2.268402	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot3	@	-2.166199	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot4	@	-2.310974	-5	5	PASS
DCS1800	700	1747.8	5;5;5;5	PvT		-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot1	@	22.94266	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot2	@	22.93399	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot3	@	22.63065	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot4	@	22.17245	16	26	PASS
DCS1800	700	1747.8	6;6;6;6	PvT		-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot1	@	23.32318	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot2	@	23.3378	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot3	@	22.87726	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot4	@	22.98148	17	26	PASS
DCS1800	700	1747.8	7;7;7;7	PvT		-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot1	@	21.72479	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot2	@	21.70078	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot3	@	21.57315	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot4	@	21.35361	17	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT		-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot1	@	18.89395	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power	@	18.7218	17	23	PASS

				slot2				
DCS1800	700	1747.8	8;8;8;8	Power @ slot3	18.56647	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot4	18.28143	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot1	17.29993	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot2	17.59967	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot3	16.96036	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot4	16.74603	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot1	15.577	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot2	15.31854	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot3	14.71066	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot4	14.784	13	19	PASS
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	13.34515	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	12.78189	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	12.91879	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	12.84628	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	11.77908	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	11.10602	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	10.86975	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	11.1593	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS

DCS1800	700	1747.8	13;13;13;13	Power slot1	@	9.55542	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power slot2	@	9.237732	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power slot3	@	8.568085	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power slot4	@	8.823395	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT		-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power slot1	@	6.627777	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power slot2	@	7.061005	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power slot3	@	7.201538	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power slot4	@	6.710938	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT		-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot1	@	5.583435	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot2	@	4.713959	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot3	@	4.559875	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot4	@	4.562836	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT		-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot1	@	4.283234	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot2	@	4.289368	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot3	@	3.530396	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot4	@	3.645721	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT		-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot1	@	0.8591309	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot2	@	0.8963928	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot3	@	0.6618042	-3	7	PASS

DCS1800	700	1747.8	17;17;17;17	Power slot4	@	0.2700195	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT		-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot1	@	-1.01236	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot2	@	-1.641327	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot3	@	-1.37326	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot4	@	-1.690552	-5	5	PASS
DCS1800	885	1784.8	5;5;5;5	PvT		-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power slot1	@	23.12836	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power slot2	@	22.6597	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power slot3	@	22.62128	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power slot4	@	22.40259	16	26	PASS
DCS1800	885	1784.8	6;6;6;6	PvT		-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power slot1	@	23.70651	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power slot2	@	23.02689	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power slot3	@	22.77438	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power slot4	@	22.88885	17	26	PASS
DCS1800	885	1784.8	7;7;7;7	PvT		-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power slot1	@	22.35507	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power slot2	@	22.19357	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power slot3	@	22.05832	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power slot4	@	21.60266	17	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT		-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power slot1	@	19.73596	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power	@	18.79111	17	23	PASS



				slot2				
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	18.91074	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	18.79337	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	17.64096	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	17.54666	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	17.41312	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	16.89368	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	15.57001	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	15.38507	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	15.08206	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	14.13528	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	14.39554	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	13.94366	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	13.28546	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	12.7471	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	11.46323	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	11.11569	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	11.52356	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	10.89832	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS


DCS1800	885	1784.8	13;13;13;13	Power slot1	@	9.525055	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power slot2	@	9.728424	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power slot3	@	9.433899	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power slot4	@	9.35202	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT		-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot1	@	7.624573	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot2	@	7.538513	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot3	@	6.961243	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot4	@	6.535309	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT		-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot1	@	5.608795	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot2	@	5.478119	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot3	@	4.772552	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot4	@	5.015778	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT		-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot1	@	4.309998	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot2	@	4.50473	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot3	@	3.86264	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot4	@	3.9776	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT		-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot1	@	1.156097	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot2	@	1.271149	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot3	@	1.321869	-3	7	PASS

DCS1800	885	1784.8	17;17;17;17	Power slot4	@	1.204193	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot1	@	-0.2415161	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot2	@	-0.1958618	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot3	@	-1.102814	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot4	@	-0.4466553	-5	5	PASS

GSM900 Channel=124 Gamma=17;17;17;17.png




GSM900 Channel=124 Gamma=6;6;6;6.png

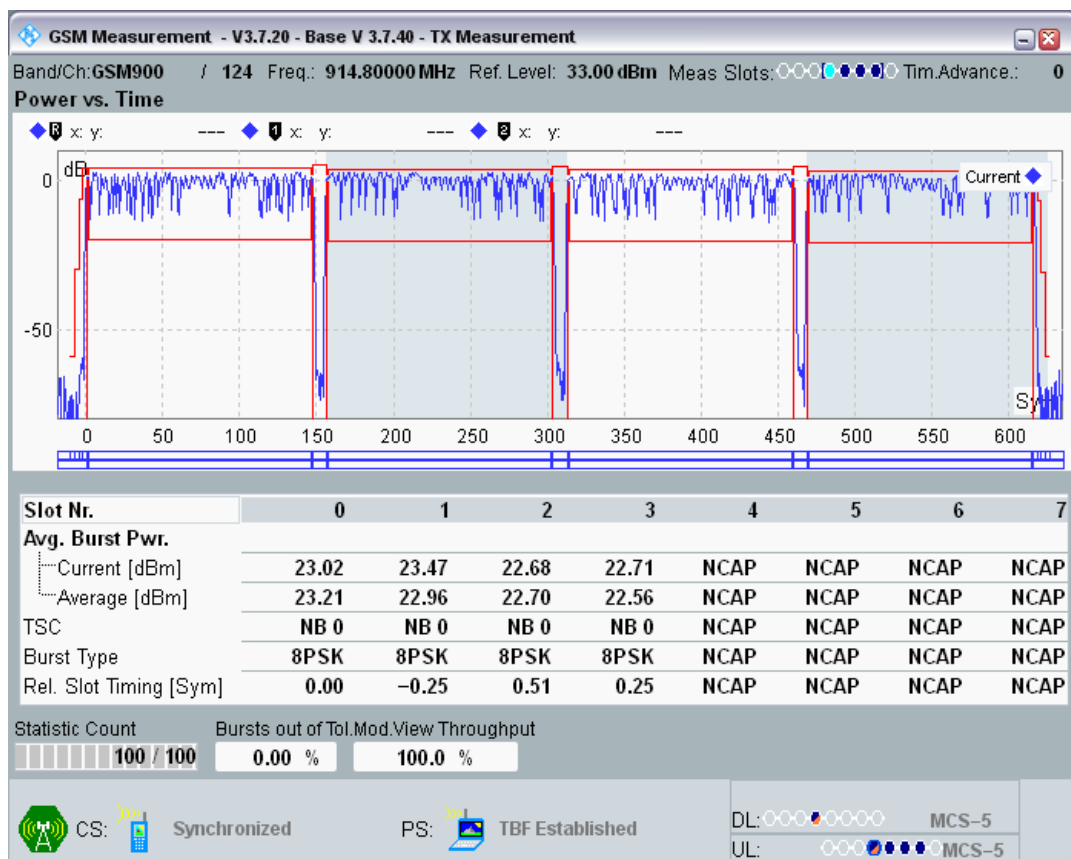

GSM900 Channel=60 Gamma=17;17;17;17.png




GSM900 Channel=60 Gamma=6;6;6;6.png

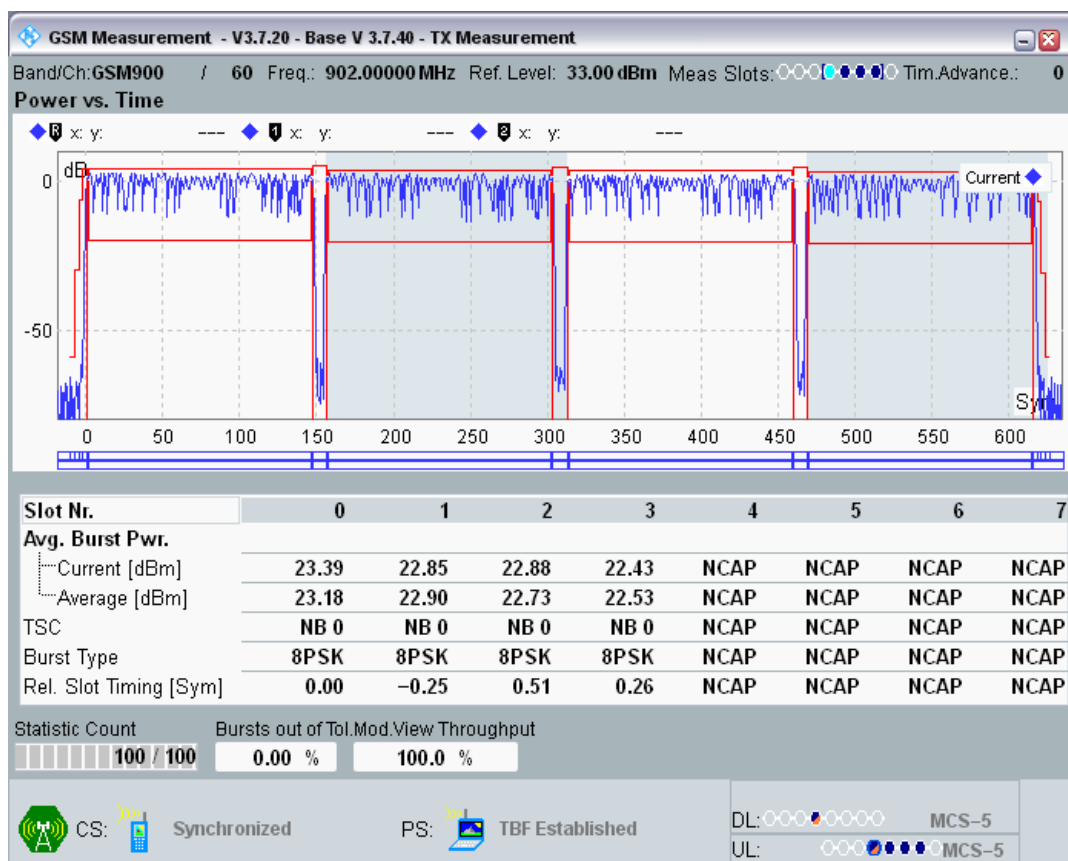


GSM900 Channel=975 Gamma=17;17;17;17.png



GSM900 Channel=975 Gamma=6;6;6;6.png

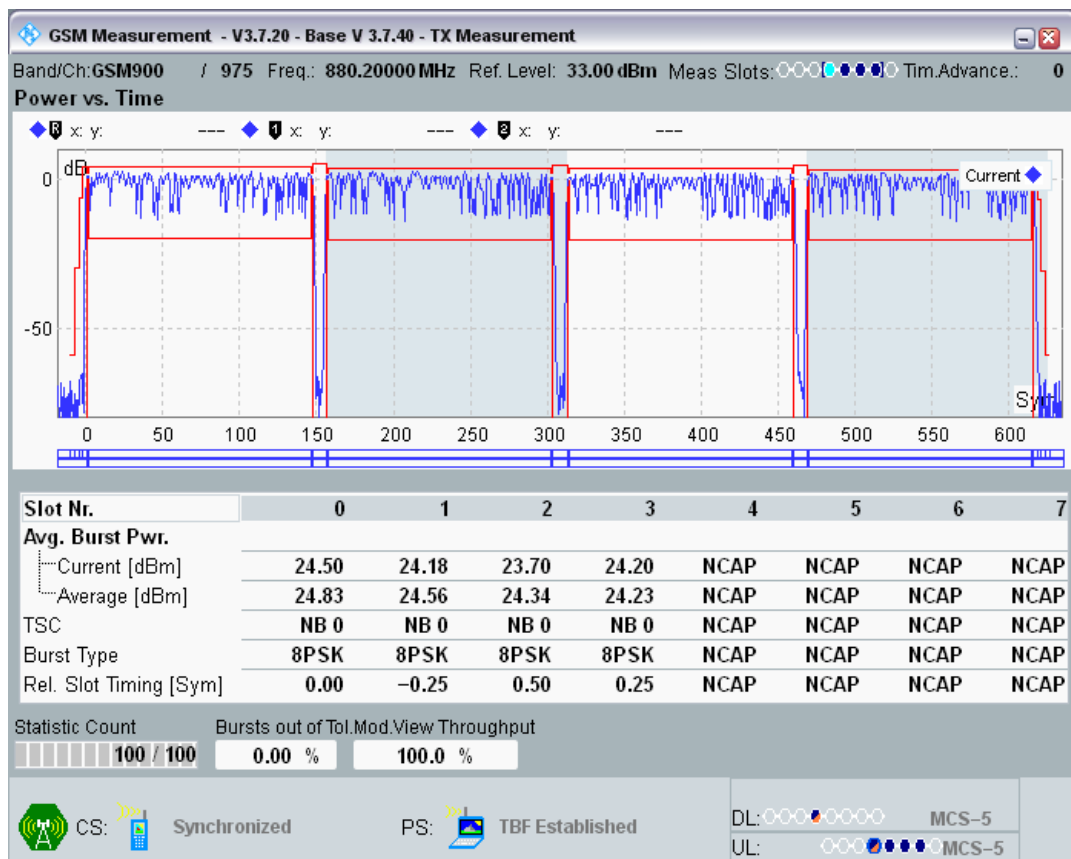

DCS1800 Channel=512 Gamma=18;18;18;18.png

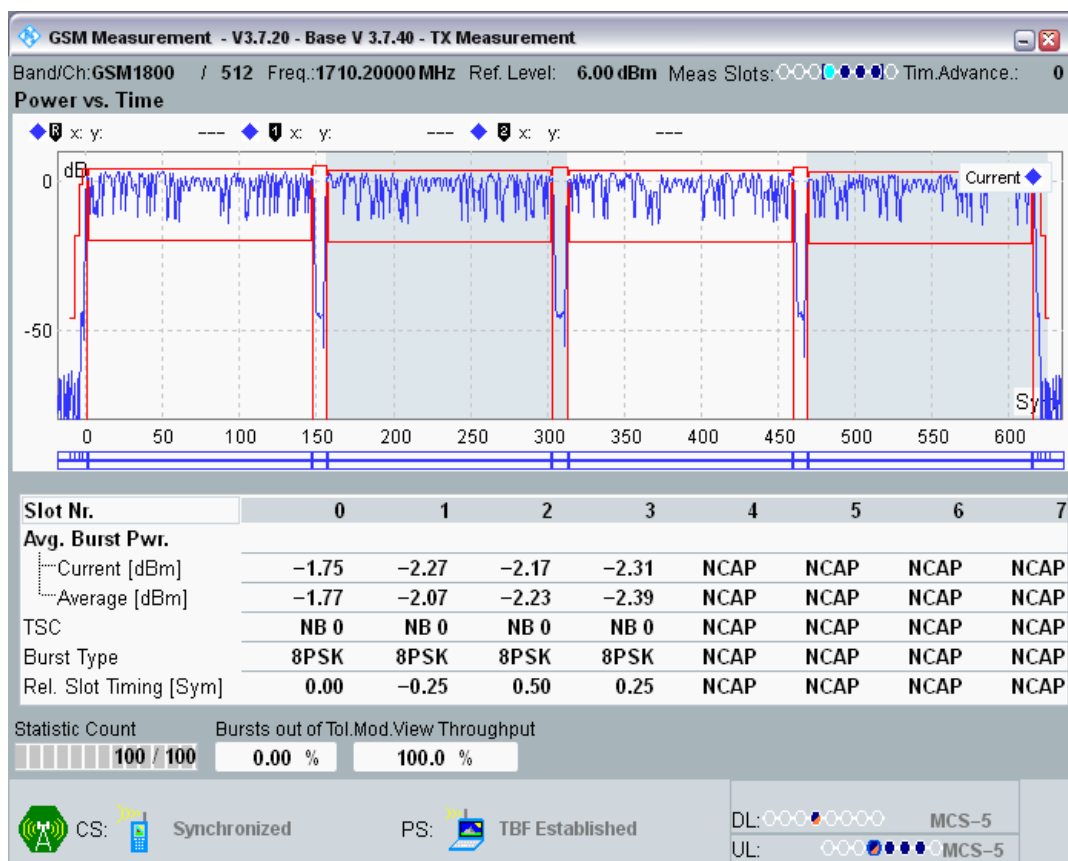

DCS1800 Channel=512 Gamma=5;5;5;5.png




DCS1800 Channel=700 Gamma=18;18;18;18.png







DCS1800 Channel=700 Gamma=5;5;5;5.png

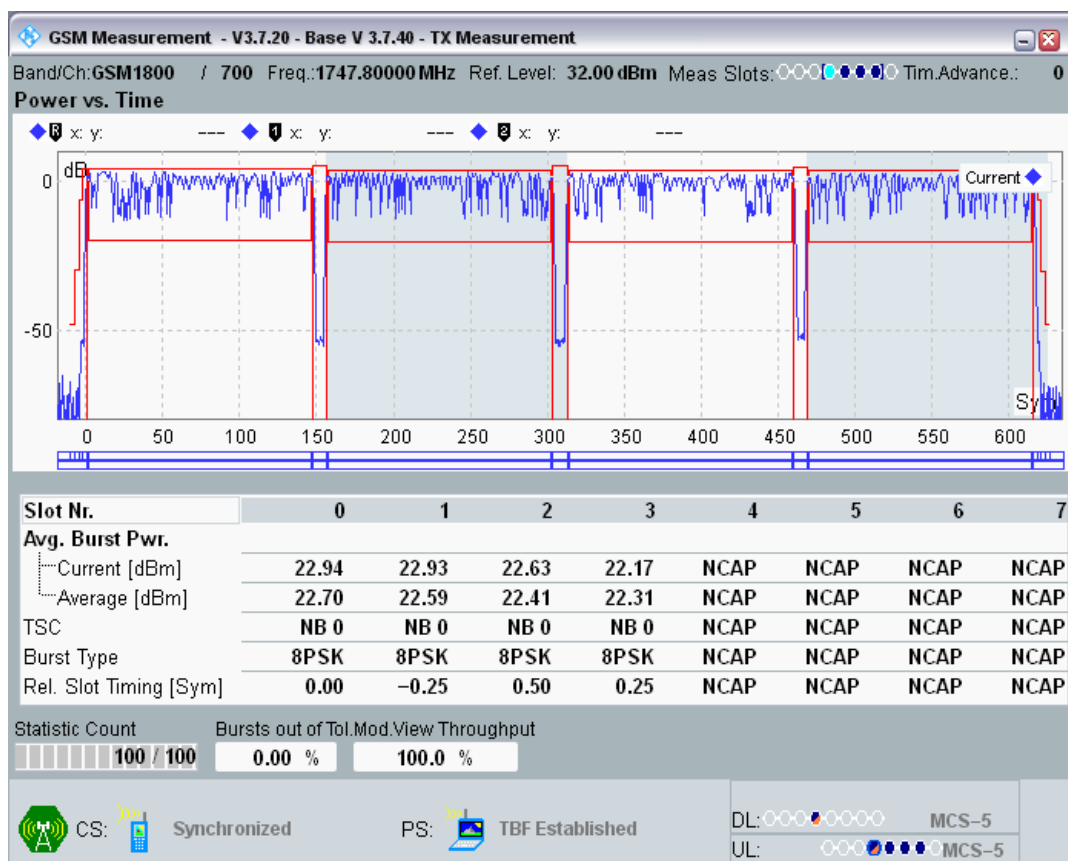

DCS1800 Channel=885 Gamma=18;18;18;18.png

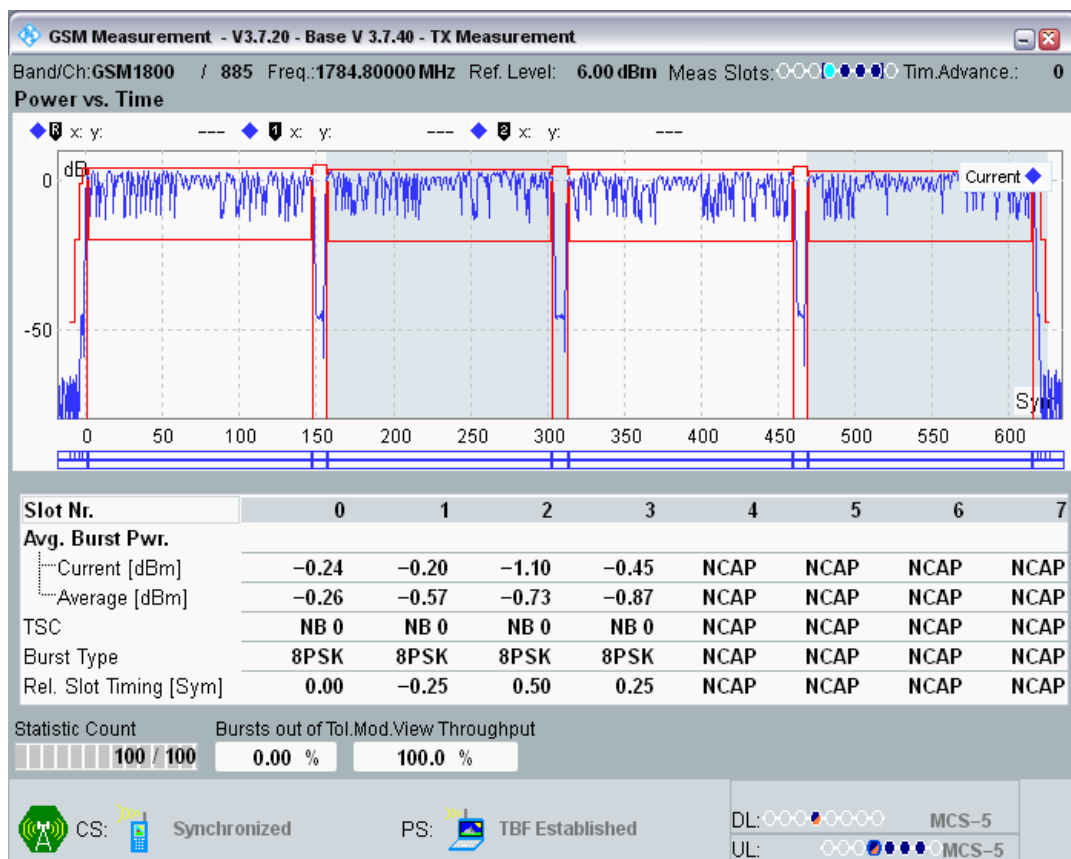

DCS1800 Channel=885 Gamma=5;5;5;5.png

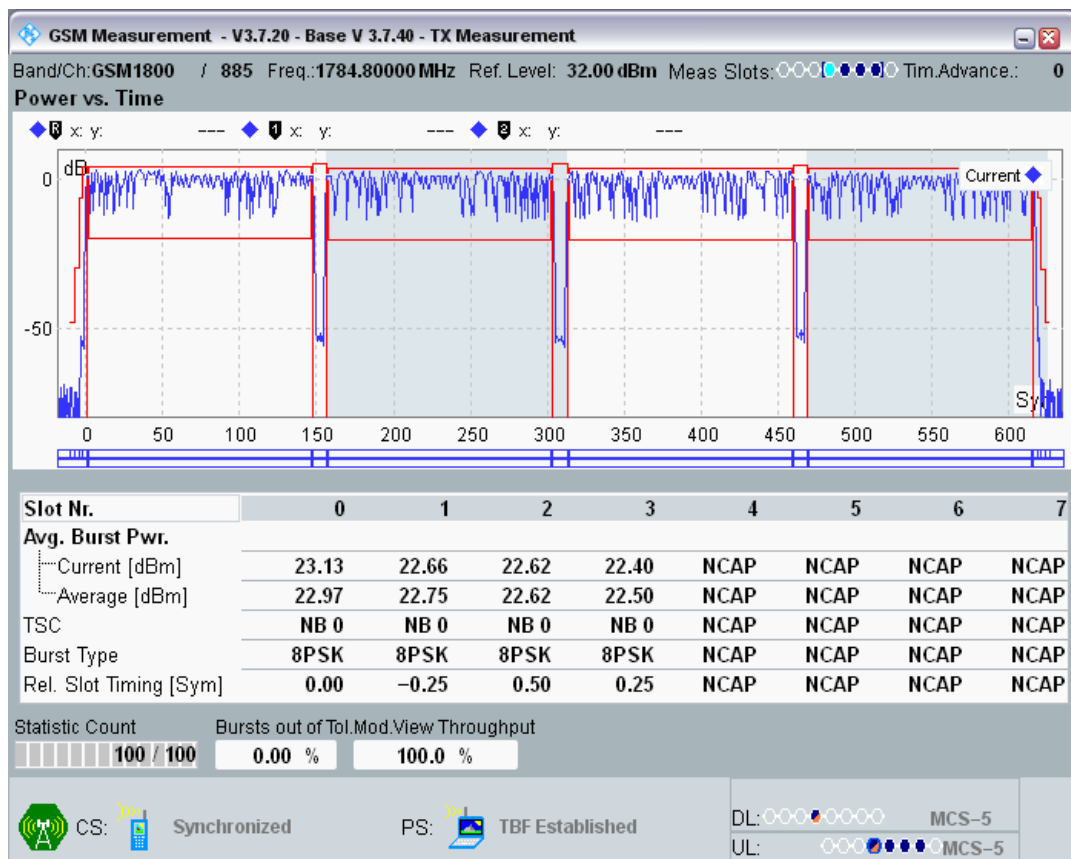

**Clause 4.2.29 Modulation Spectrum in EGPRS configuration**

Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-77.23	-60	-61.26	-51	PASS
GSM900	975	880.2	6;6;6;6	-1600 KHz	-76.04	-60	-60.07	-51	PASS
GSM900	975	880.2	6;6;6;6	-1400 KHz	-75.87	-60	-59.90	-51	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-75.03	-60	-59.06	-51	PASS
GSM900	975	880.2	6;6;6;6	-1000 KHz	-74.20	-60	-58.24	-51	PASS
GSM900	975	880.2	6;6;6;6	-800 KHz	-73.26	-60	-57.29	-51	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-72.03	-60	-56.06	-51	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-66.78	-60	-50.81	-36	PASS
GSM900	975	880.2	6;6;6;6	-250 KHz	-42.42	-33	-26.45	-36	PASS
GSM900	975	880.2	6;6;6;6	-200 KHz	-35.32	-30	-19.36	-36	PASS
GSM900	975	880.2	6;6;6;6	-100 KHz	-7.83	0.5	8.14	-36	PASS
GSM900	975	880.2	6;6;6;6	100 KHz	-7.90	0.5	8.06	-36	PASS
GSM900	975	880.2	6;6;6;6	200 KHz	-35.66	-30	-19.69	-36	PASS
GSM900	975	880.2	6;6;6;6	250 KHz	-42.68	-33	-26.71	-36	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-66.77	-60	-50.80	-36	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-72.14	-60	-56.17	-51	PASS
GSM900	975	880.2	6;6;6;6	800 KHz	-73.53	-60	-57.56	-51	PASS
GSM900	975	880.2	6;6;6;6	1000 KHz	-74.26	-60	-58.29	-51	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-75.14	-60	-59.17	-51	PASS
GSM900	975	880.2	6;6;6;6	1400 KHz	-76.14	-60	-60.17	-51	PASS
GSM900	975	880.2	6;6;6;6	1600 KHz	-76.17	-60	-60.20	-51	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-77.38	-60	-61.42	-51	PASS
GSM900	60	902	6;6;6;6	-1800	-76.69	-60	-61.35	-51	PASS

				KHz					
GSM900	60	902	6;6;6;6	-1600 KHz	-75.81	-60	-60.46	-51	PASS
GSM900	60	902	6;6;6;6	-1400 KHz	-75.36	-60	-60.01	-51	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-74.73	-60	-59.39	-51	PASS
GSM900	60	902	6;6;6;6	-1000 KHz	-74.10	-60	-58.76	-51	PASS
GSM900	60	902	6;6;6;6	-800 KHz	-73.19	-60	-57.85	-51	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-71.85	-60	-56.51	-51	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-66.51	-60	-51.17	-36	PASS
GSM900	60	902	6;6;6;6	-250 KHz	-42.02	-33	-26.68	-36	PASS
GSM900	60	902	6;6;6;6	-200 KHz	-35.14	-30	-19.79	-36	PASS
GSM900	60	902	6;6;6;6	-100 KHz	-8.44	0.5	6.91	-36	PASS
GSM900	60	902	6;6;6;6	100 KHz	-7.99	0.5	7.35	-36	PASS
GSM900	60	902	6;6;6;6	200 KHz	-35.75	-30	-20.40	-36	PASS
GSM900	60	902	6;6;6;6	250 KHz	-42.59	-33	-27.25	-36	PASS
GSM900	60	902	6;6;6;6	400 KHz	-66.74	-60	-51.40	-36	PASS
GSM900	60	902	6;6;6;6	600 KHz	-71.89	-60	-56.54	-51	PASS
GSM900	60	902	6;6;6;6	800 KHz	-73.14	-60	-57.79	-51	PASS
GSM900	60	902	6;6;6;6	1000 KHz	-74.26	-60	-58.92	-51	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-74.84	-60	-59.50	-51	PASS
GSM900	60	902	6;6;6;6	1400 KHz	-75.69	-60	-60.34	-51	PASS
GSM900	60	902	6;6;6;6	1600 KHz	-75.94	-60	-60.59	-51	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-76.92	-60	-61.58	-51	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-76.25	-60	-61.26	-51	PASS
GSM900	124	914.8	6;6;6;6	-1600 KHz	-75.45	-60	-60.46	-51	PASS
GSM900	124	914.8	6;6;6;6	-1400 KHz	-75.21	-60	-60.22	-51	PASS

				KHz					
GSM900	124	914.8	6;6;6;6	-1200 KHz	-74.55	-60	-59.56	-51	PASS
GSM900	124	914.8	6;6;6;6	-1000 KHz	-73.95	-60	-58.96	-51	PASS
GSM900	124	914.8	6;6;6;6	-800 KHz	-72.89	-60	-57.90	-51	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-71.81	-60	-56.82	-51	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-66.53	-60	-51.54	-36	PASS
GSM900	124	914.8	6;6;6;6	-250 KHz	-42.09	-33	-27.10	-36	PASS
GSM900	124	914.8	6;6;6;6	-200 KHz	-35.22	-30	-20.23	-36	PASS
GSM900	124	914.8	6;6;6;6	-100 KHz	-7.67	0.5	7.32	-36	PASS
GSM900	124	914.8	6;6;6;6	100 KHz	-7.33	0.5	7.66	-36	PASS
GSM900	124	914.8	6;6;6;6	200 KHz	-35.55	-30	-20.56	-36	PASS
GSM900	124	914.8	6;6;6;6	250 KHz	-42.76	-33	-27.77	-36	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-67.10	-60	-52.11	-36	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-71.75	-60	-56.76	-51	PASS
GSM900	124	914.8	6;6;6;6	800 KHz	-73.08	-60	-58.09	-51	PASS
GSM900	124	914.8	6;6;6;6	1000 KHz	-74.24	-60	-59.25	-51	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-74.66	-60	-59.67	-51	PASS
GSM900	124	914.8	6;6;6;6	1400 KHz	-75.55	-60	-60.56	-51	PASS
GSM900	124	914.8	6;6;6;6	1600 KHz	-75.60	-60	-60.61	-51	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-76.33	-60	-61.34	-51	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-75.90	-60	-61.99	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1600 KHz	-75.44	-60	-61.53	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1400 KHz	-74.43	-60	-60.52	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-73.80	-60	-59.90	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1000 KHz	-72.66	-60	-58.75	-56	PASS


				KHz					
DCS1800	512	1710.2	5;5;5;5	-800 KHz	-71.48	-60	-57.57	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-70.43	-60	-56.52	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-65.94	-60	-52.03	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-250 KHz	-42.58	-33	-28.67	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-200 KHz	-37.25	-30	-23.35	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-100 KHz	-7.89	0.5	6.01	-36	PASS
DCS1800	512	1710.2	5;5;5;5	100 KHz	-7.71	0.5	6.20	-36	PASS
DCS1800	512	1710.2	5;5;5;5	200 KHz	-37.62	-30	-23.72	-36	PASS
DCS1800	512	1710.2	5;5;5;5	250 KHz	-42.99	-33	-29.09	-36	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-66.42	-60	-52.52	-36	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-70.36	-60	-56.45	-56	PASS
DCS1800	512	1710.2	5;5;5;5	800 KHz	-71.88	-60	-57.97	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1000 KHz	-73.11	-60	-59.20	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-73.84	-60	-59.93	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1400 KHz	-74.53	-60	-60.62	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1600 KHz	-75.57	-60	-61.66	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-76.16	-60	-62.26	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-76.25	-60	-61.91	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1600 KHz	-75.44	-60	-61.10	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1400 KHz	-74.56	-60	-60.22	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-73.71	-60	-59.38	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1000 KHz	-73.23	-60	-58.89	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-800 KHz	-72.06	-60	-57.72	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-70.51	-60	-56.17	-56	PASS

				KHz					
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-66.04	-60	-51.71	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-250 KHz	-42.90	-33	-28.56	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-200 KHz	-37.34	-30	-23.01	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-100 KHz	-7.97	0.5	6.36	-36	PASS
DCS1800	700	1747.8	5;5;5;5	100 KHz	-7.90	0.5	6.44	-36	PASS
DCS1800	700	1747.8	5;5;5;5	200 KHz	-37.86	-30	-23.52	-36	PASS
DCS1800	700	1747.8	5;5;5;5	250 KHz	-43.16	-33	-28.82	-36	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-66.28	-60	-51.94	-36	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-70.48	-60	-56.15	-56	PASS
DCS1800	700	1747.8	5;5;5;5	800 KHz	-72.18	-60	-57.84	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1000 KHz	-73.50	-60	-59.16	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-73.98	-60	-59.64	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1400 KHz	-74.98	-60	-60.64	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1600 KHz	-76.06	-60	-61.72	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-76.48	-60	-62.15	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-76.42	-60	-61.94	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1600 KHz	-75.47	-60	-60.99	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1400 KHz	-74.80	-60	-60.32	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-74.01	-60	-59.53	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1000 KHz	-73.18	-60	-58.70	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-800 KHz	-71.81	-60	-57.33	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-70.57	-60	-56.09	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-65.59	-60	-51.11	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-250 KHz	-43.18	-33	-28.70	-36	PASS


				KHz					
DCS1800	885	1784.8	5;5;5;5	-200 KHz	-37.22	-30	-22.74	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-100 KHz	-7.51	0.5	6.97	-36	PASS
DCS1800	885	1784.8	5;5;5;5	100 KHz	-7.71	0.5	6.77	-36	PASS
DCS1800	885	1784.8	5;5;5;5	200 KHz	-37.49	-30	-23.01	-36	PASS
DCS1800	885	1784.8	5;5;5;5	250 KHz	-43.36	-33	-28.88	-36	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-66.19	-60	-51.71	-36	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-70.54	-60	-56.06	-56	PASS
DCS1800	885	1784.8	5;5;5;5	800 KHz	-72.00	-60	-57.52	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1000 KHz	-73.47	-60	-58.99	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-74.19	-60	-59.71	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1400 KHz	-74.97	-60	-60.49	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1600 KHz	-75.87	-60	-61.39	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-76.51	-60	-62.03	-56	PASS

GSM900 Channel=124 Gamma=6;6;6;6.png




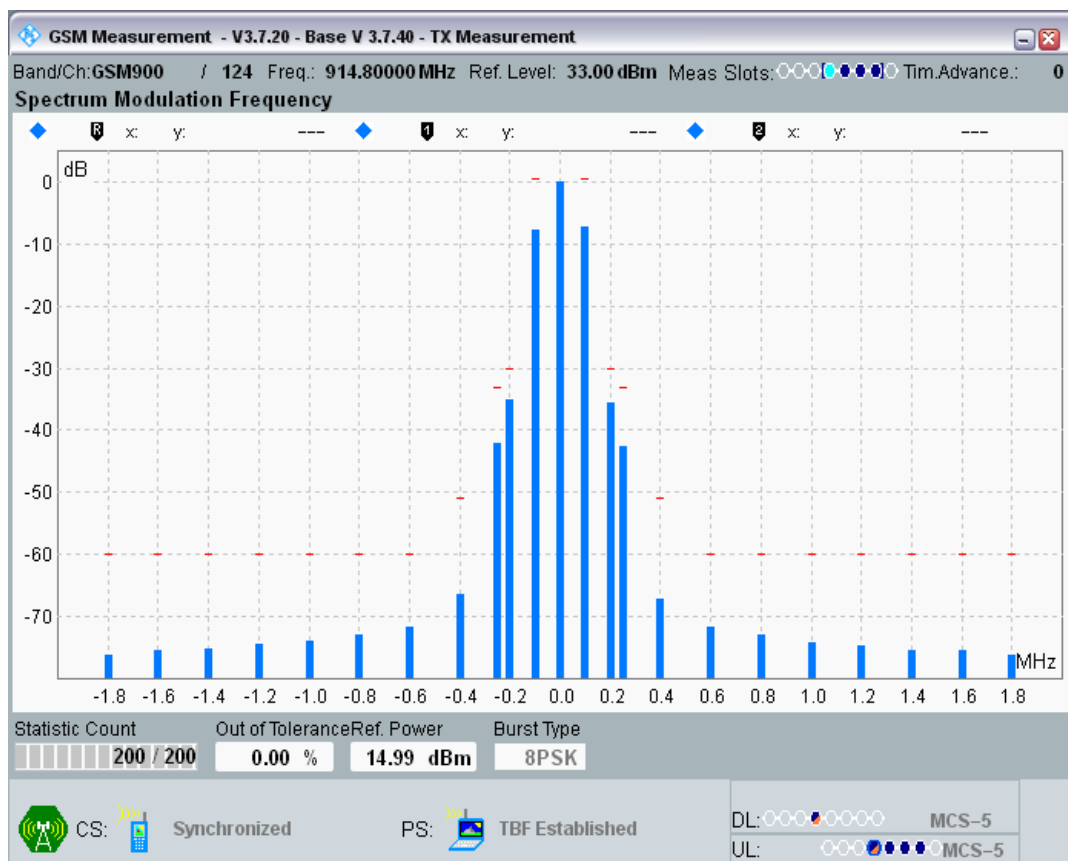


GSM900 Channel=60 Gamma=6;6;6;6.png

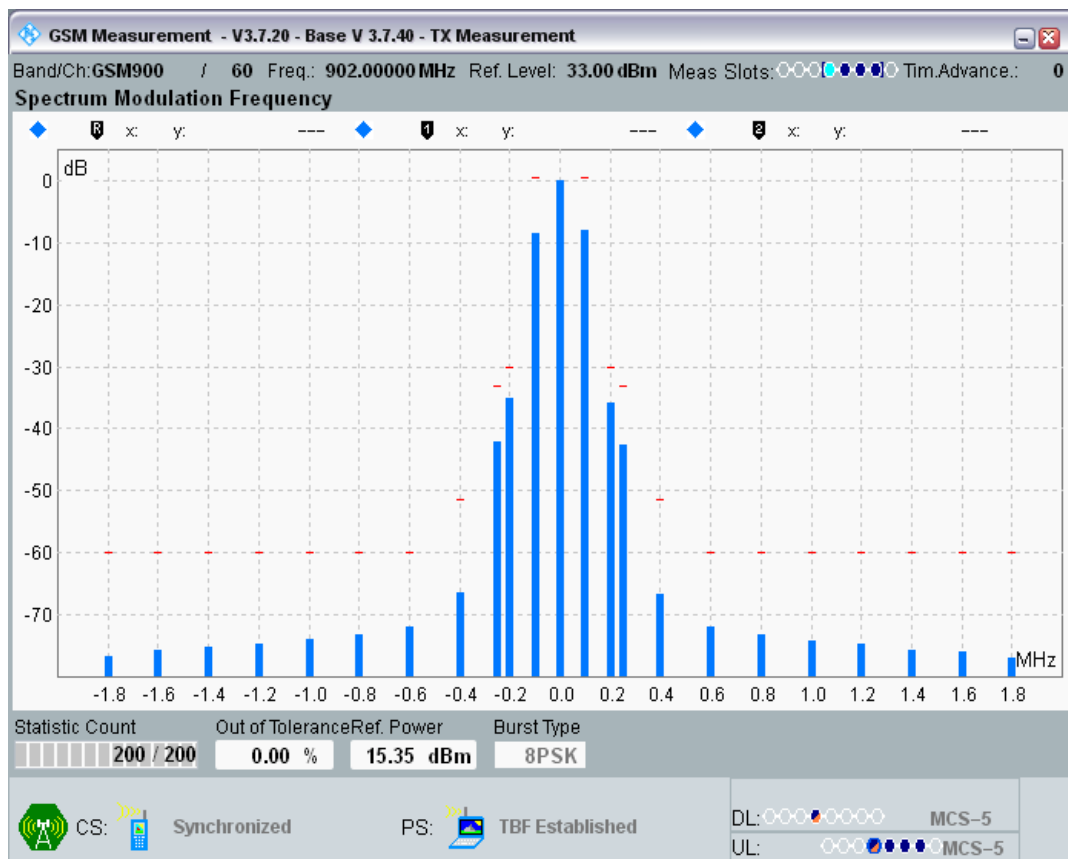


GSM900 Channel=975 Gamma=6;6;6;6.png

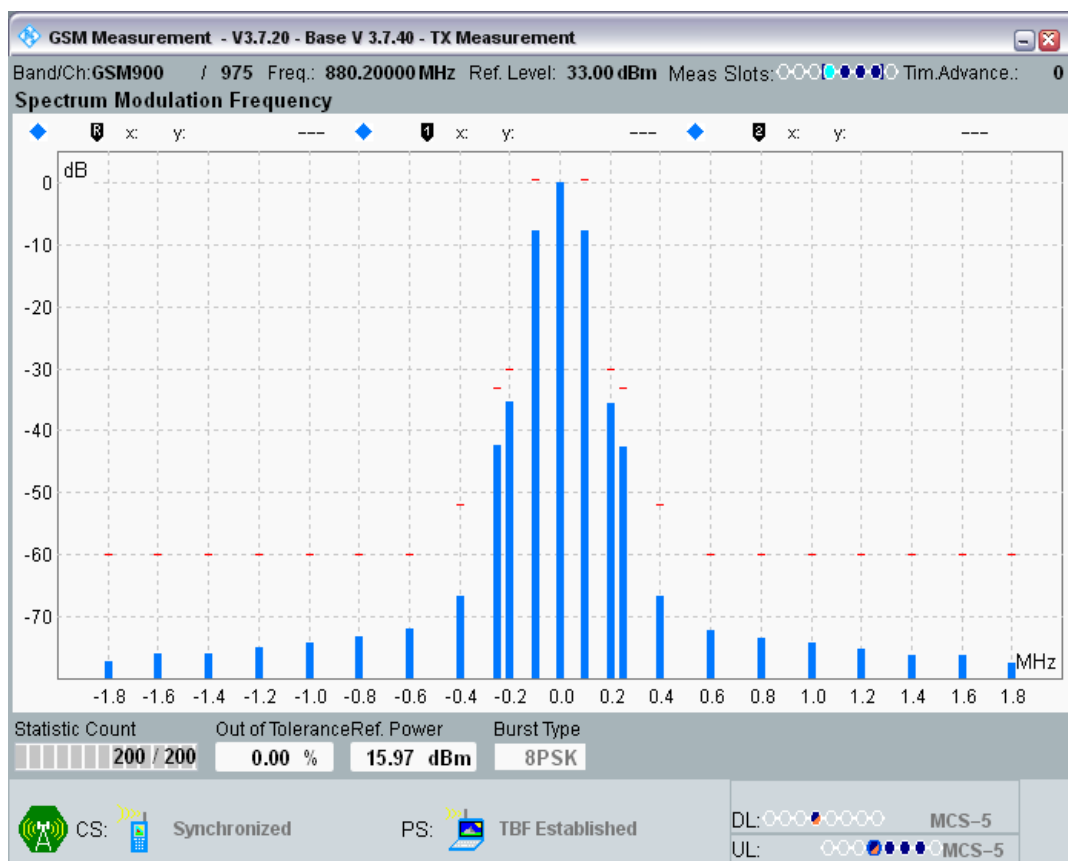


DCS1800 Channel=512 Gamma=5;5;5;5.png

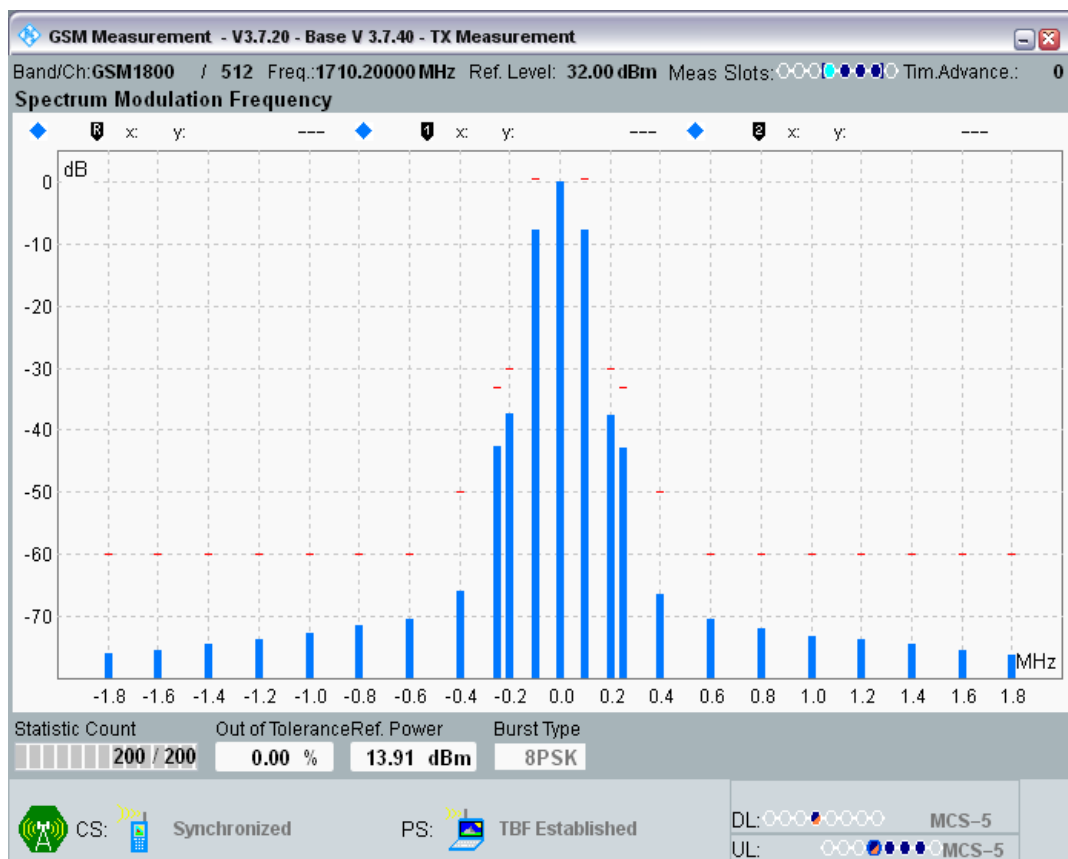

DCS1800 Channel=700 Gamma=5;5;5;5.png

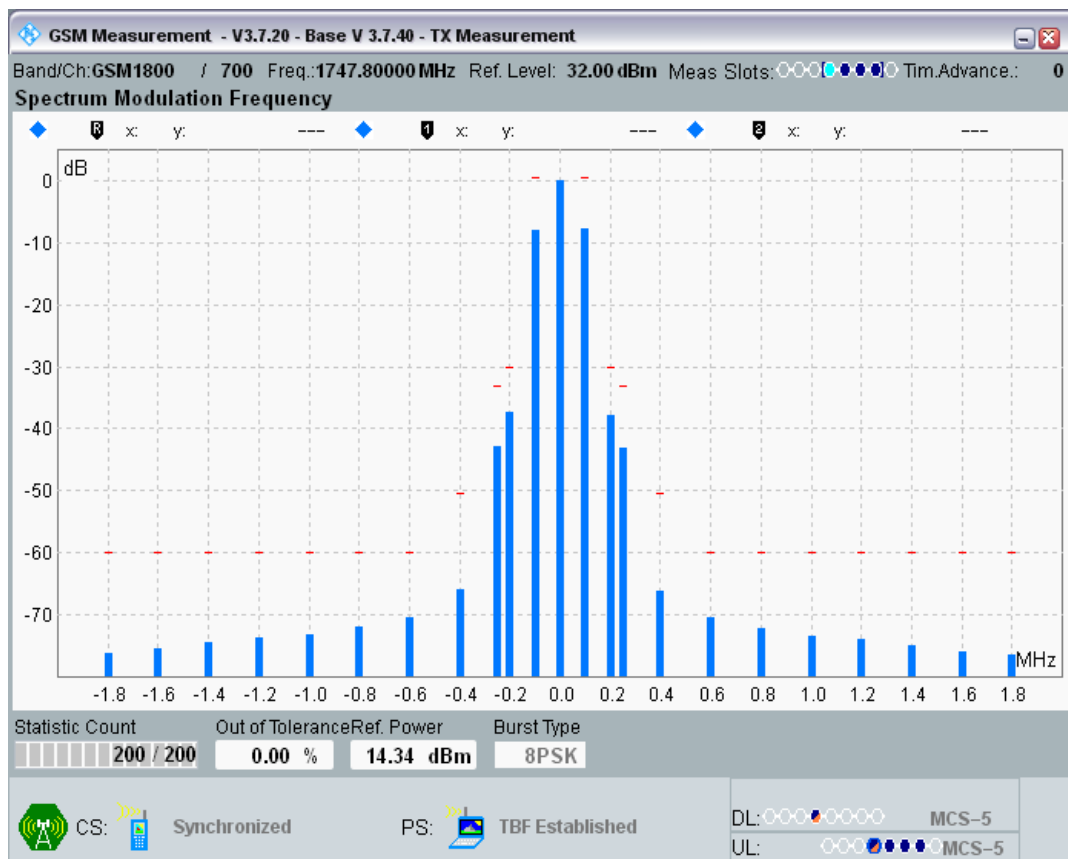

DCS1800 Channel=885 Gamma=5;5;5;5.png

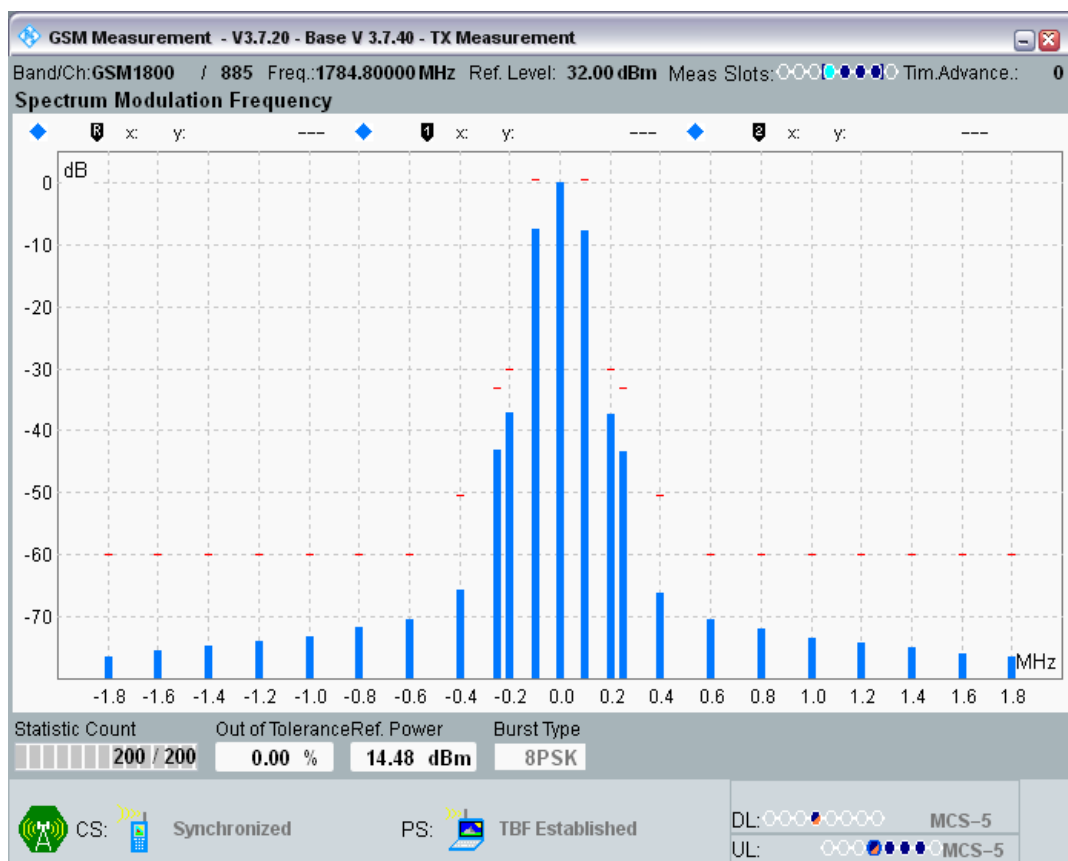


### Clause 4.2.29 Switching Spectrum in EGPRS configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-48.57	-24	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-48.41	-21	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-43.79	-21	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-39.22	-19	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-36.54	-19	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-43.17	-21	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-46.95	-21	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-50.38	-24	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-50.13	-24	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-48.30	-21	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-42.73	-21	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-38.57	-19	PASS
GSM900	60	902	6;6;6;6	400 KHz	-38.69	-19	PASS
GSM900	60	902	6;6;6;6	600 KHz	-45.47	-21	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-47.49	-21	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-50.91	-24	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-48.76	-24	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-47.90	-21	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-45.77	-21	PASS

GSM900	124	914.8	6;6;6;6	-400 KHz	-39.31	-19	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-38.44	-19	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-45.77	-21	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-48.46	-21	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-49.28	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-50.57	-27	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-48.38	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-44.46	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-40.05	-22	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-39.59	-22	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-43.97	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-47.83	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-50.39	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-50.35	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-48.14	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-45.34	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-40.14	-22	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-40.41	-22	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-43.77	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-47.66	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-49.91	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-51.12	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-48.23	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-45.02	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-38.71	-22	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-39.07	-22	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-45.08	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-46.42	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-48.91	-27	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

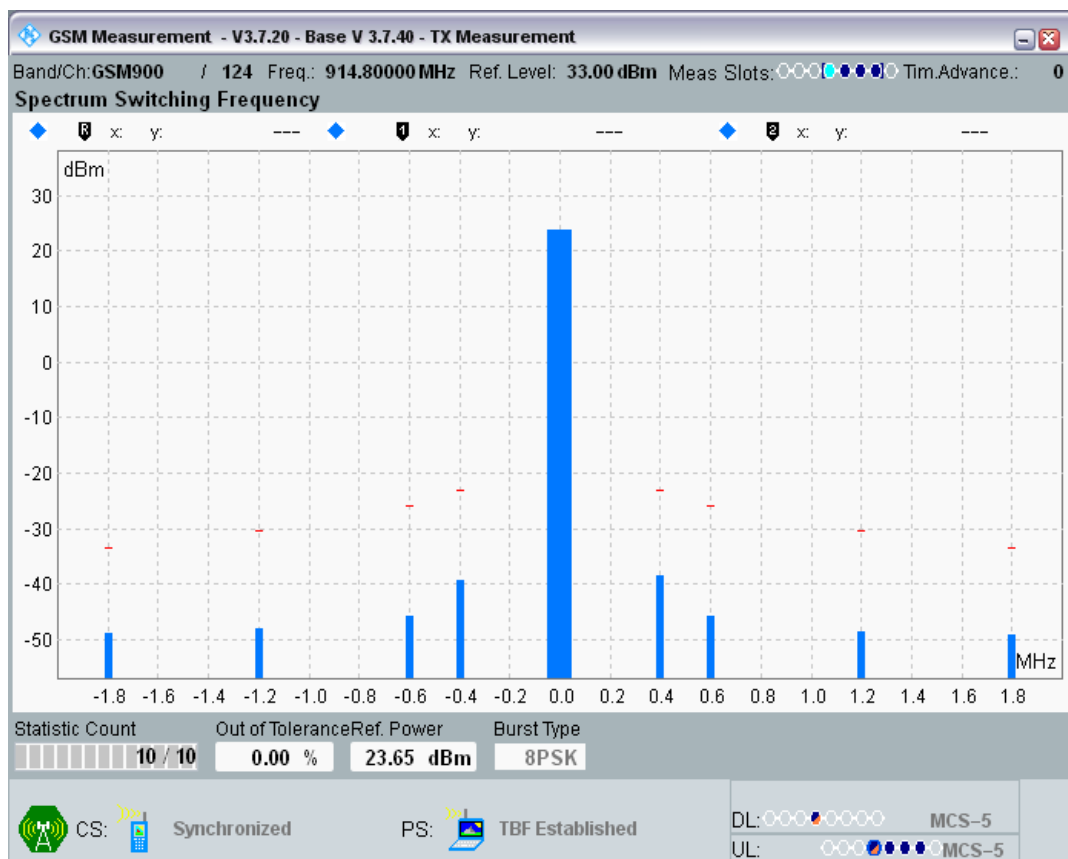


GSM900 Channel=60 Gamma=6;6;6;6.png

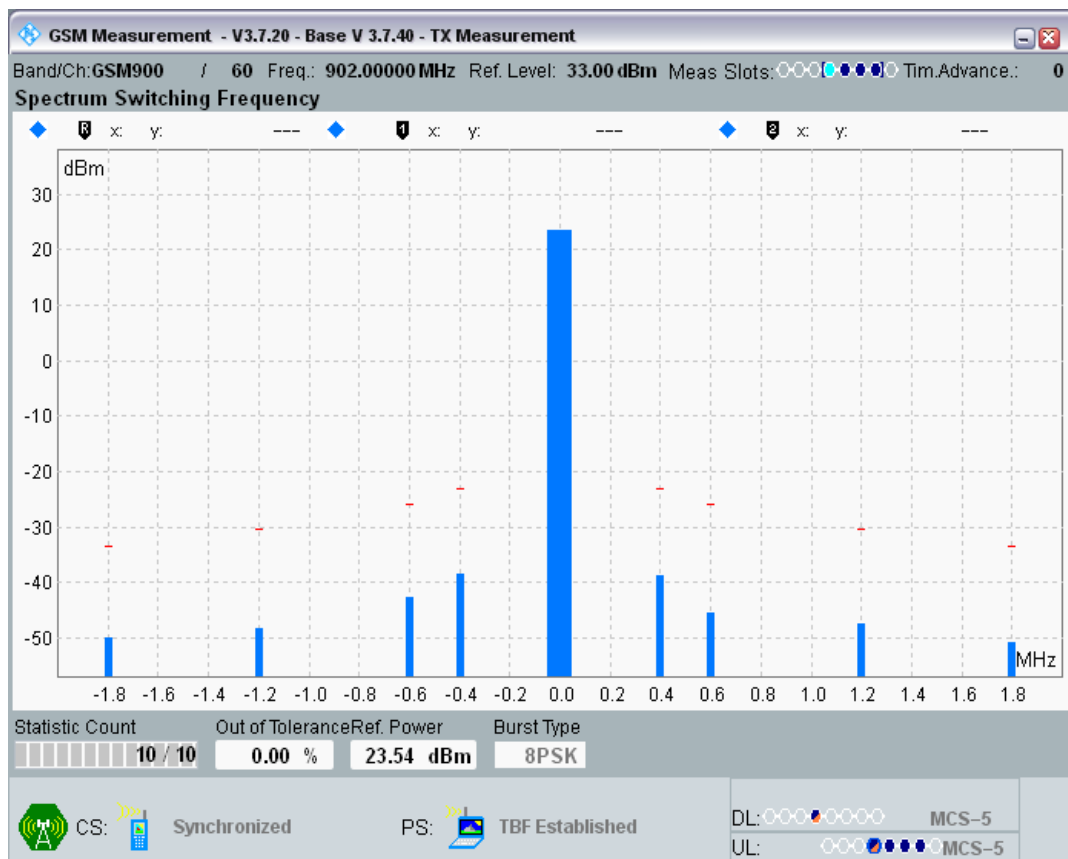


GSM900 Channel=975 Gamma=6;6;6;6.png

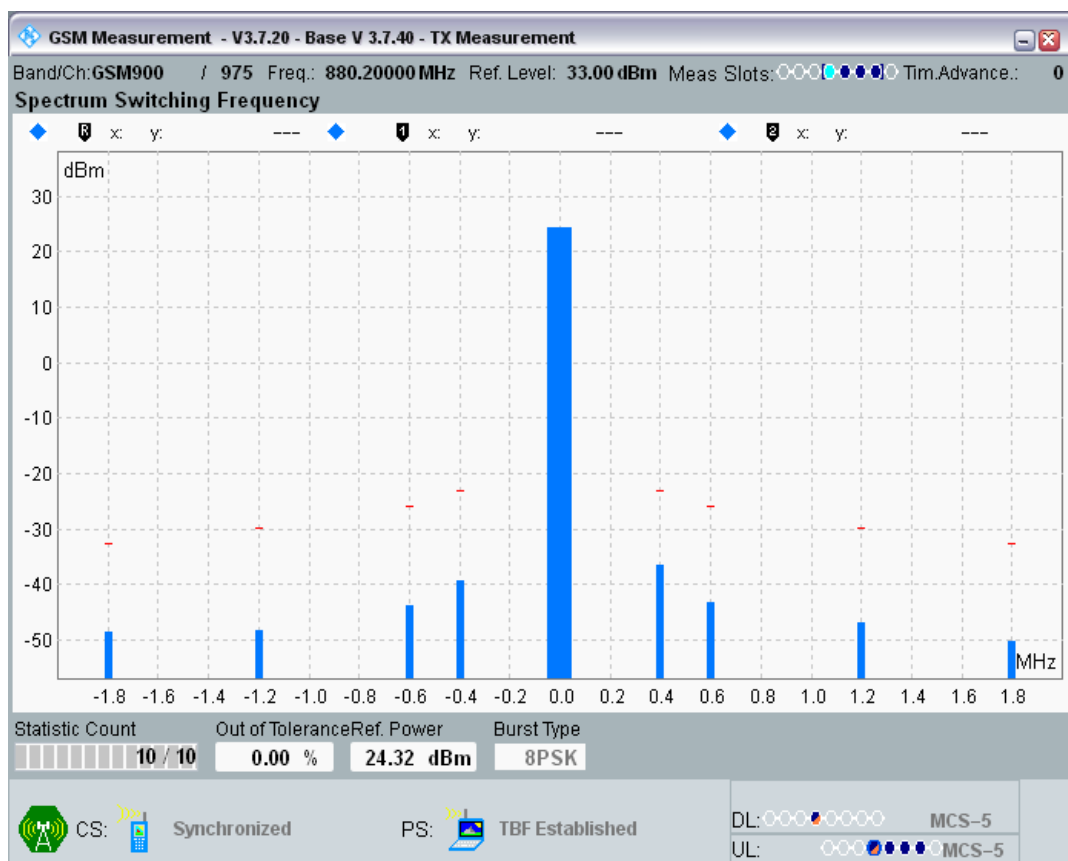

DCS1800 Channel=512 Gamma=5;5;5;5.png

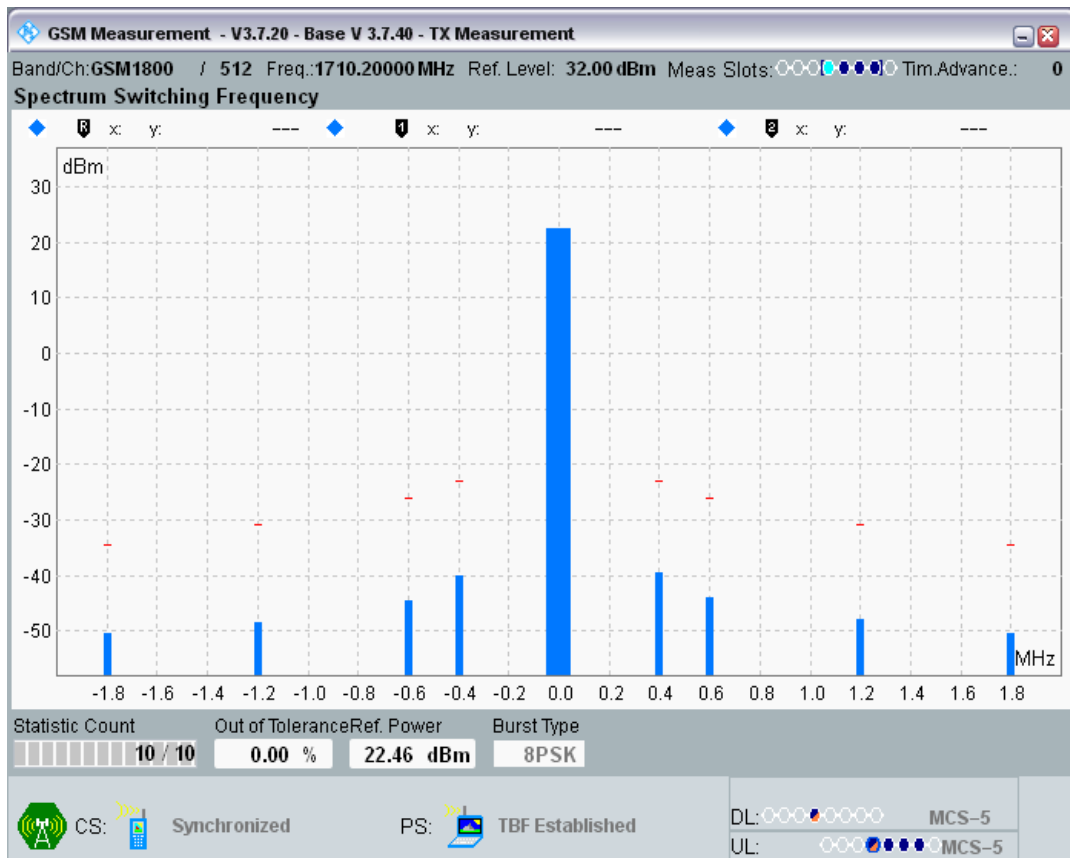

DCS1800 Channel=700 Gamma=5;5;5;5.png

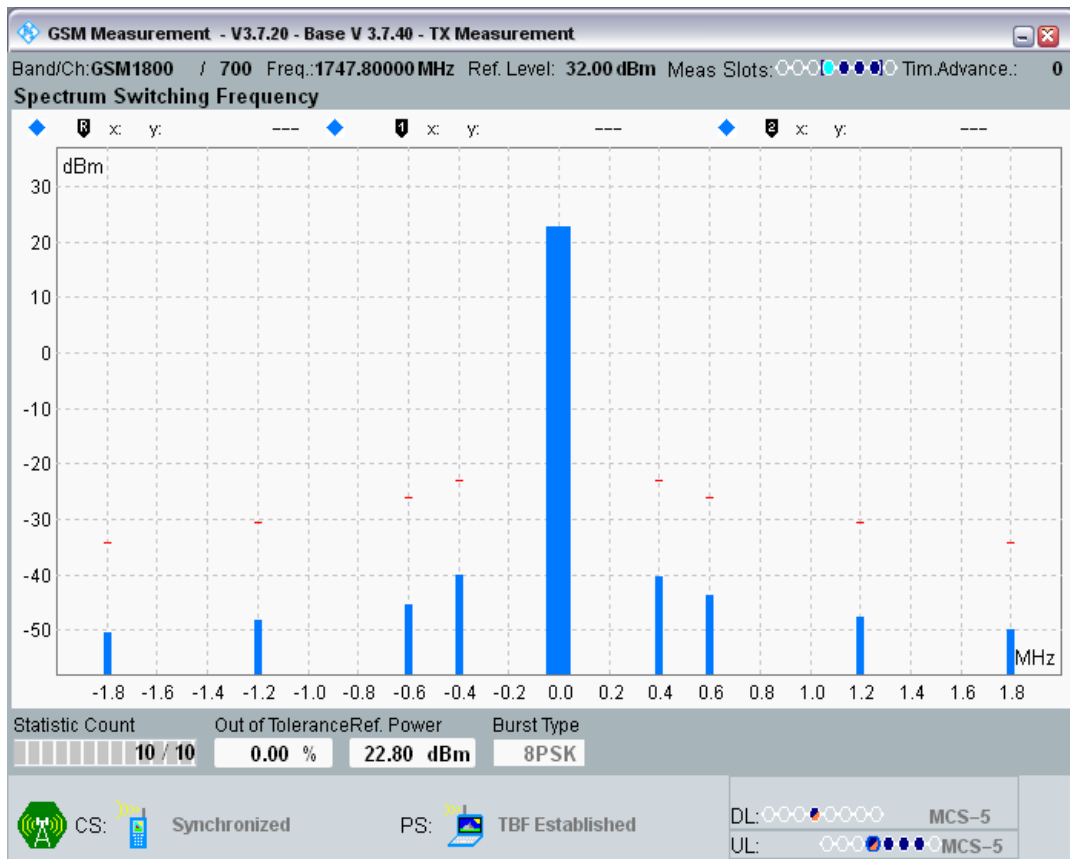



DCS1800 Channel=885 Gamma=5;5;5;5.png

