


Test Condition: NTNV, Test Mode: GSM, GPRS, EGPRS, Test Band: GSM900, DCS1800

## Test Data


### Clause 4.2.1 Transmitter-Frequency error and phase error

Band	Channel	Frequency (MHz)	PCL	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	5	Frequency Error (Hz)	16.89	-88.02	88.02	PASS
GSM900	975	880.2	5	RMS Phase Error (Degree)	0.44	0	5	PASS
GSM900	975	880.2	5	Peak Phase Error (Degree)	1.35	0	20	PASS
GSM900	60	902	5	Frequency Error (Hz)	20.63	-90.2	90.2	PASS
GSM900	60	902	5	RMS Phase Error (Degree)	0.59	0	5	PASS
GSM900	60	902	5	Peak Phase Error (Degree)	1.69	0	20	PASS
GSM900	124	914.8	5	Frequency Error (Hz)	16.76	-91.48	91.48	PASS
GSM900	124	914.8	5	RMS Phase Error (Degree)	0.44	0	5	PASS
GSM900	124	914.8	5	Peak Phase Error (Degree)	1.33	0	20	PASS
DCS1800	512	1710.2	0	Frequency Error (Hz)	26.64	-171.02	171.02	PASS
DCS1800	512	1710.2	0	RMS Phase Error (Degree)	0.65	0	5	PASS
DCS1800	512	1710.2	0	Peak Phase Error (Degree)	2.22	0	20	PASS
DCS1800	700	1747.8	0	Frequency Error (Hz)	29.25	-174.78	174.78	PASS
DCS1800	700	1747.8	0	RMS Phase Error (Degree)	0.69	0	5	PASS
DCS1800	700	1747.8	0	Peak Phase Error (Degree)	2.83	0	20	PASS
DCS1800	885	1784.8	0	Frequency Error (Hz)	31.48	-178.48	178.48	PASS
DCS1800	885	1784.8	0	RMS Phase Error (Degree)	0.60	0	5	PASS
DCS1800	885	1784.8	0	Peak Phase Error (Degree)	1.88	0	20	PASS


GSM900 Channel=124 PCL=5.png

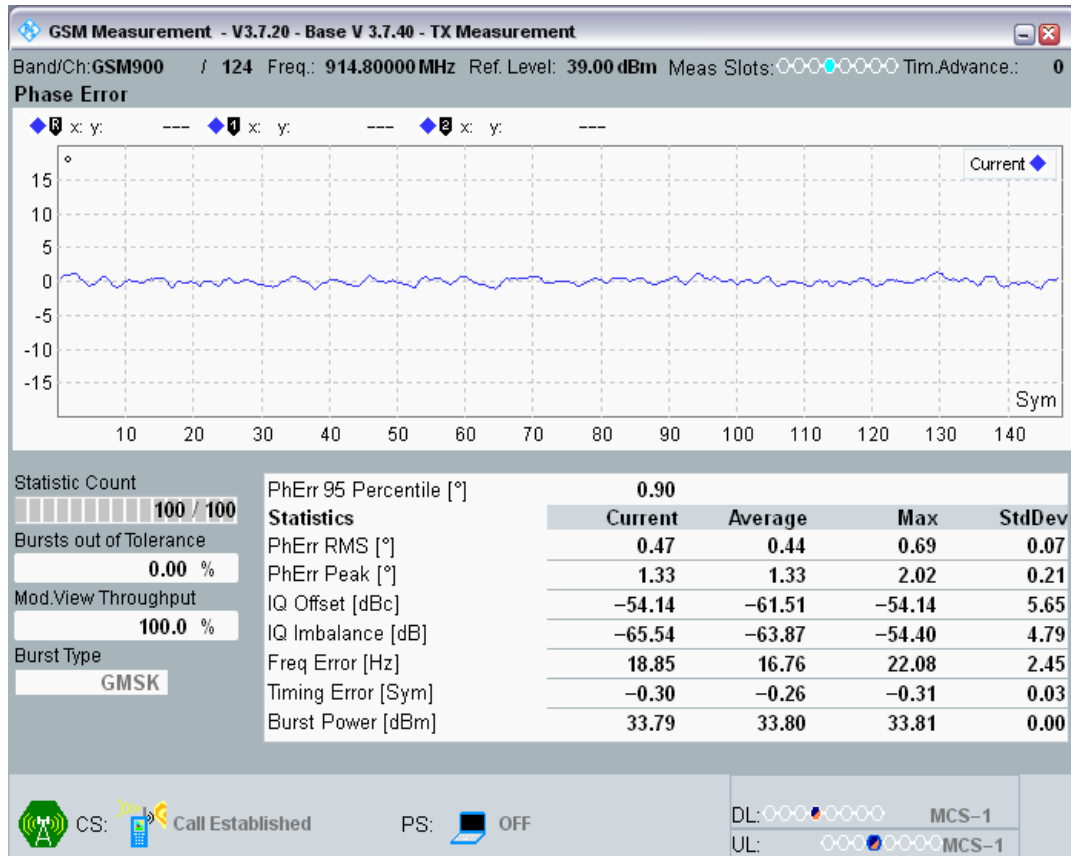


GSM900 Channel=60 PCL=5.png

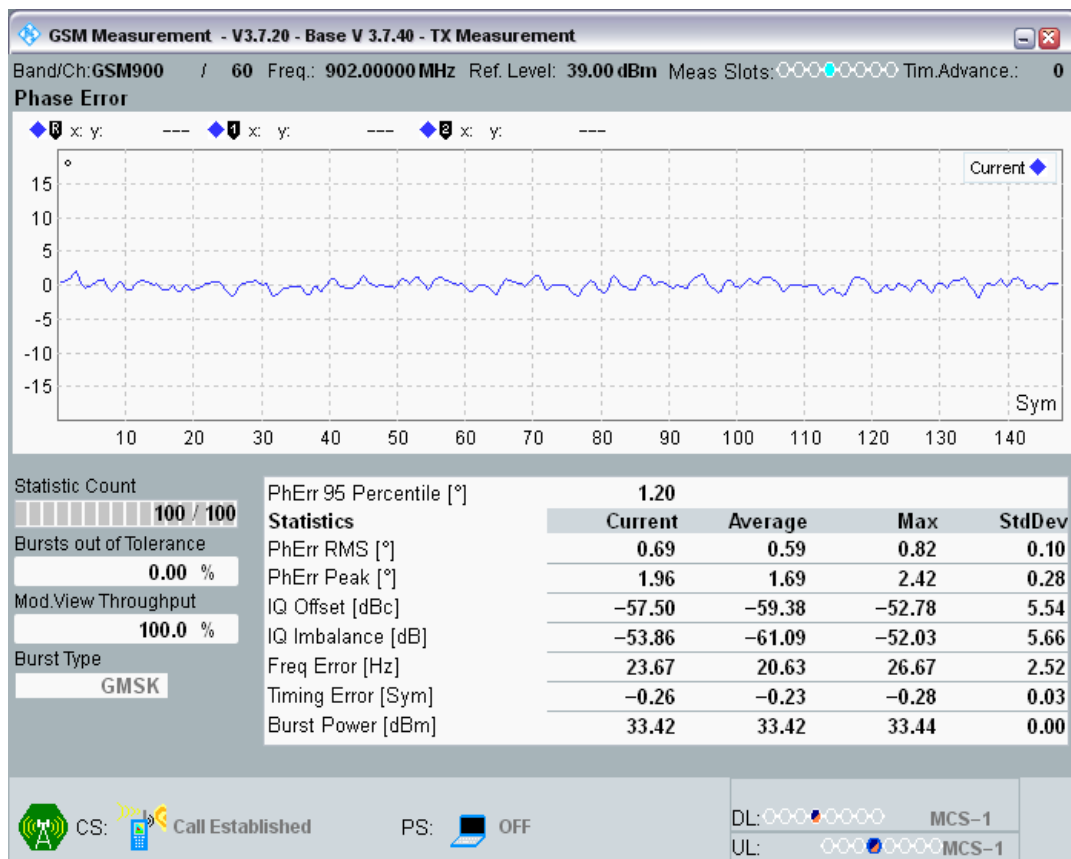


GSM900 Channel=975 PCL=5.png

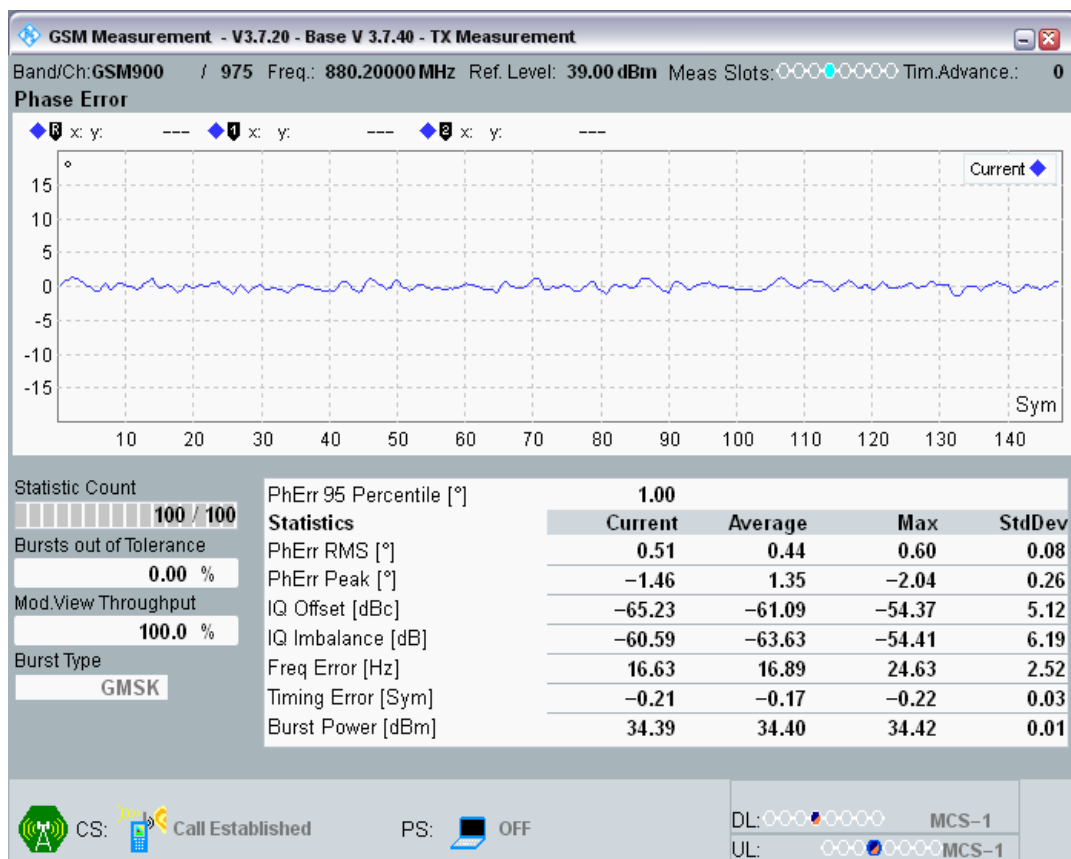


DCS1800 Channel=512 PCL=0.png

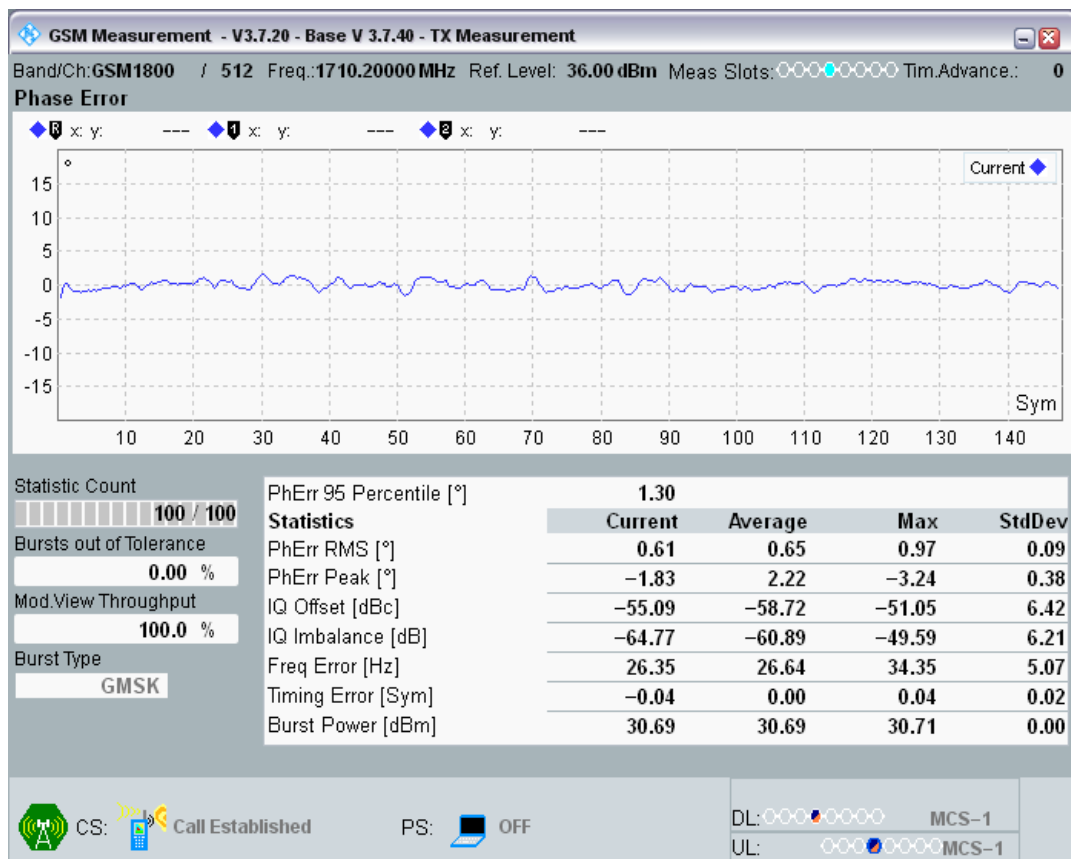

DCS1800 Channel=700 PCL=0.png

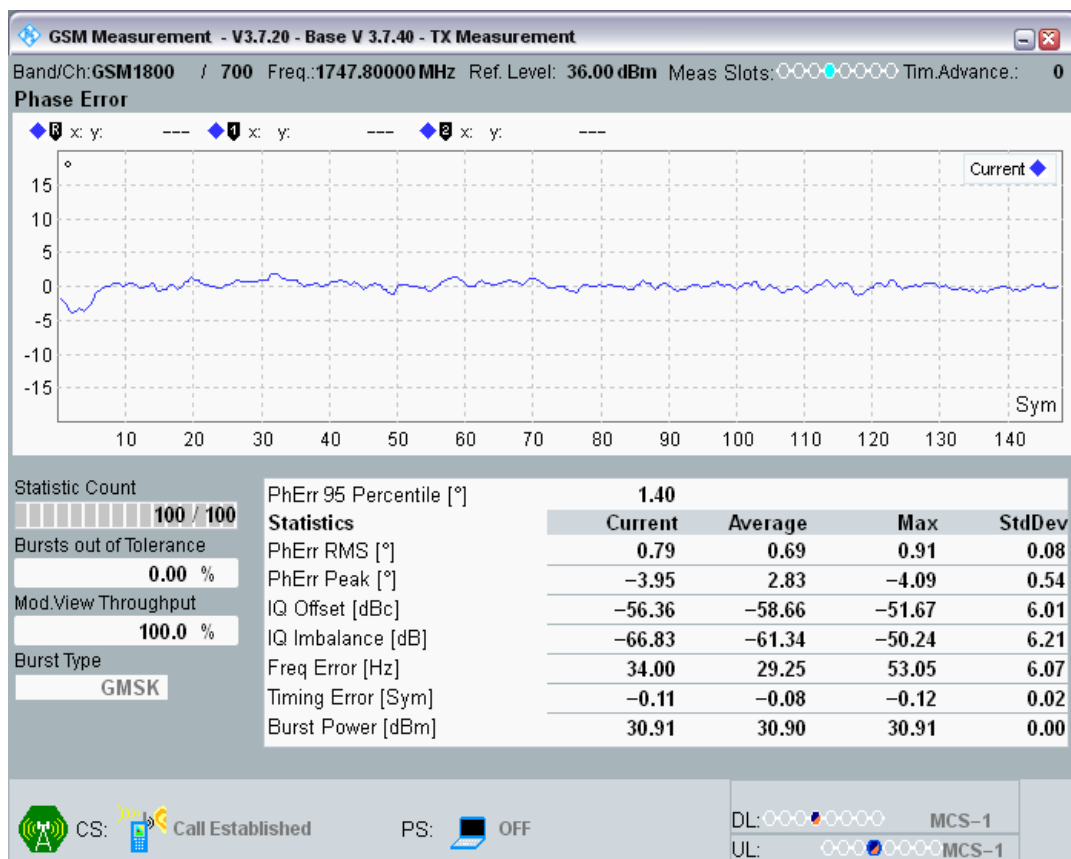

DCS1800 Channel=885 PCL=0.png

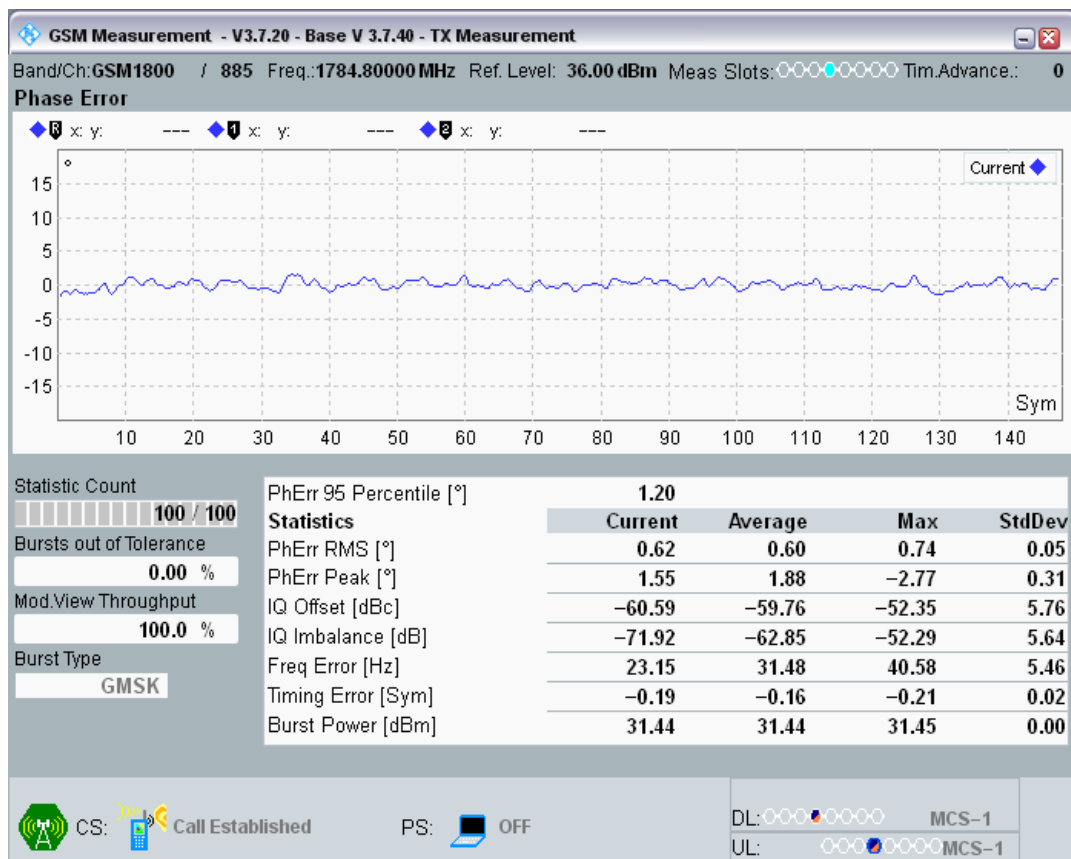


## Clause 4.2.2 Transmitter-Frequency error under multi path and interference


## conditions

Band	Type	Channel	Frequency (MHz)	PCL	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
DCS1800	RA130	512	1710.2	0	27.99	-400	400	PASS
DCS1800	RA130	700	1747.8	0	31.64	-400	400	PASS
DCS1800	RA130	885	1784.8	0	34.97	-400	400	PASS
DCS1800	HT100	512	1710.2	0	29.93	-350	350	PASS
DCS1800	HT100	700	1747.8	0	26.28	-350	350	PASS
DCS1800	HT100	885	1784.8	0	34.48	-350	350	PASS
DCS1800	TU50	512	1710.2	0	26.57	-260	260	PASS
DCS1800	TU50	700	1747.8	0	28.86	-260	260	PASS
DCS1800	TU50	885	1784.8	0	31.80	-260	260	PASS
DCS1800	TU1_5	512	1710.2	0	30.67	-320	320	PASS
DCS1800	TU1_5	700	1747.8	0	27.15	-320	320	PASS
DCS1800	TU1_5	885	1784.8	0	30.64	-320	320	PASS
GSM900	RA250	975	880.2	5	17.79	-300	300	PASS
GSM900	RA250	60	902	5	18.82	-300	300	PASS
GSM900	RA250	124	914.8	5	16.82	-300	300	PASS
GSM900	HT100	975	880.2	5	18.76	-180	180	PASS
GSM900	HT100	60	902	5	18.02	-180	180	PASS
GSM900	HT100	124	914.8	5	17.69	-180	180	PASS
GSM900	TU50	975	880.2	5	15.17	-160	160	PASS
GSM900	TU50	60	902	5	18.37	-160	160	PASS
GSM900	TU50	124	914.8	5	18.27	-160	160	PASS
GSM900	TU3	975	880.2	5	18.31	-230	230	PASS
GSM900	TU3	60	902	5	17.92	-230	230	PASS
GSM900	TU3	124	914.8	5	17.50	-230	230	PASS


DCS1800 Channel=512 PCL=0 HT100.png

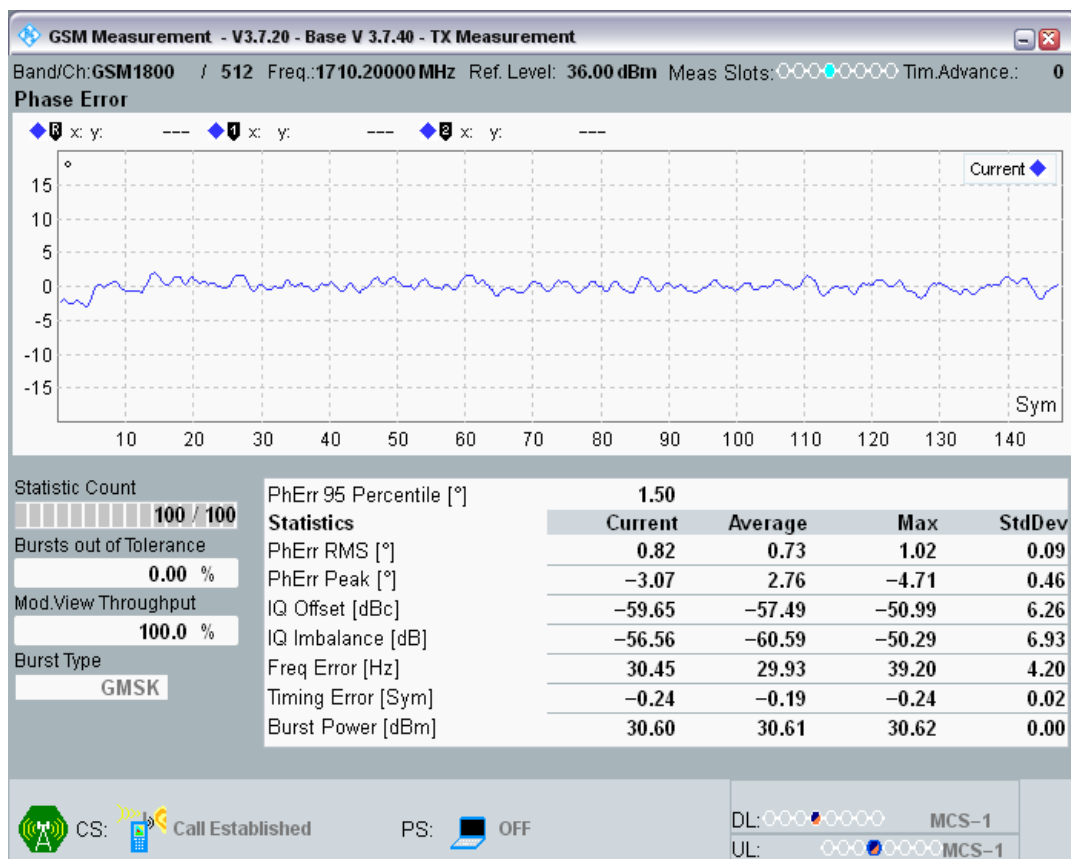


DCS1800 Channel=512 PCL=0 RA130.png

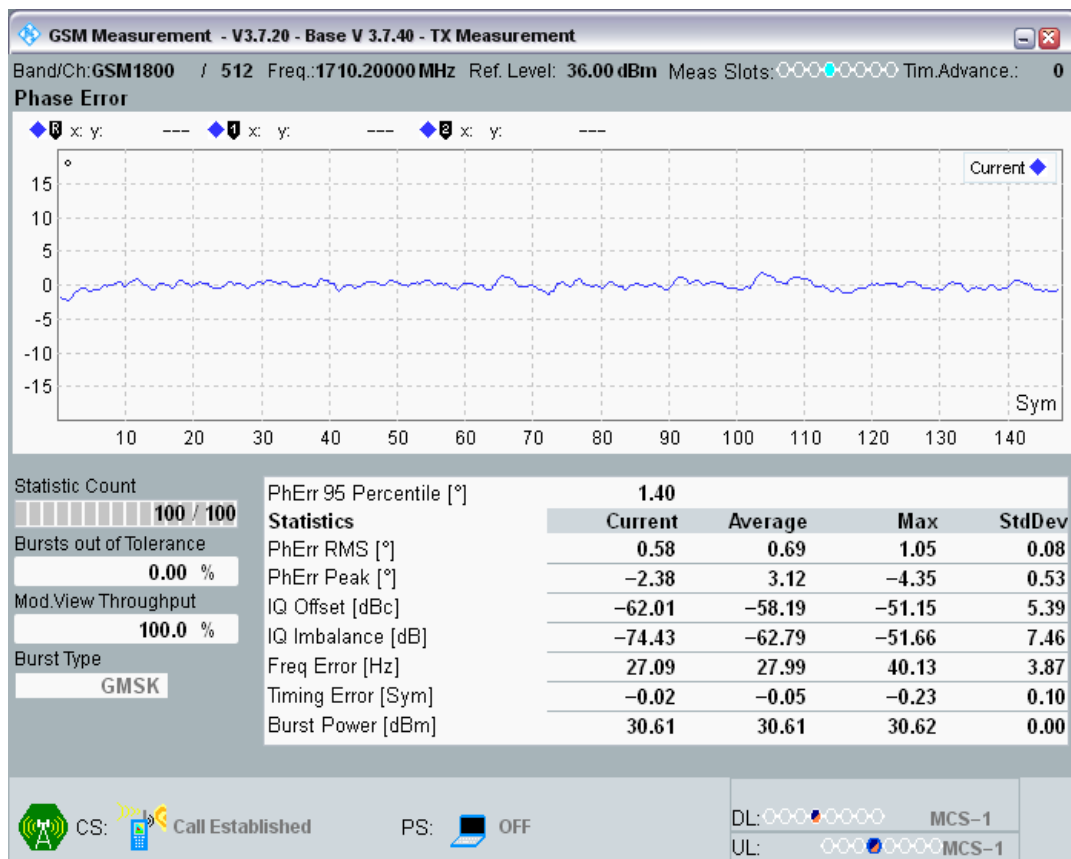


DCS1800 Channel=512 PCL=0 TU1\_5.png

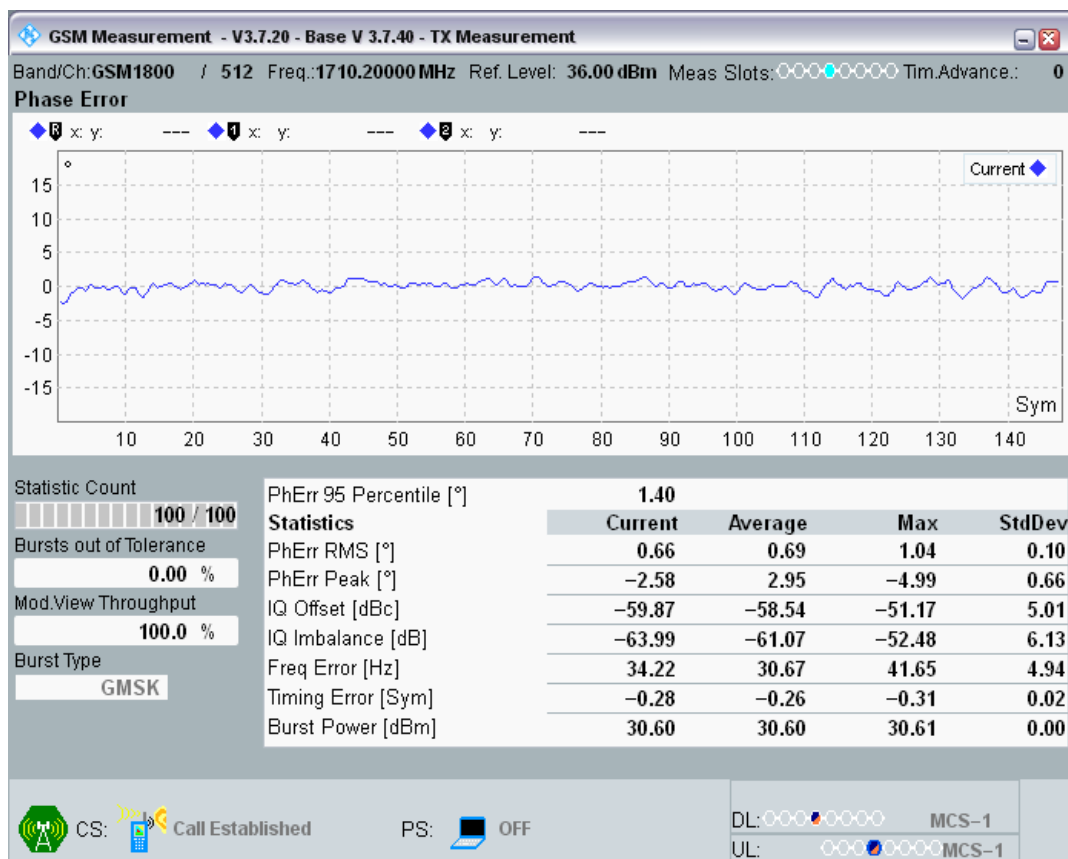


DCS1800 Channel=512 PCL=0 TU50.png

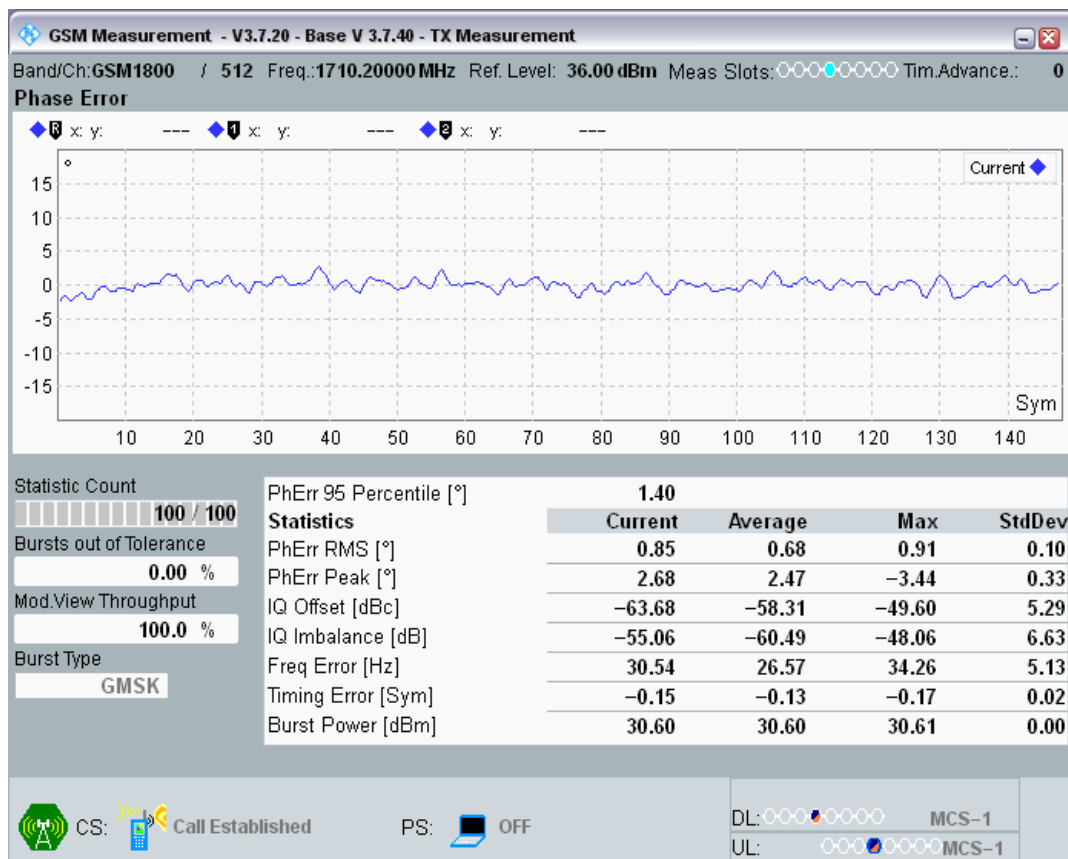

DCS1800 Channel=700 PCL=0 HT100.png

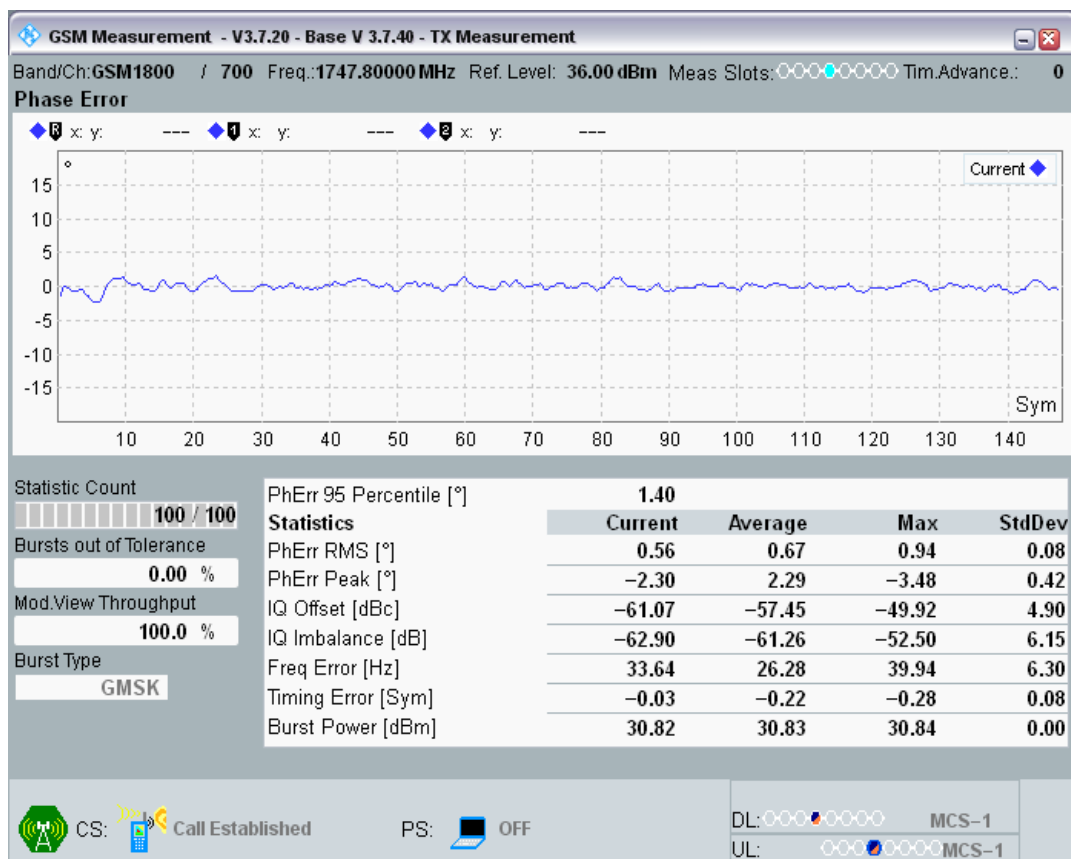


DCS1800 Channel=700 PCL=0 RA130.png

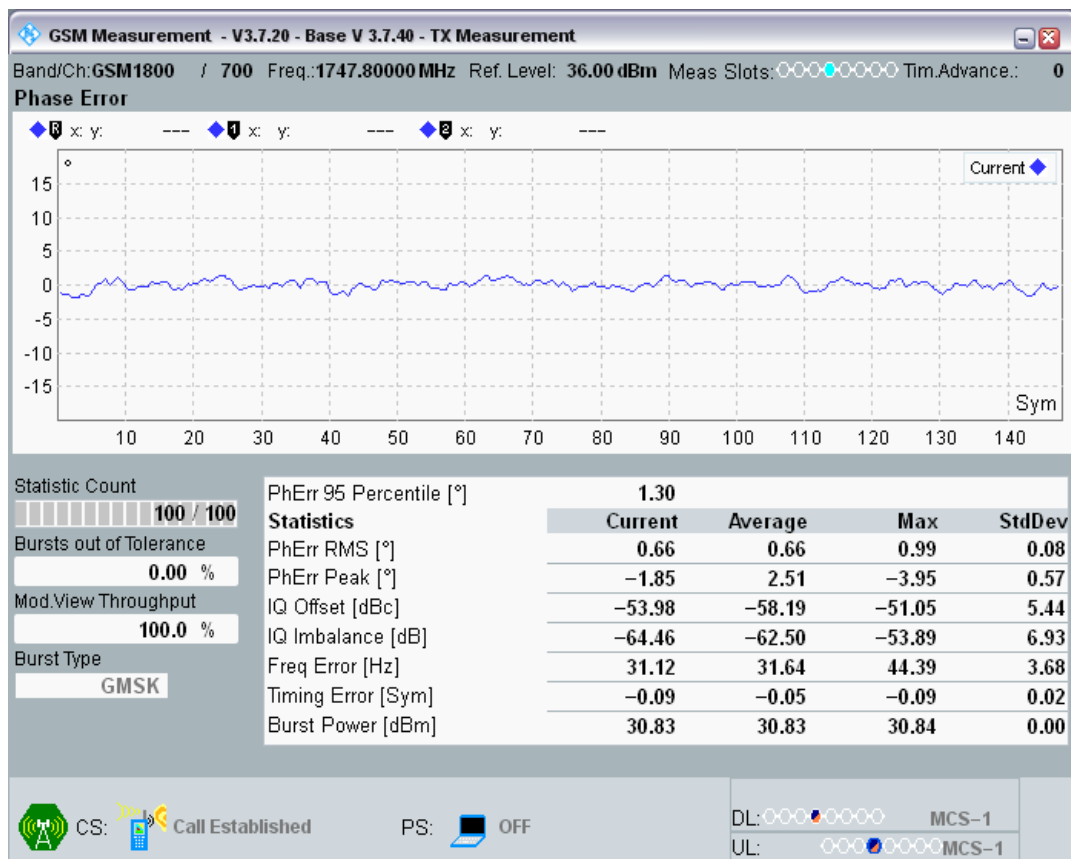


DCS1800 Channel=700 PCL=0 TU1\_5.png




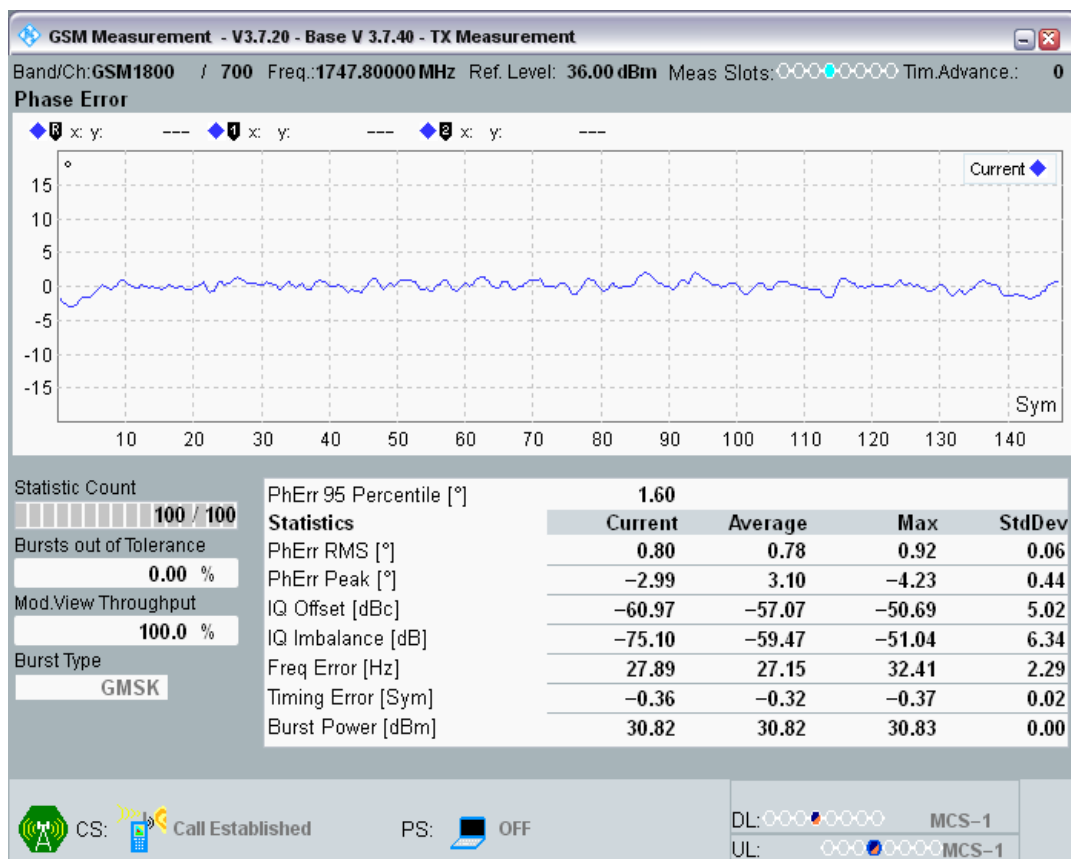


DCS1800 Channel=700 PCL=0 TU50.png

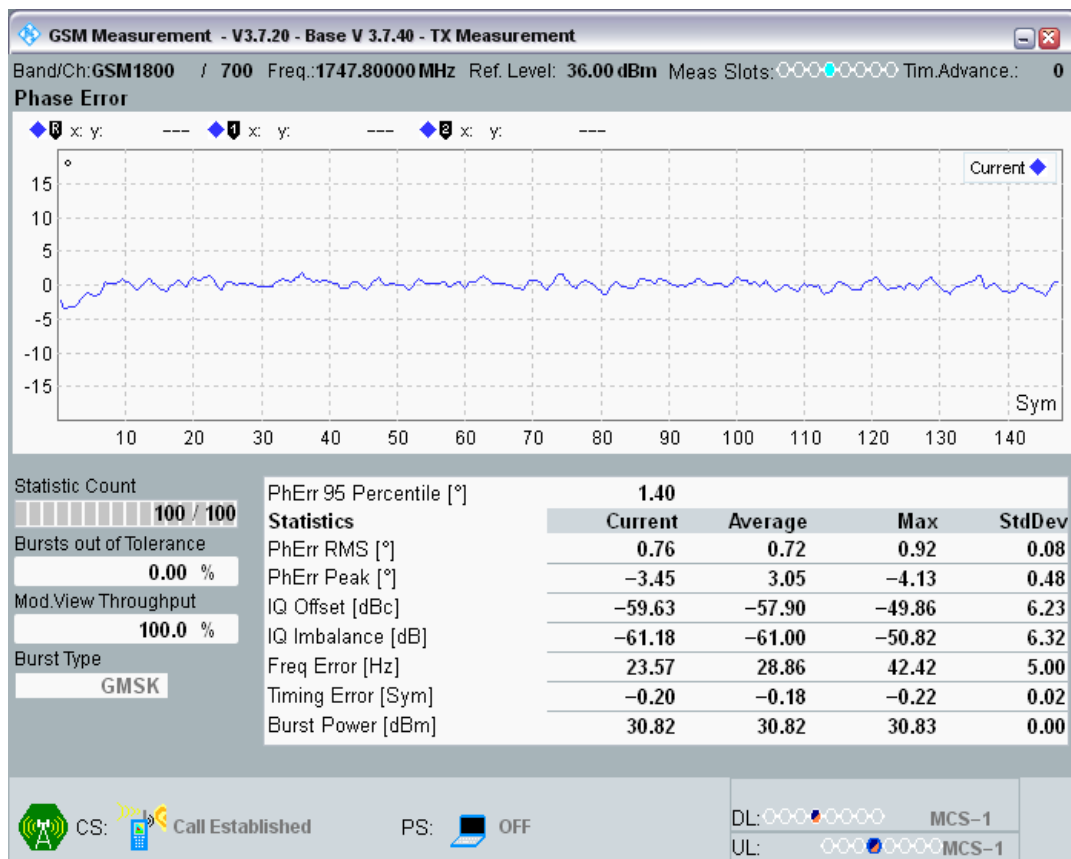


DCS1800 Channel=885 PCL=0 HT100.png

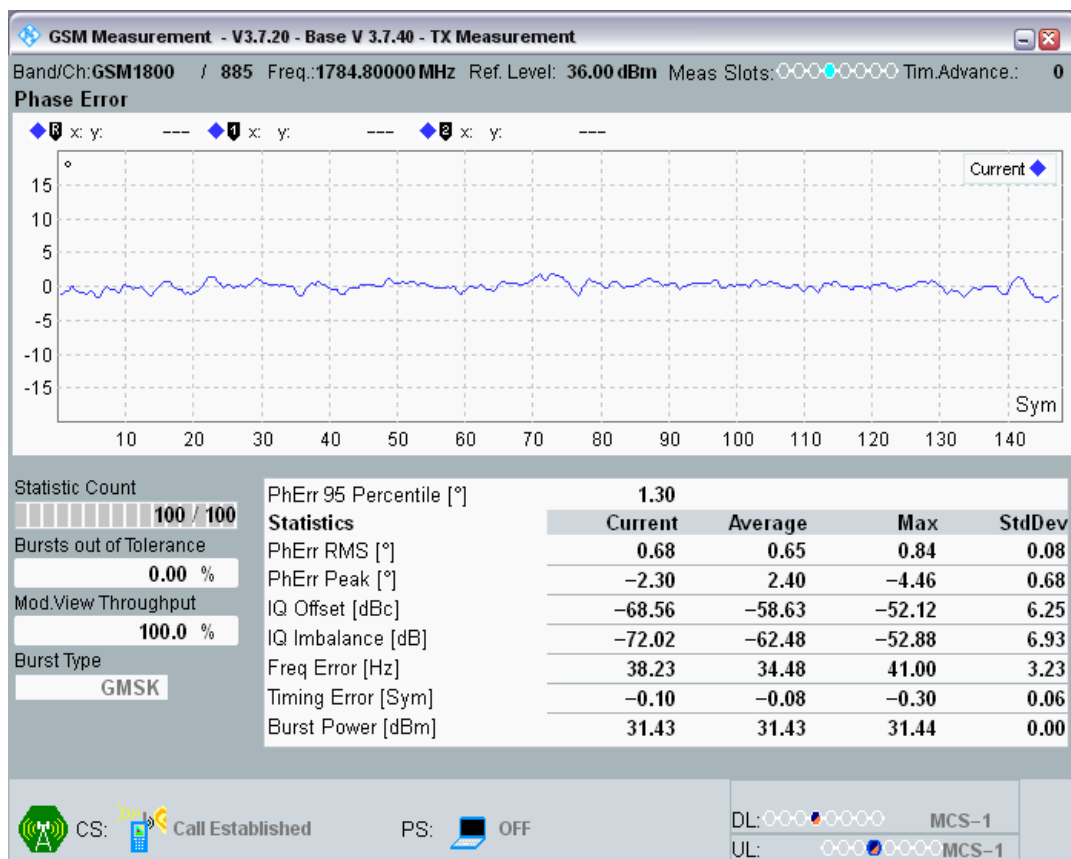


DCS1800 Channel=885 PCL=0 RA130.png

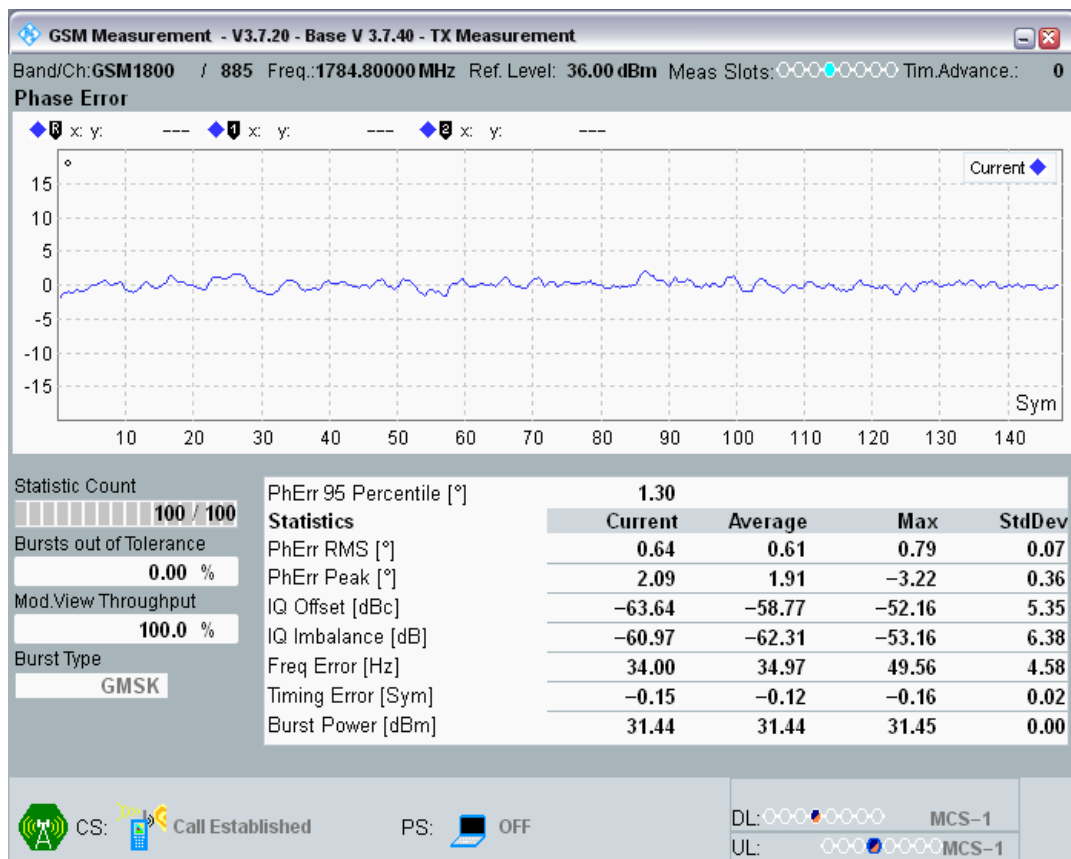


DCS1800 Channel=885 PCL=0 TU1\_5.png

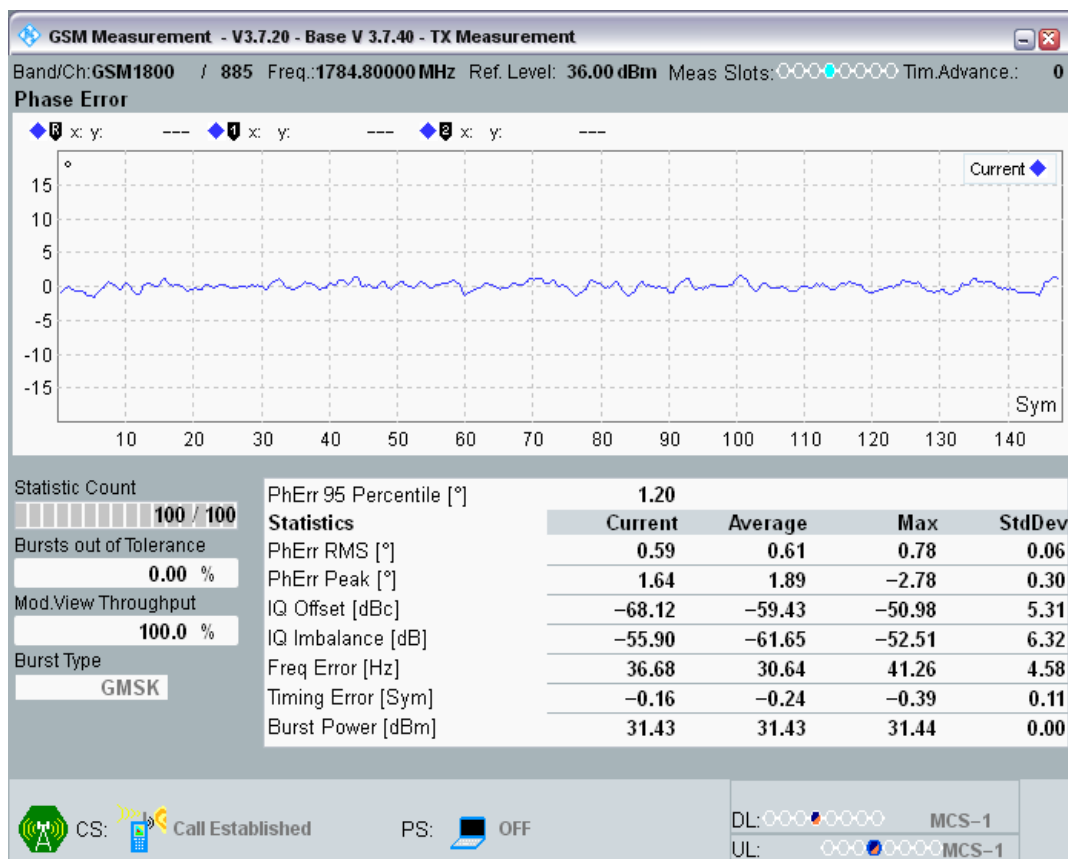


DCS1800 Channel=885 PCL=0 TU50.png

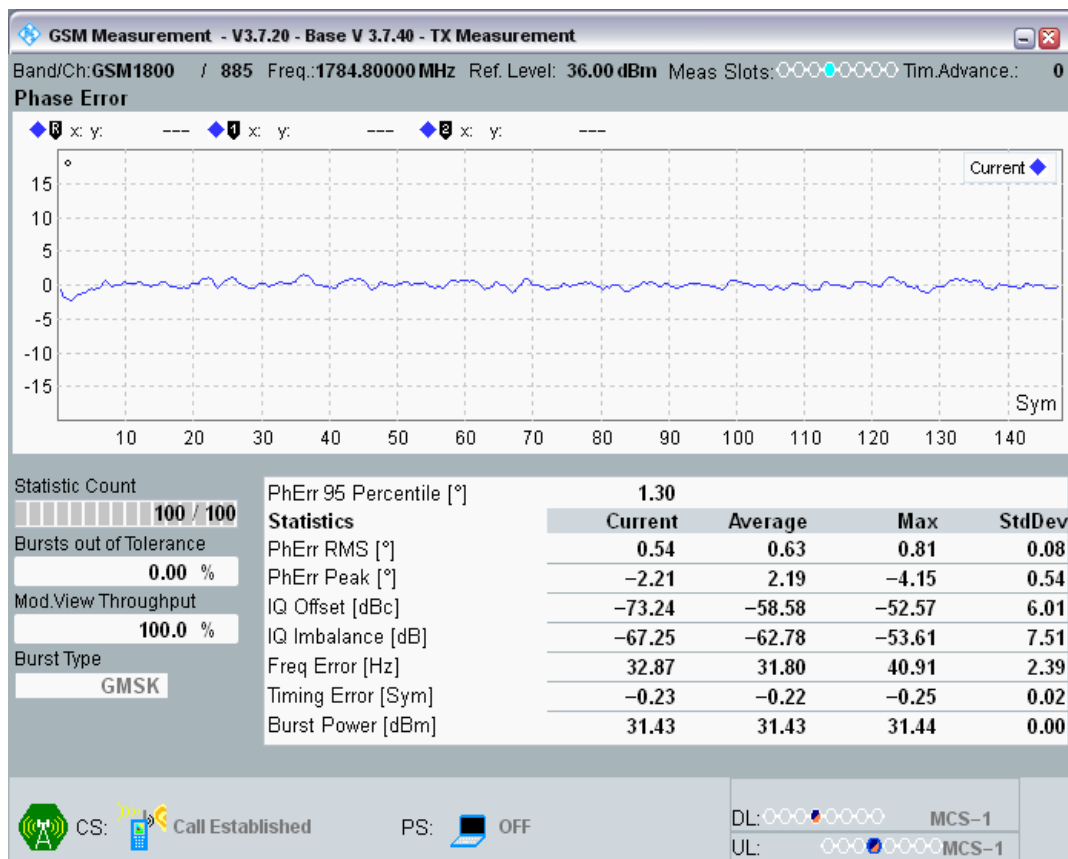


GSM900 Channel=124 PCL=5 HT100.png

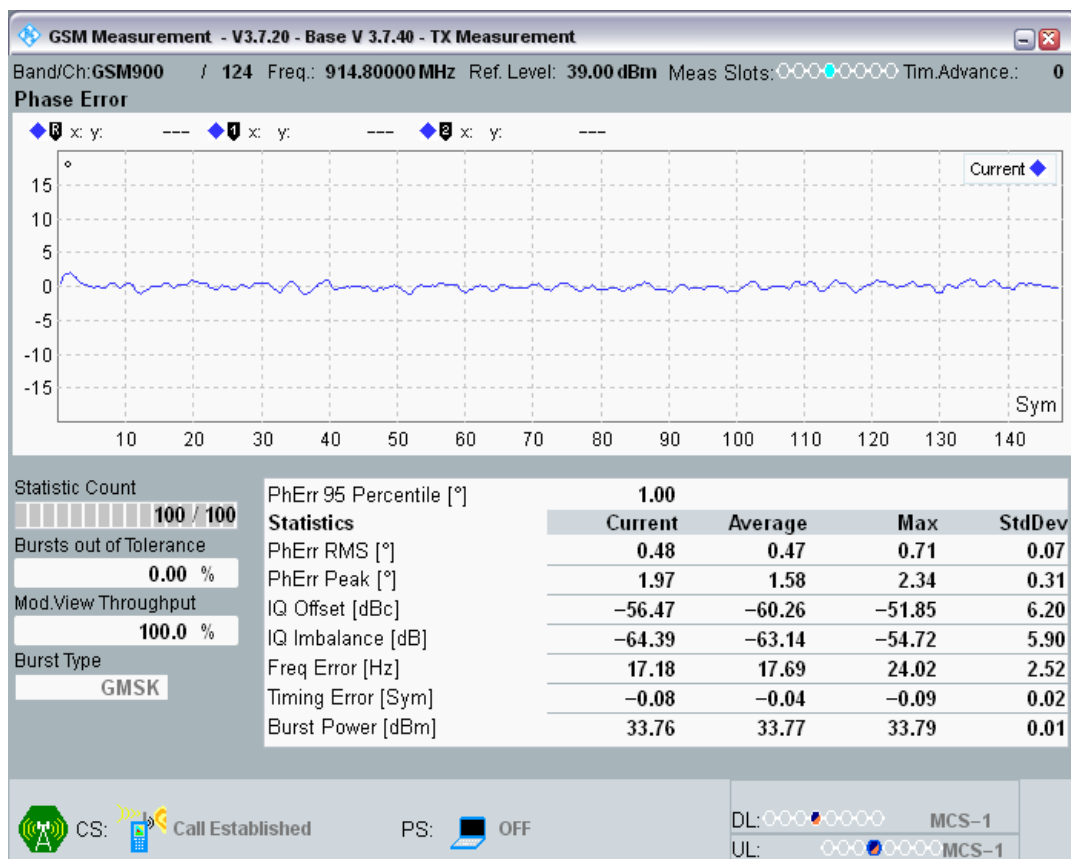


GSM900 Channel=124 PCL=5 RA250.png

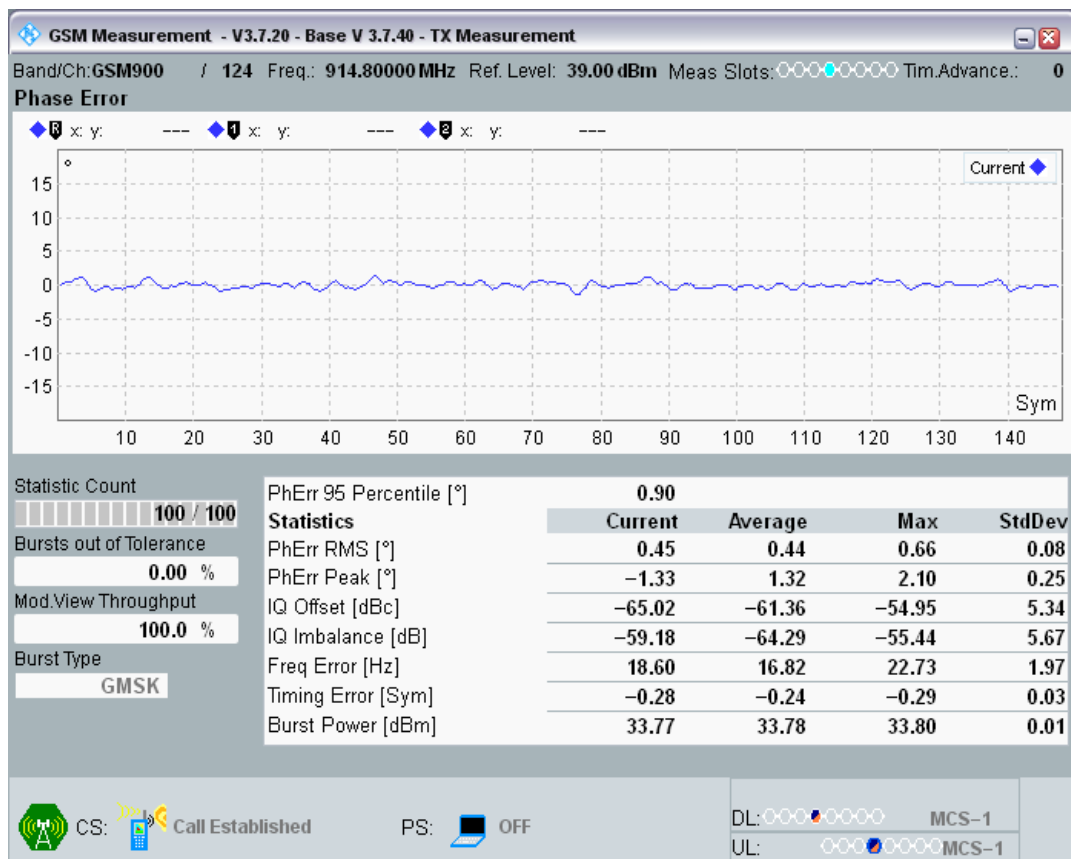


GSM900 Channel=124 PCL=5 TU3.png

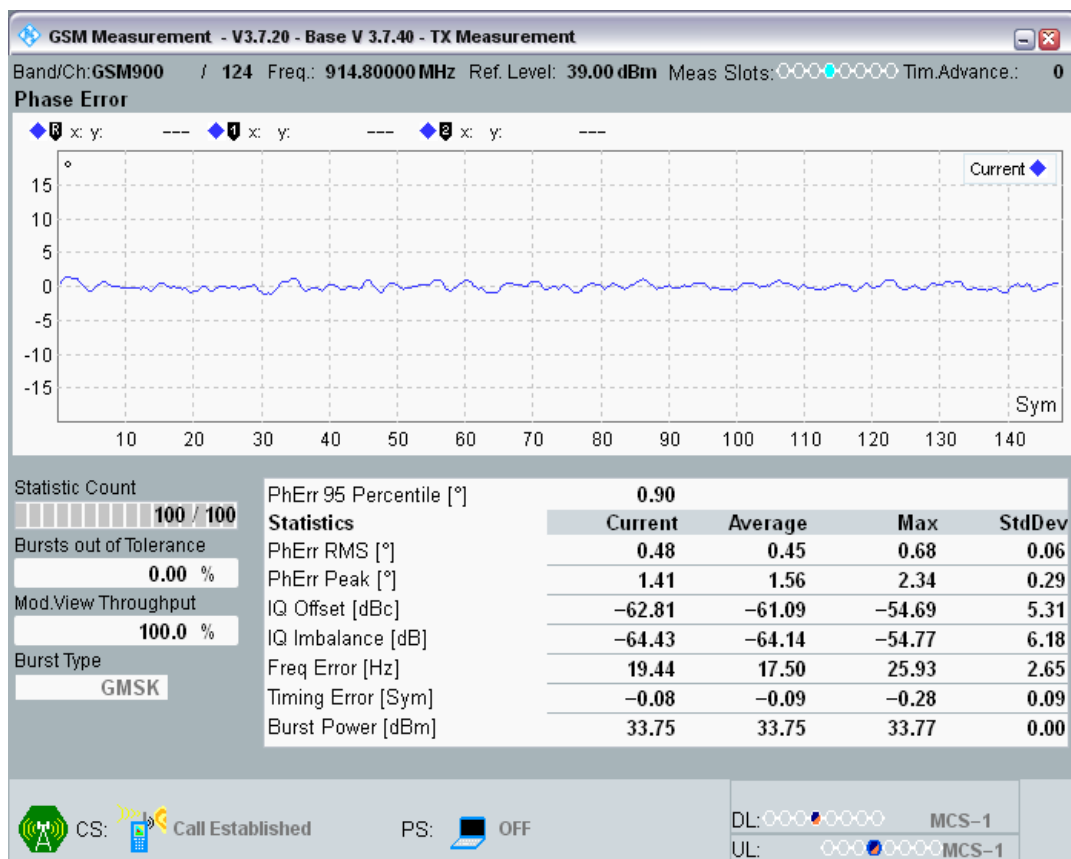


GSM900 Channel=124 PCL=5 TU50.png

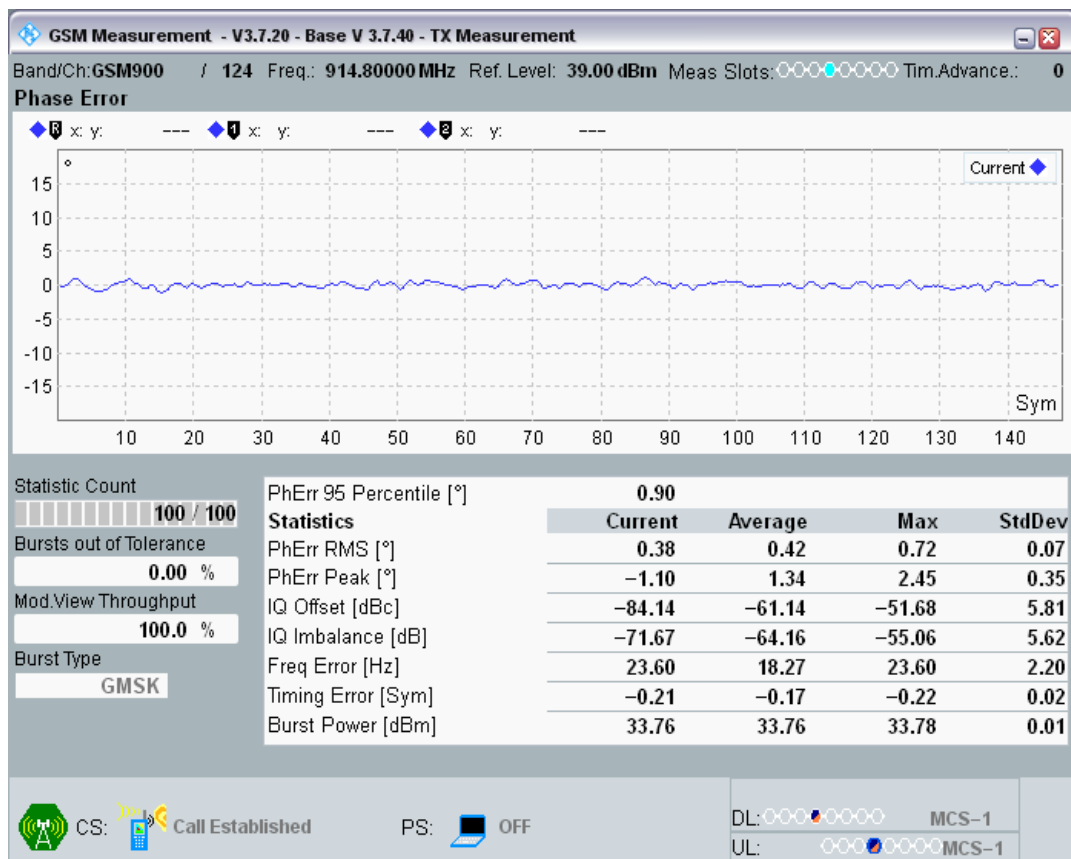


GSM900 Channel=60 PCL=5 HT100.png

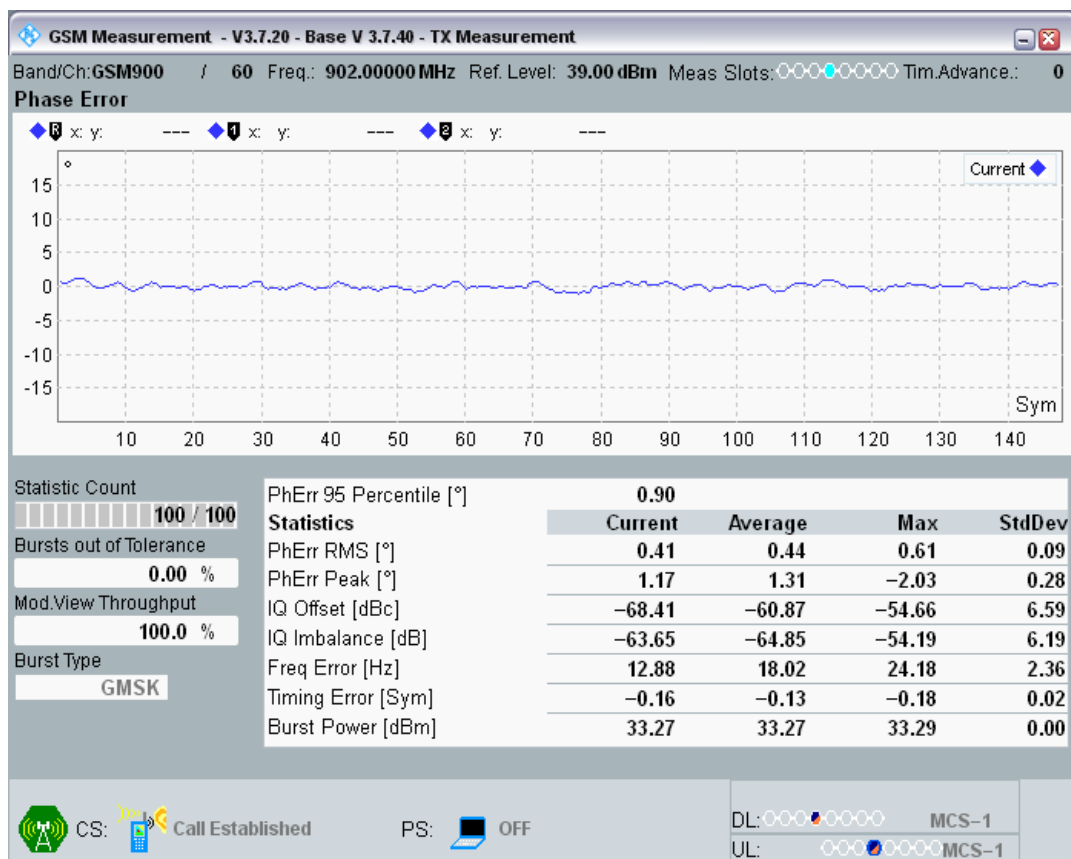


GSM900 Channel=60 PCL=5 RA250.png

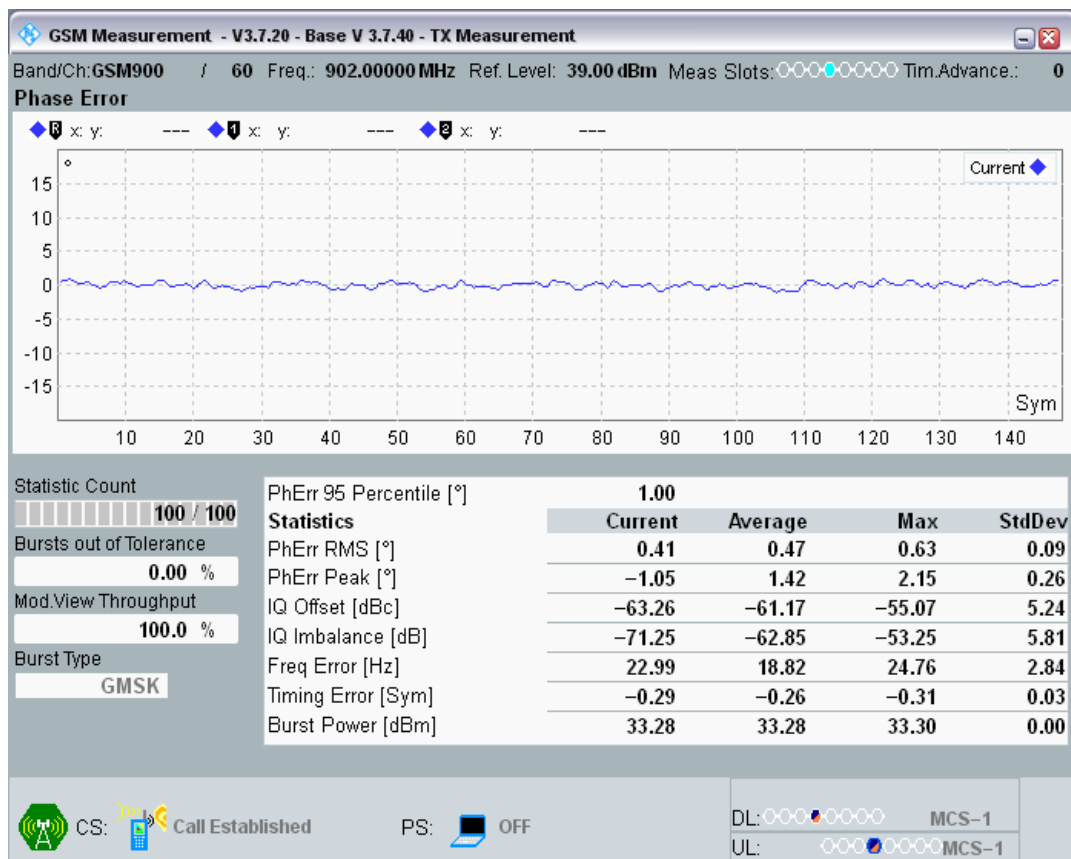

GSM900 Channel=60 PCL=5 TU3.png

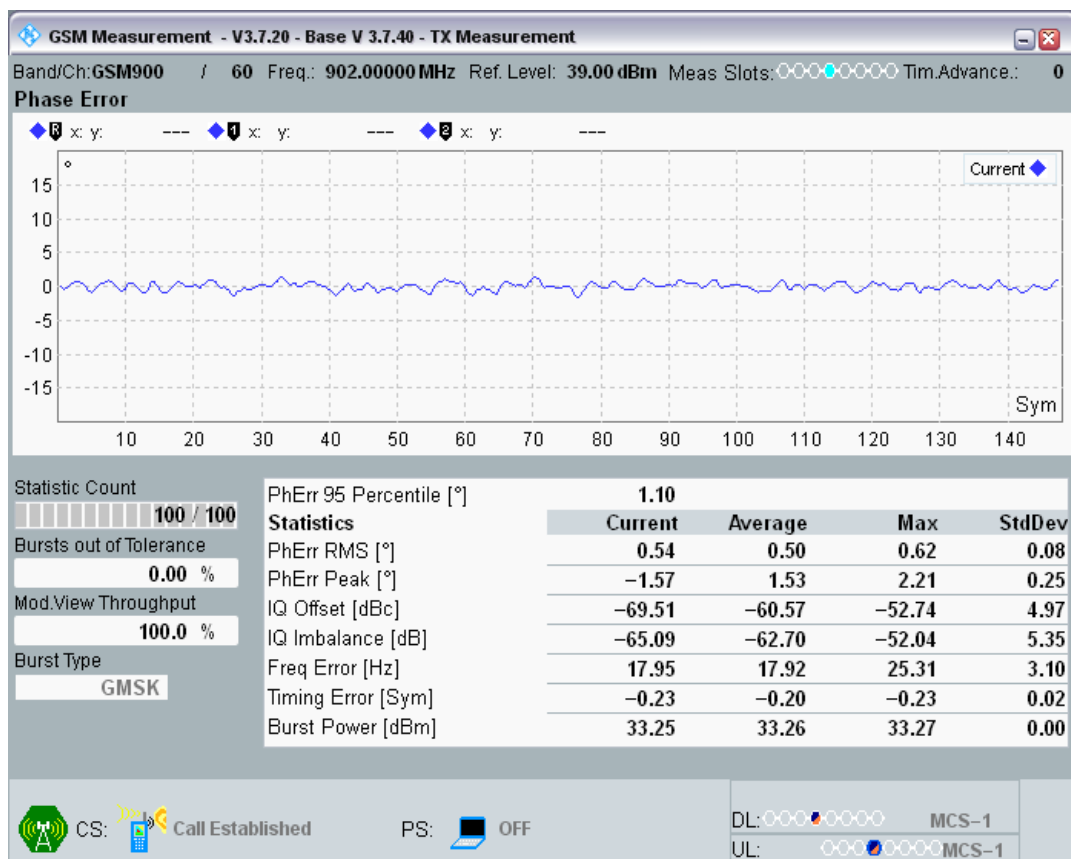


GSM900 Channel=60 PCL=5 TU50.png

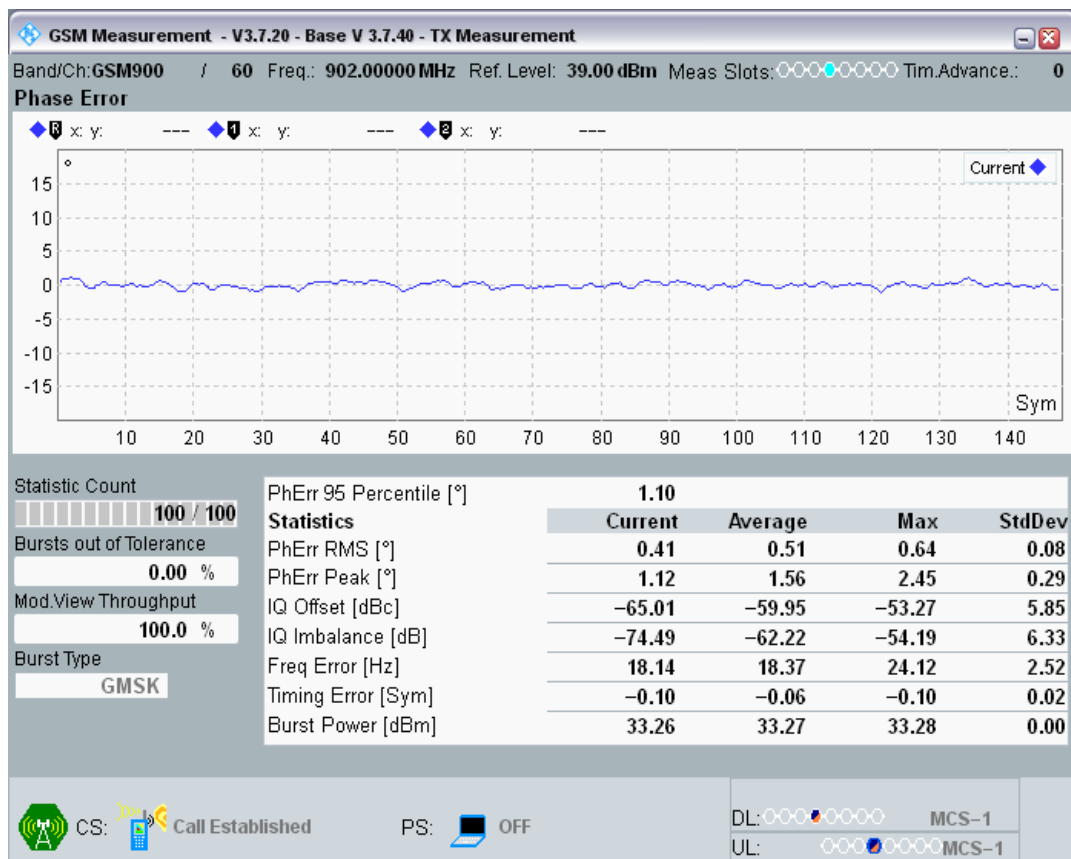


GSM900 Channel=975 PCL=5 HT100.png



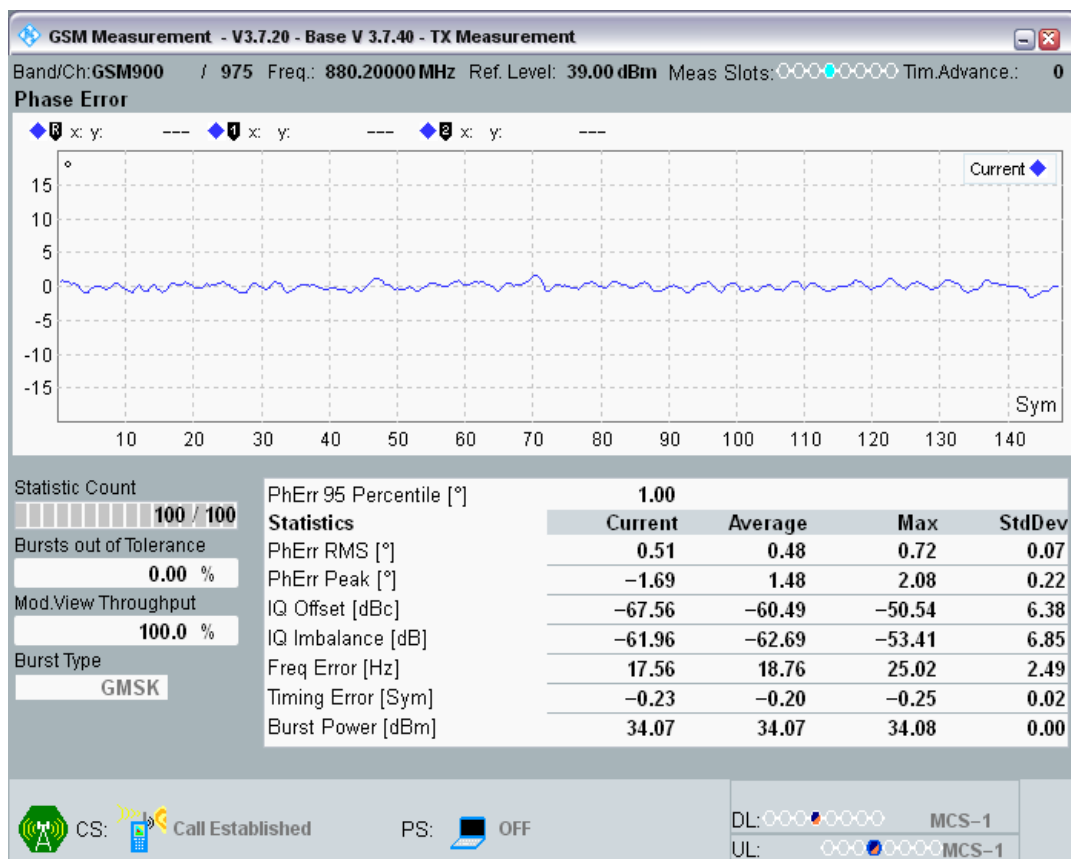

GSM900 Channel=975 PCL=5 RA250.png

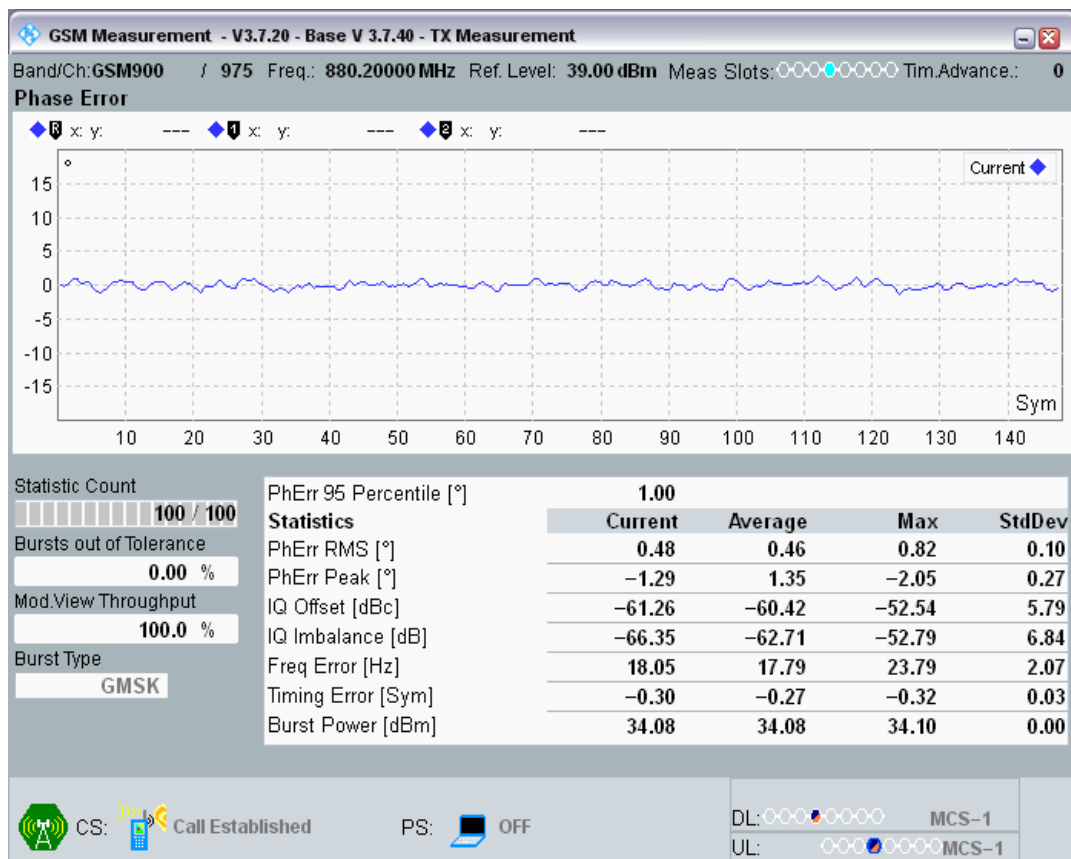


GSM900 Channel=975 PCL=5 TU3.png





GSM900 Channel=975 PCL=5 TU50.png

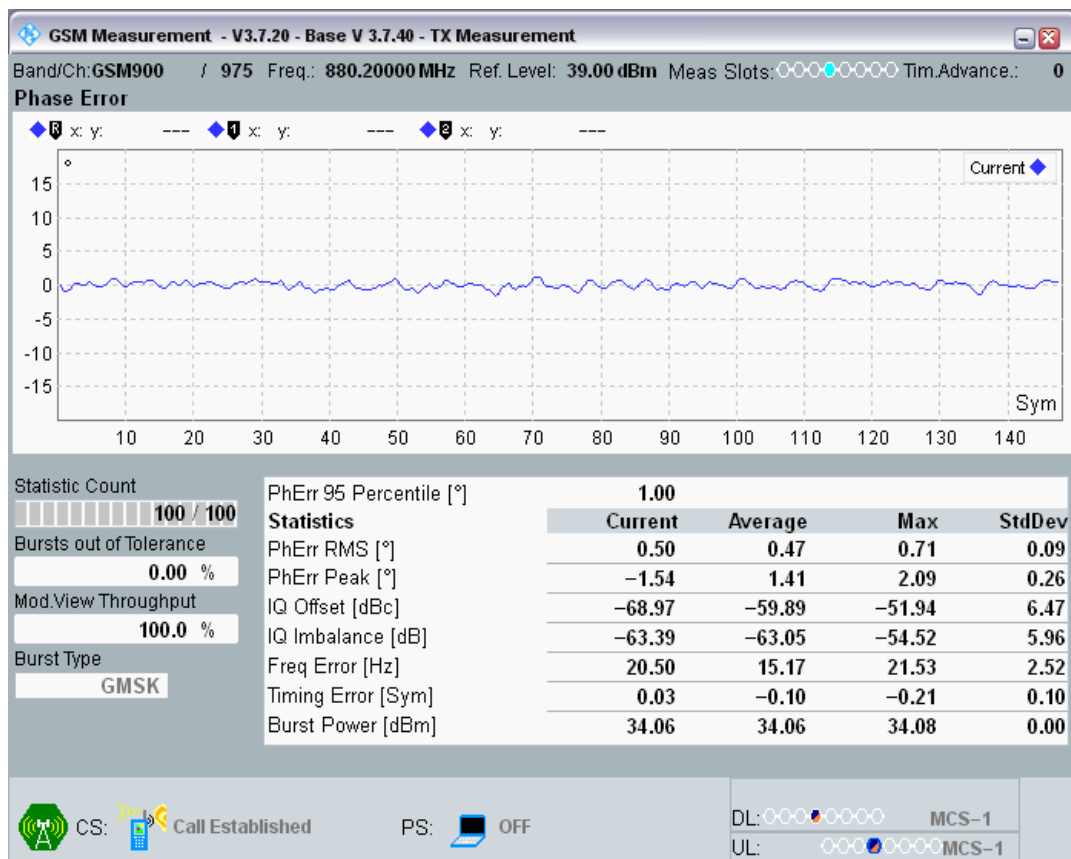

### Clause 4.2.5 Transmitter output power and burst timing

Band	Channel	Frequency (MHz)	PCL	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
DCS1800	512	1710.2	0	Power	30.55322	28	32	PASS
DCS1800	512	1710.2	0	PvT	-	-	-	PASS
DCS1800	512	1710.2	1	Power	28.53259	25	31	PASS
DCS1800	512	1710.2	1	PvT	-	-	-	PASS
DCS1800	512	1710.2	2	Power	26.59497	23	29	PASS
DCS1800	512	1710.2	2	PvT	-	-	-	PASS
DCS1800	512	1710.2	3	Power	24.57327	21	27	PASS
DCS1800	512	1710.2	3	PvT	-	-	-	PASS
DCS1800	512	1710.2	4	Power	22.56458	19	25	PASS
DCS1800	512	1710.2	4	PvT	-	-	-	PASS
DCS1800	512	1710.2	5	Power	20.61185	17	23	PASS
DCS1800	512	1710.2	5	PvT	-	-	-	PASS
DCS1800	512	1710.2	6	Power	18.57837	15	21	PASS
DCS1800	512	1710.2	6	PvT	-	-	-	PASS
DCS1800	512	1710.2	7	Power	16.67181	13	19	PASS
DCS1800	512	1710.2	7	PvT	-	-	-	PASS
DCS1800	512	1710.2	8	Power	14.74878	11	17	PASS
DCS1800	512	1710.2	8	PvT	-	-	-	PASS
DCS1800	512	1710.2	9	Power	12.67529	8	16	PASS
DCS1800	512	1710.2	9	PvT	-	-	-	PASS
DCS1800	512	1710.2	10	Power	10.88361	6	14	PASS
DCS1800	512	1710.2	10	PvT	-	-	-	PASS
DCS1800	512	1710.2	11	Power	8.94458	4	12	PASS
DCS1800	512	1710.2	11	PvT	-	-	-	PASS
DCS1800	512	1710.2	12	Power	6.927094	2	10	PASS
DCS1800	512	1710.2	12	PvT	-	-	-	PASS
DCS1800	512	1710.2	13	Power	5.510681	0	8	PASS
DCS1800	512	1710.2	13	PvT	-	-	-	PASS
DCS1800	512	1710.2	14	Power	3.075378	-3	7	PASS
DCS1800	512	1710.2	14	PvT	-	-	-	PASS
DCS1800	512	1710.2	15	Power	1.205109	-5	5	PASS
DCS1800	512	1710.2	15	PvT	-	-	-	PASS
DCS1800	700	1747.8	0	Power	30.8313	28	32	PASS
DCS1800	700	1747.8	0	PvT	-	-	-	PASS
DCS1800	700	1747.8	1	Power	28.81442	25	31	PASS
DCS1800	700	1747.8	1	PvT	-	-	-	PASS
DCS1800	700	1747.8	2	Power	26.8161	23	29	PASS
DCS1800	700	1747.8	2	PvT	-	-	-	PASS
DCS1800	700	1747.8	3	Power	24.81006	21	27	PASS
DCS1800	700	1747.8	3	PvT	-	-	-	PASS
DCS1800	700	1747.8	4	Power	22.8439	19	25	PASS
DCS1800	700	1747.8	4	PvT	-	-	-	PASS


DCS1800	700	1747.8	5	Power	20.83649	17	23	PASS
DCS1800	700	1747.8	5	PvT	-	-	-	PASS
DCS1800	700	1747.8	6	Power	18.80457	15	21	PASS
DCS1800	700	1747.8	6	PvT	-	-	-	PASS
DCS1800	700	1747.8	7	Power	16.90817	13	19	PASS
DCS1800	700	1747.8	7	PvT	-	-	-	PASS
DCS1800	700	1747.8	8	Power	14.94778	11	17	PASS
DCS1800	700	1747.8	8	PvT	-	-	-	PASS
DCS1800	700	1747.8	9	Power	12.98846	8	16	PASS
DCS1800	700	1747.8	9	PvT	-	-	-	PASS
DCS1800	700	1747.8	10	Power	10.97217	6	14	PASS
DCS1800	700	1747.8	10	PvT	-	-	-	PASS
DCS1800	700	1747.8	11	Power	9.037811	4	12	PASS
DCS1800	700	1747.8	11	PvT	-	-	-	PASS
DCS1800	700	1747.8	12	Power	6.961121	2	10	PASS
DCS1800	700	1747.8	12	PvT	-	-	-	PASS
DCS1800	700	1747.8	13	Power	5.472137	0	8	PASS
DCS1800	700	1747.8	13	PvT	-	-	-	PASS
DCS1800	700	1747.8	14	Power	2.883972	-3	7	PASS
DCS1800	700	1747.8	14	PvT	-	-	-	PASS
DCS1800	700	1747.8	15	Power	0.9171448	-5	5	PASS
DCS1800	700	1747.8	15	PvT	-	-	-	PASS
DCS1800	885	1784.8	0	Power	31.38101	28	32	PASS
DCS1800	885	1784.8	0	PvT	-	-	-	PASS
DCS1800	885	1784.8	1	Power	29.33929	25	31	PASS
DCS1800	885	1784.8	1	PvT	-	-	-	PASS
DCS1800	885	1784.8	2	Power	27.31631	23	29	PASS
DCS1800	885	1784.8	2	PvT	-	-	-	PASS
DCS1800	885	1784.8	3	Power	25.32349	21	27	PASS
DCS1800	885	1784.8	3	PvT	-	-	-	PASS
DCS1800	885	1784.8	4	Power	23.28656	19	25	PASS
DCS1800	885	1784.8	4	PvT	-	-	-	PASS
DCS1800	885	1784.8	5	Power	21.2836	17	23	PASS
DCS1800	885	1784.8	5	PvT	-	-	-	PASS
DCS1800	885	1784.8	6	Power	19.23175	15	21	PASS
DCS1800	885	1784.8	6	PvT	-	-	-	PASS
DCS1800	885	1784.8	7	Power	17.2937	13	19	PASS
DCS1800	885	1784.8	7	PvT	-	-	-	PASS
DCS1800	885	1784.8	8	Power	15.31033	11	17	PASS
DCS1800	885	1784.8	8	PvT	-	-	-	PASS
DCS1800	885	1784.8	9	Power	13.3183	8	16	PASS
DCS1800	885	1784.8	9	PvT	-	-	-	PASS
DCS1800	885	1784.8	10	Power	11.25107	6	14	PASS

DCS1800	885	1784.8	10	PvT	-	-	-	PASS
DCS1800	885	1784.8	11	Power	9.227509	4	12	PASS
DCS1800	885	1784.8	11	PvT	-	-	-	PASS
DCS1800	885	1784.8	12	Power	7.015045	2	10	PASS
DCS1800	885	1784.8	12	PvT	-	-	-	PASS
DCS1800	885	1784.8	13	Power	5.465057	0	8	PASS
DCS1800	885	1784.8	13	PvT	-	-	-	PASS
DCS1800	885	1784.8	14	Power	2.609467	-3	7	PASS
DCS1800	885	1784.8	14	PvT	-	-	-	PASS
DCS1800	885	1784.8	15	Power	0.4048157	-5	5	PASS
DCS1800	885	1784.8	15	PvT	-	-	-	PASS
GSM900	975	880.2	5	Power	34.18637	31	35	PASS
GSM900	975	880.2	5	PvT	-	-	-	PASS
GSM900	975	880.2	6	Power	32.51578	28	34	PASS
GSM900	975	880.2	6	PvT	-	-	-	PASS
GSM900	975	880.2	7	Power	30.58142	26	32	PASS
GSM900	975	880.2	7	PvT	-	-	-	PASS
GSM900	975	880.2	8	Power	28.62244	24	30	PASS
GSM900	975	880.2	8	PvT	-	-	-	PASS
GSM900	975	880.2	9	Power	26.64941	22	28	PASS
GSM900	975	880.2	9	PvT	-	-	-	PASS
GSM900	975	880.2	10	Power	24.56854	20	26	PASS
GSM900	975	880.2	10	PvT	-	-	-	PASS
GSM900	975	880.2	11	Power	22.51401	18	24	PASS
GSM900	975	880.2	11	PvT	-	-	-	PASS
GSM900	975	880.2	12	Power	20.55005	16	22	PASS
GSM900	975	880.2	12	PvT	-	-	-	PASS
GSM900	975	880.2	13	Power	18.50159	14	20	PASS
GSM900	975	880.2	13	PvT	-	-	-	PASS
GSM900	975	880.2	14	Power	16.5239	12	18	PASS
GSM900	975	880.2	14	PvT	-	-	-	PASS
GSM900	975	880.2	15	Power	14.37463	10	16	PASS
GSM900	975	880.2	15	PvT	-	-	-	PASS
GSM900	975	880.2	16	Power	12.34219	6	16	PASS
GSM900	975	880.2	16	PvT	-	-	-	PASS
GSM900	975	880.2	17	Power	10.30618	4	14	PASS
GSM900	975	880.2	17	PvT	-	-	-	PASS
GSM900	975	880.2	18	Power	7.857971	2	12	PASS
GSM900	975	880.2	18	PvT	-	-	-	PASS
GSM900	975	880.2	19	Power	5.853882	0	10	PASS
GSM900	975	880.2	19	PvT	-	-	-	PASS
GSM900	60	902	5	Power	33.33829	31	35	PASS
GSM900	60	902	5	PvT	-	-	-	PASS


GSM900	60	902	6	Power	31.57776	28	34	PASS
GSM900	60	902	6	PvT	-	-	-	PASS
GSM900	60	902	7	Power	29.59396	26	32	PASS
GSM900	60	902	7	PvT	-	-	-	PASS
GSM900	60	902	8	Power	27.58041	24	30	PASS
GSM900	60	902	8	PvT	-	-	-	PASS
GSM900	60	902	9	Power	25.57285	22	28	PASS
GSM900	60	902	9	PvT	-	-	-	PASS
GSM900	60	902	10	Power	23.51166	20	26	PASS
GSM900	60	902	10	PvT	-	-	-	PASS
GSM900	60	902	11	Power	21.48752	18	24	PASS
GSM900	60	902	11	PvT	-	-	-	PASS
GSM900	60	902	12	Power	19.5192	16	22	PASS
GSM900	60	902	12	PvT	-	-	-	PASS
GSM900	60	902	13	Power	17.47955	14	20	PASS
GSM900	60	902	13	PvT	-	-	-	PASS
GSM900	60	902	14	Power	15.46368	12	18	PASS
GSM900	60	902	14	PvT	-	-	-	PASS
GSM900	60	902	15	Power	13.5018	10	16	PASS
GSM900	60	902	15	PvT	-	-	-	PASS
GSM900	60	902	16	Power	11.52203	6	16	PASS
GSM900	60	902	16	PvT	-	-	-	PASS
GSM900	60	902	17	Power	9.495514	4	14	PASS
GSM900	60	902	17	PvT	-	-	-	PASS
GSM900	60	902	18	Power	7.14325	2	12	PASS
GSM900	60	902	18	PvT	-	-	-	PASS
GSM900	60	902	19	Power	5.066528	0	10	PASS
GSM900	60	902	19	PvT	-	-	-	PASS
GSM900	124	914.8	5	Power	33.74307	31	35	PASS
GSM900	124	914.8	5	PvT	-	-	-	PASS
GSM900	124	914.8	6	Power	32.02625	28	34	PASS
GSM900	124	914.8	6	PvT	-	-	-	PASS
GSM900	124	914.8	7	Power	30.03857	26	32	PASS
GSM900	124	914.8	7	PvT	-	-	-	PASS
GSM900	124	914.8	8	Power	28.05139	24	30	PASS
GSM900	124	914.8	8	PvT	-	-	-	PASS
GSM900	124	914.8	9	Power	26.06216	22	28	PASS
GSM900	124	914.8	9	PvT	-	-	-	PASS
GSM900	124	914.8	10	Power	23.96408	20	26	PASS
GSM900	124	914.8	10	PvT	-	-	-	PASS
GSM900	124	914.8	11	Power	21.93158	18	24	PASS
GSM900	124	914.8	11	PvT	-	-	-	PASS
GSM900	124	914.8	12	Power	19.87128	16	22	PASS

GSM900	124	914.8	12	PvT	-	-	-	PASS
GSM900	124	914.8	13	Power	17.80957	14	20	PASS
GSM900	124	914.8	13	PvT	-	-	-	PASS
GSM900	124	914.8	14	Power	15.68613	12	18	PASS
GSM900	124	914.8	14	PvT	-	-	-	PASS
GSM900	124	914.8	15	Power	13.89908	10	16	PASS
GSM900	124	914.8	15	PvT	-	-	-	PASS
GSM900	124	914.8	16	Power	11.828	6	16	PASS
GSM900	124	914.8	16	PvT	-	-	-	PASS
GSM900	124	914.8	17	Power	9.783295	4	14	PASS
GSM900	124	914.8	17	PvT	-	-	-	PASS
GSM900	124	914.8	18	Power	7.169403	2	12	PASS
GSM900	124	914.8	18	PvT	-	-	-	PASS
GSM900	124	914.8	19	Power	5.080566	0	10	PASS
GSM900	124	914.8	19	PvT	-	-	-	PASS


DCS1800 Channel=512 PCL=0.png

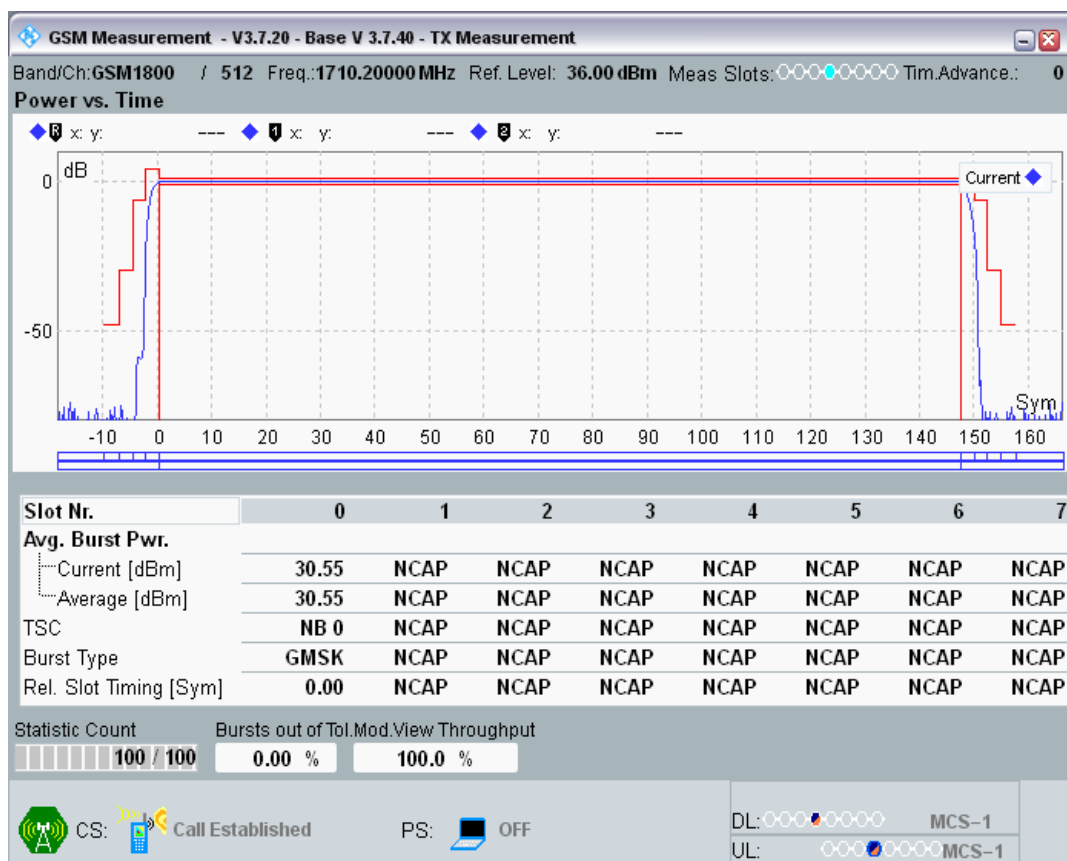


DCS1800 Channel=512 PCL=15.png

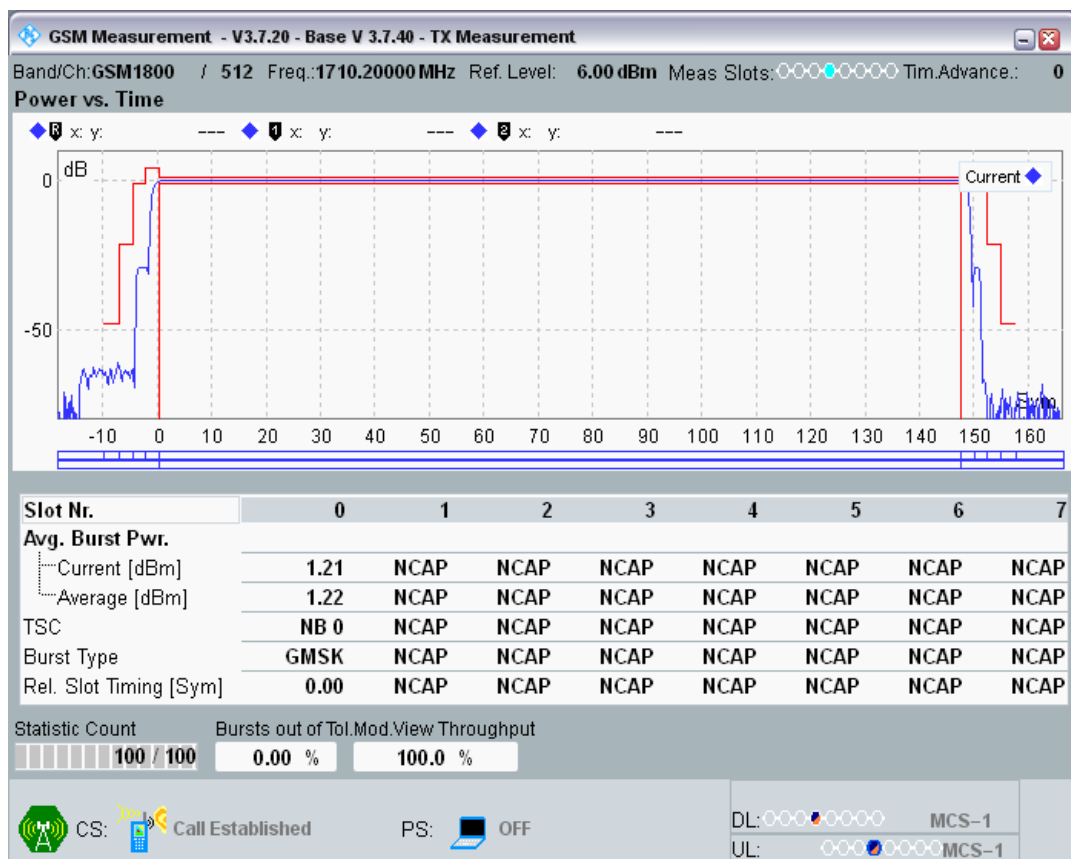


DCS1800 Channel=700 PCL=0.png

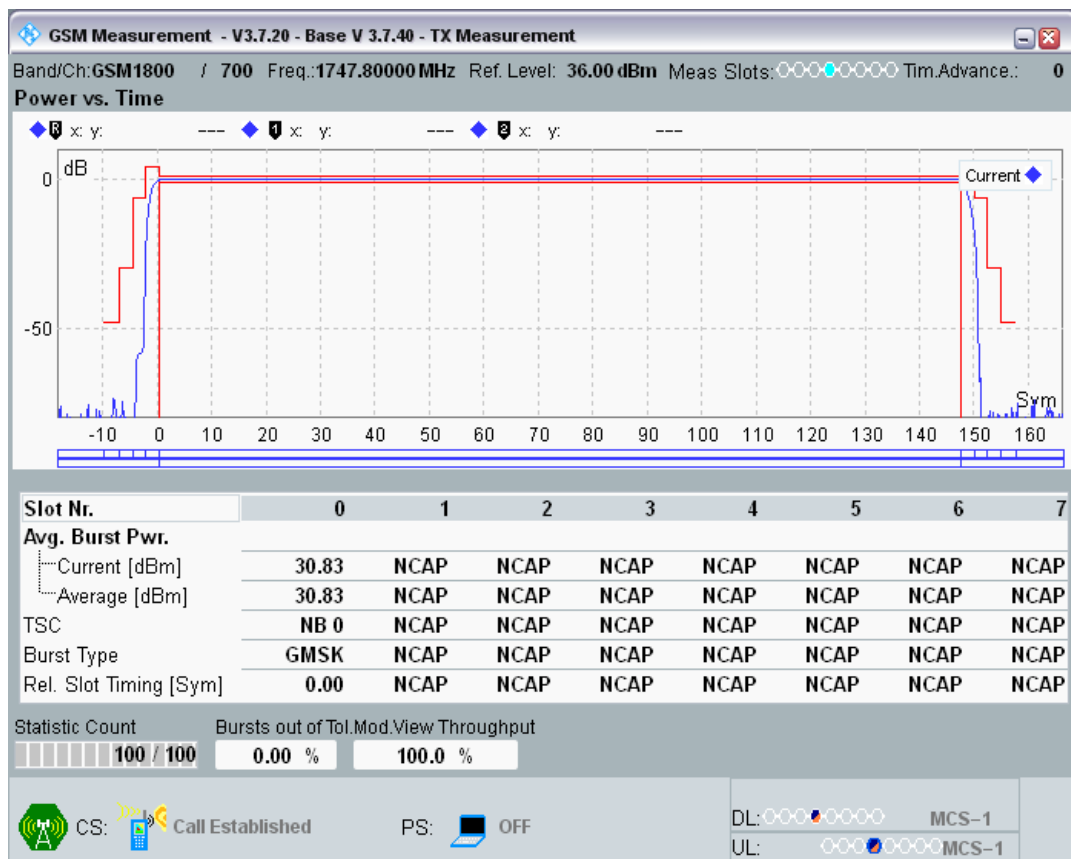

DCS1800 Channel=700 PCL=15.png

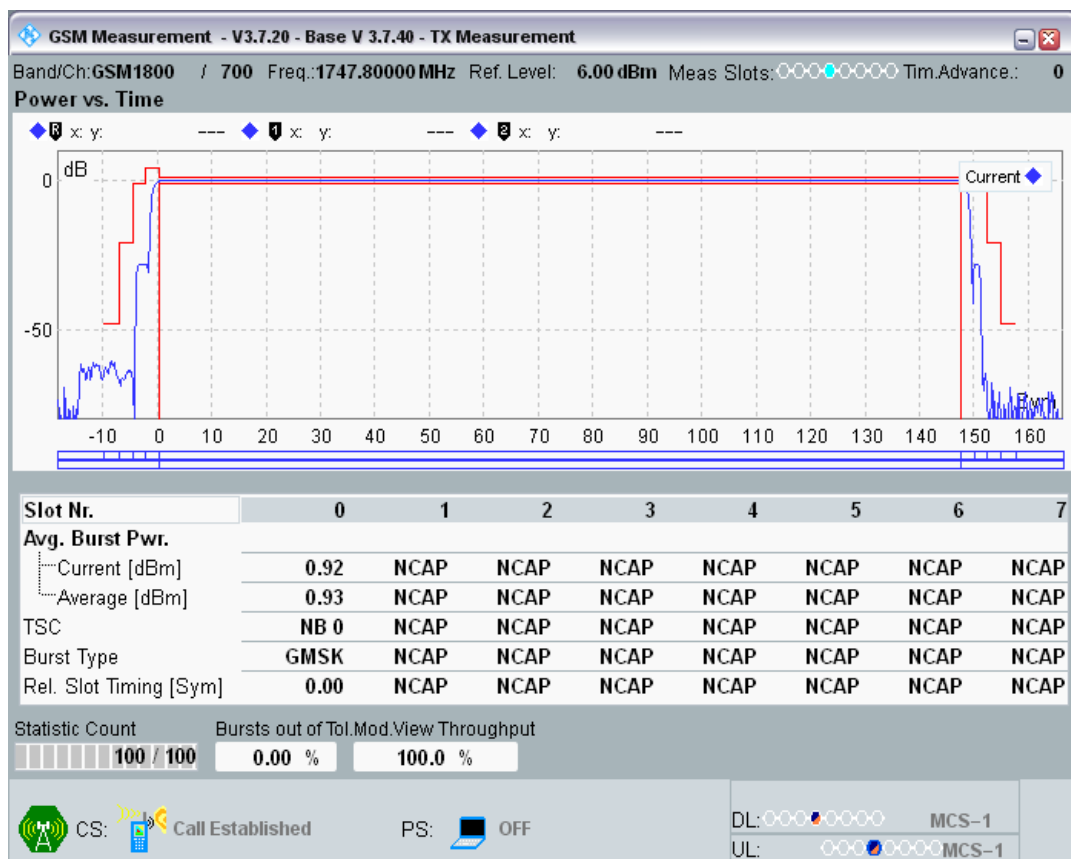


DCS1800 Channel=885 PCL=0.png

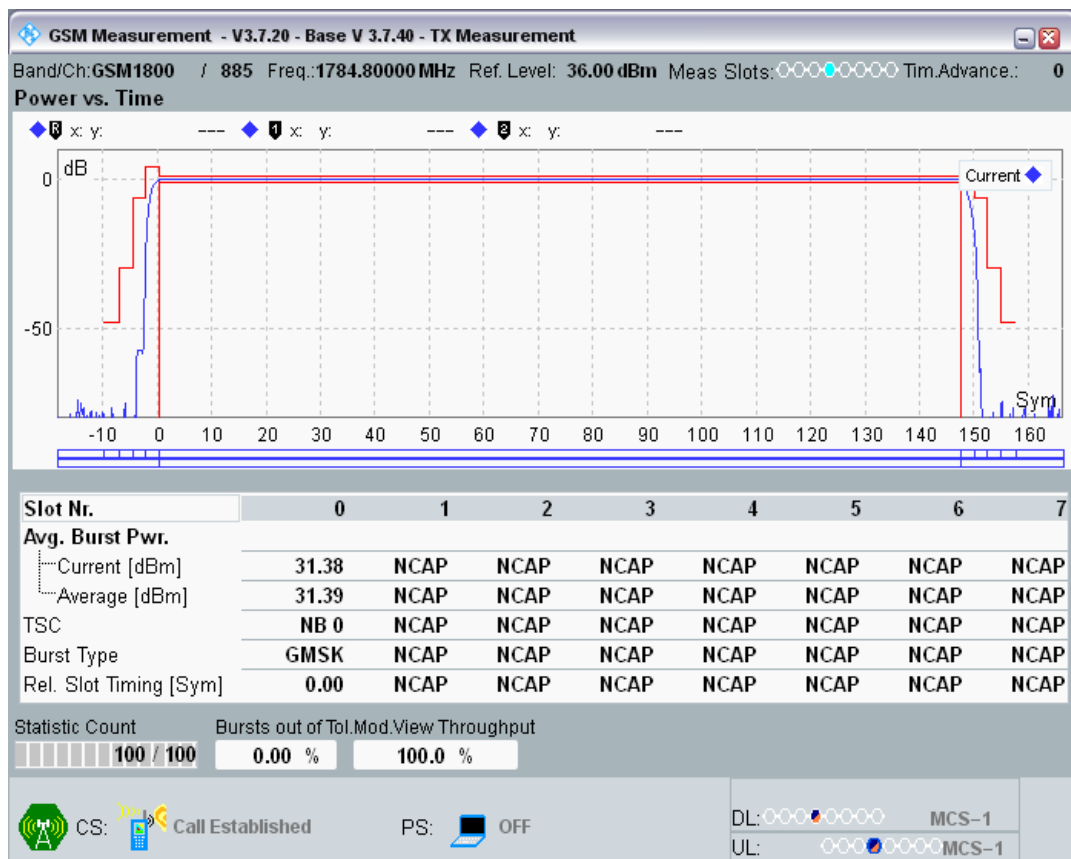


DCS1800 Channel=885 PCL=15.png




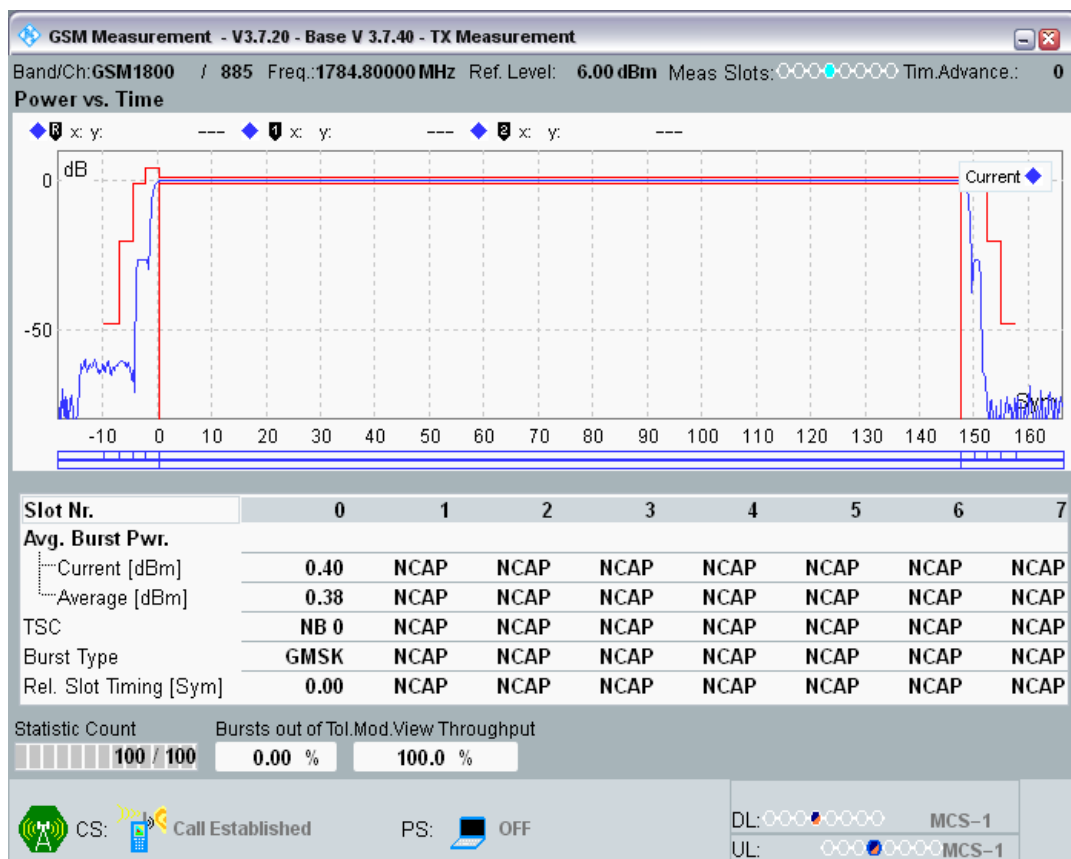

GSM900 Channel=124 PCL=19.png

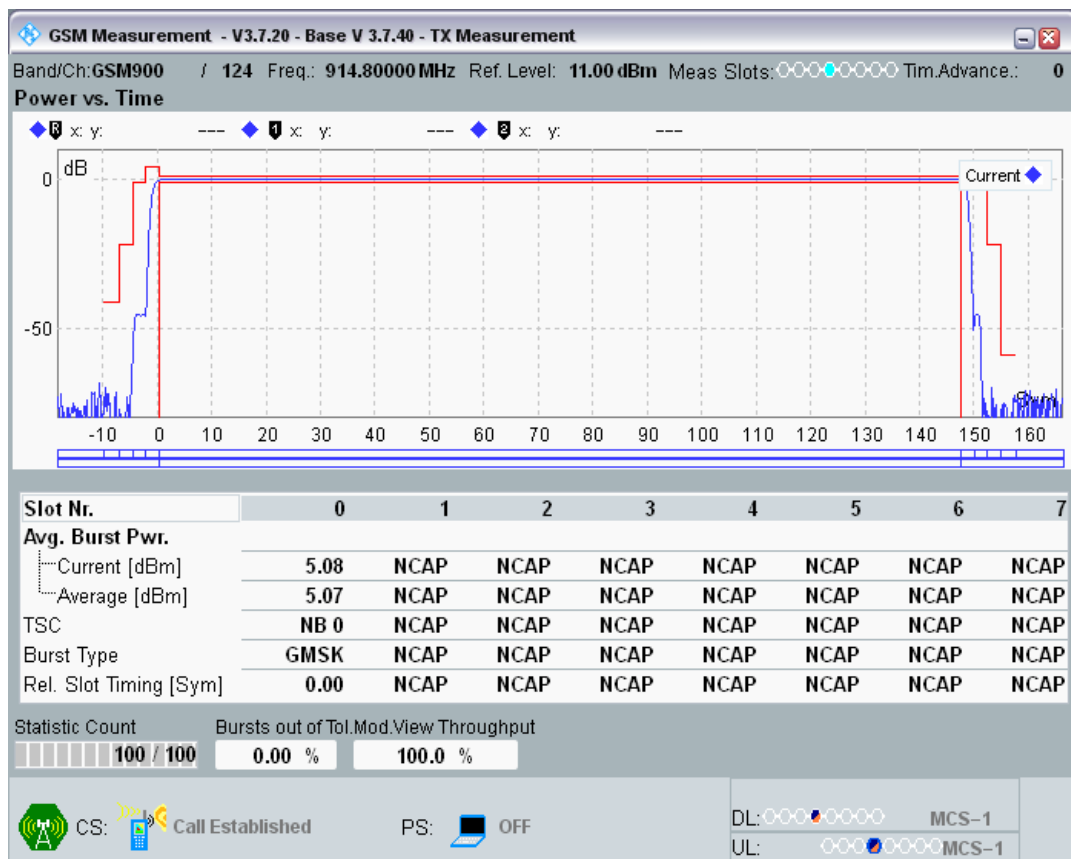


GSM900 Channel=124 PCL=5.png

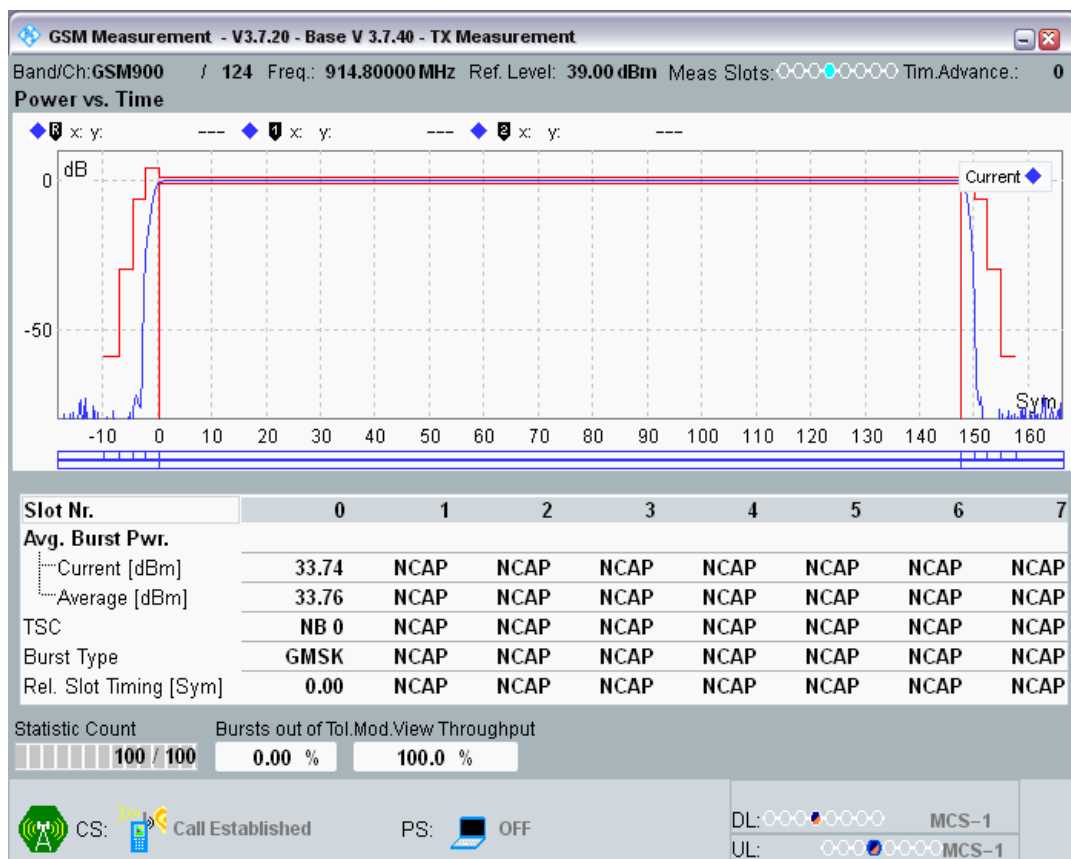


GSM900 Channel=60 PCL=19.png




GSM900 Channel=60 PCL=5.png

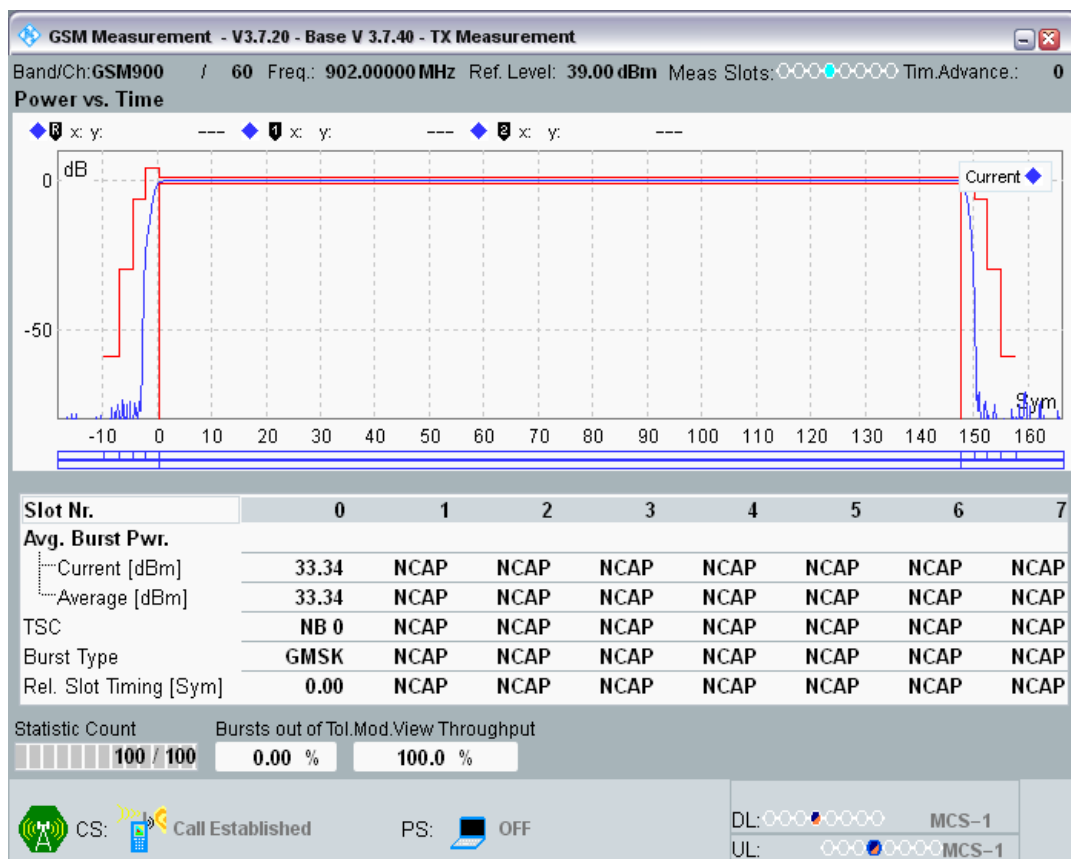

GSM900 Channel=975 PCL=19.png

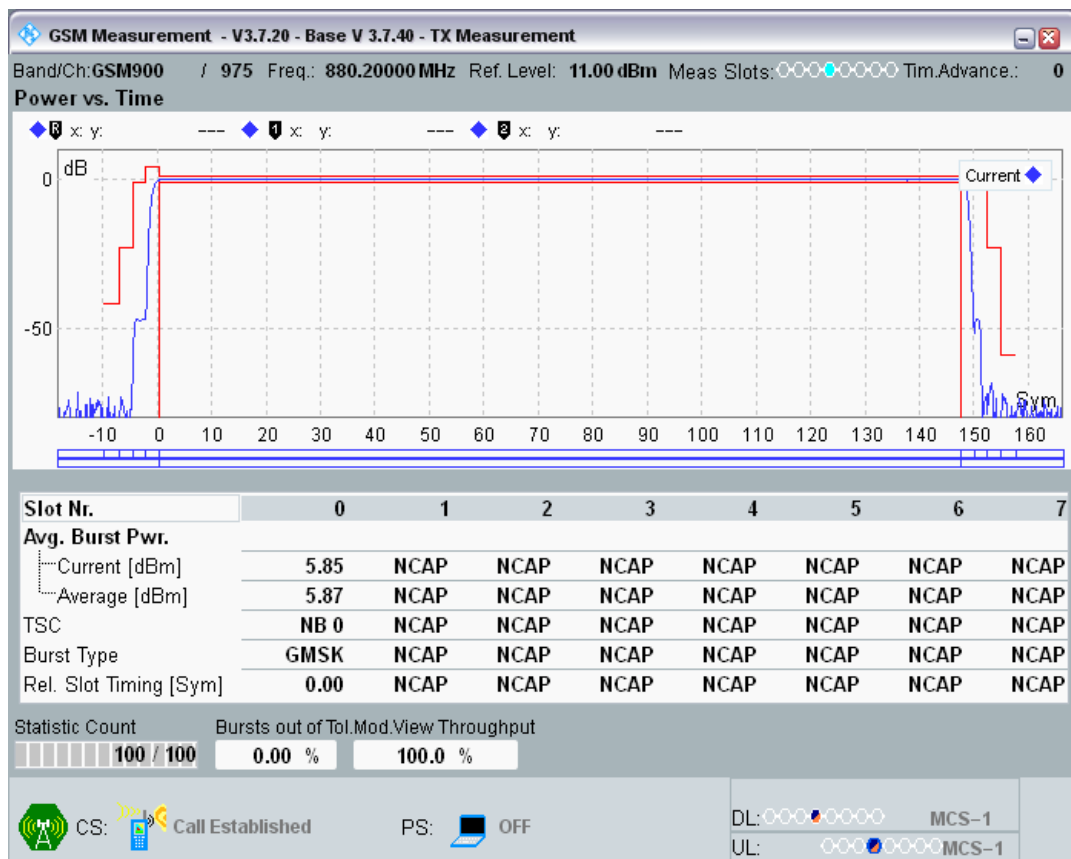

GSM900 Channel=975 PCL=5.png

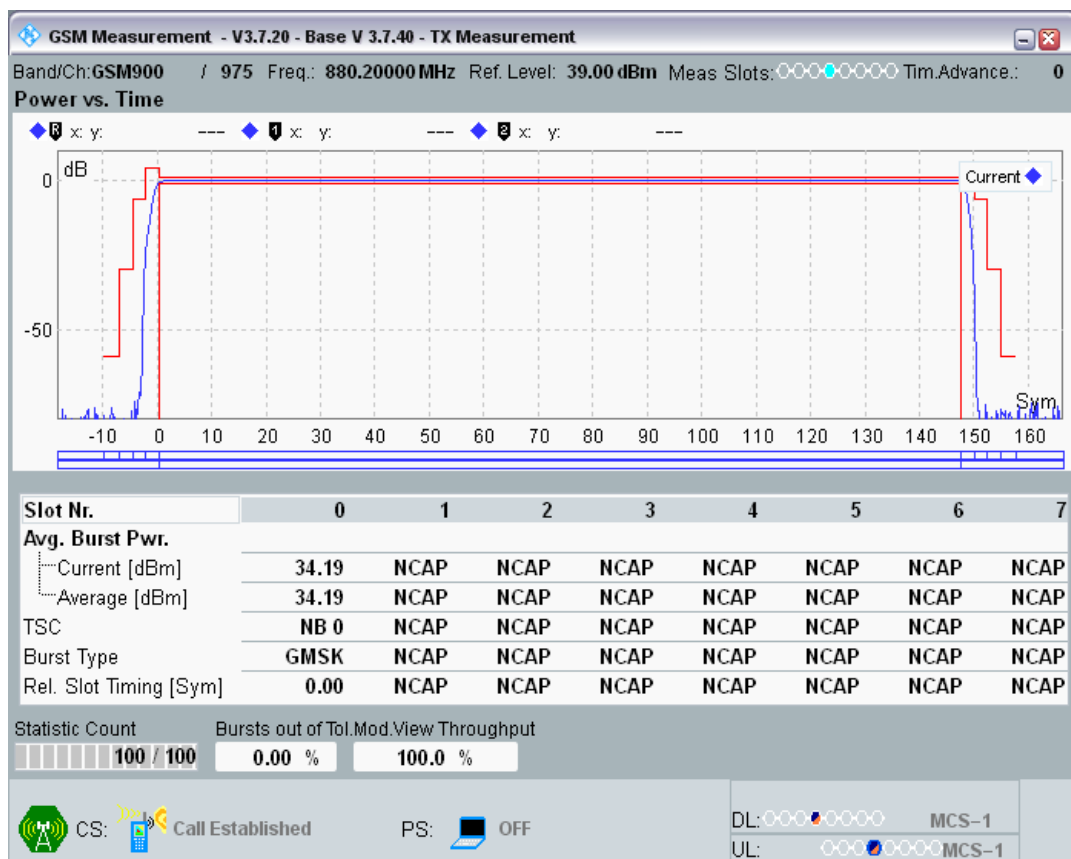

### Clause 4.2.6 Transmitter-Modulation Spectrum

Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-81.18	-60	-58.42	-56	PASS
DCS1800	512	1710.2	0	-1600 KHz	-80.95	-60	-58.19	-56	PASS
DCS1800	512	1710.2	0	-1400 KHz	-80.21	-60	-57.46	-56	PASS
DCS1800	512	1710.2	0	-1200 KHz	-79.21	-60	-56.46	-56	PASS
DCS1800	512	1710.2	0	-1000 KHz	-78.02	-60	-55.27	-56	PASS
DCS1800	512	1710.2	0	-800 KHz	-76.24	-60	-53.49	-56	PASS
DCS1800	512	1710.2	0	-600 KHz	-74.19	-60	-51.43	-56	PASS
DCS1800	512	1710.2	0	-400 KHz	-68.61	-60	-45.86	-36	PASS
DCS1800	512	1710.2	0	-250 KHz	-41.14	-33	-18.39	-36	PASS
DCS1800	512	1710.2	0	-200 KHz	-36.64	-30	-13.88	-36	PASS

				KHz					
DCS1800	512	1710.2	0	-100 KHz	-8.90	0.5	13.85	-36	PASS
DCS1800	512	1710.2	0	100 KHz	-8.65	0.5	14.10	-36	PASS
DCS1800	512	1710.2	0	200 KHz	-36.94	-30	-14.19	-36	PASS
DCS1800	512	1710.2	0	250 KHz	-41.00	-33	-18.24	-36	PASS
DCS1800	512	1710.2	0	400 KHz	-68.71	-60	-45.96	-36	PASS
DCS1800	512	1710.2	0	600 KHz	-74.52	-60	-51.77	-56	PASS
DCS1800	512	1710.2	0	800 KHz	-76.10	-60	-53.35	-56	PASS
DCS1800	512	1710.2	0	1000 KHz	-78.21	-60	-55.46	-56	PASS
DCS1800	512	1710.2	0	1200 KHz	-79.10	-60	-56.35	-56	PASS
DCS1800	512	1710.2	0	1400 KHz	-80.02	-60	-57.27	-56	PASS
DCS1800	512	1710.2	0	1600 KHz	-80.96	-60	-58.21	-56	PASS
DCS1800	512	1710.2	0	1800 KHz	-81.23	-60	-58.48	-56	PASS
DCS1800	700	1747.8	0	-1800 KHz	-81.19	-60	-58.37	-56	PASS
DCS1800	700	1747.8	0	-1600 KHz	-80.91	-60	-58.09	-56	PASS
DCS1800	700	1747.8	0	-1400 KHz	-80.16	-60	-57.35	-56	PASS
DCS1800	700	1747.8	0	-1200 KHz	-79.39	-60	-56.58	-56	PASS
DCS1800	700	1747.8	0	-1000 KHz	-77.90	-60	-55.08	-56	PASS
DCS1800	700	1747.8	0	-800 KHz	-76.46	-60	-53.65	-56	PASS
DCS1800	700	1747.8	0	-600 KHz	-73.72	-60	-50.90	-56	PASS
DCS1800	700	1747.8	0	-400 KHz	-68.49	-60	-45.67	-36	PASS
DCS1800	700	1747.8	0	-250 KHz	-41.25	-33	-18.44	-36	PASS
DCS1800	700	1747.8	0	-200 KHz	-36.39	-30	-13.57	-36	PASS
DCS1800	700	1747.8	0	-100 KHz	-8.81	0.5	14.00	-36	PASS
DCS1800	700	1747.8	0	100 KHz	-8.37	0.5	14.44	-36	PASS
DCS1800	700	1747.8	0	200 KHz	-36.61	-30	-13.80	-36	PASS

DCS1800	700	1747.8	0	250 KHz	-40.97	-33	-18.16	-36	PASS
DCS1800	700	1747.8	0	400 KHz	-68.38	-60	-45.57	-36	PASS
DCS1800	700	1747.8	0	600 KHz	-73.85	-60	-51.03	-56	PASS
DCS1800	700	1747.8	0	800 KHz	-76.43	-60	-53.61	-56	PASS
DCS1800	700	1747.8	0	1000 KHz	-77.91	-60	-55.09	-56	PASS
DCS1800	700	1747.8	0	1200 KHz	-78.87	-60	-56.06	-56	PASS
DCS1800	700	1747.8	0	1400 KHz	-79.89	-60	-57.07	-56	PASS
DCS1800	700	1747.8	0	1600 KHz	-80.83	-60	-58.01	-56	PASS
DCS1800	700	1747.8	0	1800 KHz	-81.17	-60	-58.36	-56	PASS
DCS1800	885	1784.8	0	-1800 KHz	-81.37	-60	-57.82	-56	PASS
DCS1800	885	1784.8	0	-1600 KHz	-80.96	-60	-57.41	-56	PASS
DCS1800	885	1784.8	0	-1400 KHz	-80.22	-60	-56.67	-56	PASS
DCS1800	885	1784.8	0	-1200 KHz	-79.39	-60	-55.84	-56	PASS
DCS1800	885	1784.8	0	-1000 KHz	-78.05	-60	-54.50	-56	PASS
DCS1800	885	1784.8	0	-800 KHz	-76.46	-60	-52.92	-56	PASS
DCS1800	885	1784.8	0	-600 KHz	-74.03	-60	-50.48	-56	PASS
DCS1800	885	1784.8	0	-400 KHz	-68.33	-60	-44.79	-36	PASS
DCS1800	885	1784.8	0	-250 KHz	-41.24	-33	-17.69	-36	PASS
DCS1800	885	1784.8	0	-200 KHz	-36.71	-30	-13.16	-36	PASS
DCS1800	885	1784.8	0	-100 KHz	-8.98	0.5	14.57	-36	PASS
DCS1800	885	1784.8	0	100 KHz	-8.71	0.5	14.84	-36	PASS
DCS1800	885	1784.8	0	200 KHz	-36.71	-30	-13.16	-36	PASS
DCS1800	885	1784.8	0	250 KHz	-40.98	-33	-17.43	-36	PASS
DCS1800	885	1784.8	0	400 KHz	-68.68	-60	-45.13	-36	PASS
DCS1800	885	1784.8	0	600 KHz	-73.95	-60	-50.40	-56	PASS
DCS1800	885	1784.8	0	800 KHz	-76.32	-60	-52.78	-56	PASS
DCS1800	885	1784.8	0	1000 KHz	-78.37	-60	-54.82	-56	PASS


				KHz					
DCS1800	885	1784.8	0	1200 KHz	-79.33	-60	-55.79	-56	PASS
DCS1800	885	1784.8	0	1400 KHz	-80.02	-60	-56.48	-56	PASS
DCS1800	885	1784.8	0	1600 KHz	-81.09	-60	-57.54	-56	PASS
DCS1800	885	1784.8	0	1800 KHz	-81.58	-60	-58.03	-56	PASS
GSM900	975	880.2	5	-1800 KHz	-82.33	-60	-56.01	-51	PASS
GSM900	975	880.2	5	-1600 KHz	-82.47	-60	-56.15	-51	PASS
GSM900	975	880.2	5	-1400 KHz	-81.56	-60	-55.23	-51	PASS
GSM900	975	880.2	5	-1200 KHz	-80.67	-60	-54.35	-51	PASS
GSM900	975	880.2	5	-1000 KHz	-79.68	-60	-53.35	-51	PASS
GSM900	975	880.2	5	-800 KHz	-78.26	-60	-51.93	-51	PASS
GSM900	975	880.2	5	-600 KHz	-75.89	-60	-49.57	-51	PASS
GSM900	975	880.2	5	-400 KHz	-70.66	-60	-44.34	-36	PASS
GSM900	975	880.2	5	-250 KHz	-41.35	-33	-15.03	-36	PASS
GSM900	975	880.2	5	-200 KHz	-36.66	-30	-10.34	-36	PASS
GSM900	975	880.2	5	-100 KHz	-8.73	0.5	17.60	-36	PASS
GSM900	975	880.2	5	100 KHz	-8.51	0.5	17.82	-36	PASS
GSM900	975	880.2	5	200 KHz	-36.77	-30	-10.44	-36	PASS
GSM900	975	880.2	5	250 KHz	-40.84	-33	-14.52	-36	PASS
GSM900	975	880.2	5	400 KHz	-70.57	-60	-44.25	-36	PASS
GSM900	975	880.2	5	600 KHz	-76.02	-60	-49.69	-51	PASS
GSM900	975	880.2	5	800 KHz	-78.48	-60	-52.16	-51	PASS
GSM900	975	880.2	5	1000 KHz	-79.96	-60	-53.64	-51	PASS
GSM900	975	880.2	5	1200 KHz	-80.58	-60	-54.25	-51	PASS
GSM900	975	880.2	5	1400 KHz	-81.14	-60	-54.81	-51	PASS

GSM900	975	880.2	5	1600 KHz	-82.49	-60	-56.16	-51	PASS
GSM900	975	880.2	5	1800 KHz	-82.32	-60	-55.99	-51	PASS
GSM900	60	902	5	-1800 KHz	-81.77	-60	-56.60	-51	PASS
GSM900	60	902	5	-1600 KHz	-82.02	-60	-56.85	-51	PASS
GSM900	60	902	5	-1400 KHz	-81.17	-60	-56.00	-51	PASS
GSM900	60	902	5	-1200 KHz	-80.75	-60	-55.57	-51	PASS
GSM900	60	902	5	-1000 KHz	-79.25	-60	-54.08	-51	PASS
GSM900	60	902	5	-800 KHz	-78.10	-60	-52.93	-51	PASS
GSM900	60	902	5	-600 KHz	-75.88	-60	-50.70	-51	PASS
GSM900	60	902	5	-400 KHz	-70.61	-60	-45.43	-36	PASS
GSM900	60	902	5	-250 KHz	-41.19	-33	-16.02	-36	PASS
GSM900	60	902	5	-200 KHz	-36.53	-30	-11.36	-36	PASS
GSM900	60	902	5	-100 KHz	-8.57	0.5	16.60	-36	PASS
GSM900	60	902	5	100 KHz	-8.43	0.5	16.74	-36	PASS
GSM900	60	902	5	200 KHz	-36.58	-30	-11.40	-36	PASS
GSM900	60	902	5	250 KHz	-40.84	-33	-15.67	-36	PASS
GSM900	60	902	5	400 KHz	-70.82	-60	-45.65	-36	PASS
GSM900	60	902	5	600 KHz	-76.12	-60	-50.95	-51	PASS
GSM900	60	902	5	800 KHz	-77.80	-60	-52.63	-51	PASS
GSM900	60	902	5	1000 KHz	-79.36	-60	-54.19	-51	PASS
GSM900	60	902	5	1200 KHz	-80.47	-60	-55.30	-51	PASS
GSM900	60	902	5	1400 KHz	-80.56	-60	-55.39	-51	PASS
GSM900	60	902	5	1600 KHz	-81.78	-60	-56.61	-51	PASS
GSM900	60	902	5	1800 KHz	-81.94	-60	-56.77	-51	PASS
GSM900	124	914.8	5	-1800 KHz	-81.40	-60	-55.80	-51	PASS




				KHz					
GSM900	124	914.8	5	-1600 KHz	-82.18	-60	-56.59	-51	PASS
GSM900	124	914.8	5	-1400 KHz	-81.70	-60	-56.11	-51	PASS
GSM900	124	914.8	5	-1200 KHz	-81.10	-60	-55.51	-51	PASS
GSM900	124	914.8	5	-1000 KHz	-79.93	-60	-54.34	-51	PASS
GSM900	124	914.8	5	-800 KHz	-78.46	-60	-52.87	-51	PASS
GSM900	124	914.8	5	-600 KHz	-76.24	-60	-50.65	-51	PASS
GSM900	124	914.8	5	-400 KHz	-70.67	-60	-45.07	-36	PASS
GSM900	124	914.8	5	-250 KHz	-40.91	-33	-15.32	-36	PASS
GSM900	124	914.8	5	-200 KHz	-36.44	-30	-10.85	-36	PASS
GSM900	124	914.8	5	-100 KHz	-8.55	0.5	17.04	-36	PASS
GSM900	124	914.8	5	100 KHz	-8.41	0.5	17.18	-36	PASS
GSM900	124	914.8	5	200 KHz	-36.47	-30	-10.88	-36	PASS
GSM900	124	914.8	5	250 KHz	-40.83	-33	-15.24	-36	PASS
GSM900	124	914.8	5	400 KHz	-70.81	-60	-45.22	-36	PASS
GSM900	124	914.8	5	600 KHz	-76.33	-60	-50.74	-51	PASS
GSM900	124	914.8	5	800 KHz	-78.48	-60	-52.89	-51	PASS
GSM900	124	914.8	5	1000 KHz	-79.87	-60	-54.28	-51	PASS
GSM900	124	914.8	5	1200 KHz	-80.75	-60	-55.15	-51	PASS
GSM900	124	914.8	5	1400 KHz	-81.25	-60	-55.66	-51	PASS
GSM900	124	914.8	5	1600 KHz	-82.36	-60	-56.77	-51	PASS
GSM900	124	914.8	5	1800 KHz	-81.18	-60	-55.58	-51	PASS


DCS1800 Channel=512 PCL=0.png

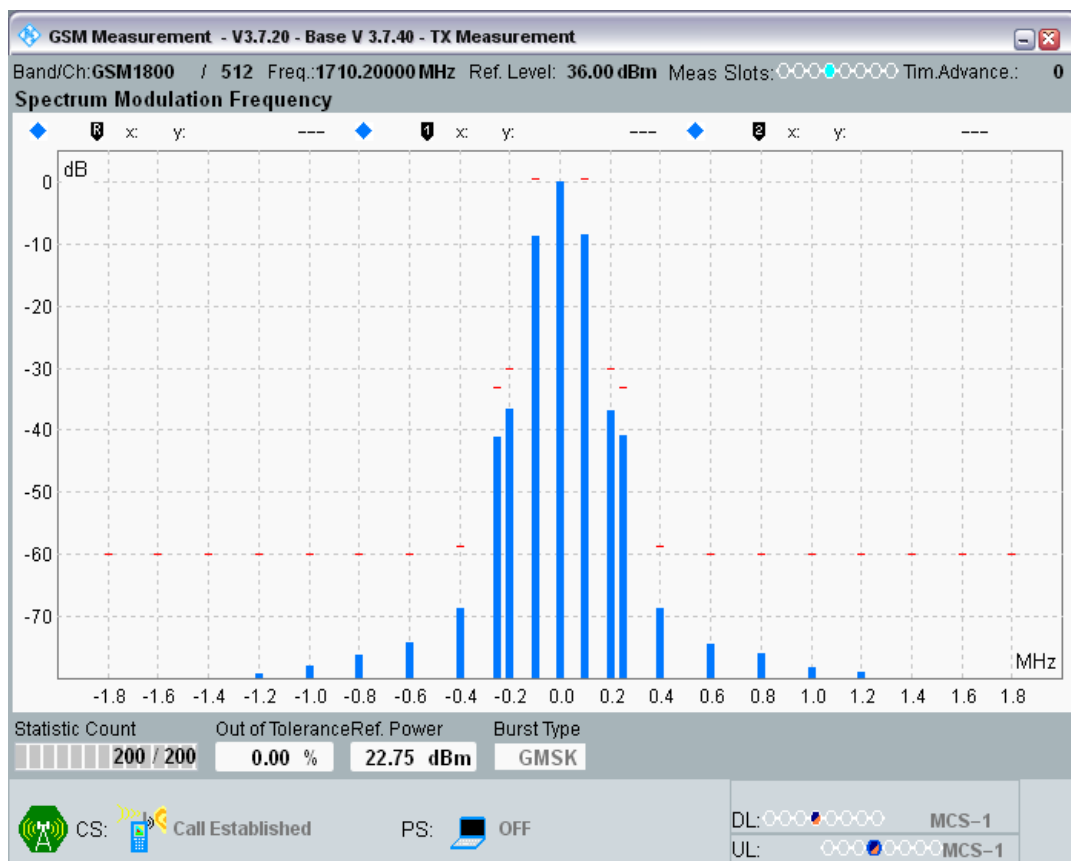


DCS1800 Channel=700 PCL=0.png

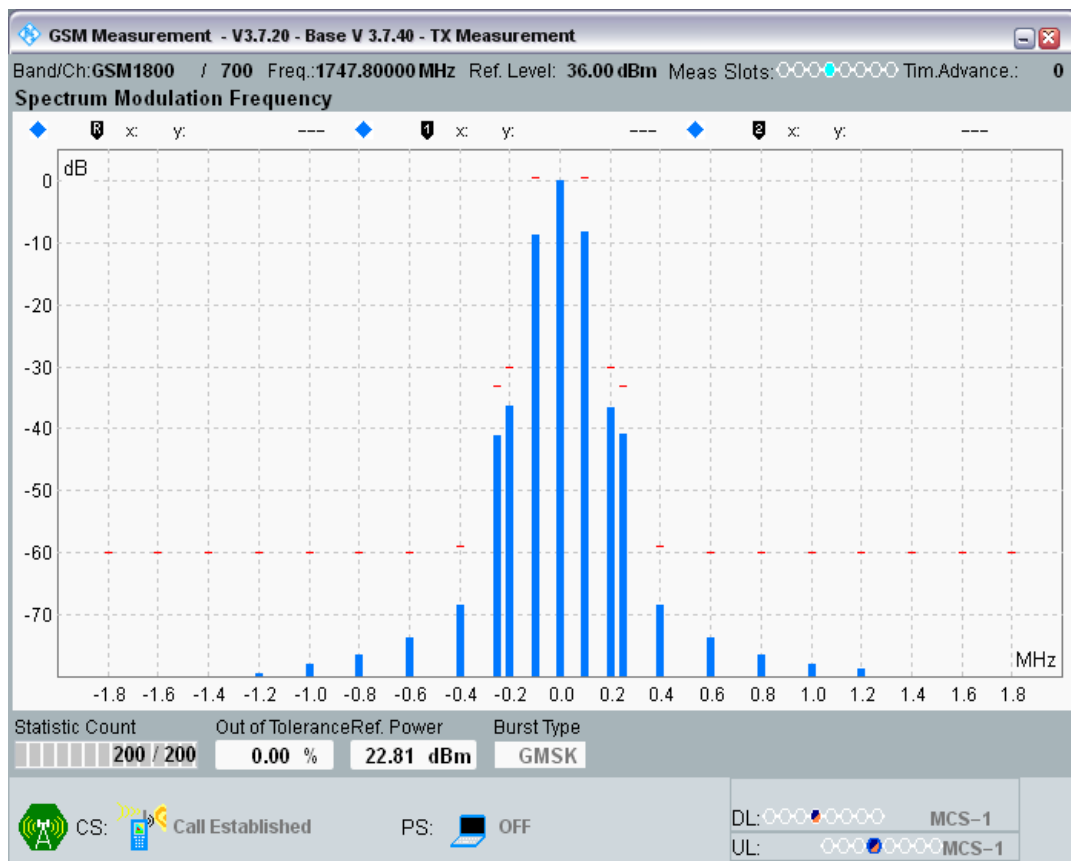


DCS1800 Channel=885 PCL=0.png

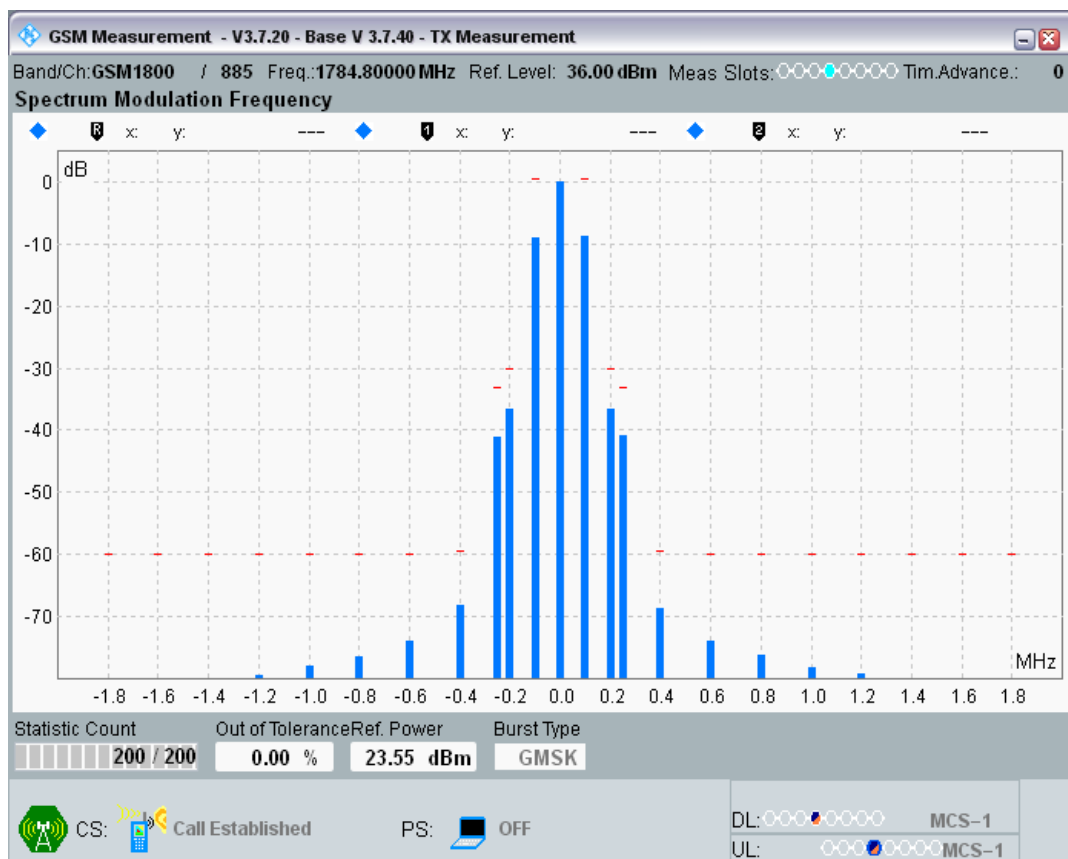


GSM900 Channel=124 PCL=5.png

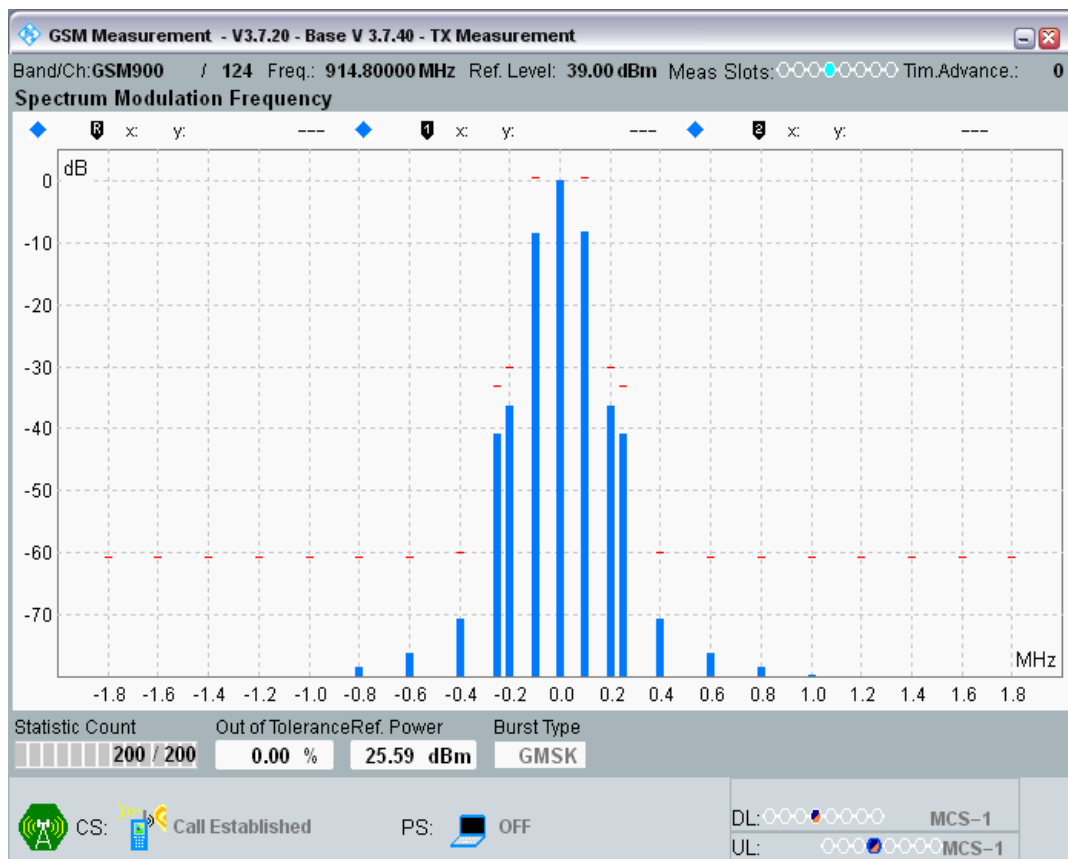

GSM900 Channel=60 PCL=5.png

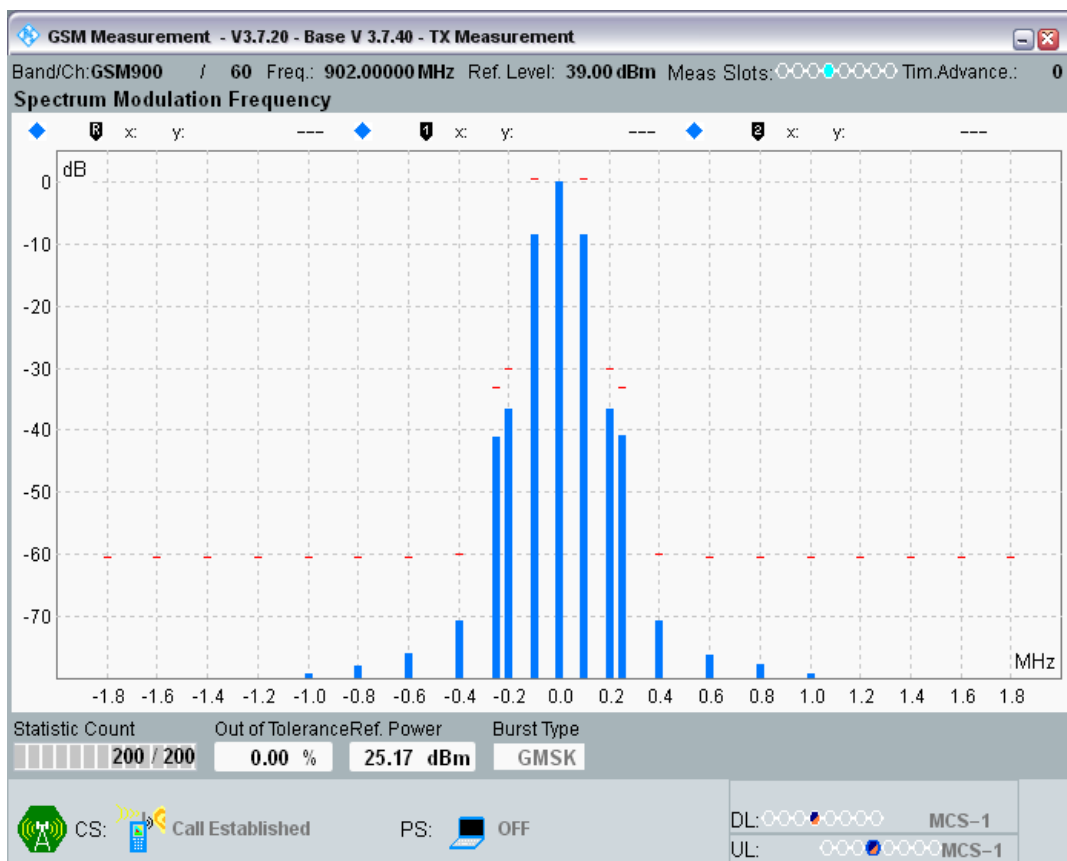

GSM900 Channel=975 PCL=5.png

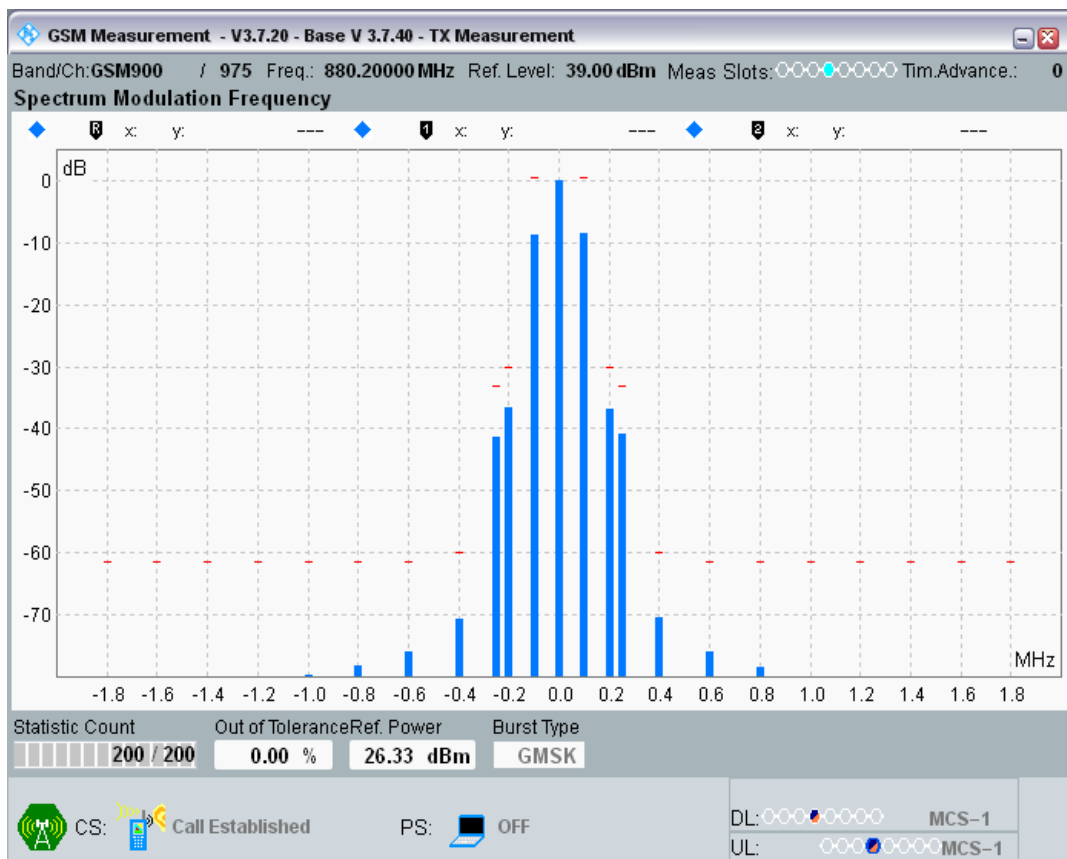

## Clause 4.2.6 Transmitter-Switching Spectrum


Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: CCISE2008044


Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-45.96	-27	PASS
DCS1800	512	1710.2	0	-1200 KHz	-40.93	-24	PASS
DCS1800	512	1710.2	0	-600 KHz	-32.96	-24	PASS
DCS1800	512	1710.2	0	-400 KHz	-31.18	-22	PASS
DCS1800	512	1710.2	0	400 KHz	-27.53	-22	PASS
DCS1800	512	1710.2	0	600 KHz	-33.17	-24	PASS
DCS1800	512	1710.2	0	1200 KHz	-39.36	-24	PASS
DCS1800	512	1710.2	0	1800 KHz	-44.84	-27	PASS
DCS1800	700	1747.8	0	-1800 KHz	-46.04	-27	PASS
DCS1800	700	1747.8	0	-1200 KHz	-40.96	-24	PASS
DCS1800	700	1747.8	0	-600 KHz	-32.74	-24	PASS
DCS1800	700	1747.8	0	-400 KHz	-29.23	-22	PASS
DCS1800	700	1747.8	0	400 KHz	-29.28	-22	PASS
DCS1800	700	1747.8	0	600 KHz	-31.78	-24	PASS
DCS1800	700	1747.8	0	1200 KHz	-38.72	-24	PASS
DCS1800	700	1747.8	0	1800 KHz	-44.39	-27	PASS
DCS1800	885	1784.8	0	-1800 KHz	-45.70	-27	PASS
DCS1800	885	1784.8	0	-1200 KHz	-40.05	-24	PASS
DCS1800	885	1784.8	0	-600 KHz	-32.93	-24	PASS
DCS1800	885	1784.8	0	-400 KHz	-30.34	-22	PASS
DCS1800	885	1784.8	0	400 KHz	-28.76	-22	PASS
DCS1800	885	1784.8	0	600 KHz	-31.10	-24	PASS
DCS1800	885	1784.8	0	1200 KHz	-38.67	-24	PASS
DCS1800	885	1784.8	0	1800 KHz	-43.67	-27	PASS
GSM900	975	880.2	5	-1800 KHz	-45.30	-24	PASS
GSM900	975	880.2	5	-1200 KHz	-42.72	-21	PASS
GSM900	975	880.2	5	-600 KHz	-37.25	-21	PASS
GSM900	975	880.2	5	-400 KHz	-28.88	-19	PASS
GSM900	975	880.2	5	400 KHz	-31.41	-19	PASS
GSM900	975	880.2	5	600 KHz	-38.41	-21	PASS
GSM900	975	880.2	5	1200 KHz	-44.69	-21	PASS
GSM900	975	880.2	5	1800 KHz	-45.09	-24	PASS
GSM900	60	902	5	-1800 KHz	-46.16	-24	PASS
GSM900	60	902	5	-1200 KHz	-44.28	-21	PASS
GSM900	60	902	5	-600 KHz	-40.48	-21	PASS
GSM900	60	902	5	-400 KHz	-30.50	-19	PASS
GSM900	60	902	5	400 KHz	-30.83	-19	PASS
GSM900	60	902	5	600 KHz	-38.81	-21	PASS
GSM900	60	902	5	1200 KHz	-43.22	-21	PASS
GSM900	60	902	5	1800 KHz	-47.37	-24	PASS
GSM900	124	914.8	5	-1800 KHz	-45.71	-24	PASS
GSM900	124	914.8	5	-1200 KHz	-44.04	-21	PASS

GSM900	124	914.8	5	-600 KHz	-39.58	-21	PASS
GSM900	124	914.8	5	-400 KHz	-29.59	-19	PASS
GSM900	124	914.8	5	400 KHz	-33.18	-19	PASS
GSM900	124	914.8	5	600 KHz	-39.88	-21	PASS
GSM900	124	914.8	5	1200 KHz	-44.71	-21	PASS
GSM900	124	914.8	5	1800 KHz	-44.63	-24	PASS


DCS1800 Channel=512 PCL=0.png

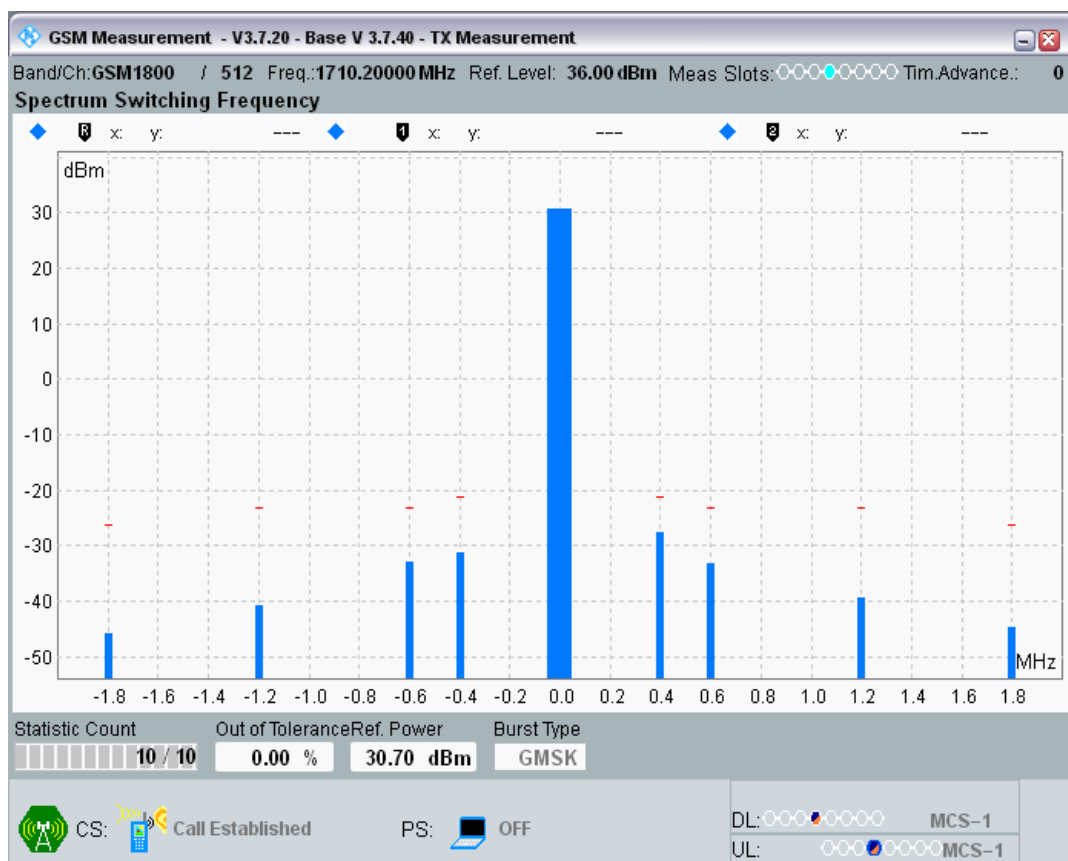


DCS1800 Channel=700 PCL=0.png

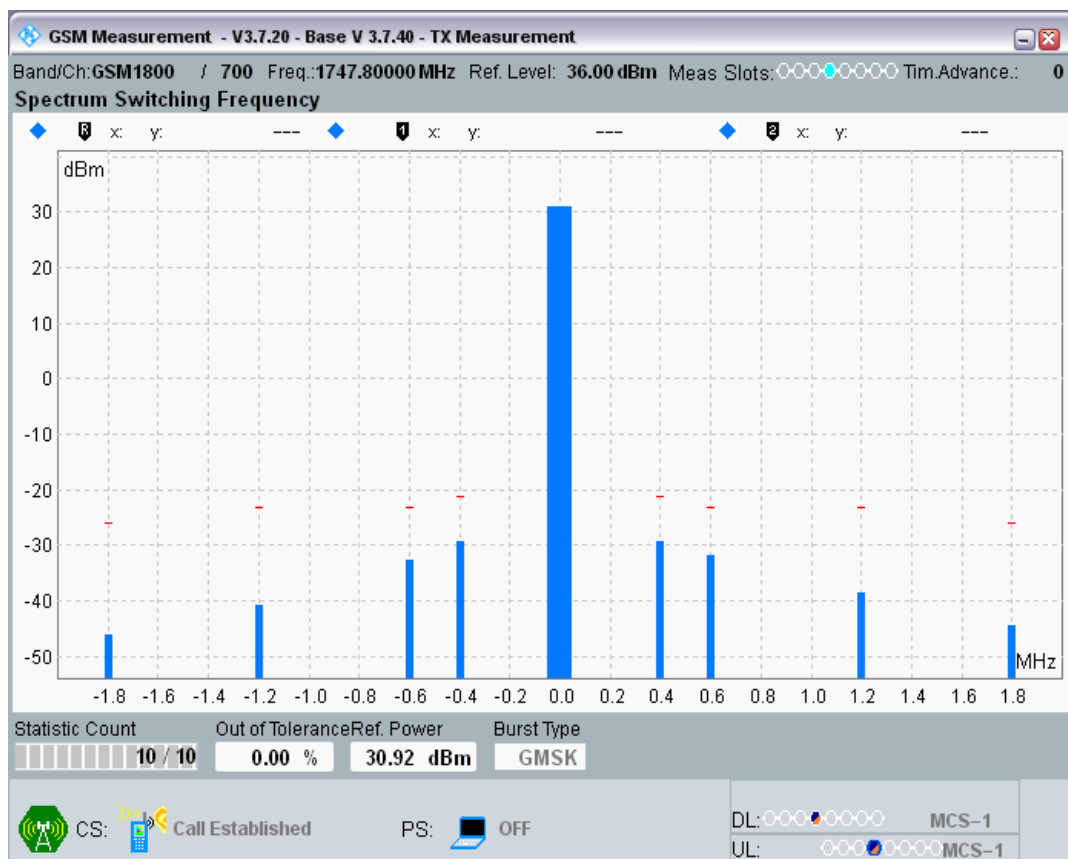


DCS1800 Channel=885 PCL=0.png

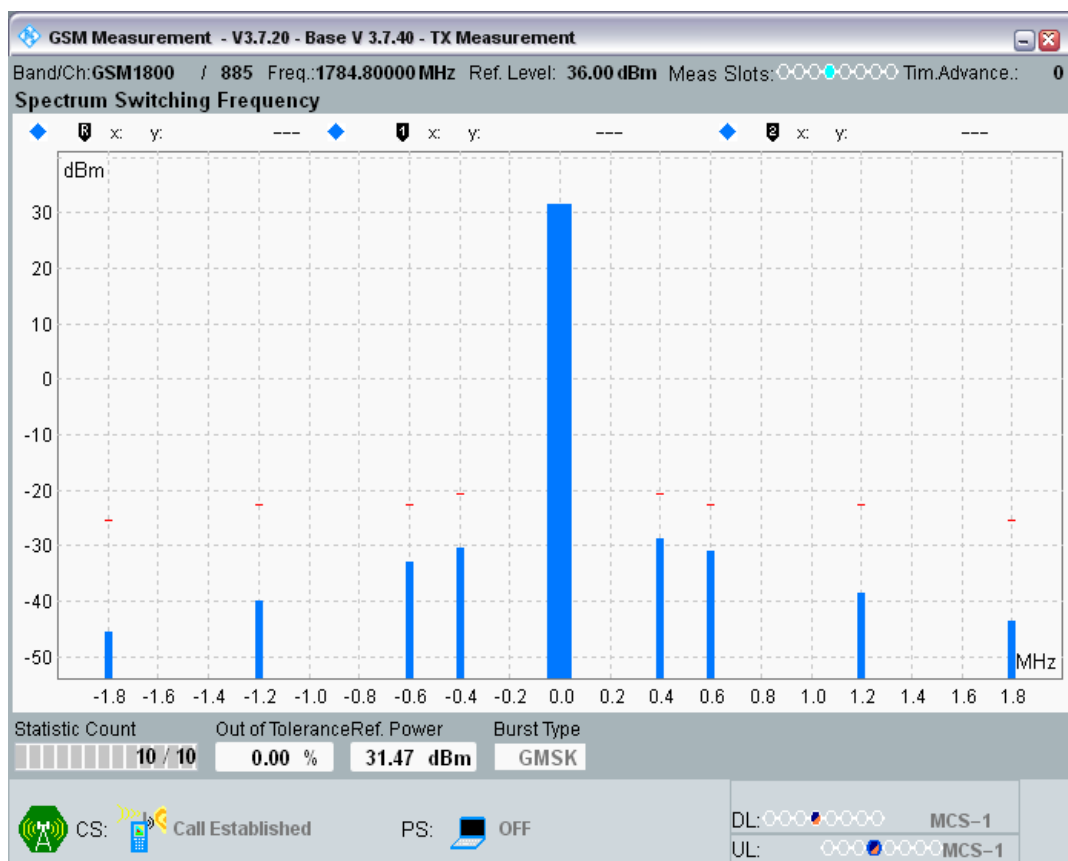

GSM900 Channel=124 PCL=5.png

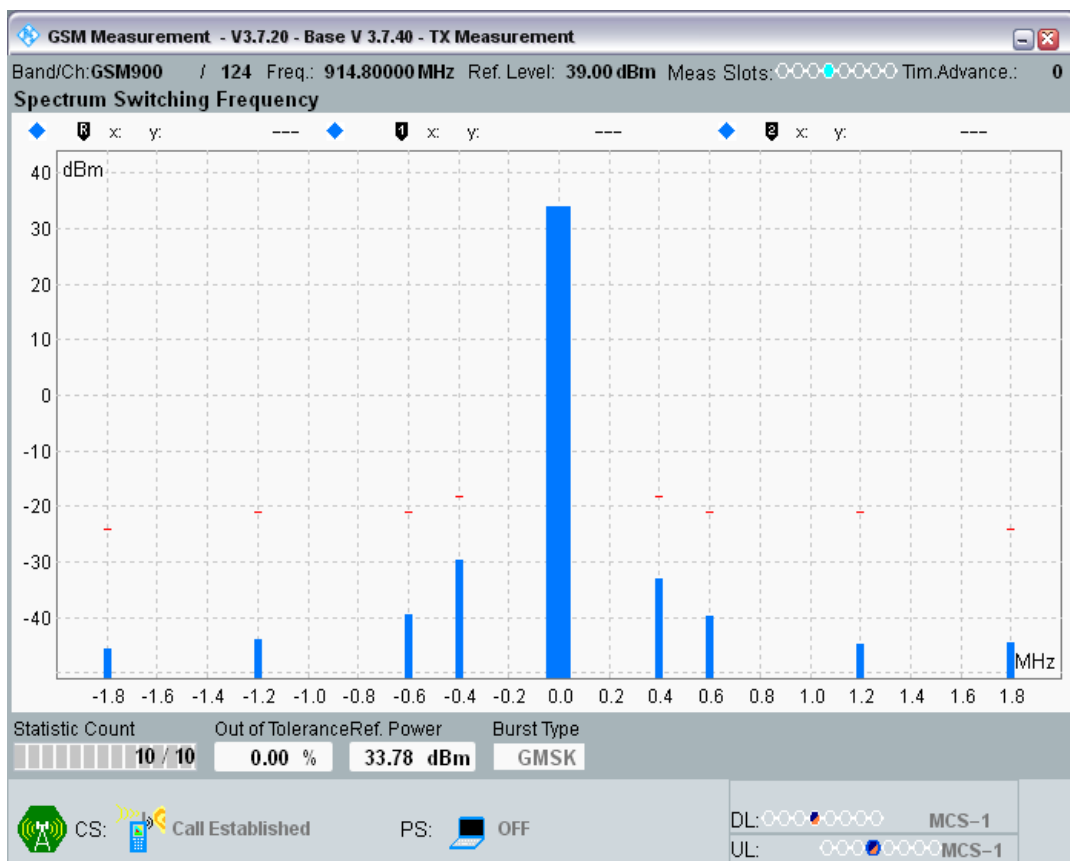


GSM900 Channel=60 PCL=5.png

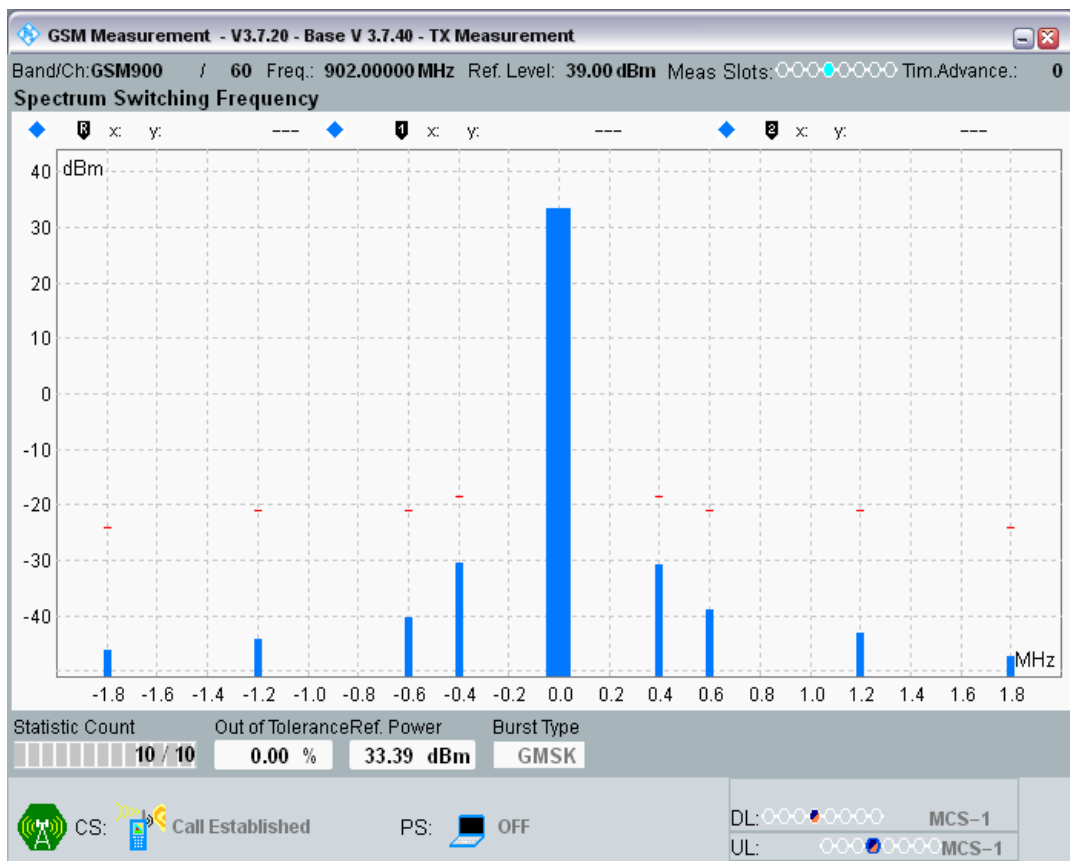

GSM900 Channel=975 PCL=5.png



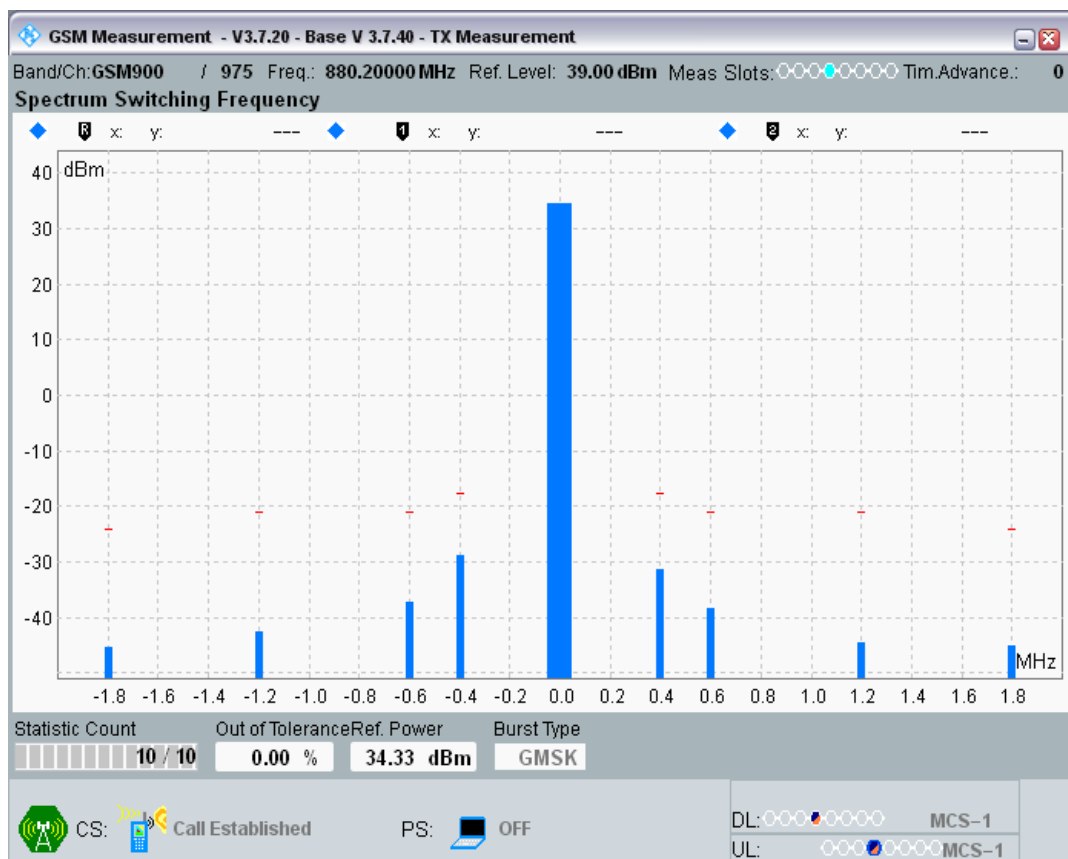


## Clause 4.2.12 Conducted spurious emissions - MS allocated a channel

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.12	-65.42	-36	PASS
DCS1800	700	1747.8	0	50MHz - 500MHz	100	394.1	-79.45	-36	PASS
DCS1800	700	1747.8	0	500MHz - 1000MHz	3000	916	-66.97	-36	PASS
DCS1800	700	1747.8	0	1000MHz - 1680MHz	3000	1397.12	-61.27	-30	PASS
DCS1800	700	1747.8	0	1680MHz - 1690MHz	1000	1686.51	-63.51	-30	PASS
DCS1800	700	1747.8	0	1690MHz - 1700MHz	300	1697.26	-69.22	-30	PASS
DCS1800	700	1747.8	0	1700MHz - 1710MHz	100	1703.94	-73.22	-30	PASS
DCS1800	700	1747.8	0	1785MHz - 1795MHz	100	1785.42	-75.56	-30	PASS
DCS1800	700	1747.8	0	1795MHz - 1805MHz	300	1797.59	-71.00	-30	PASS
DCS1800	700	1747.8	0	1800MHz - 4000MHz	3000	3496.2	-41.58	-30	PASS
DCS1800	700	1747.8	0	4000MHz	3000	8738.08299	-40.90	-30	PASS

				12750MHz					
DCS1800	700	1747.8	0	1710MHz - 1741.8MHz	100	1732.419	-56.97	-30	PASS
DCS1800	700	1747.8	0	1741.8MHz - 1746MHz	30	1745.8152	-50.06	-30	PASS
DCS1800	700	1747.8	0	1749.6MHz - 1753.8MHz	30	1749.8268	-50.22	-30	PASS
DCS1800	700	1747.8	0	1753.8MHz - 1785MHz	100	1783.1904	-56.50	-30	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.11	-77.04	-36	PASS
GSM900	60	902	5	50MHz - 500MHz	100	493.3	-92.09	-36	PASS
GSM900	60	902	5	500MHz - 850MHz	3000	843.7	-71.96	-36	PASS
GSM900	60	902	5	850MHz - 860MHz	1000	858.24	-74.75	-36	PASS
GSM900	60	902	5	860MHz - 870MHz	300	860.54	-78.25	-30	PASS
GSM900	60	902	5	870MHz - 880MHz	100	874.83	-90.75	-36	PASS
GSM900	60	902	5	915MHz - 925MHz	100	923.98	-90.37	-36	PASS
GSM900	60	902	5	960MHz - 1000MHz	3000	983.44	-71.25	-36	PASS
GSM900	60	902	5	1000MHz - 2000MHz	3000	1805	-46.85	-30	PASS
GSM900	60	902	5	2000MHz - 12750MHz	3000	2705.065587	-44.45	-30	PASS
GSM900	60	902	5	880MHz - 896MHz	100	888.992	-55.49	-36	PASS
GSM900	60	902	5	896MHz - 900.2MHz	30	899.507	-55.72	-36	PASS
GSM900	60	902	5	903.8MHz - 908MHz	30	904.0268	-56.72	-36	PASS
GSM900	60	902	5	908MHz - 915MHz	100	908.161	-54.64	-36	PASS


DCS1800 Channel=700 PCL=0.png

## Conducted spurious emissions

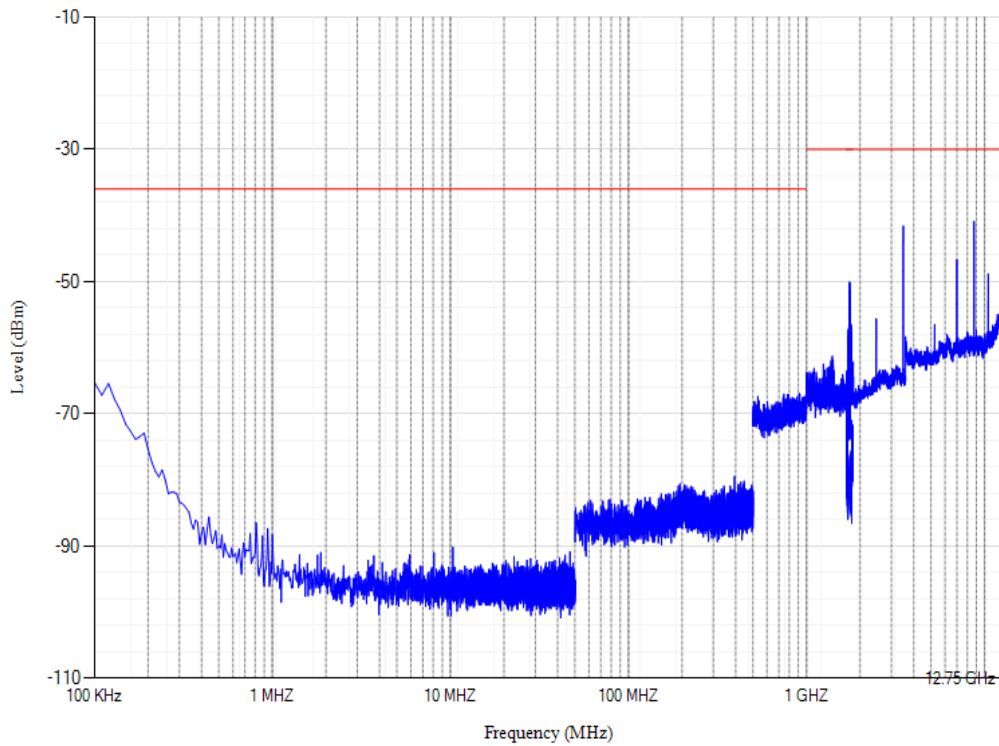

GSM900 Channel=60 PCL=5.png

## Conducted spurious emissions

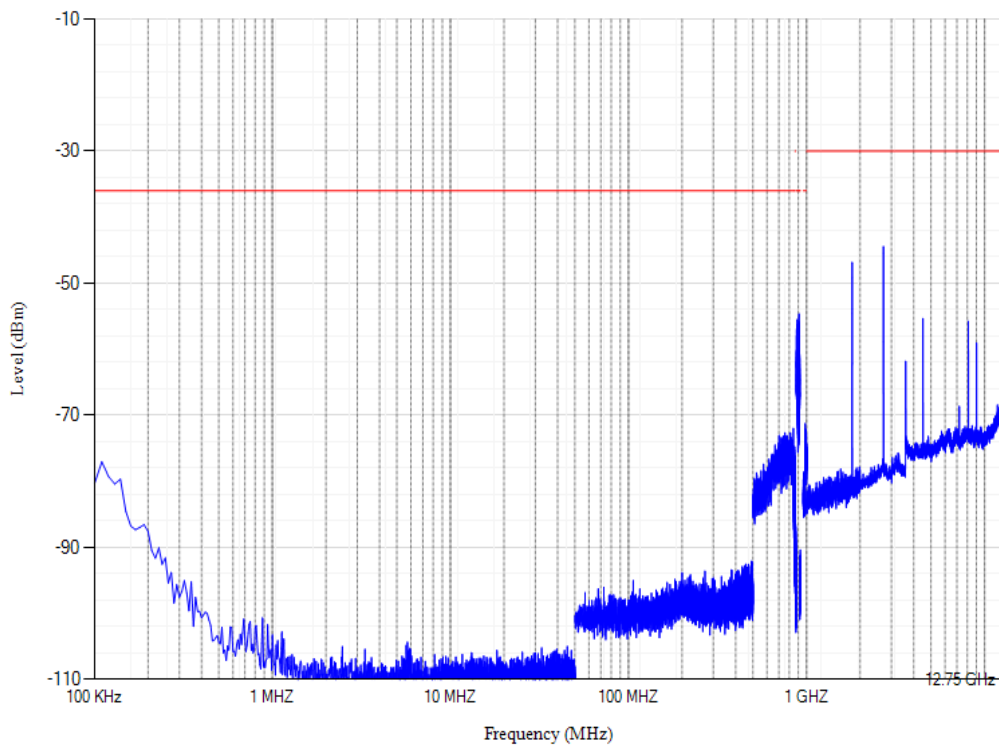


## Clause 4.2.13 Conducted spurious emission - MS in idle mode

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.13	-63.74	-57	PASS
DCS1800	700	1747.8	0	50MHz - 880MHz	100	752.9	-77.53	-57	PASS
DCS1800	700	1747.8	0	880MHz - 915MHz	100	891.2	-76.08	-59	PASS
DCS1800	700	1747.8	0	915MHz - 1000MHz	100	976.2	-77.63	-57	PASS
DCS1800	700	1747.8	0	1000MHz - 1710MHz	100	1192.9	-75.05	-47	PASS
DCS1800	700	1747.8	0	1710MHz - 1785MHz	100	1737.825	-76.29	-53	PASS
DCS1800	700	1747.8	0	1785MHz - 12750MHz	100	12256.30088	-67.17	-47	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.11	-65.12	-57	PASS
GSM900	60	902	5	50MHz - 880MHz	100	839.1	-78.42	-57	PASS
GSM900	60	902	5	880MHz - 915MHz	100	890.36	-78.51	-59	PASS
GSM900	60	902	5	915MHz - 1000MHz	100	972.375	-79.41	-57	PASS
GSM900	60	902	5	1000MHz - 1710MHz	100	1472.9	-77.52	-47	PASS
GSM900	60	902	5	1710MHz - 1785MHz	100	1740.525	-76.56	-53	PASS
GSM900	60	902	5	1785MHz - 12750MHz	100	12417.21225	-68.10	-47	PASS


DCS1800 Channel=700 PCL=0.png

## Conducted spurious emissions

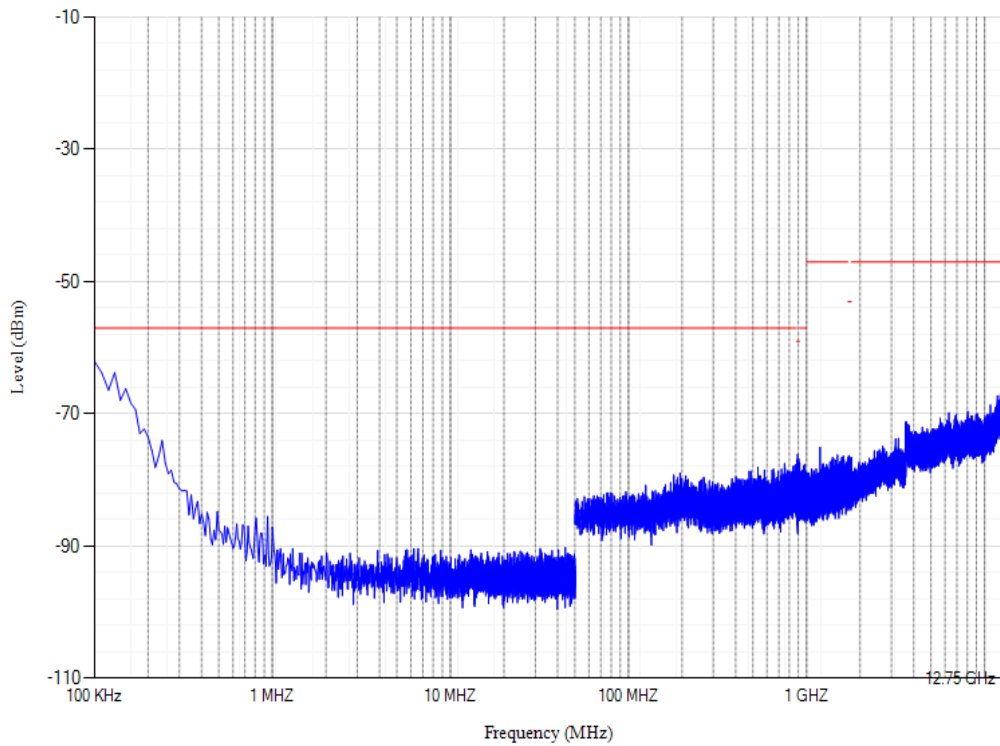

GSM900 Channel=60 PCL=5.png

## Conducted spurious emissions

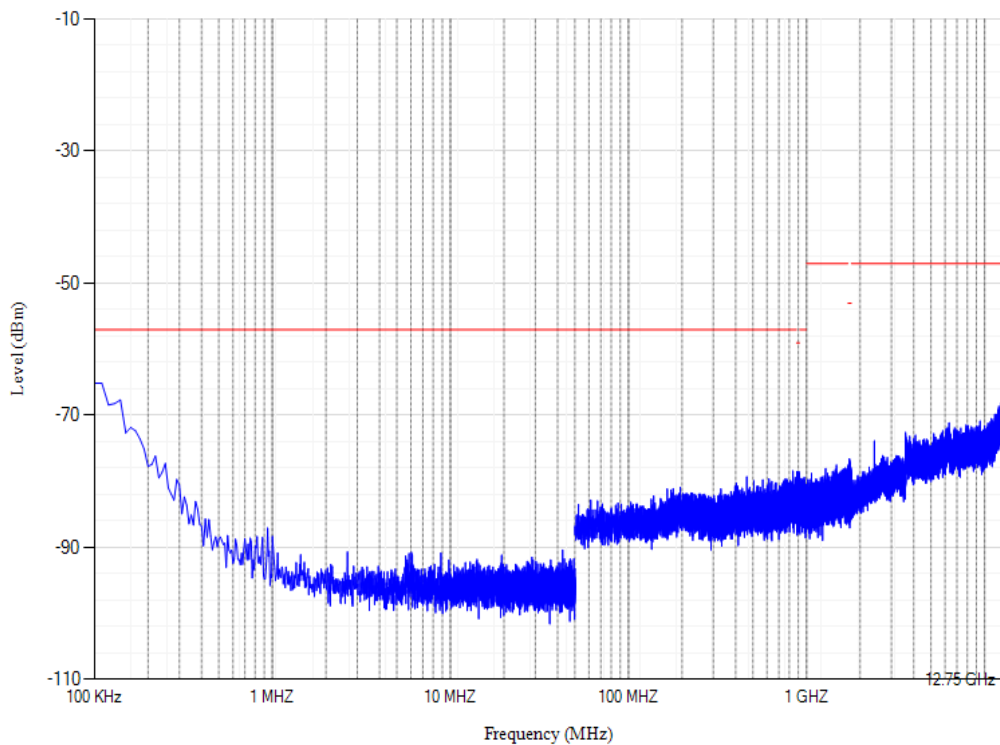

**Clause 4.2.32 Intermodulation rejection - speech channels**

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Interfer1 Freq (MHz)	Interfer1 Level (dBm)	Interfer2 Freq (MHz)	Interfer2 Level (dBm)	BER (%)	Limit (%)	Verdict
DCS1800	512	1710.2	1805.2	1804.4	-49	1803.6	-49	0.00	2.439	PASS
DCS1800	512	1710.2	1805.2	1806	-49	1806.8	-49	0.00	2.439	PASS
DCS1800	700	1747.8	1842.8	1842	-49	1841.2	-49	0.00	2.439	PASS
DCS1800	700	1747.8	1842.8	1843.6	-49	1844.4	-49	0.00	2.439	PASS
DCS1800	885	1784.8	1879.8	1879	-49	1878.2	-49	0.00	2.439	PASS
DCS1800	885	1784.8	1879.8	1880.6	-49	1881.4	-49	0.00	2.439	PASS
GSM900	975	880.2	915.2	914.4	-49	913.6	-50	0.00	2.439	PASS
GSM900	975	880.2	915.2	916	-49	916.8	-50	0.00	2.439	PASS
GSM900	60	902	947	946.2	-49	945.4	-50	0.00	2.439	PASS
GSM900	60	902	947	947.8	-49	948.6	-50	0.00	2.439	PASS
GSM900	124	914.8	959.8	959	-49	958.2	-50	0.00	2.439	PASS
GSM900	124	914.8	959.8	960.6	-49	961.4	-50	0.00	2.439	PASS

**Clause 4.2.35 AM suppression - speech channels**

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Interfer Freq (MHz)	Interfer Level (dBm)	BER (%)	Limit (%)	Verdict
DCS1800	512	1710.2	1805.2	1811.2	-31	0.00	2.439	PASS
DCS1800	700	1747.8	1842.8	1848.8	-31	0.00	2.439	PASS
DCS1800	885	1784.8	1879.8	1885.8	-31	0.00	2.439	PASS
GSM900	975	880.2	915.2	921.2	-31	0.00	2.439	PASS
GSM900	60	902	947	953	-31	0.00	2.439	PASS
GSM900	124	914.8	959.8	965.8	-31	0.00	2.439	PASS

**Clause 4.2.38 Adjacent channel rejection - speech channels (TCH)**

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Adjacent Channel	Interfer Freq (MHz)	Interfer Level (dBm)	Meas Type	Result (%)	Limit (%)	Verdict
GSM900	60	902	947	Adj -1	946.8	-89	ClassII_RBBER	0.00	9.167	PASS
GSM900	60	902	947	Adj +1	947.2	-89	ClassII_RBBER	0.00	9.167	PASS
GSM900	60	902	947	Adj -2	946.6	-57	ClassII_RBBER	0.00	9.167	PASS
GSM900	60	902	947	Adj +2	947.4	-57	ClassII_RBBER	0.00	9.167	PASS
DCS1800	700	1747.8	1842.8	Adj -1	1842.6	-89	ClassII_RBBER	0.00	8.333	PASS
DCS1800	700	1747.8	1842.8	Adj +1	1843	-89	ClassII_RBBER	0.00	8.333	PASS
DCS1800	700	1747.8	1842.8	Adj -2	1842.4	-57	ClassII_RBBER	0.00	8.333	PASS
DCS1800	700	1747.8	1842.8	Adj +2	1843.2	-57	ClassII_RBBER	0.00	8.333	PASS

**Clause 4.2.42 Reference sensitivity - TCH**

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Meas Type	Ref Sensitivity Level (dBm)	BER (%)	Limit (%)	Verdict
------	---------	--------------------	--------------------	-------------	-----------	-----------------------------	---------	-----------	---------

GSM900	975	880.2	880.2	Static	ClassII_RBER	-102	0.00	2.439	PASS
GSM900	60	902	902	Static	ClassII_RBER	-102	0.00	2.439	PASS
GSM900	124	914.8	914.8	Static	ClassII_RBER	-102	0.00	2.439	PASS
DCS1800	512	1710.2	1710.2	Static	ClassII_RBER	-102	0.00	2.439	PASS
DCS1800	700	1747.8	1747.8	Static	ClassII_RBER	-102	0.00	2.439	PASS
DCS1800	885	1784.8	1784.8	Static	ClassII_RBER	-102	0.00	2.439	PASS


#### Clause 4.2.43 Reference sensitivity - FACCH

Band	Channel	Propagation	UL Frequency (MHz)	DL Frequency (MHz)	Ref Sensitivity Level (dBm)	FER (%)	Limit (%)	Verdict
GSM900	975	TUhigh	880.2	915.2	-102	0.00	8.961	PASS
GSM900	60	TUhigh	902	947	-102	0.00	8.961	PASS
GSM900	124	TUhigh	914.8	959.8	-102	0.00	8.961	PASS
DCS1800	512	TUhigh	1710.2	1805.2	-102	0.00	8.961	PASS
DCS1800	700	TUhigh	1747.8	1842.8	-102	0.00	8.961	PASS
DCS1800	885	TUhigh	1784.8	1879.8	-102	0.00	8.961	PASS


#### Clause 4.2.4 Frequency error and phase error in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	3;3;3;3	Frequency Error (Hz)	16.18	-88.02	88.02	PASS
GSM900	975	880.2	3;3;3;3	RMS Phase Error (Degree)	0.46	0	5	PASS
GSM900	975	880.2	3;3;3;3	Peak Phase Error (Degree)	1.35	0	20	PASS
GSM900	60	902	3;3;3;3	Frequency Error (Hz)	17.11	-90.2	90.2	PASS
GSM900	60	902	3;3;3;3	RMS Phase Error (Degree)	0.45	0	5	PASS
GSM900	60	902	3;3;3;3	Peak Phase Error (Degree)	1.33	0	20	PASS
GSM900	124	914.8	3;3;3;3	Frequency Error (Hz)	13.82	-91.48	91.48	PASS
GSM900	124	914.8	3;3;3;3	RMS Phase Error (Degree)	0.44	0	5	PASS
GSM900	124	914.8	3;3;3;3	Peak Phase Error (Degree)	1.35	0	20	PASS
DCS1800	512	1710.2	3;3;3;3	Frequency Error (Hz)	22.60	-171.02	171.02	PASS
DCS1800	512	1710.2	3;3;3;3	RMS Phase Error (Degree)	0.62	0	5	PASS
DCS1800	512	1710.2	3;3;3;3	Peak Phase Error (Degree)	2.61	0	20	PASS
DCS1800	700	1747.8	3;3;3;3	Frequency Error (Hz)	27.06	-174.78	174.78	PASS
DCS1800	700	1747.8	3;3;3;3	RMS Phase Error (Degree)	0.64	0	5	PASS
DCS1800	700	1747.8	3;3;3;3	Peak Phase Error (Degree)	2.03	0	20	PASS
DCS1800	885	1784.8	3;3;3;3	Frequency Error (Hz)	24.76	-178.48	178.48	PASS
DCS1800	885	1784.8	3;3;3;3	RMS Phase Error (Degree)	0.60	0	5	PASS
DCS1800	885	1784.8	3;3;3;3	Peak Phase Error (Degree)	1.90	0	20	PASS

GSM900 Channel=124 Gamma=3;3;3;3.png

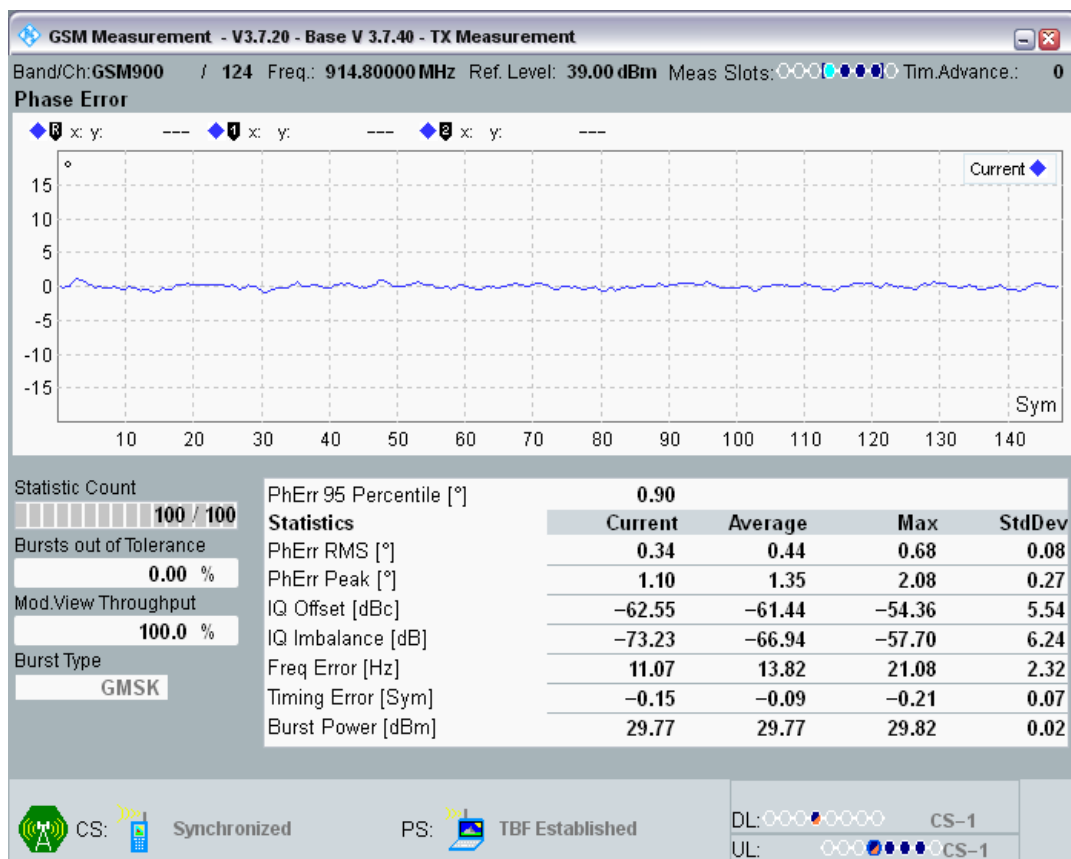


GSM900 Channel=60 Gamma=3;3;3;3.png

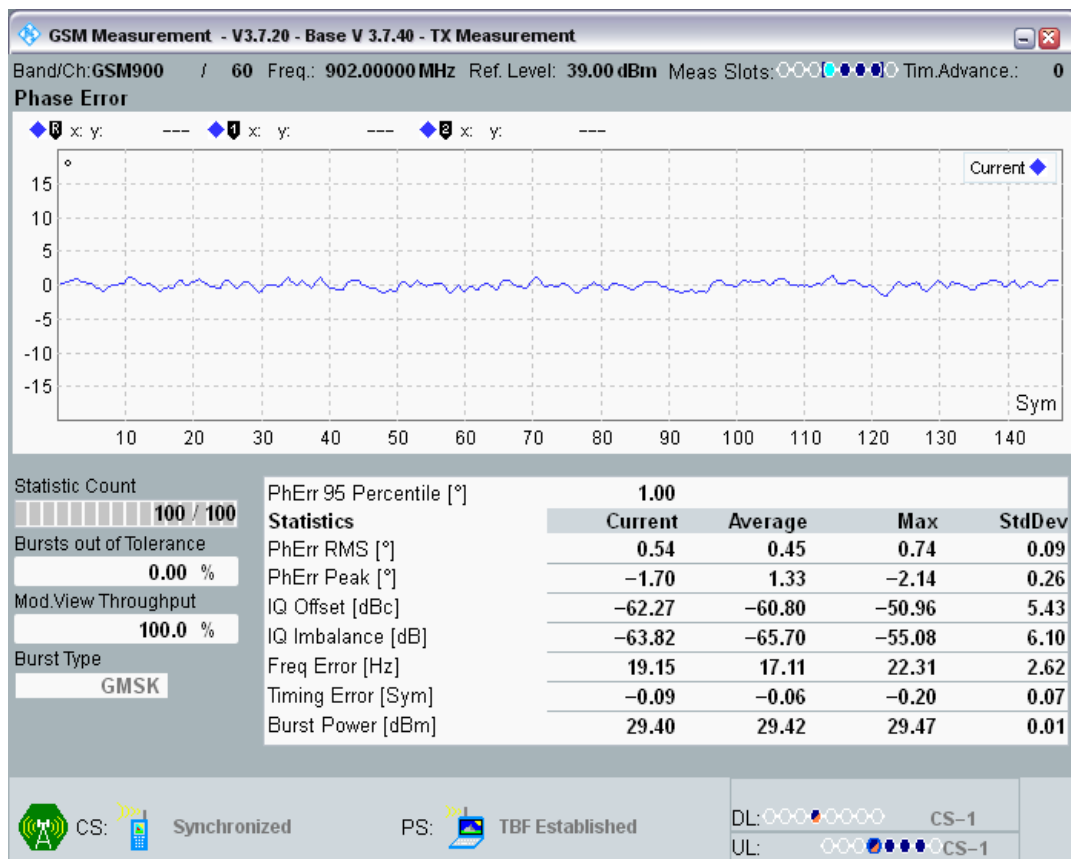


GSM900 Channel=975 Gamma=3;3;3;3.png




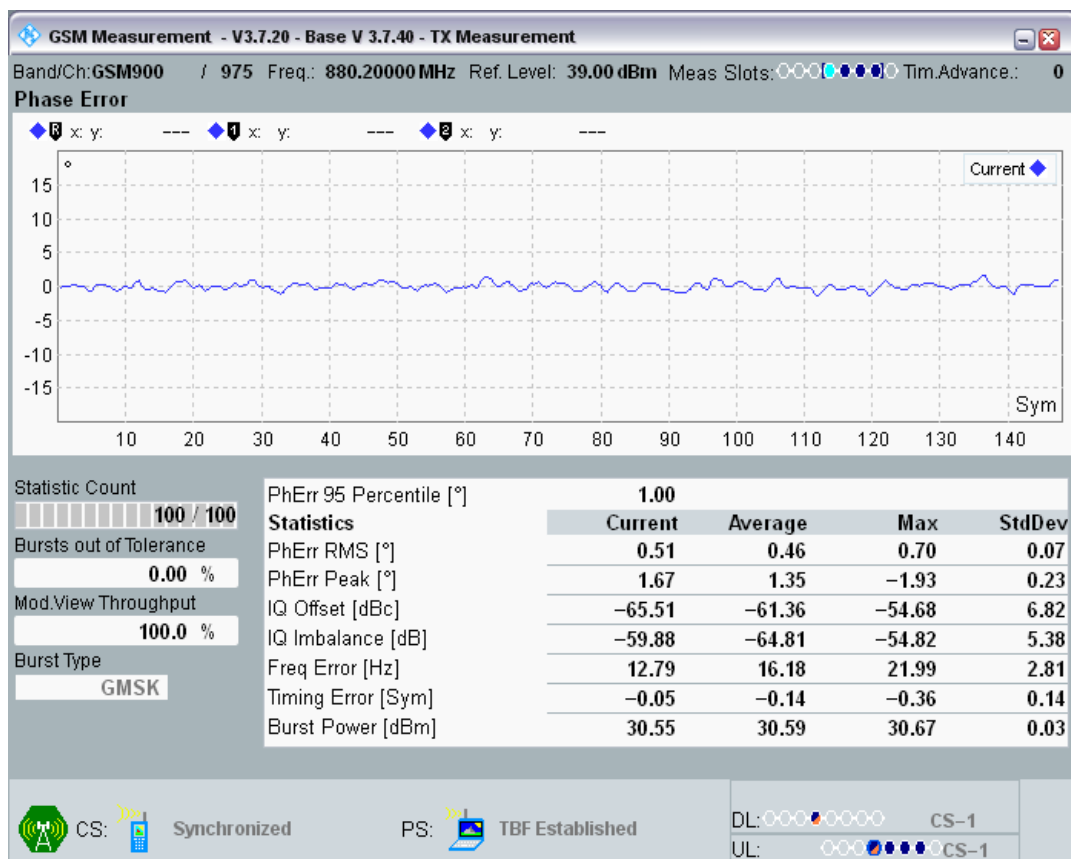


DCS1800 Channel=512 Gamma=3;3;3;3.png

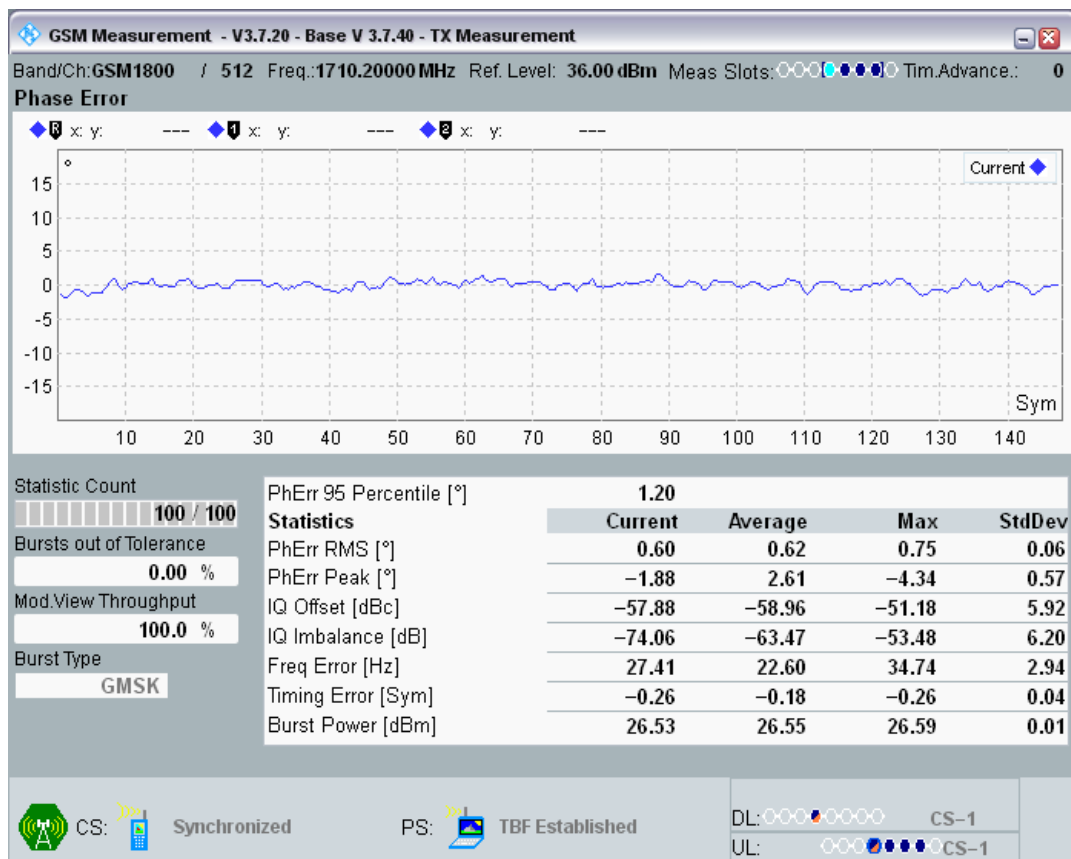

DCS1800 Channel=700 Gamma=3;3;3;3.png

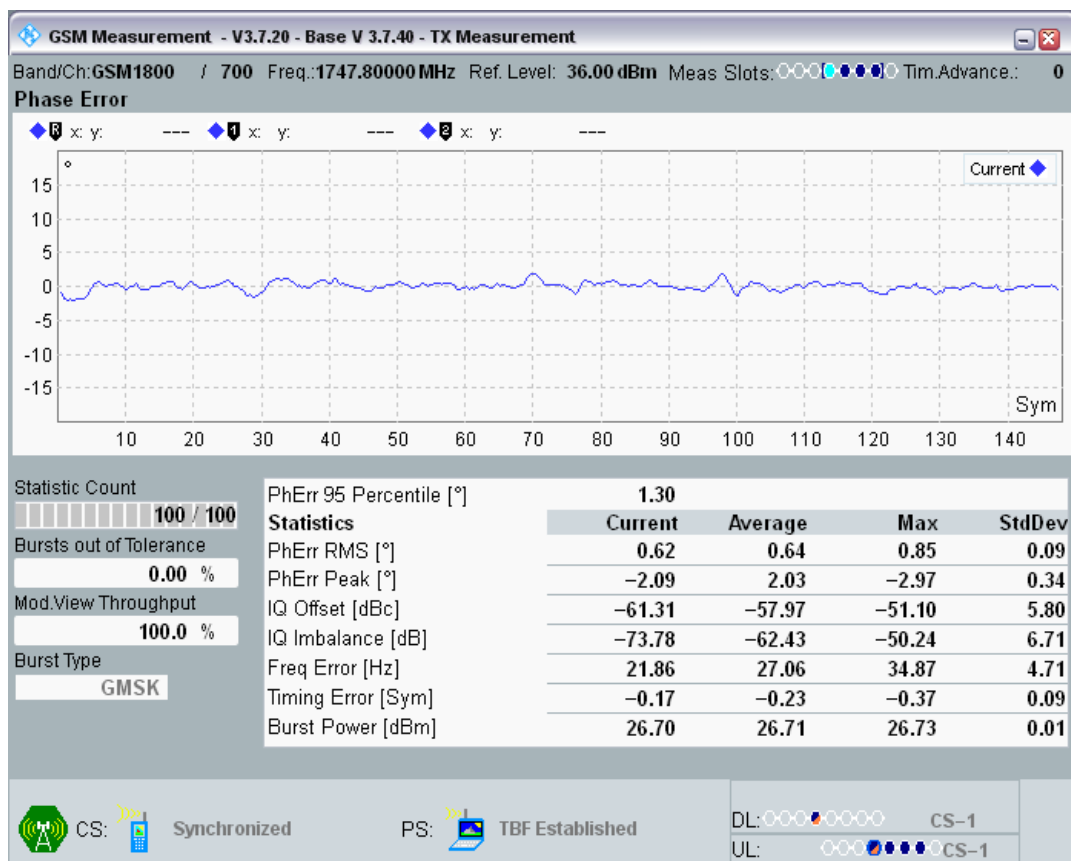

DCS1800 Channel=885 Gamma=3;3;3;3.png

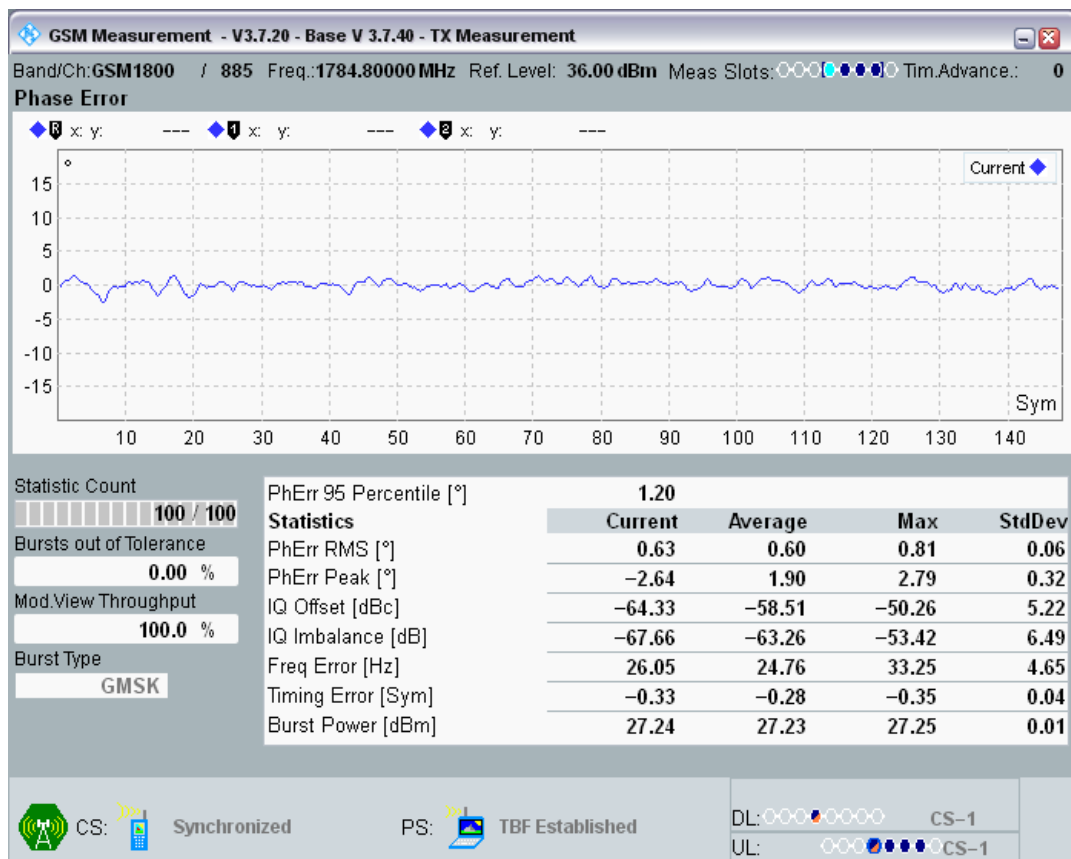

#### Clause 4.2.10 Transmitter output power in GPRS multi slot configuration

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: CCISE2008044

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	PvT	-	-	-	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot1	30.19925	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot2	30.18079	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot3	30.17435	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot4	30.16211	25	32	PASS
GSM900	975	880.2	4;4;4;4	PvT	-	-	-	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot1	30.23532	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot2	30.23309	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot3	30.18912	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot4	30.20096	24	33	PASS
GSM900	975	880.2	5;5;5;5	PvT	-	-	-	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot1	30.24213	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot2	30.21051	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot3	30.20248	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot4	30.17535	24	32	PASS
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	28.3078	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	28.31033	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	28.29907	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	28.28098	24	30	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	26.40189	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	26.40564	22	28	PASS

GSM900	975	880.2	7;7;7;7	Power slot3	@	26.39914	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power slot4	@	26.4101	22	28	PASS
GSM900	975	880.2	8;8;8;8	PvT		-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power slot1	@	24.39954	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power slot2	@	24.40393	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power slot3	@	24.39371	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power slot4	@	24.40161	20	26	PASS
GSM900	975	880.2	9;9;9;9	PvT		-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power slot1	@	22.36508	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power slot2	@	22.42157	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power slot3	@	22.42505	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power slot4	@	22.42542	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT		-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power slot1	@	20.37708	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot2	@	20.38965	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot3	@	20.37915	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot4	@	20.35809	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT		-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power slot1	@	18.3371	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot2	@	18.3472	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot3	@	18.35422	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot4	@	18.34821	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT		-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power slot1	@	16.36414	12	18	PASS

GSM900	975	880.2	12;12;12;12	Power slot2	@	16.37637	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot3	@	16.37988	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot4	@	16.37698	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT		-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power slot1	@	14.24579	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot2	@	14.23068	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot3	@	14.22714	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot4	@	14.23315	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT		-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power slot1	@	12.33597	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot2	@	12.33664	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot3	@	12.32721	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot4	@	12.32019	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT		-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power slot1	@	10.41379	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot2	@	10.39941	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot3	@	10.38419	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot4	@	10.36108	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT		-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power slot1	@	8.198486	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot2	@	8.180145	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot3	@	8.180847	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot4	@	8.176331	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT		-	-	-	PASS

GSM900	975	880.2	17;17;17;17	Power slot1	@	6.36911	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot2	@	6.320313	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot3	@	6.314117	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot4	@	6.316254	0	10	PASS
GSM900	60	902	3;3;3;3	PvT		-	-	-	PASS
GSM900	60	902	3;3;3;3	Power slot1	@	29.33084	25	32	PASS
GSM900	60	902	3;3;3;3	Power slot2	@	29.32388	25	32	PASS
GSM900	60	902	3;3;3;3	Power slot3	@	29.3027	25	32	PASS
GSM900	60	902	3;3;3;3	Power slot4	@	29.29205	25	32	PASS
GSM900	60	902	4;4;4;4	PvT		-	-	-	PASS
GSM900	60	902	4;4;4;4	Power slot1	@	29.29205	24	33	PASS
GSM900	60	902	4;4;4;4	Power slot2	@	29.25647	24	33	PASS
GSM900	60	902	4;4;4;4	Power slot3	@	29.24094	24	33	PASS
GSM900	60	902	4;4;4;4	Power slot4	@	29.23715	24	33	PASS
GSM900	60	902	5;5;5;5	PvT		-	-	-	PASS
GSM900	60	902	5;5;5;5	Power slot1	@	29.16409	24	32	PASS
GSM900	60	902	5;5;5;5	Power slot2	@	29.15091	24	32	PASS
GSM900	60	902	5;5;5;5	Power slot3	@	29.142	24	32	PASS
GSM900	60	902	5;5;5;5	Power slot4	@	29.12402	24	32	PASS
GSM900	60	902	6;6;6;6	PvT		-	-	-	PASS
GSM900	60	902	6;6;6;6	Power slot1	@	27.27039	24	30	PASS
GSM900	60	902	6;6;6;6	Power slot2	@	27.2627	24	30	PASS
GSM900	60	902	6;6;6;6	Power slot3	@	27.237	24	30	PASS
GSM900	60	902	6;6;6;6	Power slot4	@	27.23846	24	30	PASS

				slot4				
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	25.3454	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	25.34161	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot3	25.33813	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot4	25.31967	22	28	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	23.3194	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	23.32535	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	23.31503	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	23.3154	20	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS
GSM900	60	902	9;9;9;9	Power @ slot1	21.30347	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot2	21.29034	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot3	21.29501	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot4	21.2977	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS
GSM900	60	902	10;10;10;10	Power @ slot1	19.33255	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot2	19.3454	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot3	19.34341	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot4	19.33786	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power @ slot1	17.30225	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot2	17.28848	14	20	PASS
GSM900	60	902	11;11;11;11	Power @	17.30481	14	20	PASS

				slot3				
GSM900	60	902	11;11;11;11	Power @ slot4	17.30746	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power @ slot1	15.27985	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot2	15.2923	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot3	15.28864	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot4	15.28821	12	18	PASS
GSM900	60	902	13;13;13;13	PvT	-	-	-	PASS
GSM900	60	902	13;13;13;13	Power @ slot1	13.35825	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot2	13.36145	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot3	13.36142	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot4	13.36014	10	16	PASS
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Power @ slot1	11.4462	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot2	11.45404	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot3	11.45398	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot4	11.46005	6	16	PASS
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Power @ slot1	9.534393	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot2	9.546783	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot3	9.536407	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot4	9.50415	4	14	PASS
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Power @ slot1	7.357941	2	12	PASS
GSM900	60	902	16;16;16;16	Power @	7.304077	2	12	PASS



				slot2				
GSM900	60	902	16;16;16;16	Power @ slot3	7.297577	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot4	7.292877	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power @ slot1	5.540802	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot2	5.518311	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot3	5.529694	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot4	5.514618	0	10	PASS
GSM900	124	914.8	3;3;3;3	PvT	-	-	-	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot1	29.72897	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot2	29.7099	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot3	29.70172	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot4	29.68213	25	32	PASS
GSM900	124	914.8	4;4;4;4	PvT	-	-	-	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot1	29.64746	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot2	29.63937	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot3	29.61368	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot4	29.59433	24	33	PASS
GSM900	124	914.8	5;5;5;5	PvT	-	-	-	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot1	29.53662	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot2	29.49905	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot3	29.47501	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot4	29.48419	24	32	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power @	27.65695	24	30	PASS

				slot1				
GSM900	124	914.8	6;6;6;6	Power @ slot2	27.6492	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot3	27.63065	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot4	27.62152	24	30	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	25.75702	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot2	25.76083	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot3	25.75232	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	25.73141	22	28	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	23.72485	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot2	23.71277	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot3	23.70499	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	23.70721	20	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	21.70926	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	21.71048	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	21.69321	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	21.69519	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	19.64758	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	19.65054	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	19.66324	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	19.63773	16	22	PASS

GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	17.5824	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	17.59778	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	17.60928	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	17.59933	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	15.47955	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	15.50711	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	15.49387	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	15.49307	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot1	13.71149	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot2	13.71317	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	13.71265	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	13.72318	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	11.73395	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	11.74768	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	11.73895	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	11.73285	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	9.800232	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	9.784424	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	9.804871	4	14	PASS

GSM900	124	914.8	15;15;15;15	Power slot4	@	9.775635	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT		-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power slot1	@	7.438965	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power slot2	@	7.428772	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power slot3	@	7.433441	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power slot4	@	7.413177	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT		-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power slot1	@	5.525726	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot2	@	5.491119	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot3	@	5.487122	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot4	@	5.491852	0	10	PASS
DCS1800	512	1710.2	3;3;3;3	PvT		-	-	-	PASS
DCS1800	512	1710.2	3;3;3;3	Power slot1	@	26.30624	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power slot2	@	26.31134	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power slot3	@	26.30109	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power slot4	@	26.30209	22	29	PASS
DCS1800	512	1710.2	4;4;4;4	PvT		-	-	-	PASS
DCS1800	512	1710.2	4;4;4;4	Power slot1	@	26.33887	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power slot2	@	26.34058	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power slot3	@	26.32861	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power slot4	@	26.33051	21	30	PASS
DCS1800	512	1710.2	5;5;5;5	PvT		-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot1	@	26.358	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot2	@	26.35922	21	29	PASS

DCS1800	512	1710.2	5;5;5;5	Power slot3	@	26.33929	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot4	@	26.33508	21	29	PASS
DCS1800	512	1710.2	6;6;6;6	PvT		-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot1	@	24.31467	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot2	@	24.31012	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot3	@	24.319	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot4	@	24.32224	21	27	PASS
DCS1800	512	1710.2	7;7;7;7	PvT		-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power slot1	@	22.34448	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power slot2	@	22.35065	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power slot3	@	22.36081	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power slot4	@	22.3541	19	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT		-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot1	@	20.37204	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot2	@	20.39743	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot3	@	20.39606	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power slot4	@	20.39929	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT		-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power slot1	@	18.3595	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power slot2	@	18.42618	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power slot3	@	18.43439	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power slot4	@	18.43411	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT		-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power slot1	@	16.46274	13	19	PASS

DCS1800	512	1710.2	10;10;10;10	Power slot2	@	16.4791	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power slot3	@	16.49222	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power slot4	@	16.50198	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT		-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot1	@	14.54132	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot2	@	14.58347	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot3	@	14.5697	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot4	@	14.58716	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT		-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot1	@	12.49988	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot2	@	12.51843	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot3	@	12.54587	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot4	@	12.53531	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT		-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot1	@	10.69797	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot2	@	10.70929	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot3	@	10.73245	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot4	@	10.72787	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT		-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot1	@	8.791351	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot2	@	8.808807	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot3	@	8.809143	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot4	@	8.817719	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT		-	-	-	PASS

DCS1800	512	1710.2	15;15;15;15	Power slot1	@	6.804474	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot2	@	6.812561	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot3	@	6.814728	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot4	@	6.823395	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT		-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot1	@	5.438568	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot2	@	5.44635	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot3	@	5.452454	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot4	@	5.446259	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT		-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot1	@	3.03479	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot2	@	3.050018	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot3	@	3.028931	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot4	@	3.041809	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT		-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot1	@	1.240265	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot2	@	1.230103	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot3	@	1.227448	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot4	@	1.235901	-5	5	PASS
DCS1800	700	1747.8	3;3;3;3	PvT		-	-	-	PASS
DCS1800	700	1747.8	3;3;3;3	Power slot1	@	26.64639	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power slot2	@	26.64258	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power slot3	@	26.63254	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power slot4	@	26.63699	22	29	PASS

				slot4				
DCS1800	700	1747.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot1	26.58328	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot2	26.57275	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot3	26.58145	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot4	26.56952	21	30	PASS
DCS1800	700	1747.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot1	26.60345	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot2	26.60251	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot3	26.59201	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot4	26.59225	21	29	PASS
DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot1	24.57596	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot2	24.58588	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot3	24.57455	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot4	24.58624	21	27	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot1	22.58389	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot2	22.60333	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot3	22.5975	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot4	22.60214	19	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot1	20.60608	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot2	20.61224	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @	20.62961	17	23	PASS



				slot3				
DCS1800	700	1747.8	8;8;8;8	Power @ slot4	20.63403	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot1	18.57025	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot2	18.65585	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot3	18.64566	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot4	18.65317	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot1	16.65756	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot2	16.68555	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot3	16.67722	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot4	16.70508	13	19	PASS
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	14.75034	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	14.75775	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	14.76959	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	14.77274	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	12.76184	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	12.80789	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	12.78174	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	12.81396	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot1	10.80664	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @	10.81949	6	14	PASS

				slot2				
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	10.8186	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	10.8364	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	8.882263	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	8.89032	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	8.889343	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	8.91217	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	6.839203	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot2	6.840851	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot3	6.857513	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot4	6.858032	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot1	5.428955	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot2	5.445709	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot3	5.447693	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot4	5.435333	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	2.870026	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	2.861847	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot3	2.864838	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	2.882782	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power @	0.9563599	-5	5	PASS


				slot1				
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	0.9405518	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	0.9512024	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	0.9452515	-5	5	PASS
DCS1800	885	1784.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot1	27.17157	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot2	27.17596	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot3	27.16074	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot4	27.15775	22	29	PASS
DCS1800	885	1784.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot1	27.1153	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot2	27.1221	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot3	27.13367	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot4	27.11011	21	30	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	27.07458	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	27.05038	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	27.05292	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	27.03448	21	29	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	25.09244	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	25.07788	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	25.07556	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	25.0751	21	27	PASS

DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	23.04504	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	23.0473	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	23.0502	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	23.03796	19	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	21.04355	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	21.05368	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	21.04968	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	21.05261	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	19.00787	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	19.02393	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	19.02307	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	19.02252	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	17.05045	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	17.07935	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	17.07025	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	17.07114	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	15.07043	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	15.08548	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	15.09171	11	17	PASS


DCS1800	885	1784.8	11;11;11;11	Power slot4	@	15.09076	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT		-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power slot1	@	13.06848	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power slot2	@	13.09421	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power slot3	@	13.10413	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power slot4	@	13.10382	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT		-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power slot1	@	11.06308	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power slot2	@	11.07672	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power slot3	@	11.09641	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power slot4	@	11.09708	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT		-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot1	@	9.045563	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot2	@	9.074646	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot3	@	9.070068	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot4	@	9.068939	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT		-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot1	@	6.863159	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot2	@	6.892731	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot3	@	6.915955	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot4	@	6.909851	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT		-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot1	@	5.377075	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot2	@	5.393921	0	8	PASS

DCS1800	885	1784.8	16;16;16;16	Power slot3 @	5.386566	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot4 @	5.397644	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot1 @	2.604889	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot2 @	2.612518	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot3 @	2.6203	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot4 @	2.621063	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot1 @	0.4528198	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot2 @	0.4342041	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot3 @	0.4344788	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot4 @	0.429718	-5	5	PASS


GSM900 Channel=124 Gamma=17;17;17;17.png

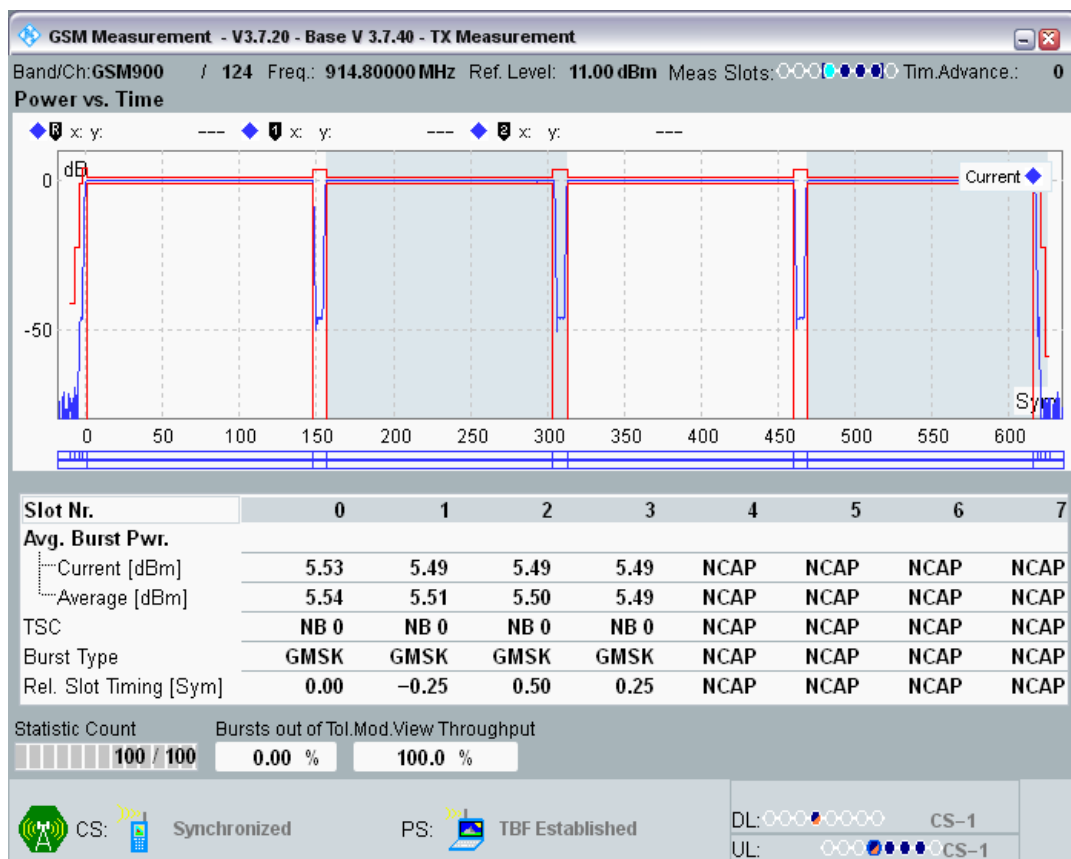


GSM900 Channel=124 Gamma=3;3;3;3.png

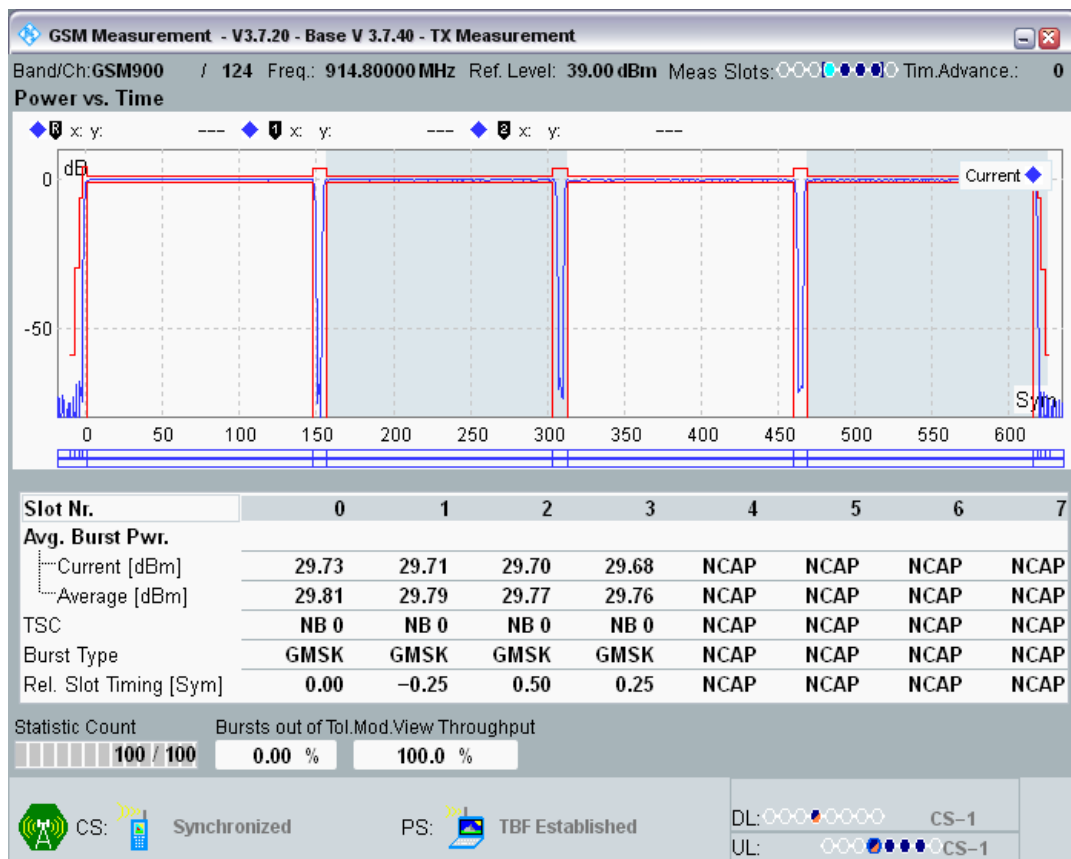

GSM900 Channel=60 Gamma=17;17;17;17.png

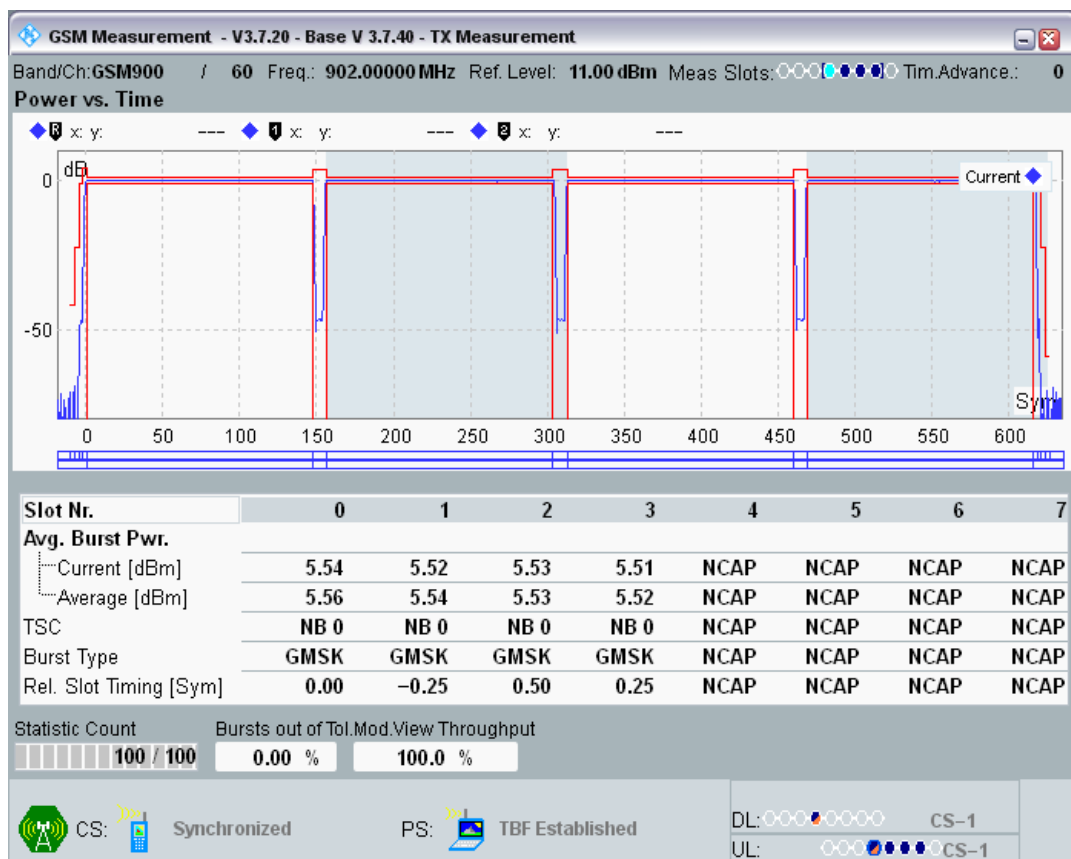


GSM900 Channel=60 Gamma=3;3;3;3.png

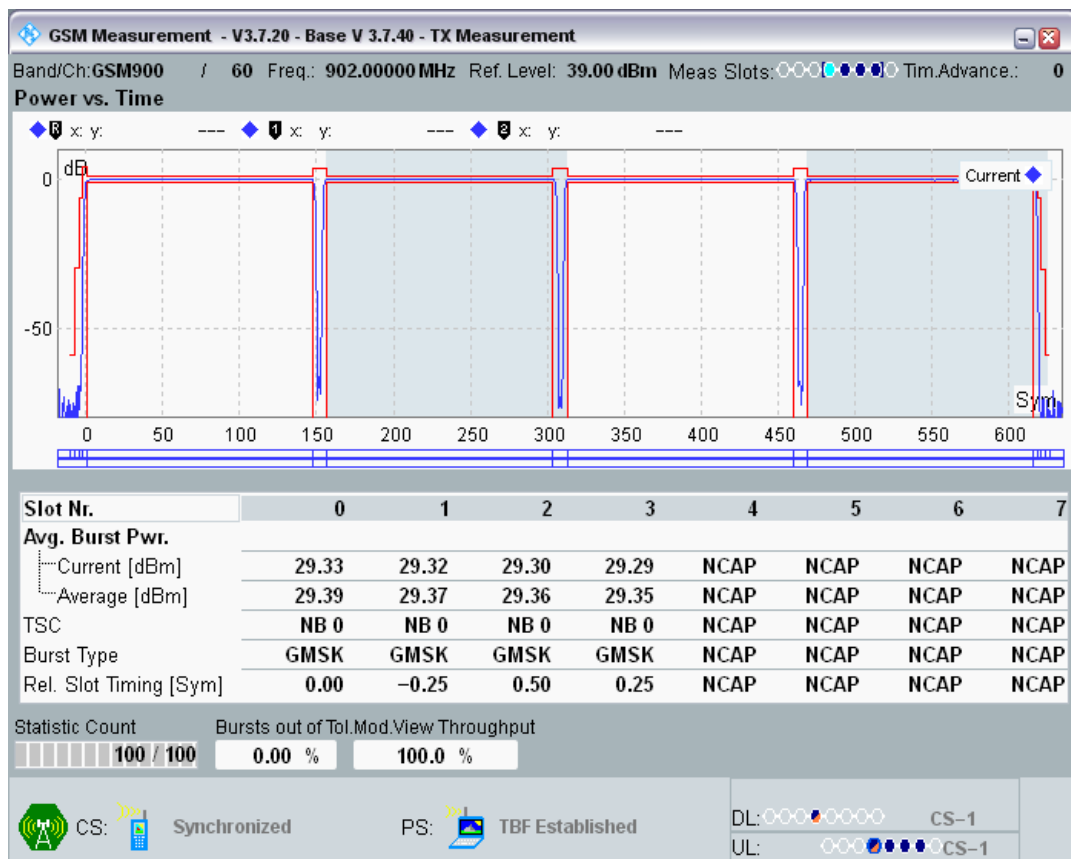


GSM900 Channel=975 Gamma=17;17;17;17.png




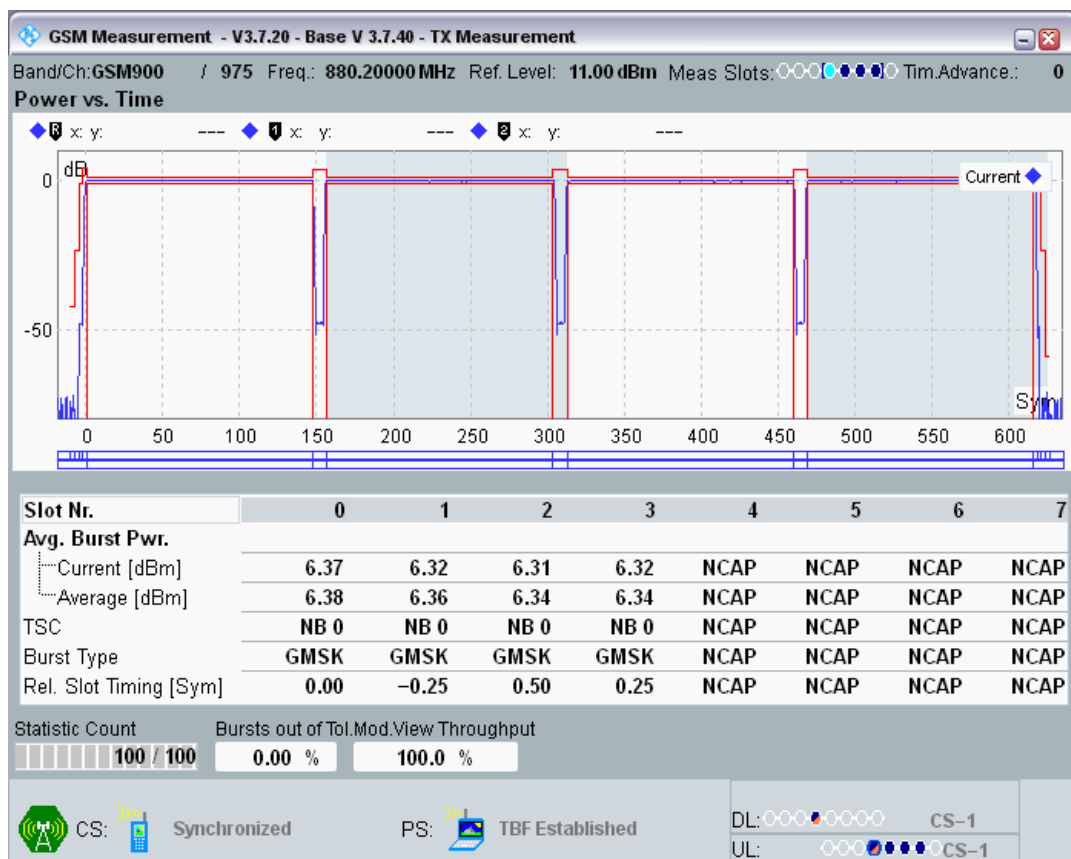


GSM900 Channel=975 Gamma=3;3;3;3.png

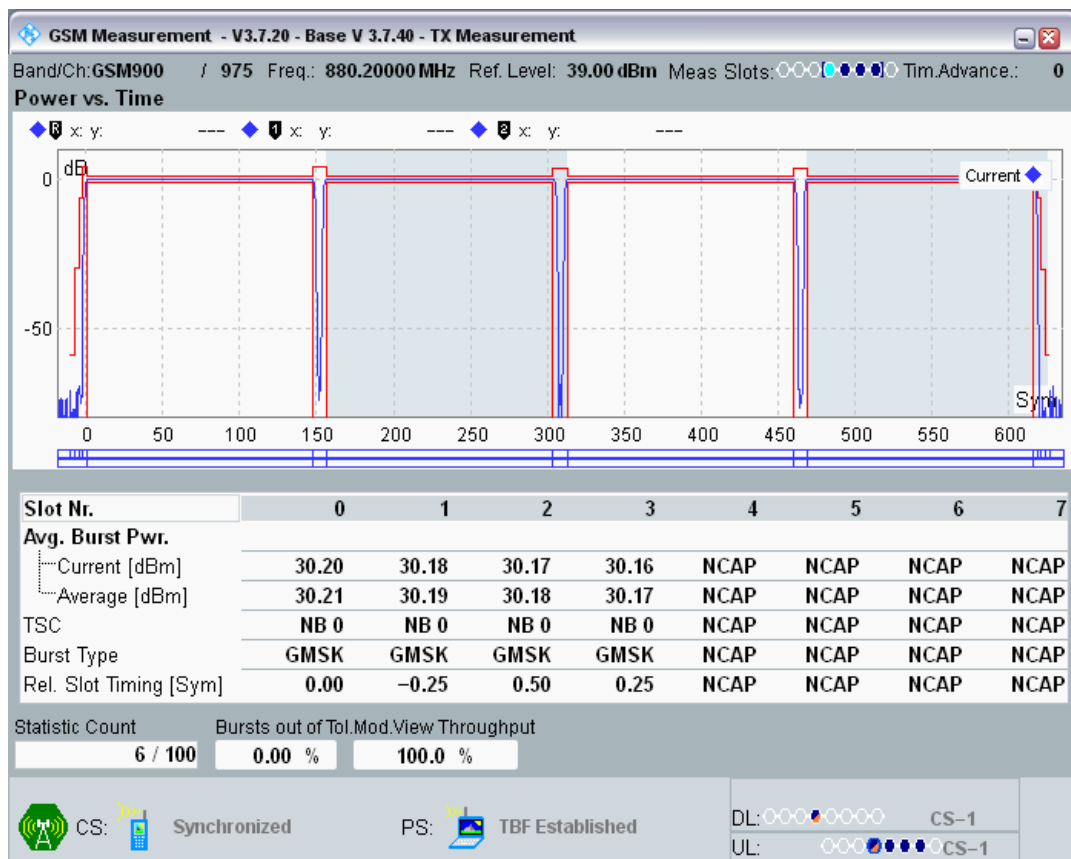


DCS1800 Channel=512 Gamma=18;18;18;18.png

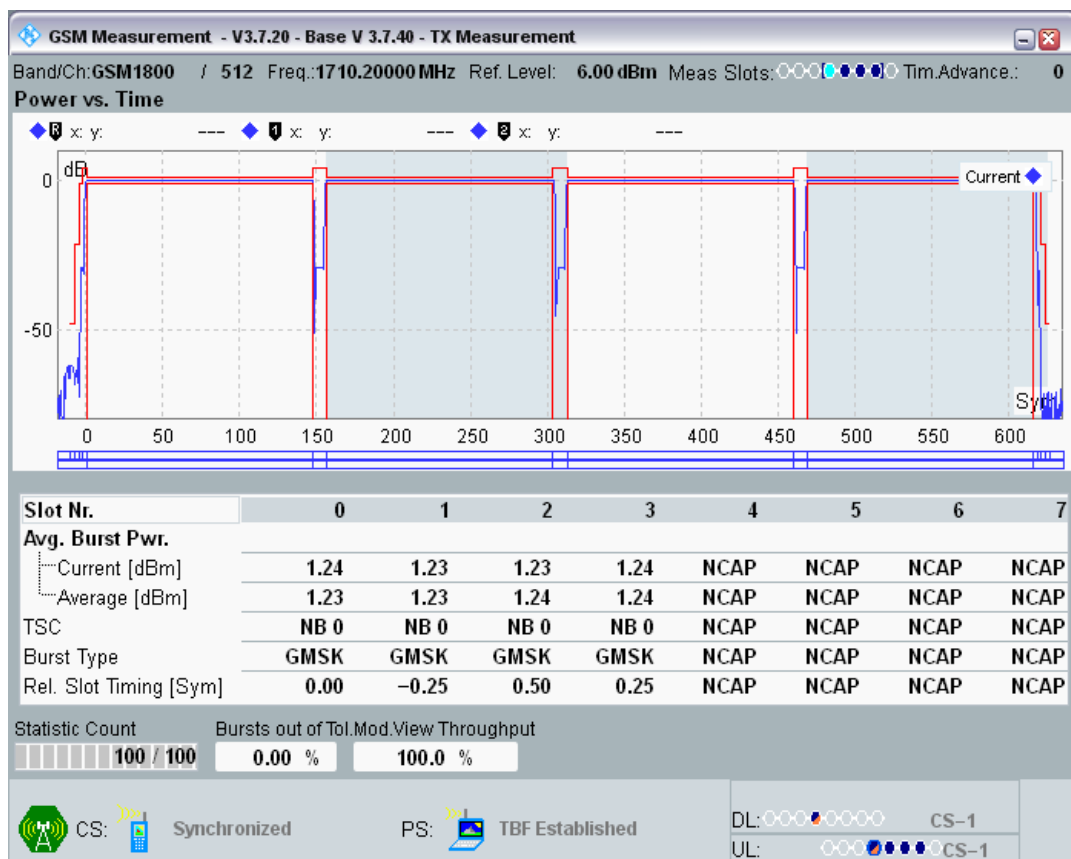

DCS1800 Channel=512 Gamma=3;3;3;3.png

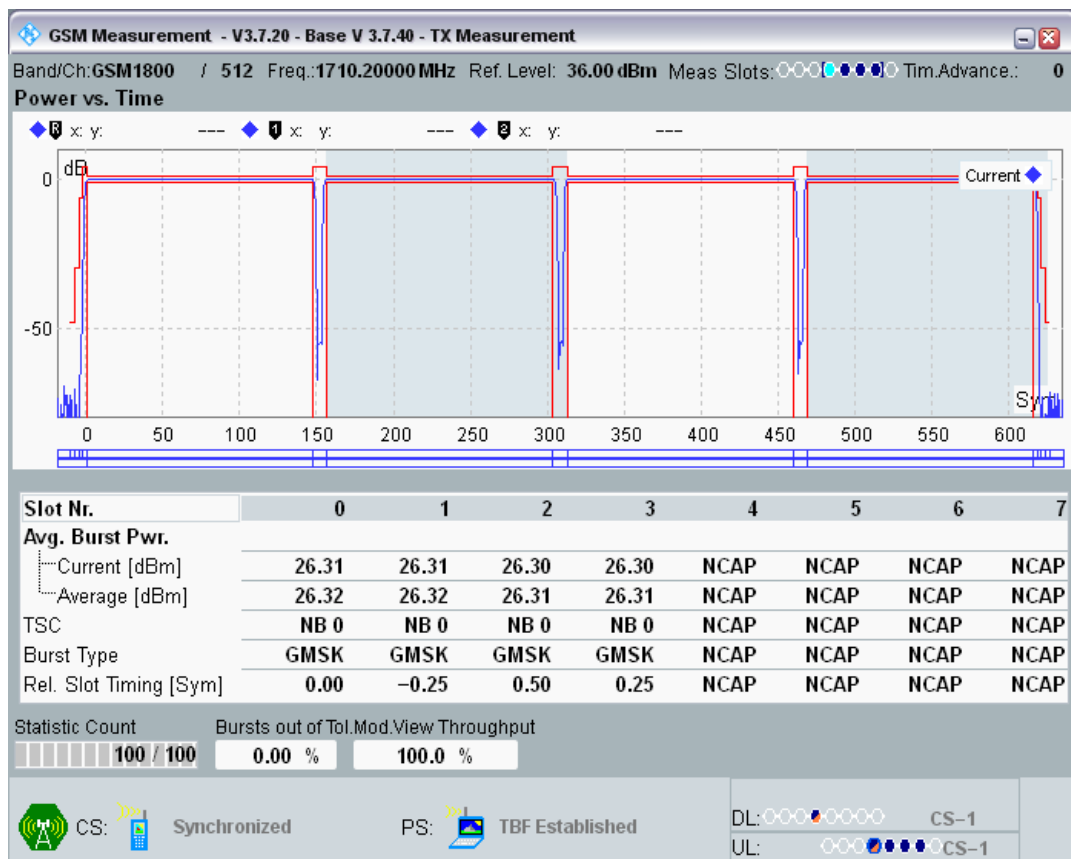


DCS1800 Channel=700 Gamma=18;18;18;18.png

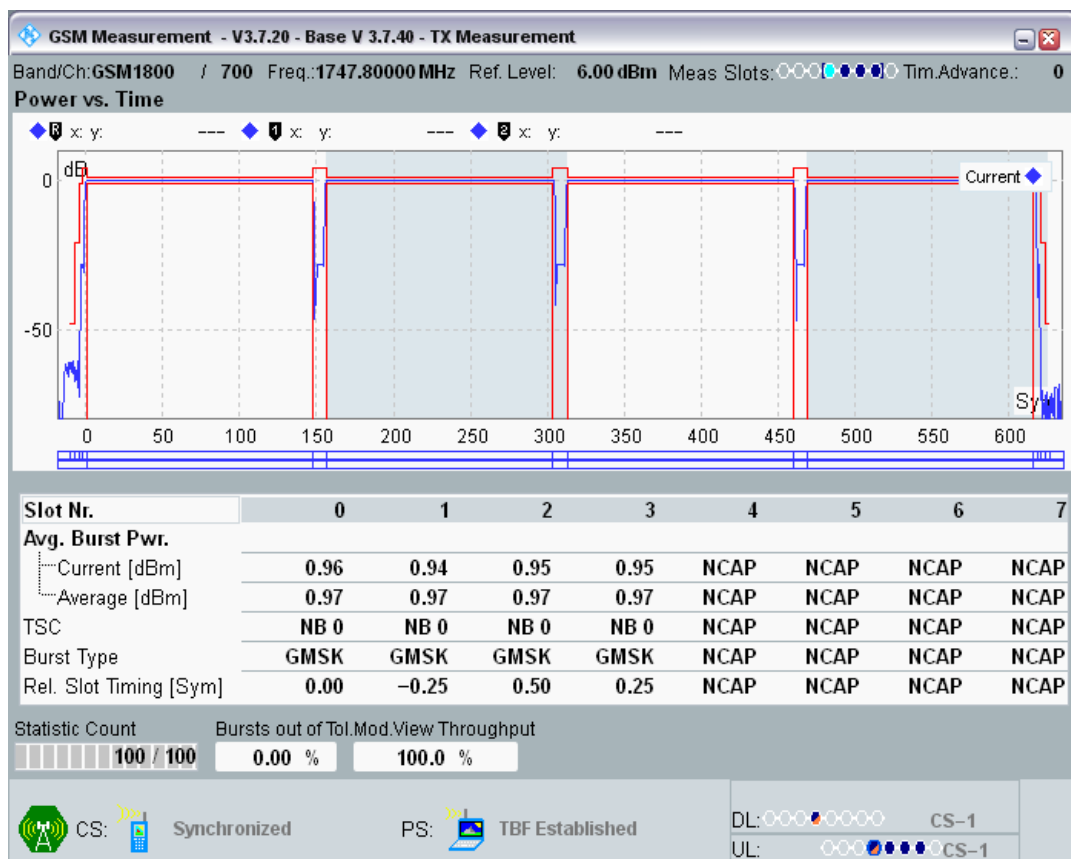


DCS1800 Channel=700 Gamma=3;3;3;3.png



DCS1800 Channel=885 Gamma=18;18;18;18.png

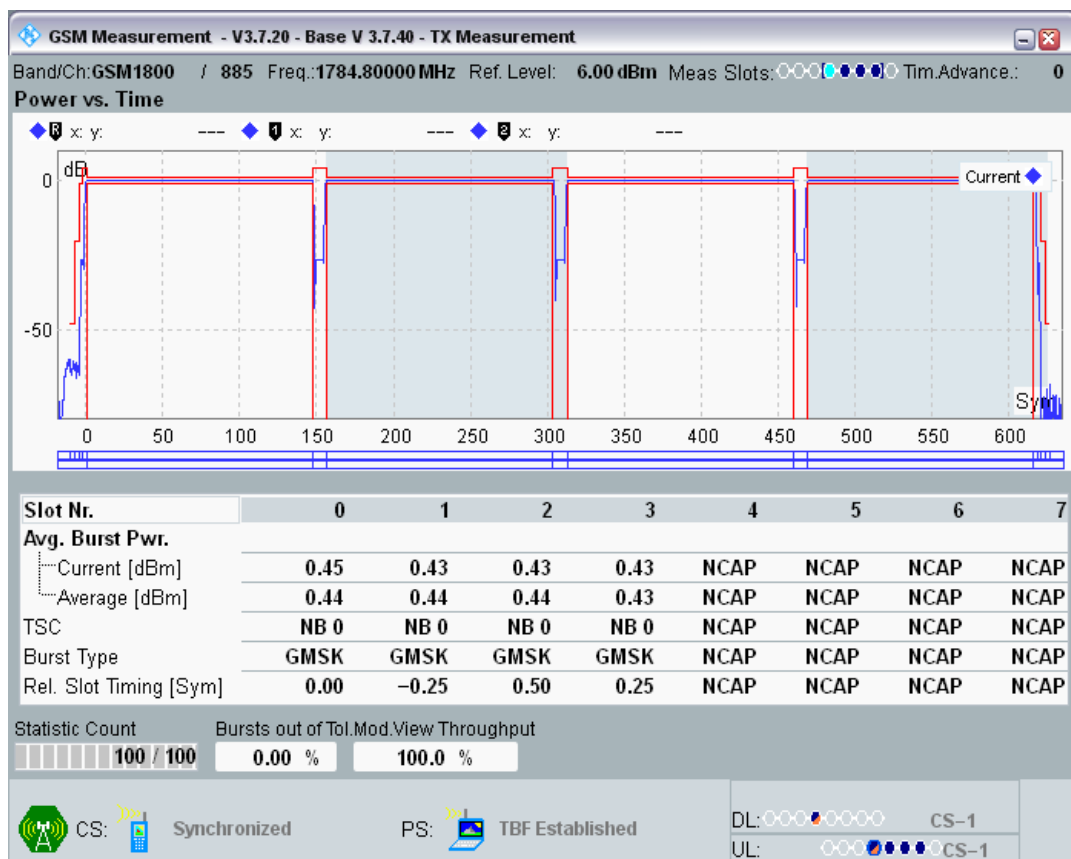

DCS1800 Channel=885 Gamma=3;3;3;3.png

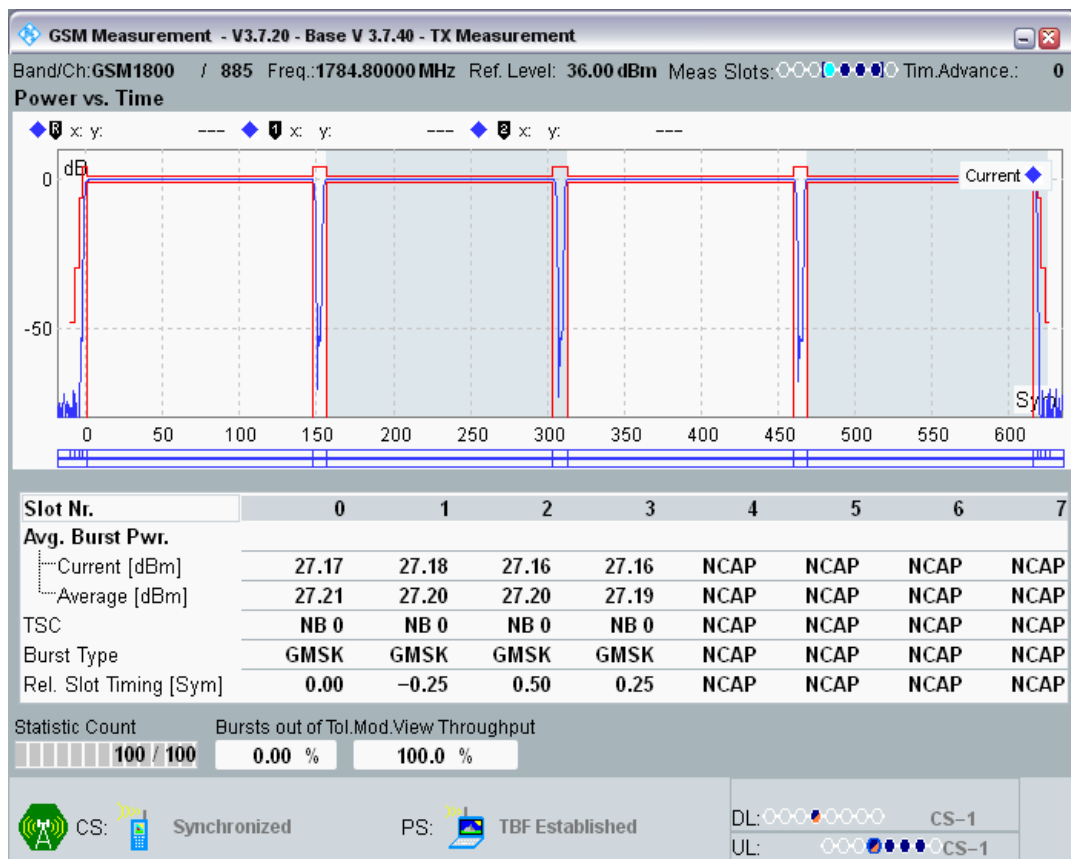

## Clause 4.2.11 Modulation Spectrum in GPRS multi slot configuration

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: CCISE2008044

Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-81.09	-60	-58.45	-51	PASS
GSM900	975	880.2	3;3;3;3	-1600 KHz	-80.76	-60	-58.13	-51	PASS
GSM900	975	880.2	3;3;3;3	-1400 KHz	-80.31	-60	-57.67	-51	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-79.51	-60	-56.87	-51	PASS
GSM900	975	880.2	3;3;3;3	-1000 KHz	-79.06	-60	-56.43	-51	PASS
GSM900	975	880.2	3;3;3;3	-800 KHz	-77.69	-60	-55.05	-51	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-75.51	-60	-52.88	-51	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-70.84	-60	-48.20	-36	PASS
GSM900	975	880.2	3;3;3;3	-250 KHz	-41.26	-33	-18.62	-36	PASS
GSM900	975	880.2	3;3;3;3	-200 KHz	-37.10	-30	-14.47	-36	PASS
GSM900	975	880.2	3;3;3;3	-100 KHz	-8.81	0.5	13.82	-36	PASS
GSM900	975	880.2	3;3;3;3	100 KHz	-9.08	0.5	13.56	-36	PASS
GSM900	975	880.2	3;3;3;3	200 KHz	-37.01	-30	-14.37	-36	PASS
GSM900	975	880.2	3;3;3;3	250 KHz	-41.12	-33	-18.49	-36	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-70.80	-60	-48.17	-36	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-75.93	-60	-53.30	-51	PASS
GSM900	975	880.2	3;3;3;3	800 KHz	-77.64	-60	-55.01	-51	PASS
GSM900	975	880.2	3;3;3;3	1000 KHz	-79.07	-60	-56.43	-51	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-79.41	-60	-56.78	-51	PASS
GSM900	975	880.2	3;3;3;3	1400 KHz	-79.61	-60	-56.97	-51	PASS
GSM900	975	880.2	3;3;3;3	1600 KHz	-80.95	-60	-58.31	-51	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-81.33	-60	-58.69	-51	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-80.03	-60	-58.83	-51	PASS
GSM900	60	902	3;3;3;3	-1600 KHz	-80.01	-60	-58.81	-51	PASS

				KHz					
GSM900	60	902	3;3;3;3	-1400 KHz	-79.24	-60	-58.04	-51	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-78.79	-60	-57.59	-51	PASS
GSM900	60	902	3;3;3;3	-1000 KHz	-78.28	-60	-57.08	-51	PASS
GSM900	60	902	3;3;3;3	-800 KHz	-77.10	-60	-55.90	-51	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-75.54	-60	-54.34	-51	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-70.37	-60	-49.18	-36	PASS
GSM900	60	902	3;3;3;3	-250 KHz	-40.84	-33	-19.64	-36	PASS
GSM900	60	902	3;3;3;3	-200 KHz	-36.62	-30	-15.43	-36	PASS
GSM900	60	902	3;3;3;3	-100 KHz	-8.47	0.5	12.73	-36	PASS
GSM900	60	902	3;3;3;3	100 KHz	-8.69	0.5	12.51	-36	PASS
GSM900	60	902	3;3;3;3	200 KHz	-36.40	-30	-15.20	-36	PASS
GSM900	60	902	3;3;3;3	250 KHz	-41.00	-33	-19.80	-36	PASS
GSM900	60	902	3;3;3;3	400 KHz	-70.53	-60	-49.33	-36	PASS
GSM900	60	902	3;3;3;3	600 KHz	-75.43	-60	-54.23	-51	PASS
GSM900	60	902	3;3;3;3	800 KHz	-77.17	-60	-55.97	-51	PASS
GSM900	60	902	3;3;3;3	1000 KHz	-78.55	-60	-57.35	-51	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-78.86	-60	-57.67	-51	PASS
GSM900	60	902	3;3;3;3	1400 KHz	-78.96	-60	-57.76	-51	PASS
GSM900	60	902	3;3;3;3	1600 KHz	-79.97	-60	-58.77	-51	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-80.26	-60	-59.06	-51	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-79.70	-60	-57.77	-51	PASS
GSM900	124	914.8	3;3;3;3	-1600 KHz	-80.84	-60	-58.91	-51	PASS
GSM900	124	914.8	3;3;3;3	-1400 KHz	-80.10	-60	-58.17	-51	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-79.54	-60	-57.61	-51	PASS

GSM900	124	914.8	3;3;3;3	-1000 KHz	-78.91	-60	-56.98	-51	PASS
GSM900	124	914.8	3;3;3;3	-800 KHz	-77.96	-60	-56.03	-51	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-75.73	-60	-53.81	-51	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-70.81	-60	-48.88	-36	PASS
GSM900	124	914.8	3;3;3;3	-250 KHz	-41.13	-33	-19.21	-36	PASS
GSM900	124	914.8	3;3;3;3	-200 KHz	-36.97	-30	-15.04	-36	PASS
GSM900	124	914.8	3;3;3;3	-100 KHz	-9.15	0.5	12.78	-36	PASS
GSM900	124	914.8	3;3;3;3	100 KHz	-8.80	0.5	13.13	-36	PASS
GSM900	124	914.8	3;3;3;3	200 KHz	-37.20	-30	-15.27	-36	PASS
GSM900	124	914.8	3;3;3;3	250 KHz	-41.05	-33	-19.12	-36	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-70.96	-60	-49.03	-36	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-75.87	-60	-53.94	-51	PASS
GSM900	124	914.8	3;3;3;3	800 KHz	-77.99	-60	-56.06	-51	PASS
GSM900	124	914.8	3;3;3;3	1000 KHz	-79.10	-60	-57.17	-51	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-79.26	-60	-57.33	-51	PASS
GSM900	124	914.8	3;3;3;3	1400 KHz	-79.69	-60	-57.76	-51	PASS
GSM900	124	914.8	3;3;3;3	1600 KHz	-80.81	-60	-58.88	-51	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-79.78	-60	-57.85	-51	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-79.51	-60	-60.80	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1600 KHz	-79.42	-60	-60.71	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1400 KHz	-78.81	-60	-60.10	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-78.28	-60	-59.57	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1000 KHz	-77.14	-60	-58.43	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-800 KHz	-75.80	-60	-57.09	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-73.45	-60	-54.74	-56	PASS


				KHz					
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-68.66	-60	-49.94	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-250 KHz	-41.21	-33	-22.50	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-200 KHz	-36.69	-30	-17.98	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-100 KHz	-9.14	0.5	9.57	-36	PASS
DCS1800	512	1710.2	3;3;3;3	100 KHz	-8.90	0.5	9.81	-36	PASS
DCS1800	512	1710.2	3;3;3;3	200 KHz	-36.87	-30	-18.16	-36	PASS
DCS1800	512	1710.2	3;3;3;3	250 KHz	-41.06	-33	-22.35	-36	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-68.71	-60	-50.00	-36	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-73.52	-60	-54.81	-56	PASS
DCS1800	512	1710.2	3;3;3;3	800 KHz	-75.87	-60	-57.16	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1000 KHz	-77.30	-60	-58.59	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-77.84	-60	-59.13	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1400 KHz	-78.60	-60	-59.89	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1600 KHz	-79.39	-60	-60.68	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-79.34	-60	-60.63	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-78.99	-60	-60.32	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1600 KHz	-79.31	-60	-60.64	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1400 KHz	-78.78	-60	-60.11	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-77.97	-60	-59.30	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1000 KHz	-77.26	-60	-58.59	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-800 KHz	-75.47	-60	-56.80	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-73.53	-60	-54.86	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-68.54	-60	-49.87	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-250 KHz	-41.01	-33	-22.34	-36	PASS




DCS1800	700	1747.8	3;3;3;3	-200 KHz	-36.63	-30	-17.96	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-100 KHz	-8.66	0.5	10.01	-36	PASS
DCS1800	700	1747.8	3;3;3;3	100 KHz	-8.56	0.5	10.11	-36	PASS
DCS1800	700	1747.8	3;3;3;3	200 KHz	-36.82	-30	-18.15	-36	PASS
DCS1800	700	1747.8	3;3;3;3	250 KHz	-40.75	-33	-22.08	-36	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-68.31	-60	-49.64	-36	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-73.14	-60	-54.47	-56	PASS
DCS1800	700	1747.8	3;3;3;3	800 KHz	-75.91	-60	-57.24	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1000 KHz	-77.33	-60	-58.66	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-77.86	-60	-59.19	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1400 KHz	-78.26	-60	-59.59	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1600 KHz	-79.27	-60	-60.60	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-79.07	-60	-60.40	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-80.09	-60	-60.71	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1600 KHz	-79.78	-60	-60.40	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1400 KHz	-78.77	-60	-59.39	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-78.18	-60	-58.80	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1000 KHz	-77.15	-60	-57.77	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-800 KHz	-75.95	-60	-56.58	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-73.51	-60	-54.13	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-68.42	-60	-49.04	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-250 KHz	-40.96	-33	-21.58	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-200 KHz	-36.71	-30	-17.33	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-100 KHz	-9.11	0.5	10.27	-36	PASS
DCS1800	885	1784.8	3;3;3;3	100 KHz	-8.71	0.5	10.67	-36	PASS

DCS1800	885	1784.8	3;3;3;3	200 KHz	-36.87	-30	-17.49	-36	PASS
DCS1800	885	1784.8	3;3;3;3	250 KHz	-40.93	-33	-21.55	-36	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-68.37	-60	-48.99	-36	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-73.77	-60	-54.40	-56	PASS
DCS1800	885	1784.8	3;3;3;3	800 KHz	-75.86	-60	-56.48	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1000 KHz	-77.38	-60	-58.00	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-77.90	-60	-58.53	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1400 KHz	-78.40	-60	-59.02	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1600 KHz	-79.92	-60	-60.54	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-80.14	-60	-60.77	-56	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

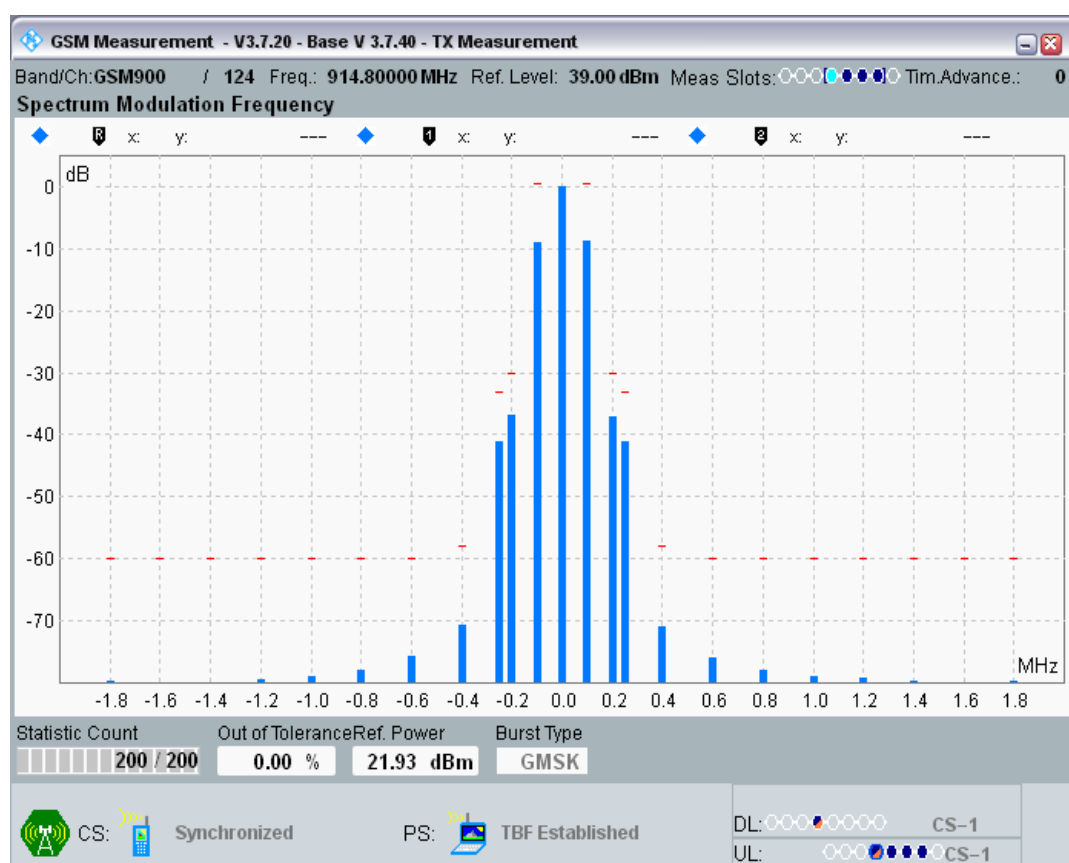


GSM900 Channel=60 Gamma=3;3;3;3.png

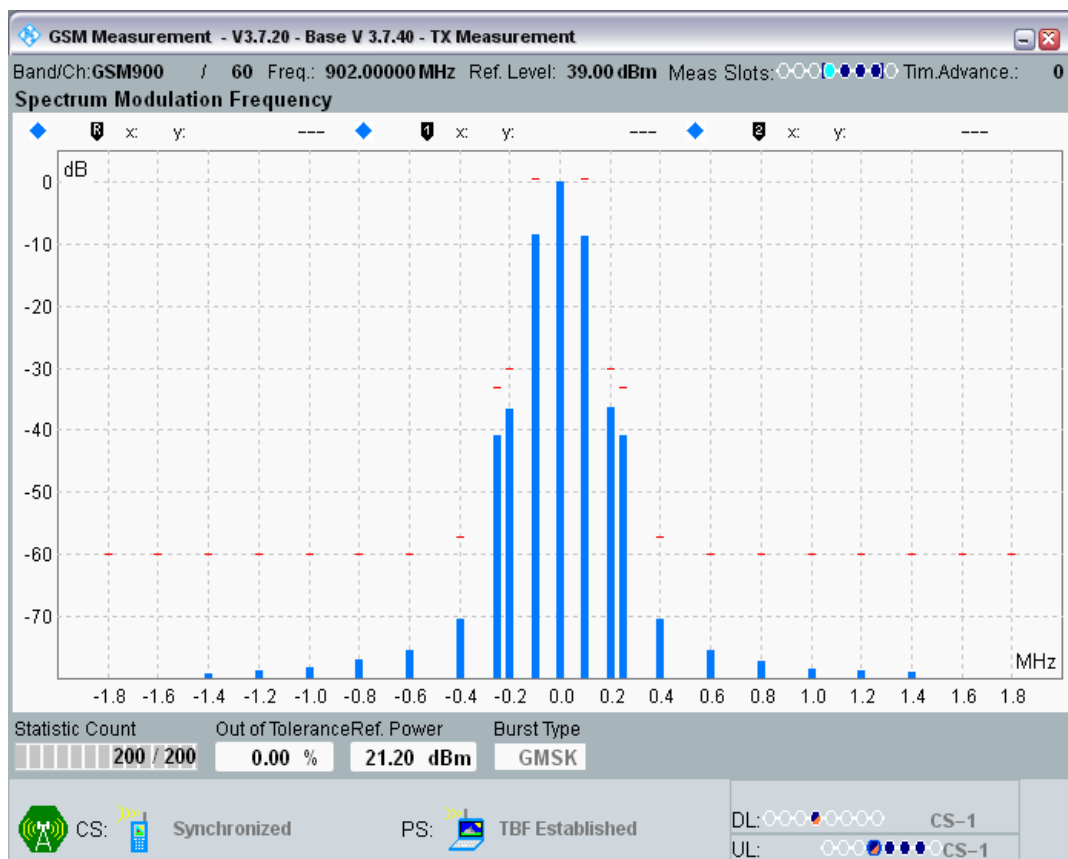


GSM900 Channel=975 Gamma=3;3;3;3.png

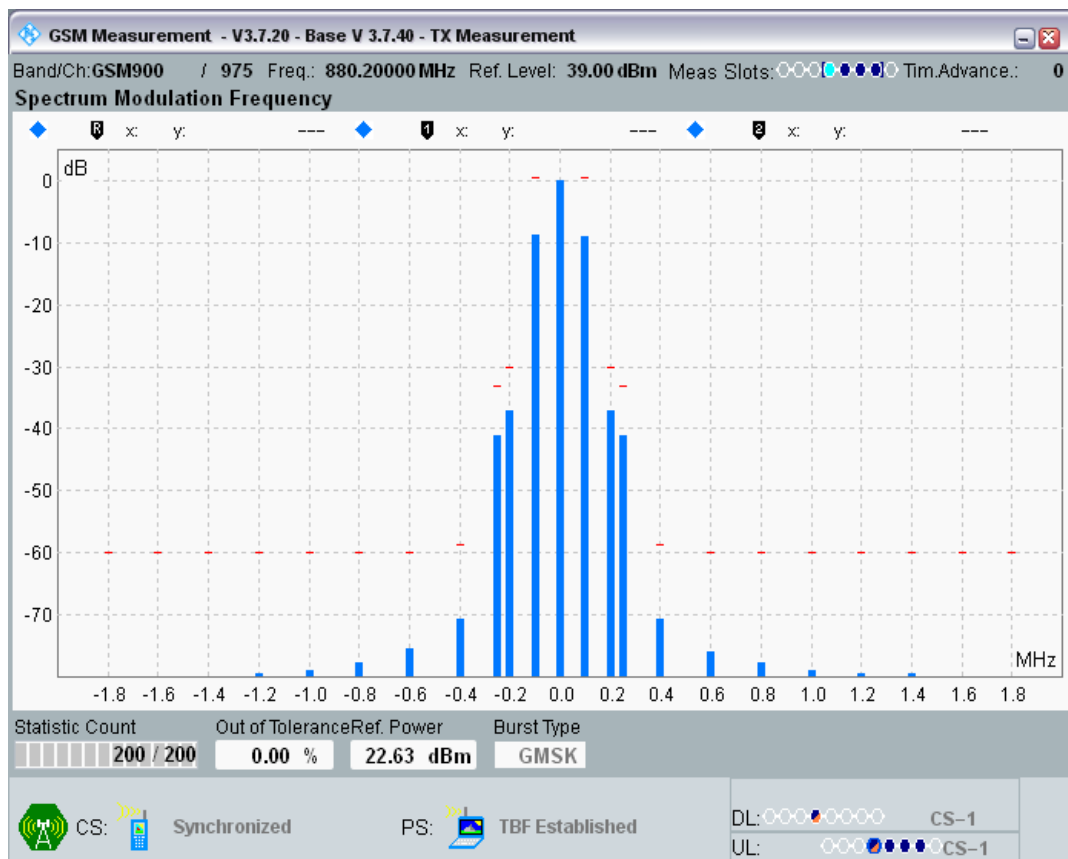


DCS1800 Channel=512 Gamma=3;3;3;3.png

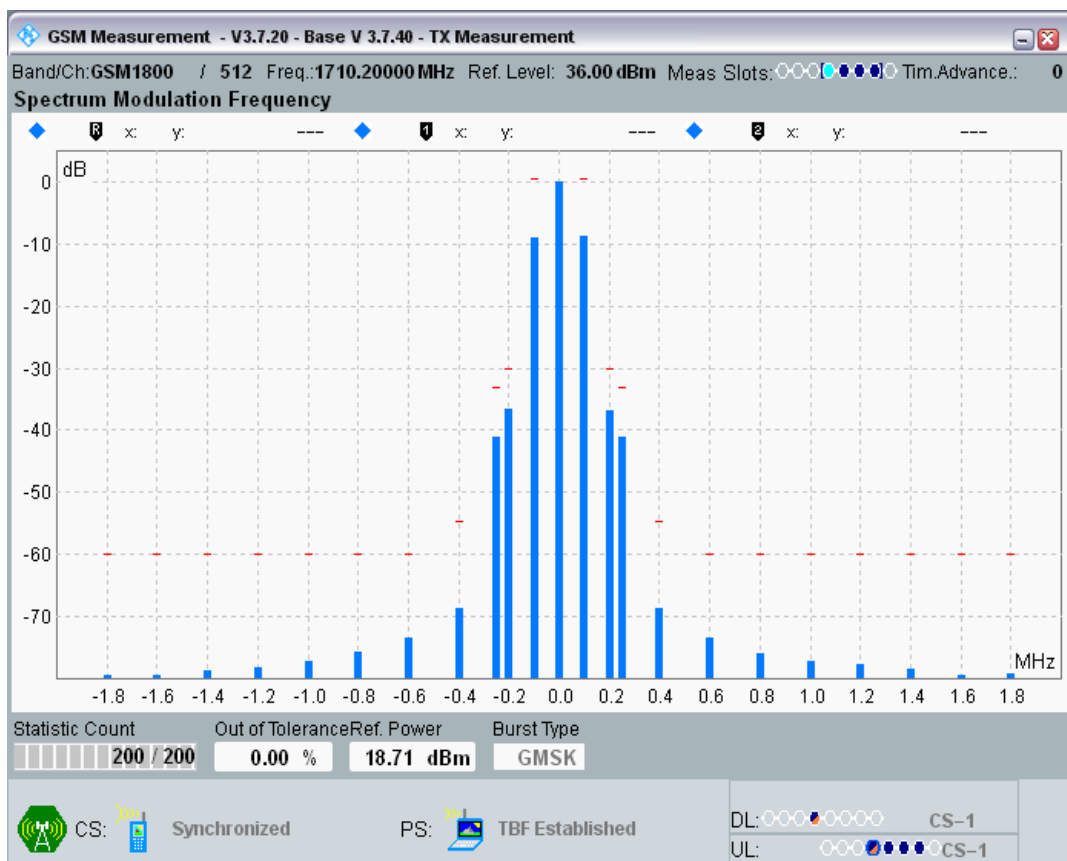

DCS1800 Channel=700 Gamma=3;3;3;3.png

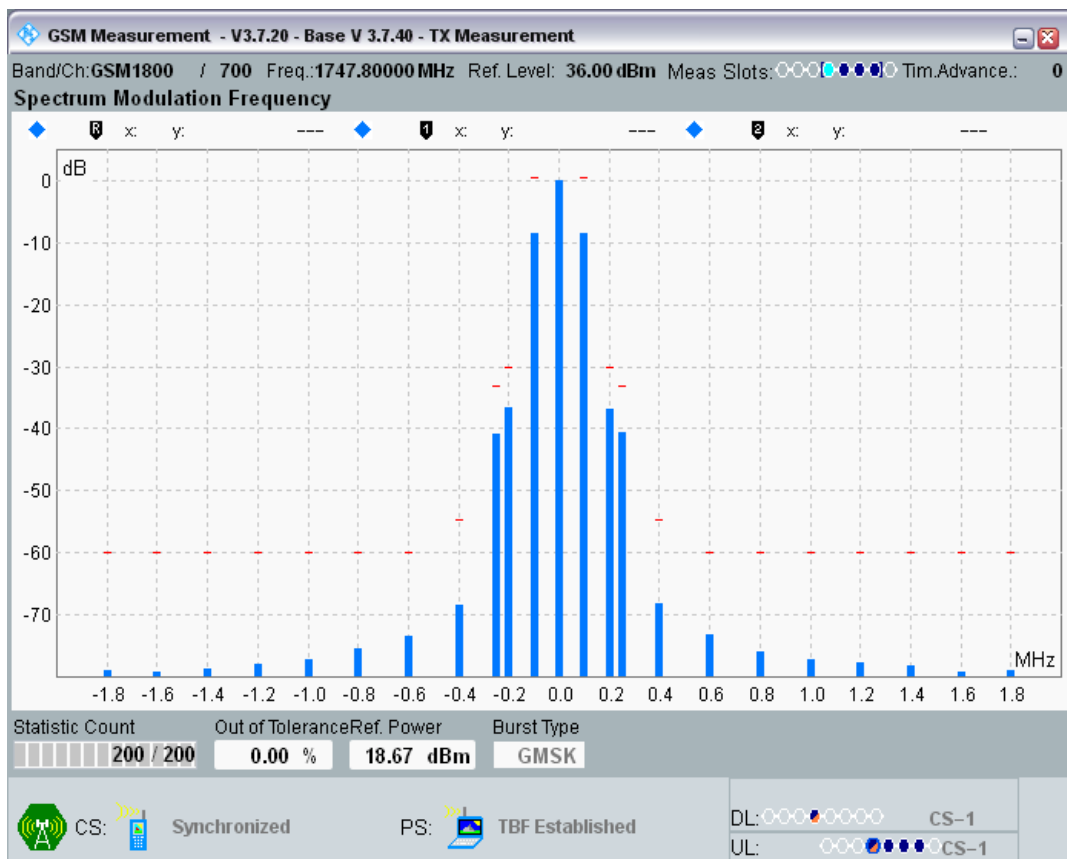

DCS1800 Channel=885 Gamma=3;3;3;3.png

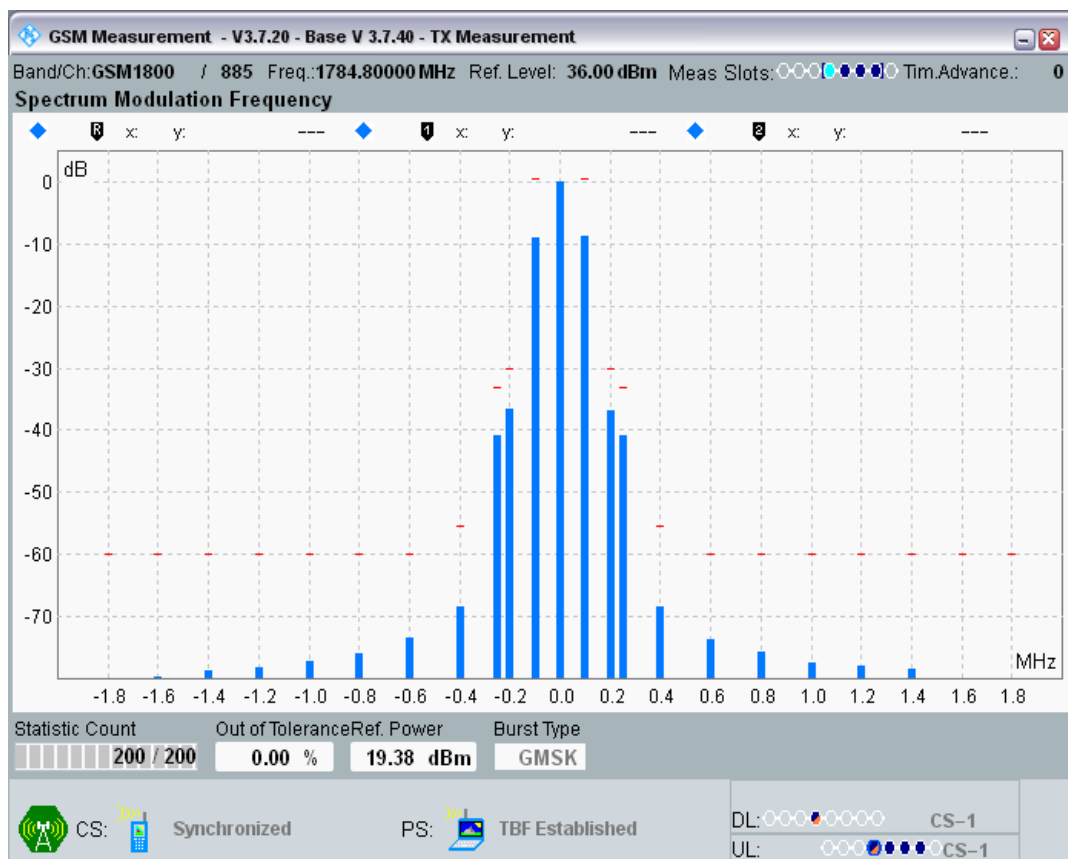


#### Clause 4.2.11 Switching Spectrum in GPRS multi slot configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-45.20	-24	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-39.37	-21	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-31.02	-21	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-26.39	-19	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-27.53	-19	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-27.91	-21	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-39.21	-21	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-44.24	-24	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-45.89	-24	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-40.04	-21	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-31.55	-21	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-26.64	-19	PASS
GSM900	60	902	3;3;3;3	400 KHz	-27.83	-19	PASS
GSM900	60	902	3;3;3;3	600 KHz	-28.42	-21	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-40.40	-21	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-45.64	-24	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-45.56	-24	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-39.15	-21	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-30.90	-21	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-26.94	-19	PASS

GSM900	124	914.8	3;3;3;3	400 KHz	-28.19	-19	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-27.58	-21	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-39.86	-21	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-45.43	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-50.05	-27	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-44.64	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-37.83	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-32.46	-22	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-27.32	-22	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-35.19	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-43.28	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-49.38	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-49.17	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-44.66	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-37.37	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-32.63	-22	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-28.28	-22	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-33.76	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-43.73	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-47.46	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-49.19	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-44.97	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-36.70	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-32.46	-22	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-28.53	-22	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-32.45	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-42.41	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-47.57	-27	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

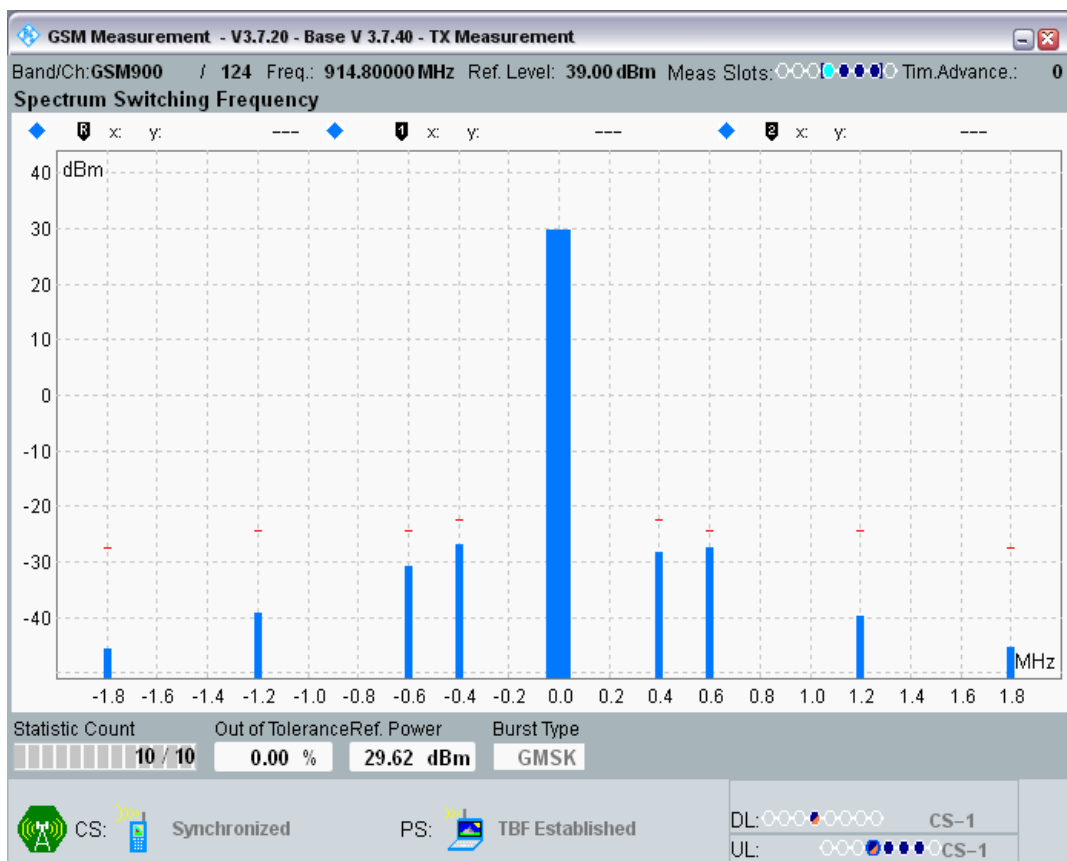


GSM900 Channel=60 Gamma=3;3;3;3.png

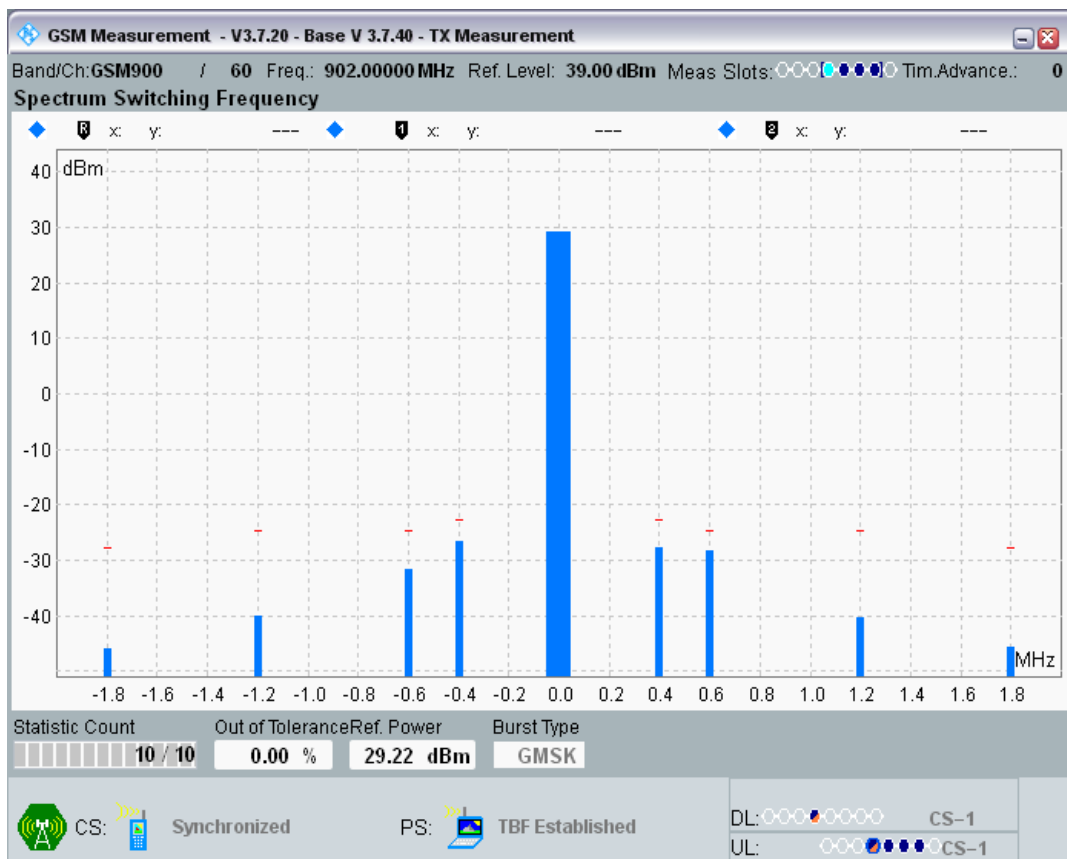

GSM900 Channel=975 Gamma=3;3;3;3.png

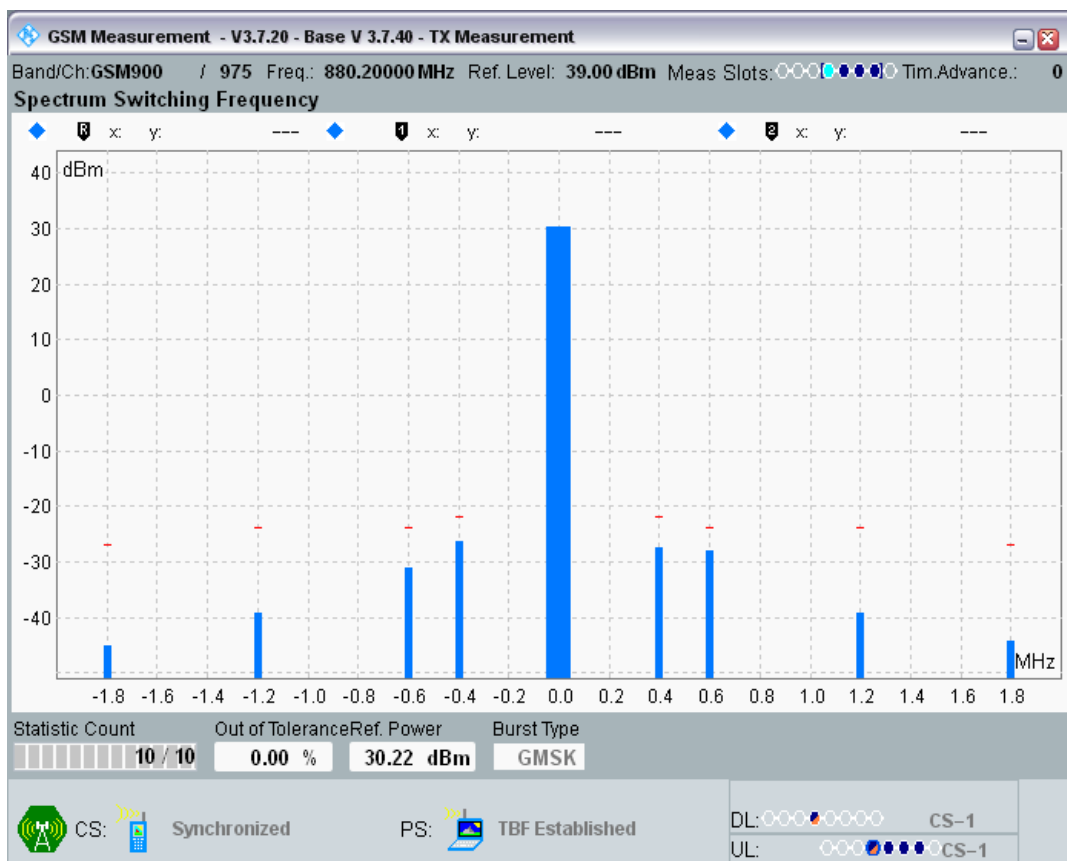


DCS1800 Channel=512 Gamma=3;3;3;3.png

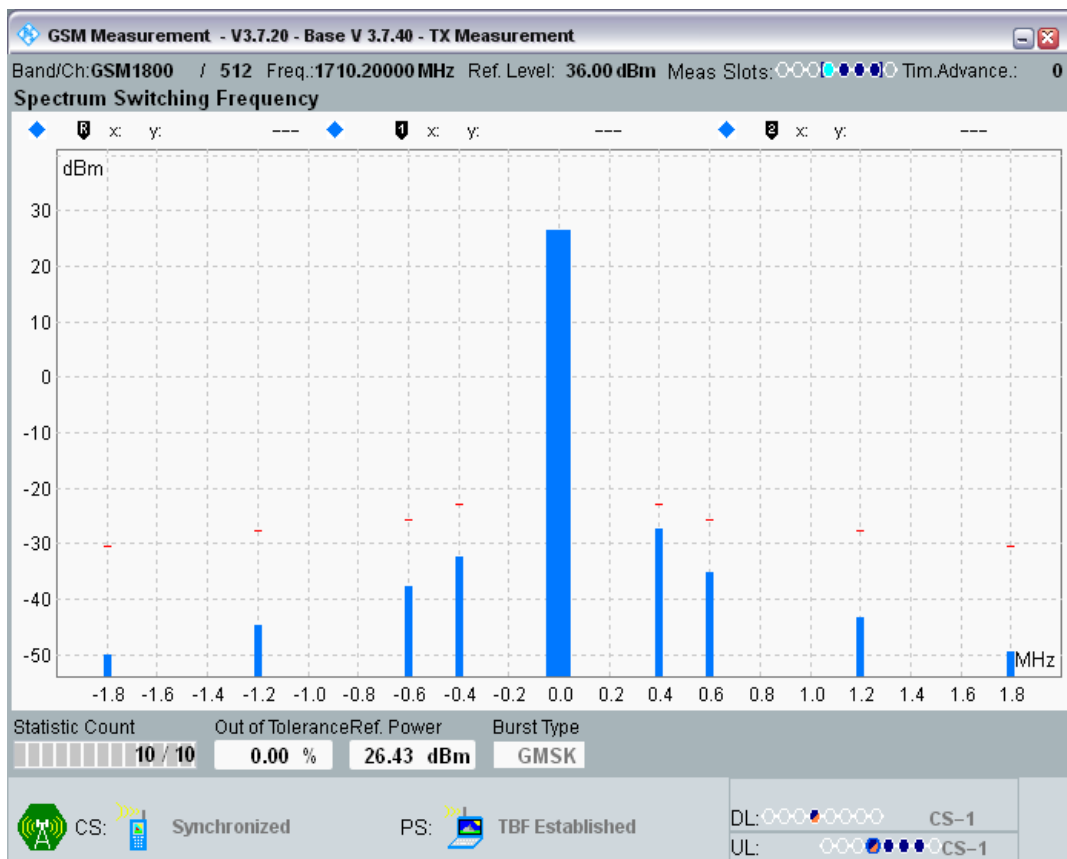


DCS1800 Channel=700 Gamma=3;3;3;3.png



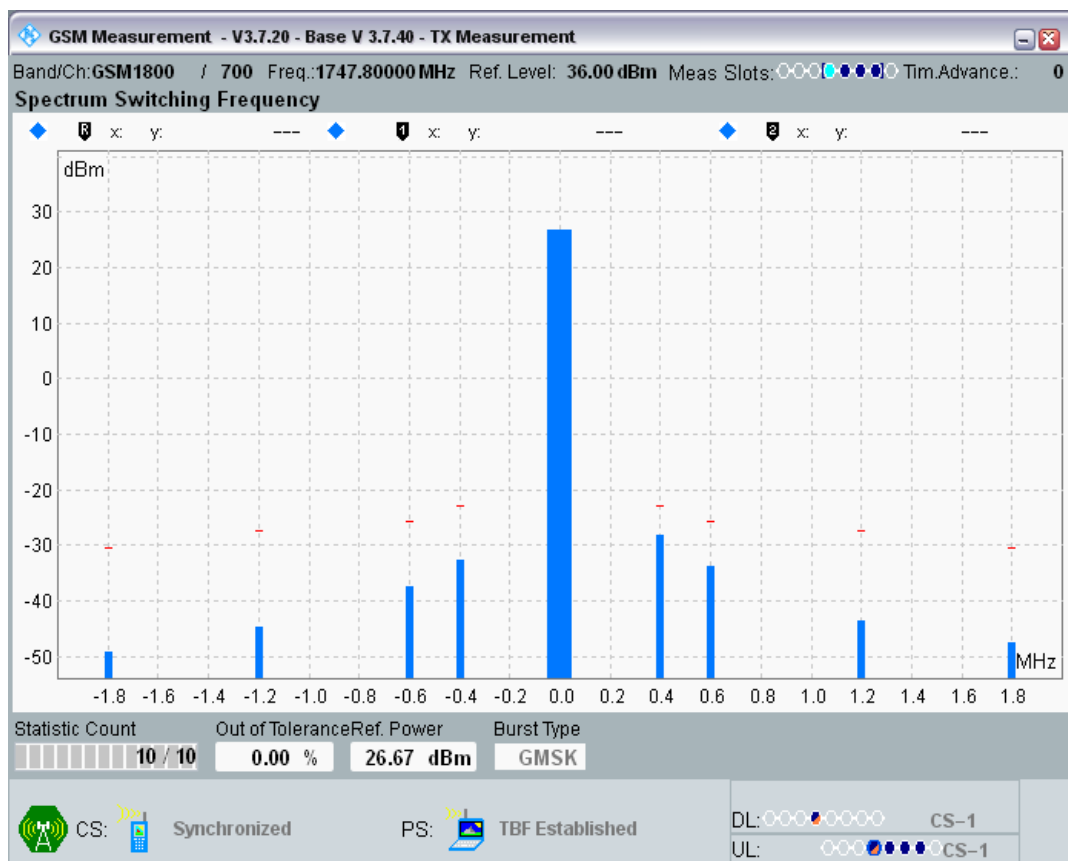

DCS1800 Channel=885 Gamma=3;3;3;3.png

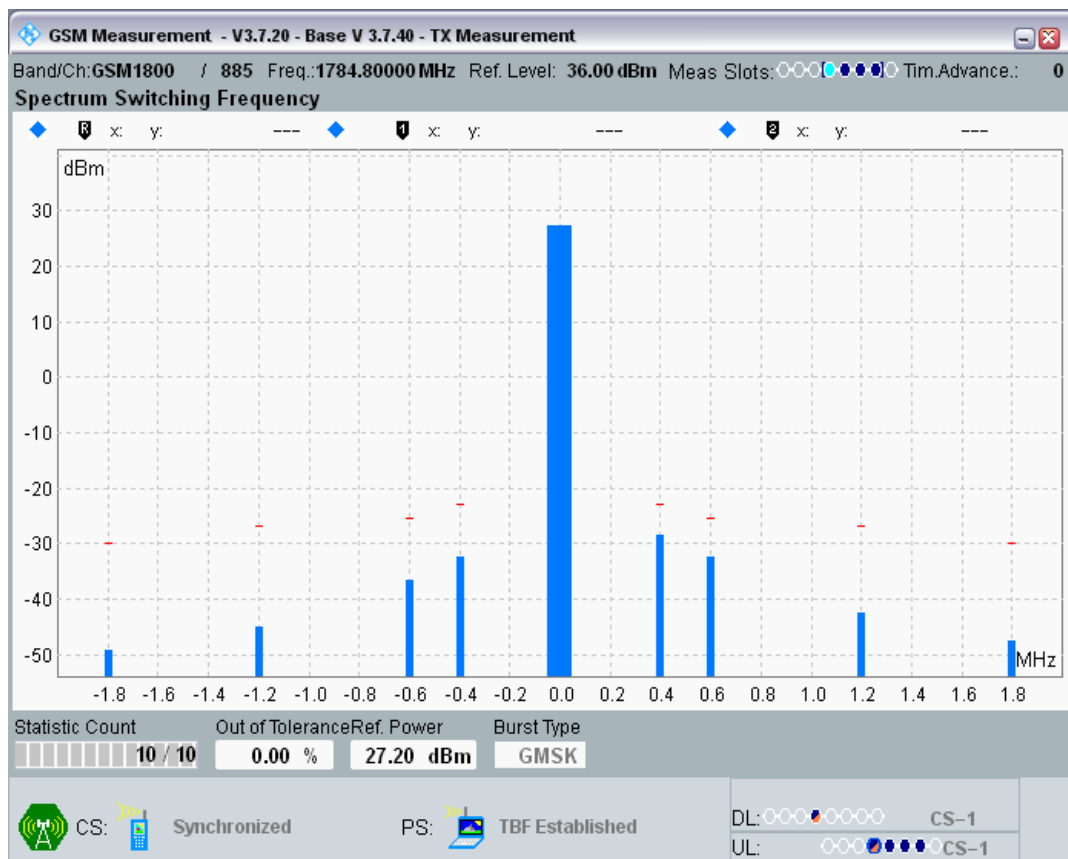

## Clause 4.2.44 Minimum Input level for Reference Performance - GPRS PDTCH

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: CCISE2008044

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	PDTCH CS-1	-104	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH CS-2	-104	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH CS-3	-104	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH CS-4	-101	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH CS-1	-104	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH CS-2	-104	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH CS-3	-104	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH CS-4	-101	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH CS-1	-104	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH CS-2	-104	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH CS-3	-104	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH CS-4	-101	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH CS-1	-104	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH CS-2	-104	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH CS-3	-104	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH CS-4	-101	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH CS-1	-104	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH CS-2	-104	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH CS-3	-104	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH CS-4	-101	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH	-104	0.00	10	PASS

					CS-1				
DCS1800	885	1784.8	1879.8	Static	PDTCH	-104	0.00	10	PASS
					CS-2				
DCS1800	885	1784.8	1879.8	Static	PDTCH	-104	0.00	10	PASS
					CS-3				
DCS1800	885	1784.8	1879.8	Static	PDTCH	-101	0.00	10	PASS
					CS-4				

#### Clause 4.2.44 Minimum Input level for Reference Performance - GPRS USF


Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	USF CS-1	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF CS-2	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF CS-3	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF CS-4	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF CS-1	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF CS-2	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF CS-3	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF CS-4	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF CS-1	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF CS-2	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF CS-3	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF CS-4	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF CS-1	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF CS-2	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF CS-3	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF CS-4	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF CS-1	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF CS-2	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF CS-3	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF CS-4	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF CS-1	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF CS-2	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF CS-3	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF CS-4	-104	0.00	1	PASS

#### Clause 4.2.26 Frequency error and Modulation accuracy in EGPRS Configuration


Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	6;6;6;6	Frequency Error (Hz)	16.79	-88.02	88.02	PASS
GSM900	975	880.2	6;6;6;6	RMS EVM (%)	1.68	0	9	PASS
GSM900	975	880.2	6;6;6;6	Peak EVM (%)	5.13	0	30	PASS
GSM900	60	902	6;6;6;6	Frequency Error (Hz)	16.34	-90.2	90.2	PASS
GSM900	60	902	6;6;6;6	RMS EVM (%)	1.53	0	9	PASS

GSM900	60	902	6;6;6;6	Peak EVM (%)	4.41	0	30	PASS
GSM900	124	914.8	6;6;6;6	Frequency Error (Hz)	13.33	-91.48	91.48	PASS
GSM900	124	914.8	6;6;6;6	RMS EVM (%)	1.55	0	9	PASS
GSM900	124	914.8	6;6;6;6	Peak EVM (%)	4.73	0	30	PASS
DCS1800	512	1710.2	5;5;5;5	Frequency Error (Hz)	15.50	-171.02	171.02	PASS
DCS1800	512	1710.2	5;5;5;5	RMS EVM (%)	1.02	0	9	PASS
DCS1800	512	1710.2	5;5;5;5	Peak EVM (%)	3.40	0	30	PASS
DCS1800	700	1747.8	5;5;5;5	Frequency Error (Hz)	17.34	-174.78	174.78	PASS
DCS1800	700	1747.8	5;5;5;5	RMS EVM (%)	1.03	0	9	PASS
DCS1800	700	1747.8	5;5;5;5	Peak EVM (%)	3.25	0	30	PASS
DCS1800	885	1784.8	5;5;5;5	Frequency Error (Hz)	18.89	-178.48	178.48	PASS
DCS1800	885	1784.8	5;5;5;5	RMS EVM (%)	1.03	0	9	PASS
DCS1800	885	1784.8	5;5;5;5	Peak EVM (%)	3.14	0	30	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

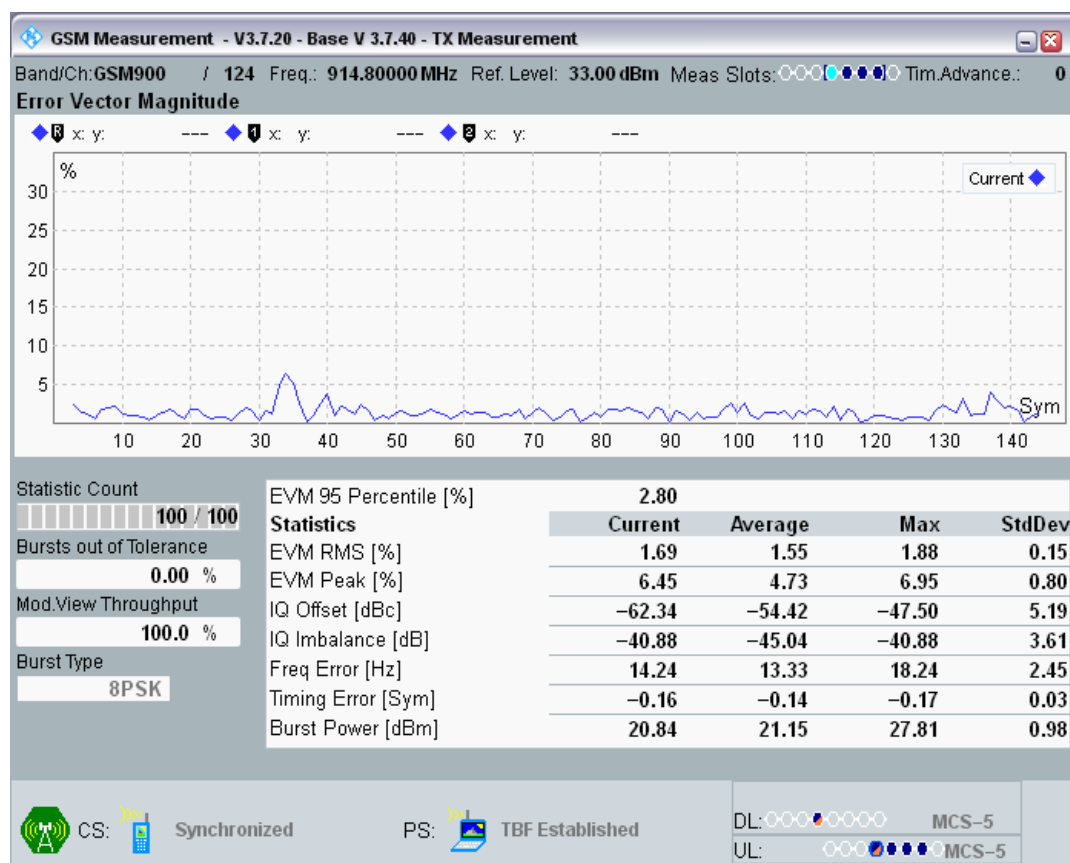


GSM900 Channel=60 Gamma=6;6;6;6.png

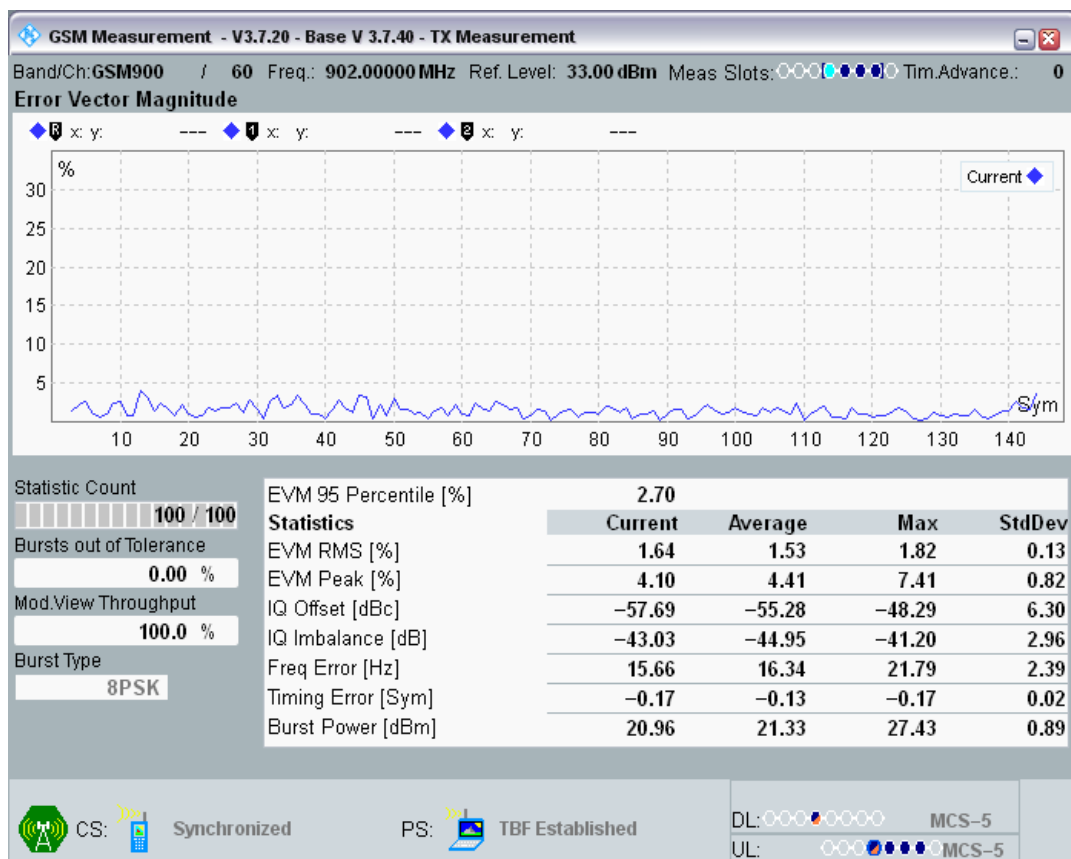


GSM900 Channel=975 Gamma=6;6;6;6.png

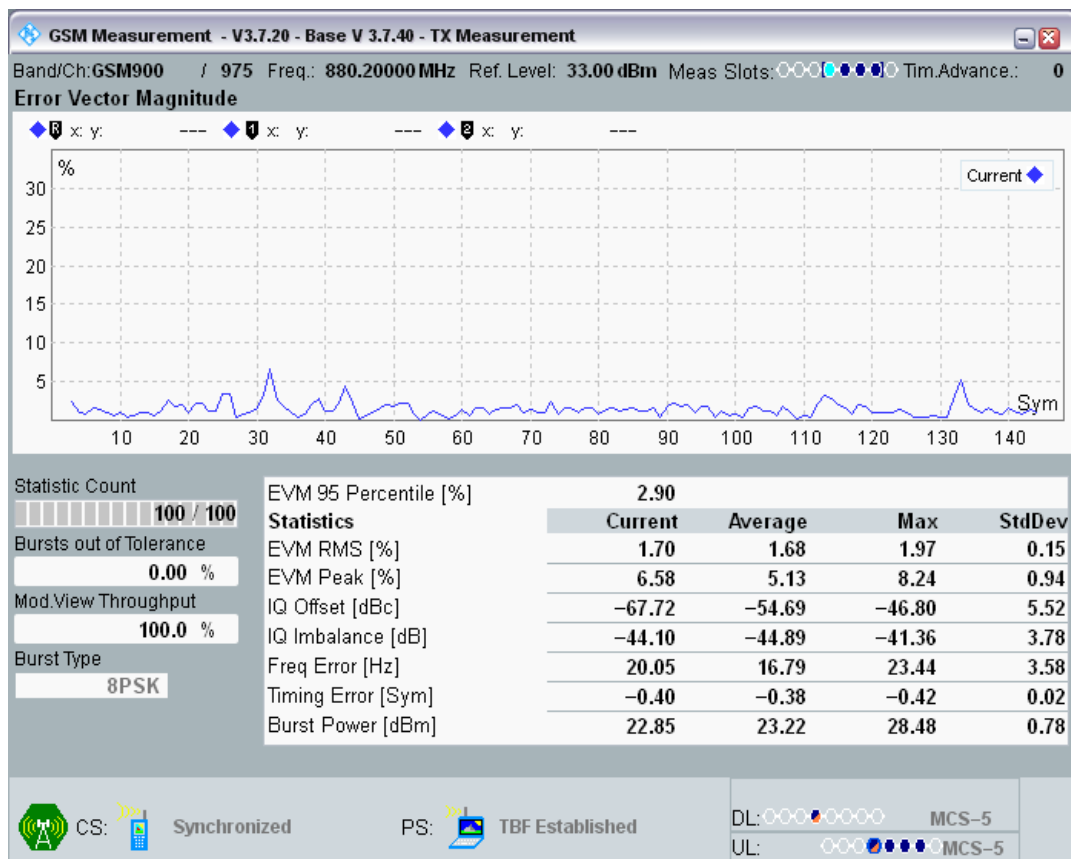


DCS1800 Channel=512 Gamma=5;5;5;5.png

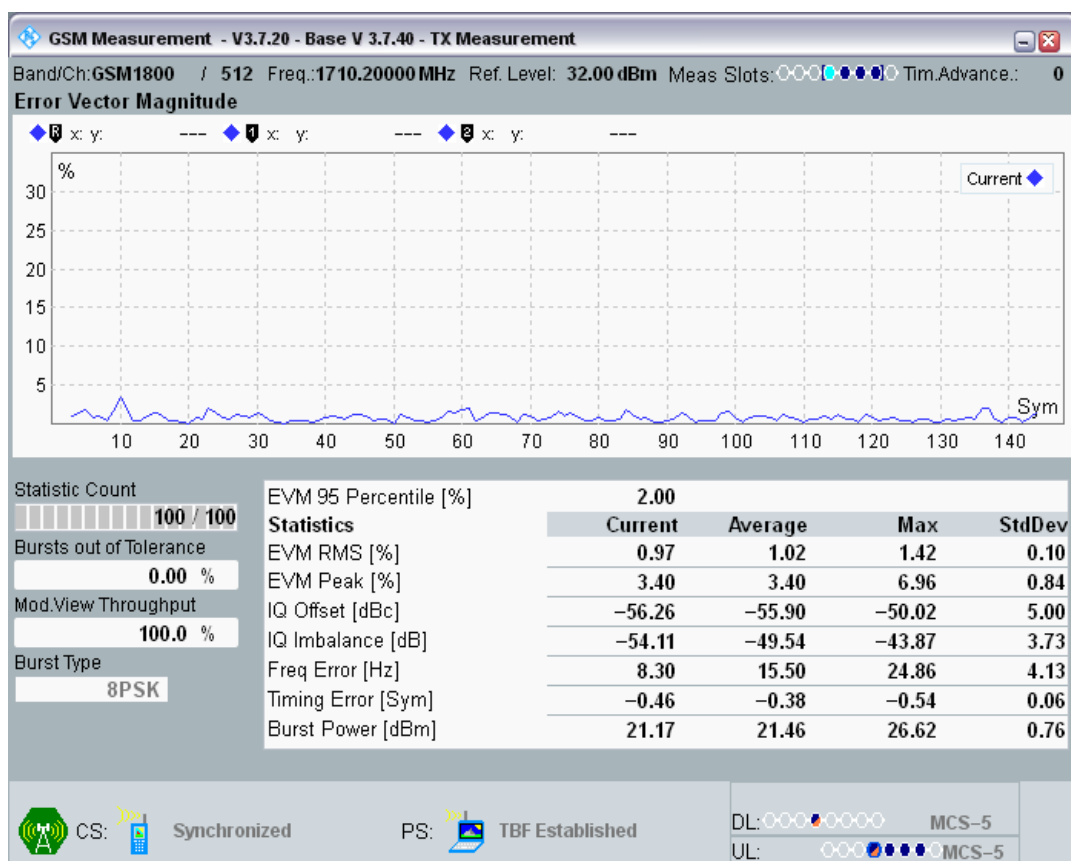

DCS1800 Channel=700 Gamma=5;5;5;5.png

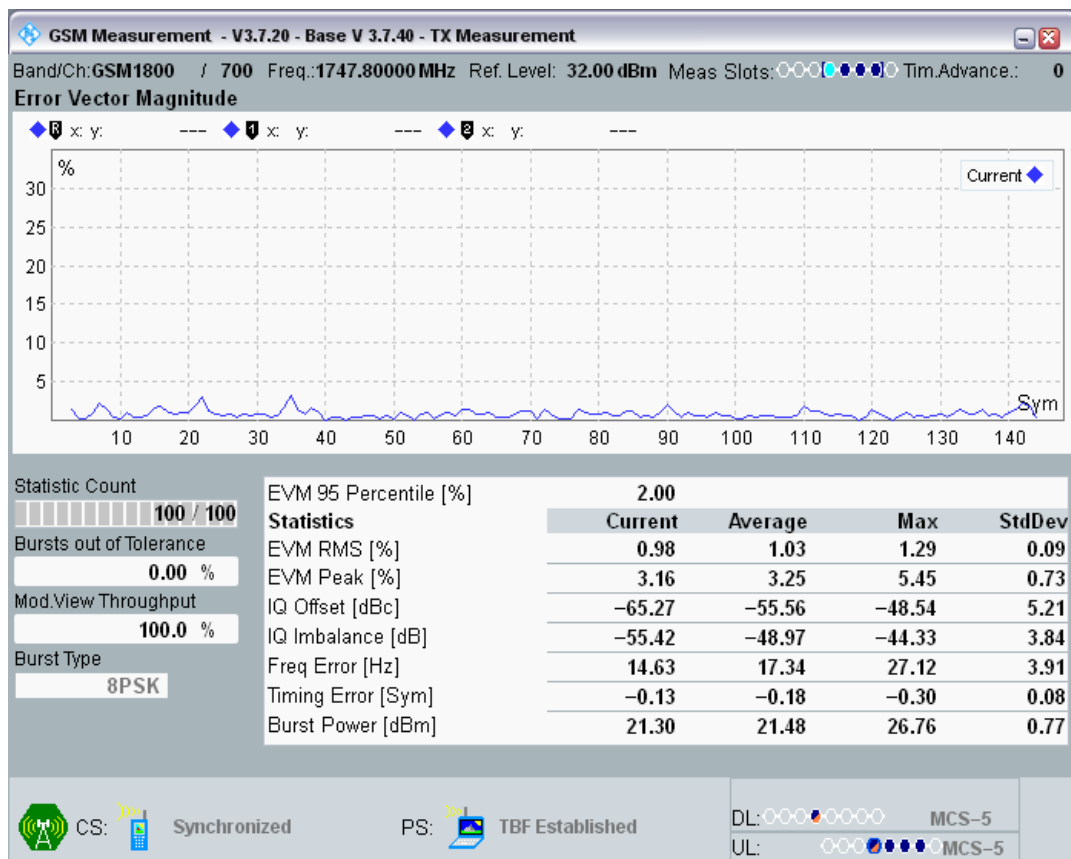

DCS1800 Channel=885 Gamma=5;5;5;5.png

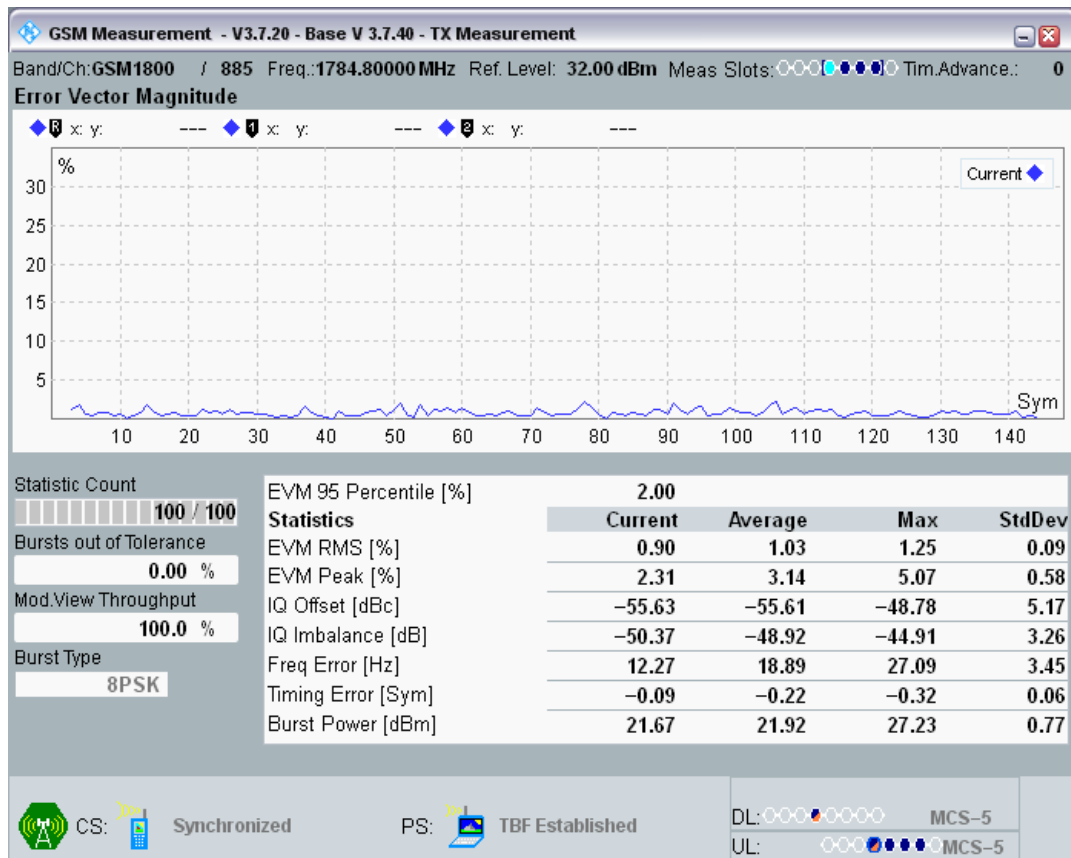


### Clause 4.2.27 Frequency error under multipath and interference conditions in EGPRS Configuration

Band	Type	Channel	Frequency (MHz)	Gamma	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
GSM900	RA250	975	880.2	6;6;6;6	12.40	-300	300	PASS
GSM900	RA250	60	902	6;6;6;6	17.11	-300	300	PASS
GSM900	RA250	124	914.8	6;6;6;6	15.98	-300	300	PASS
GSM900	HT100	975	880.2	6;6;6;6	15.92	-180	180	PASS
GSM900	HT100	60	902	6;6;6;6	15.79	-180	180	PASS
GSM900	HT100	124	914.8	6;6;6;6	15.05	-180	180	PASS
GSM900	TU50	975	880.2	6;6;6;6	12.72	-160	160	PASS
GSM900	TU50	60	902	6;6;6;6	15.59	-160	160	PASS
GSM900	TU50	124	914.8	6;6;6;6	14.69	-160	160	PASS
GSM900	TU3	975	880.2	6;6;6;6	14.27	-230	230	PASS
GSM900	TU3	60	902	6;6;6;6	19.08	-230	230	PASS
GSM900	TU3	124	914.8	6;6;6;6	17.27	-230	230	PASS
DCS1800	RA130	512	1710.2	5;5;5;5	13.82	-400	400	PASS
DCS1800	RA130	700	1747.8	5;5;5;5	13.14	-400	400	PASS
DCS1800	RA130	885	1784.8	5;5;5;5	14.59	-400	400	PASS
DCS1800	HT100	512	1710.2	5;5;5;5	9.40	-350	350	PASS
DCS1800	HT100	700	1747.8	5;5;5;5	11.72	-350	350	PASS
DCS1800	HT100	885	1784.8	5;5;5;5	17.01	-350	350	PASS
DCS1800	TU50	512	1710.2	5;5;5;5	15.21	-260	260	PASS


DCS1800	TU50	700	1747.8	5;5;5;5	17.34	-260	260	PASS
DCS1800	TU50	885	1784.8	5;5;5;5	20.18	-260	260	PASS
DCS1800	TU1_5	512	1710.2	5;5;5;5	18.31	-320	320	PASS
DCS1800	TU1_5	700	1747.8	5;5;5;5	17.14	-320	320	PASS
DCS1800	TU1_5	885	1784.8	5;5;5;5	23.05	-320	320	PASS

GSM900 Channel=124 Gamma=6;6;6;6 HT100.png

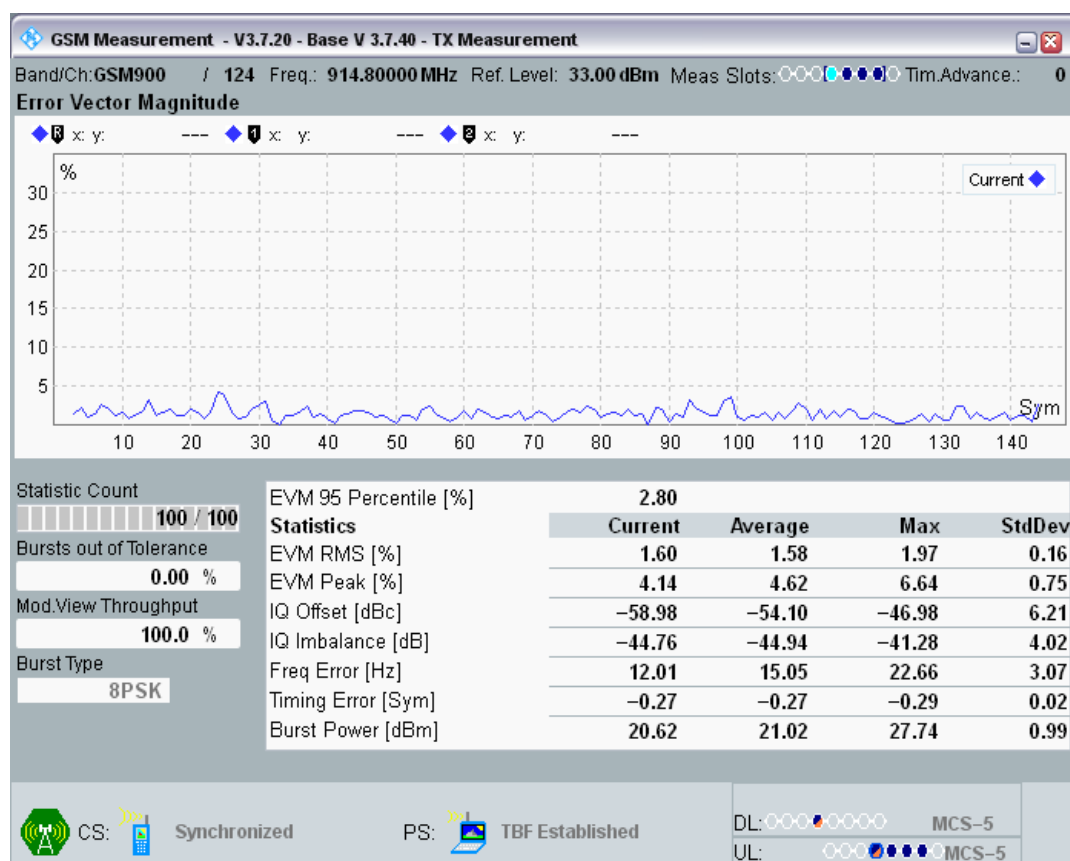


GSM900 Channel=124 Gamma=6;6;6;6 RA250.png




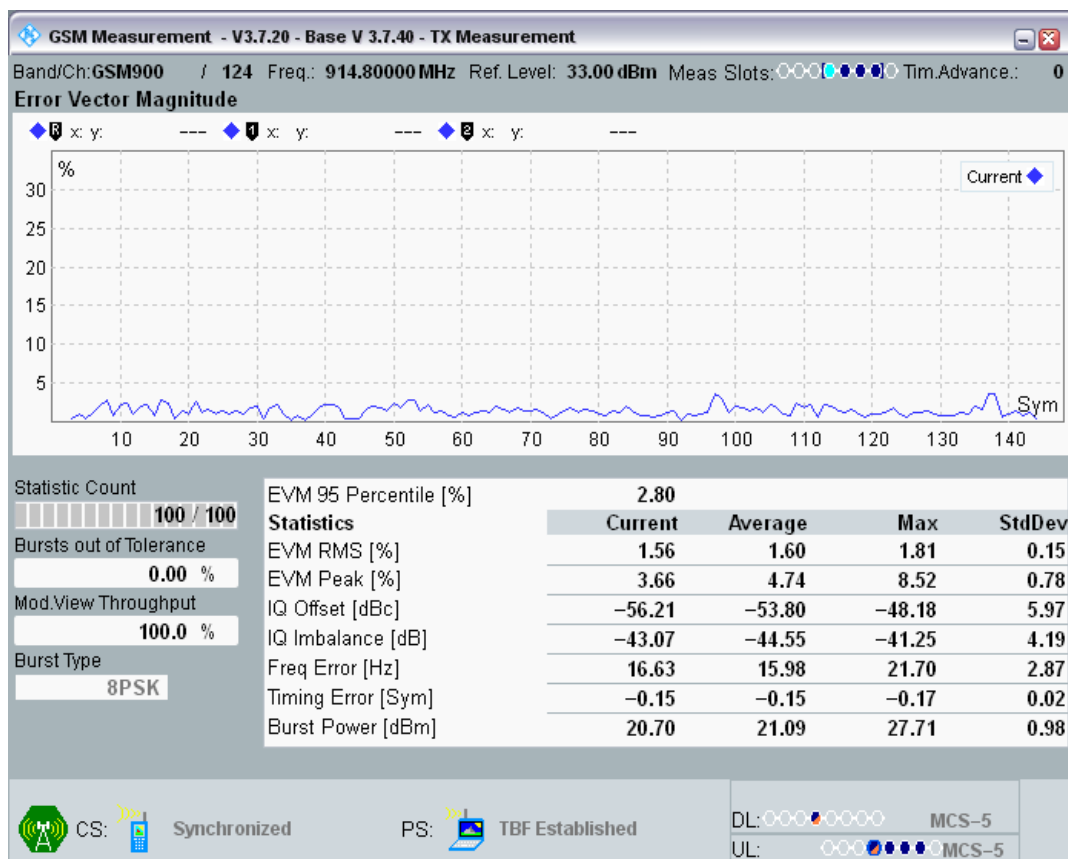


GSM900 Channel=124 Gamma=6;6;6;6 TU3.png

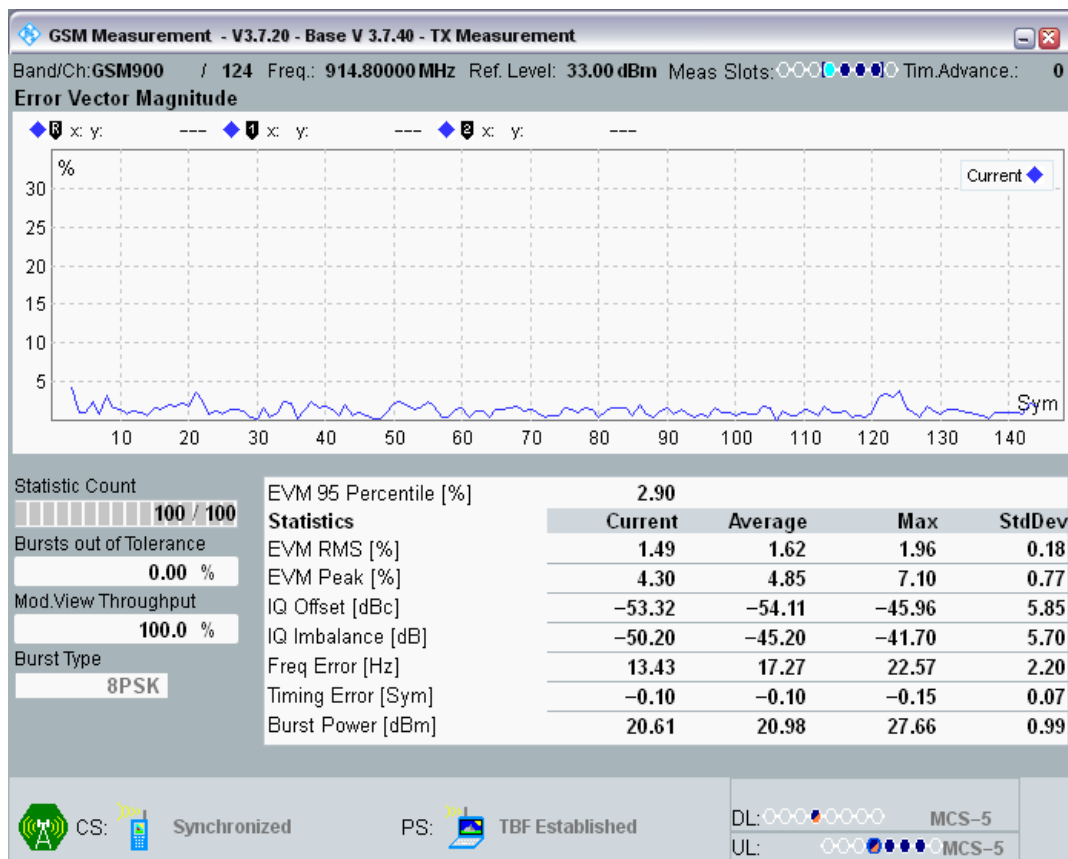


GSM900 Channel=124 Gamma=6;6;6;6 TU50.png

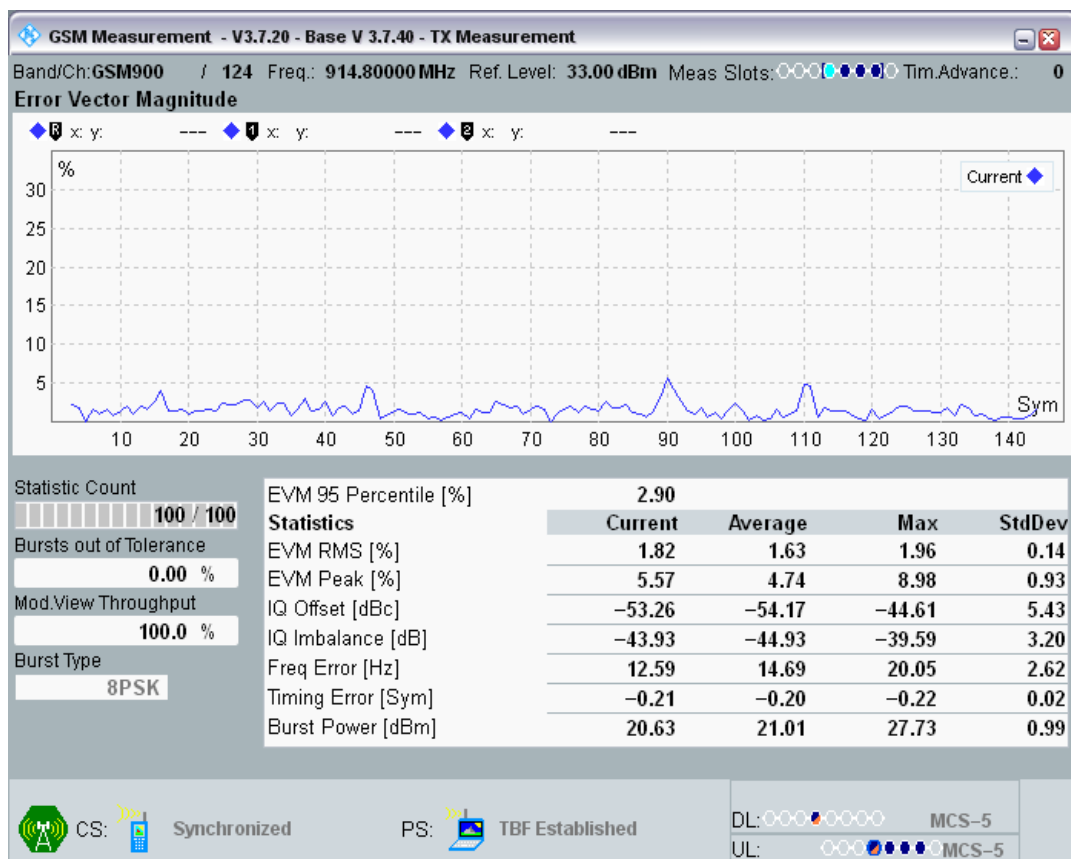


GSM900 Channel=60 Gamma=6;6;6;6 HT100.png

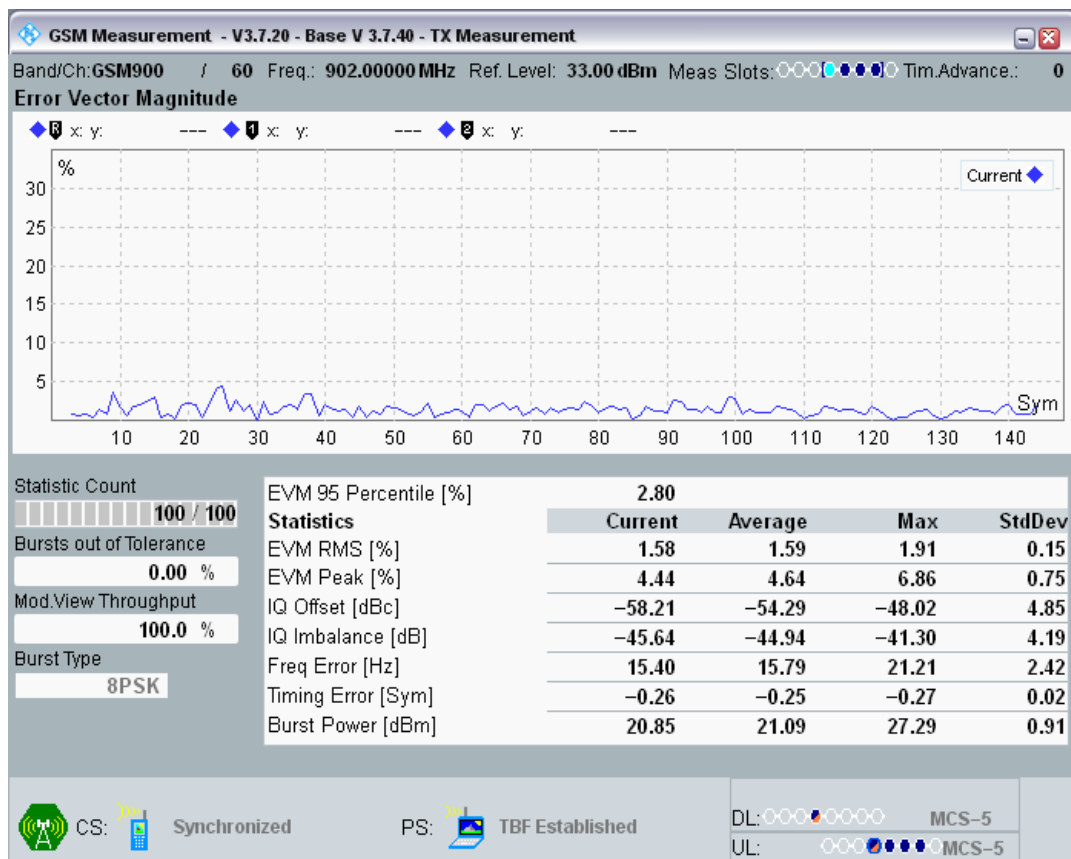


GSM900 Channel=60 Gamma=6;6;6;6 RA250.png

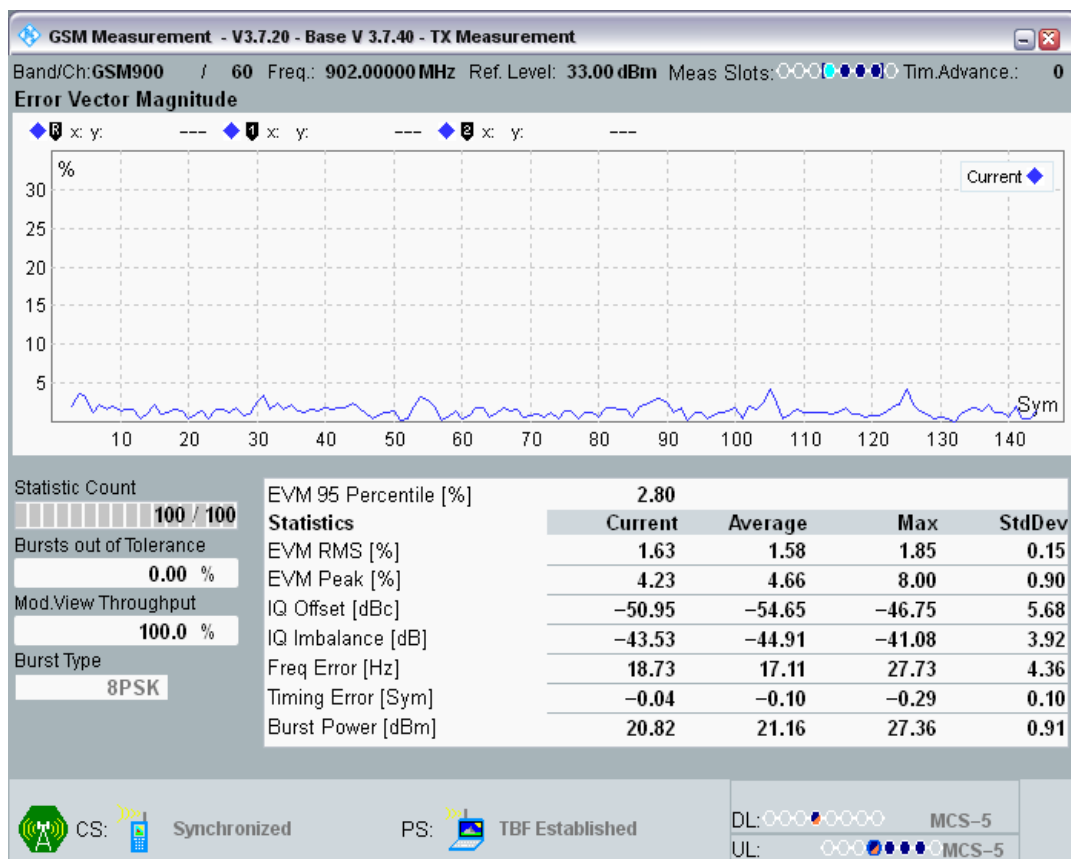


GSM900 Channel=60 Gamma=6;6;6;6 TU3.png

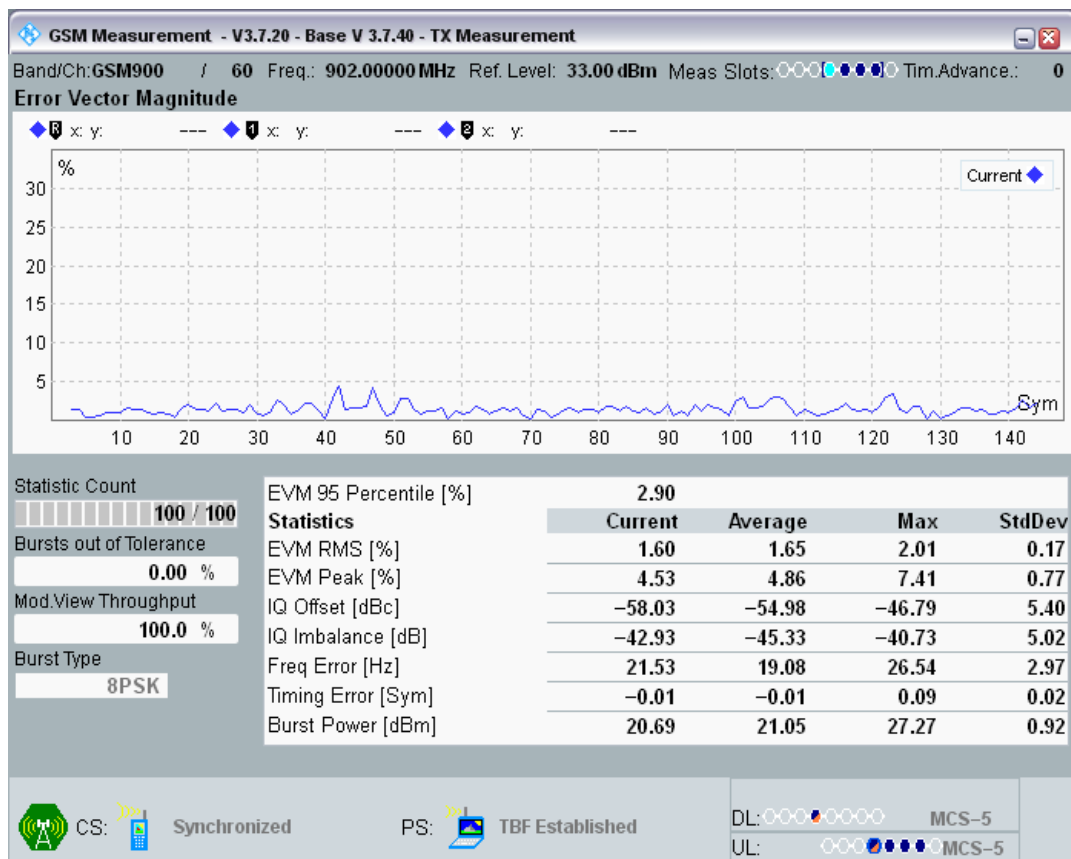


GSM900 Channel=60 Gamma=6;6;6;6 TU50.png

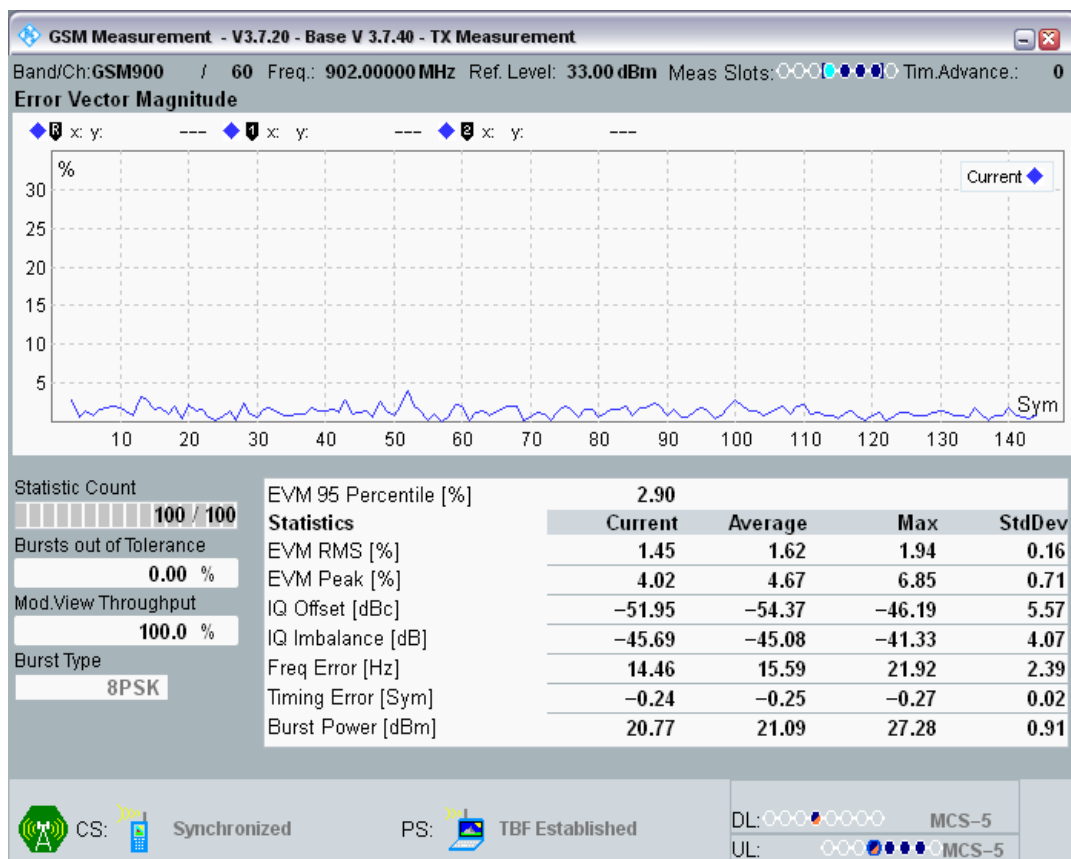


GSM900 Channel=975 Gamma=6;6;6;6 HT100.png

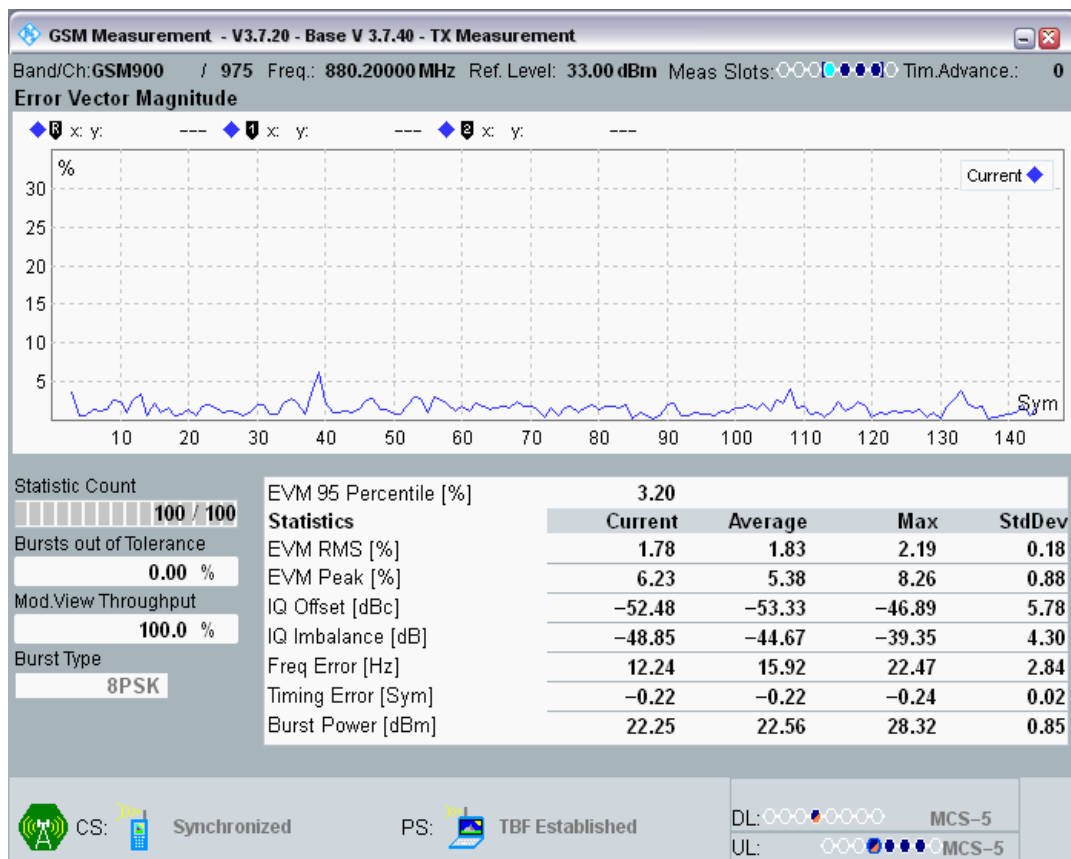


GSM900 Channel=975 Gamma=6;6;6;6 RA250.png

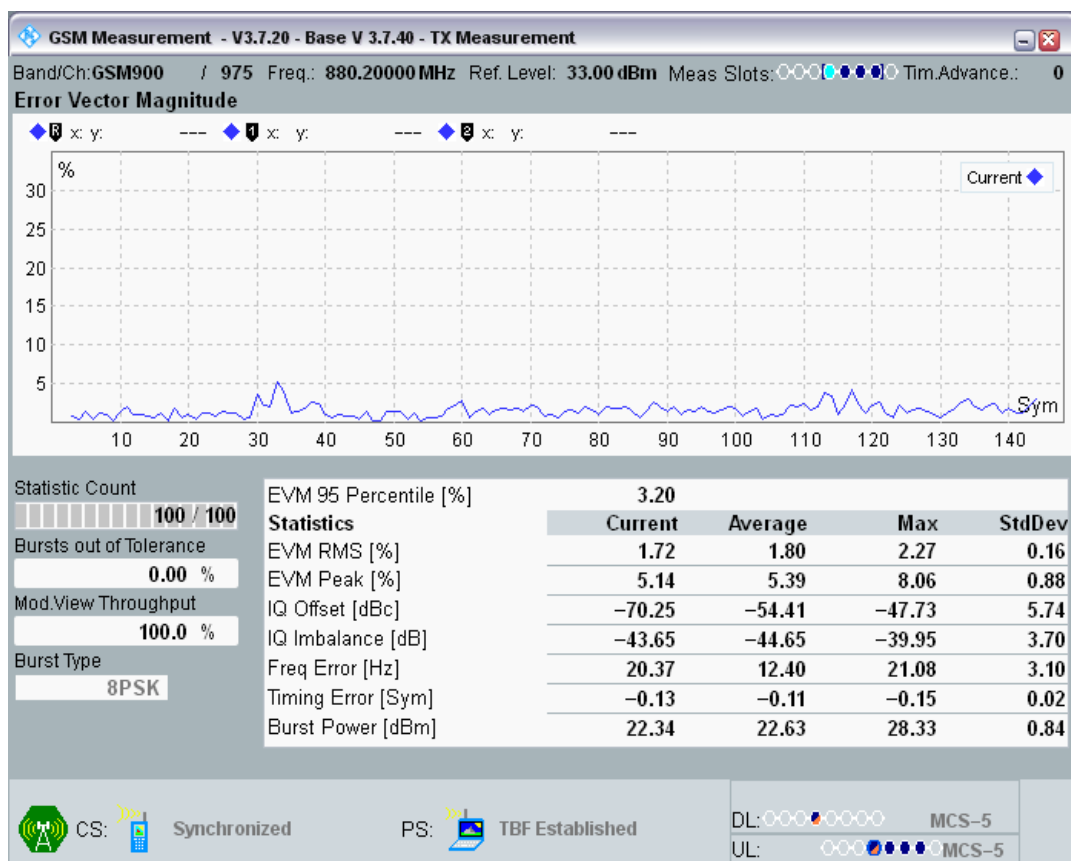


GSM900 Channel=975 Gamma=6;6;6;6 TU3.png

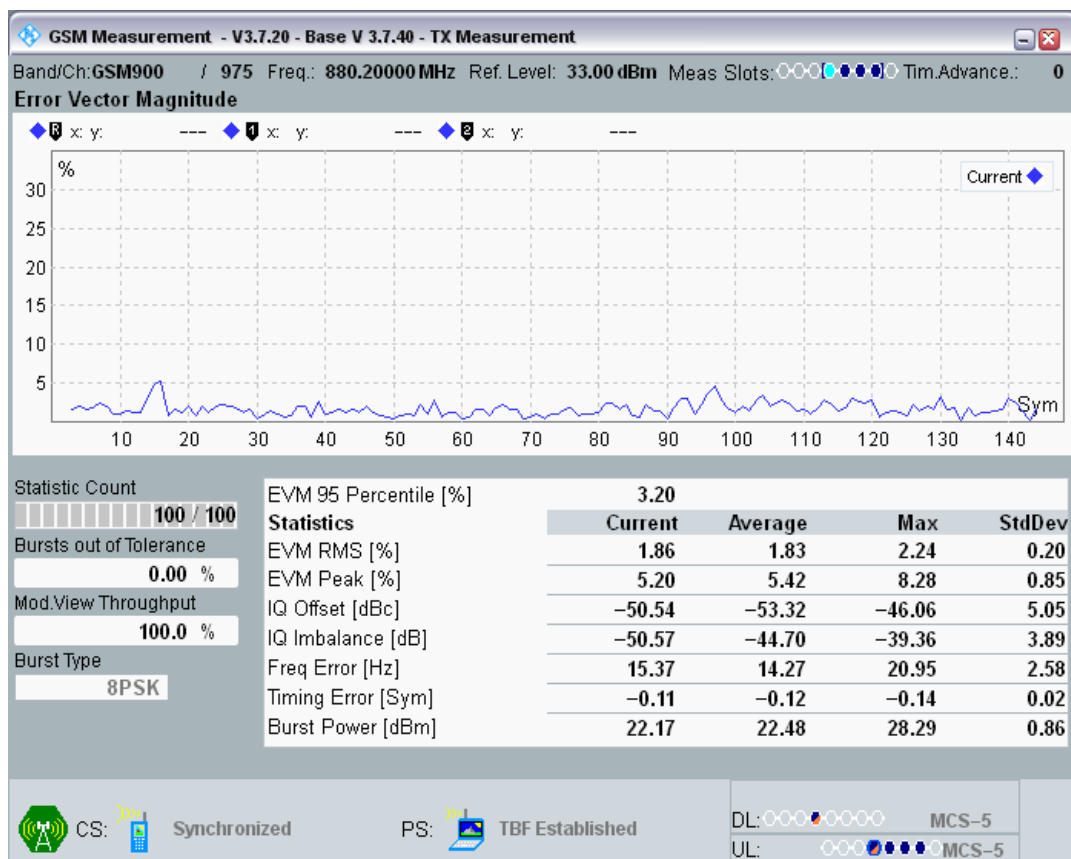


GSM900 Channel=975 Gamma=6;6;6;6 TU50.png

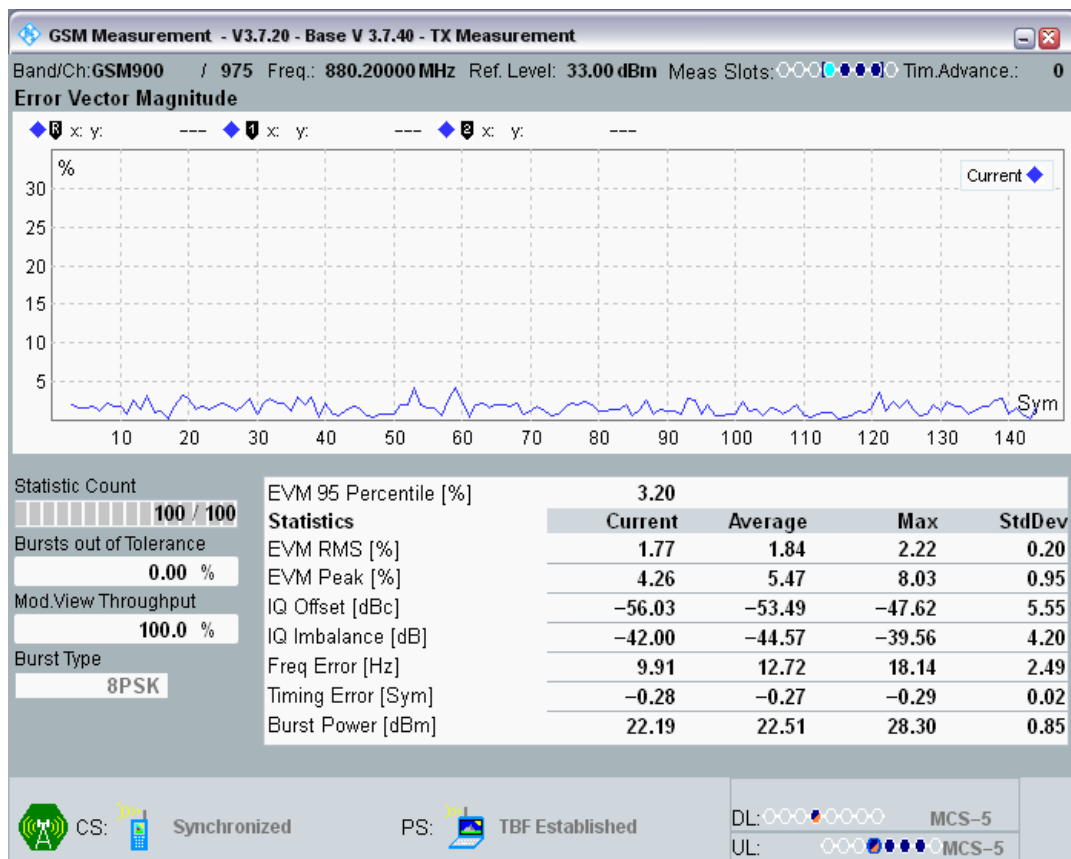


DCS1800 Channel=512 Gamma=5;5;5;5 HT100.png

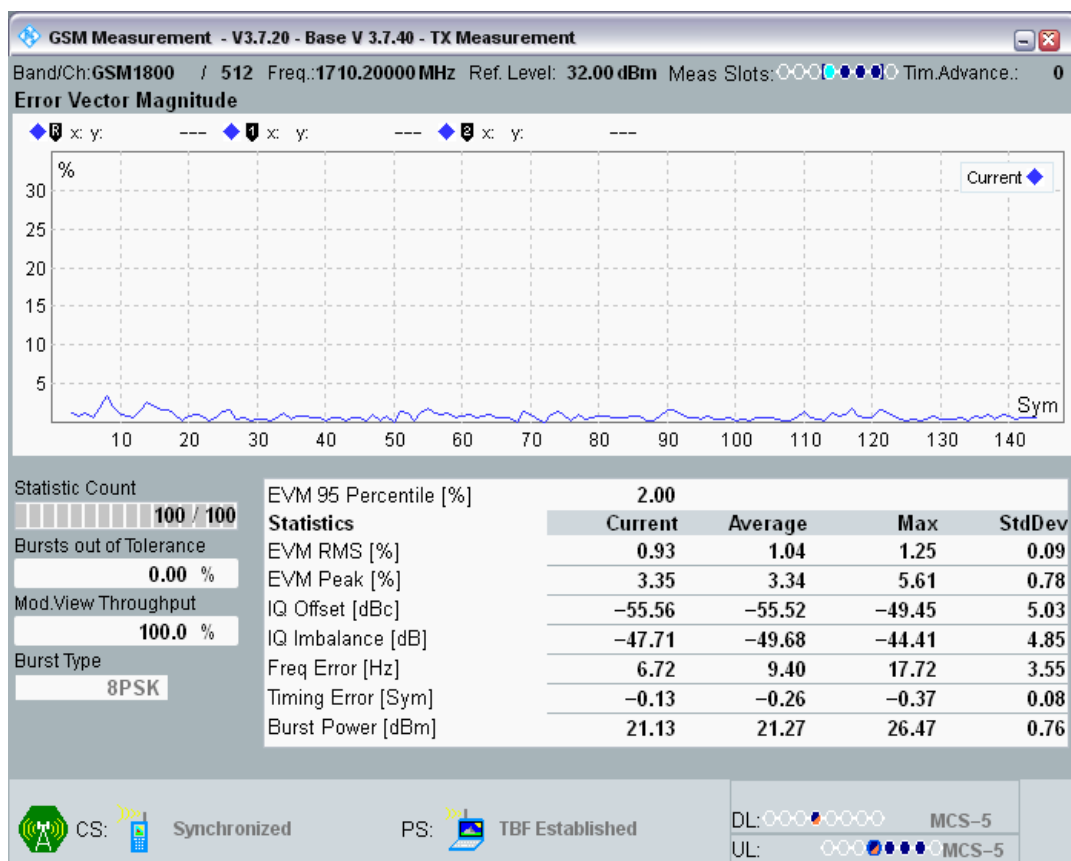

DCS1800 Channel=512 Gamma=5;5;5;5 RA130.png

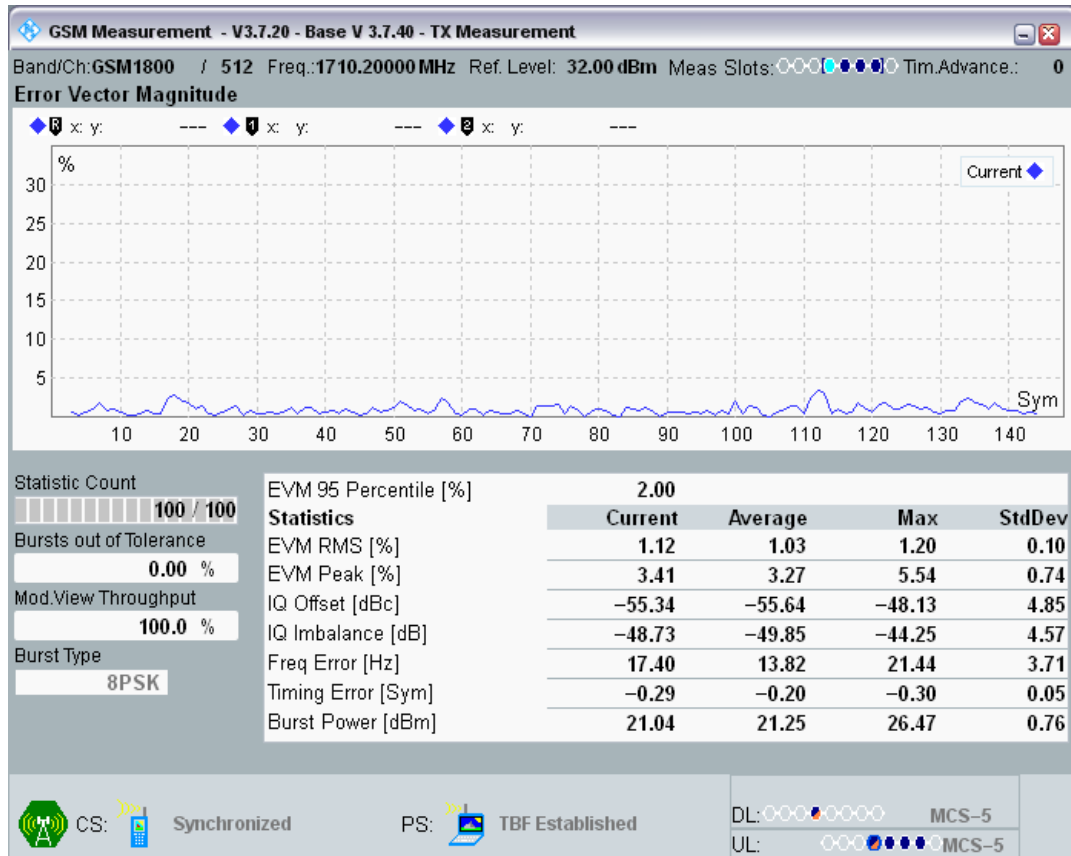


DCS1800 Channel=512 Gamma=5;5;5;5 TU1\_5.png

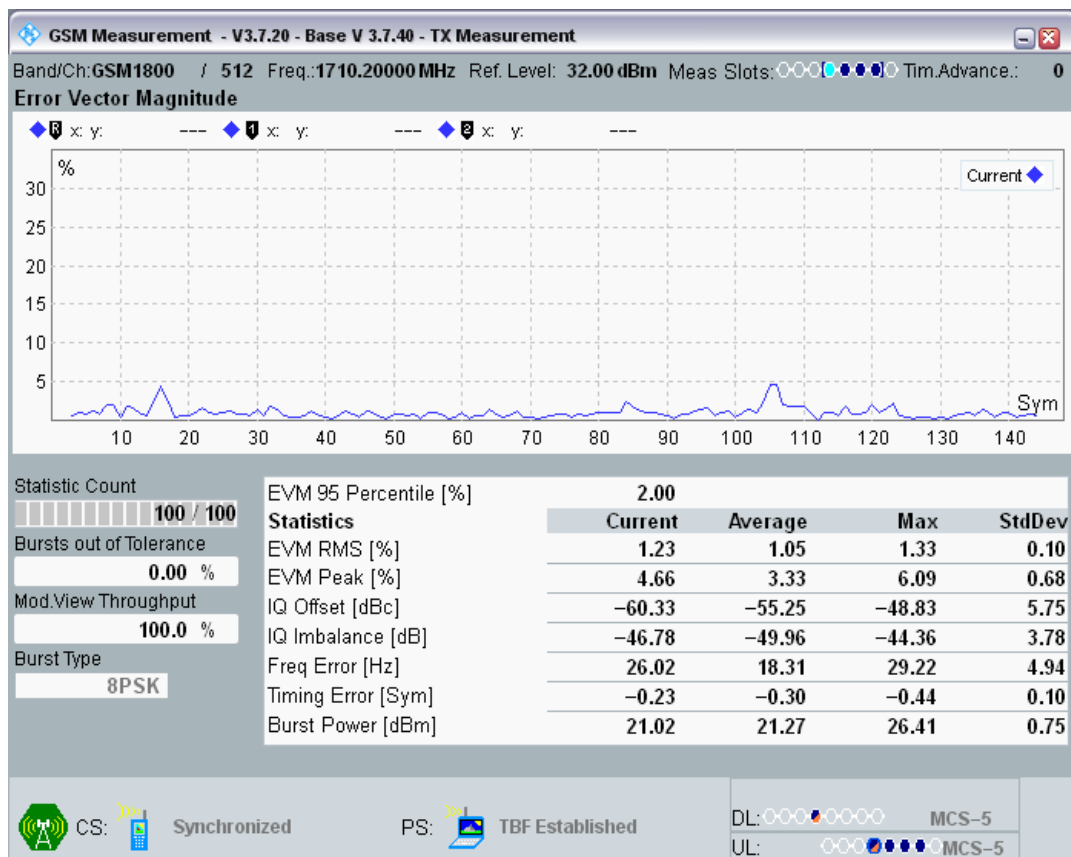





DCS1800 Channel=512 Gamma=5;5;5;5 TU50.png

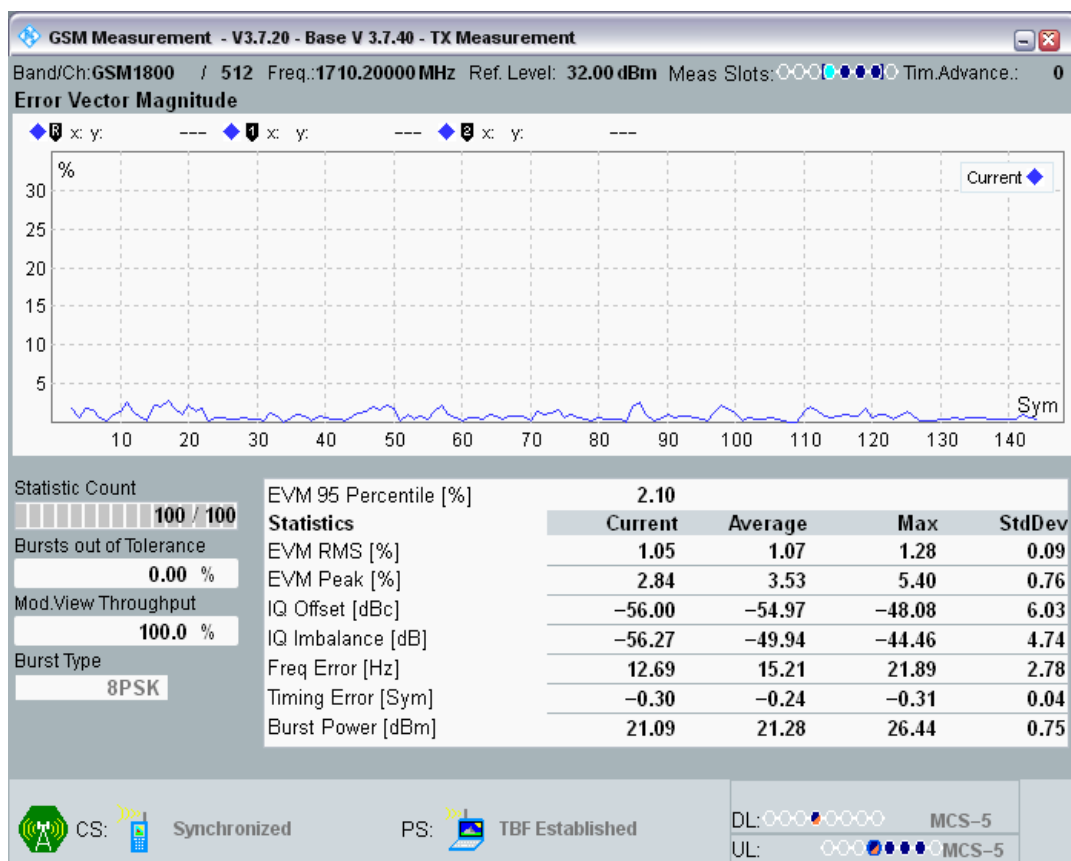


DCS1800 Channel=700 Gamma=5;5;5;5 HT100.png

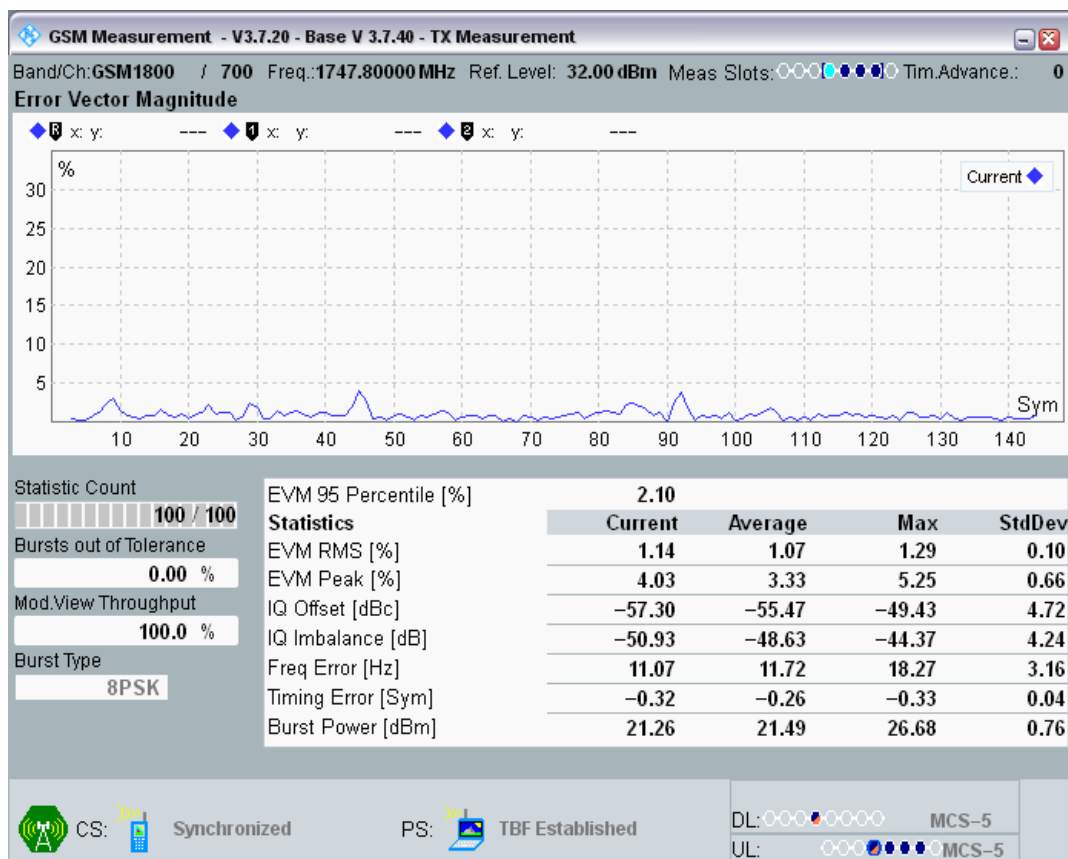


DCS1800 Channel=700 Gamma=5;5;5;5 RA130.png

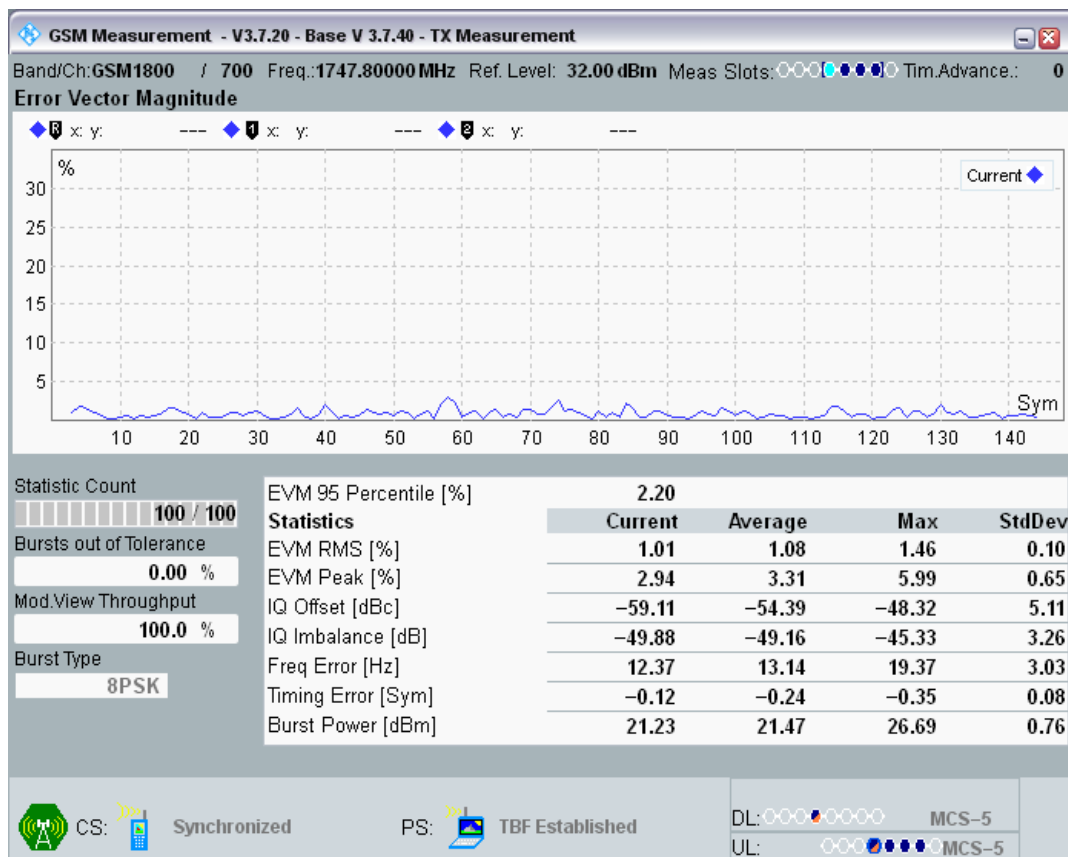


DCS1800 Channel=700 Gamma=5;5;5;5 TU1\_5.png

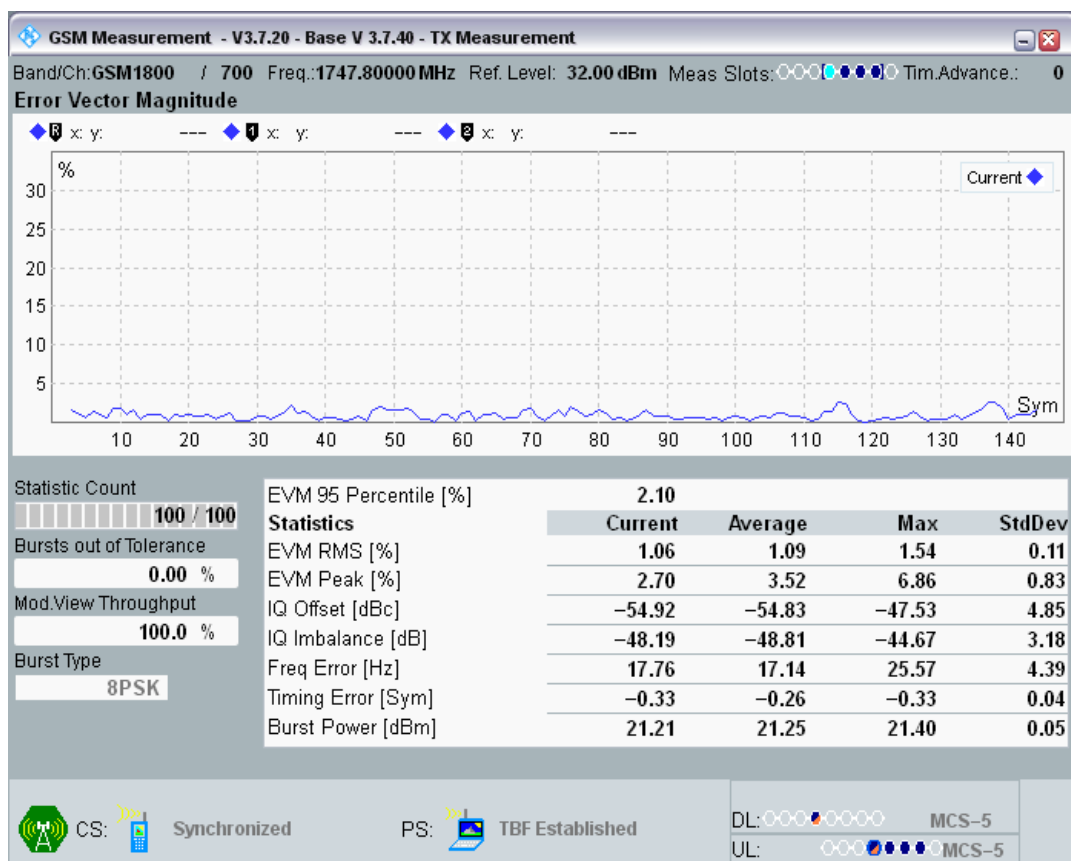


DCS1800 Channel=700 Gamma=5;5;5;5 TU50.png

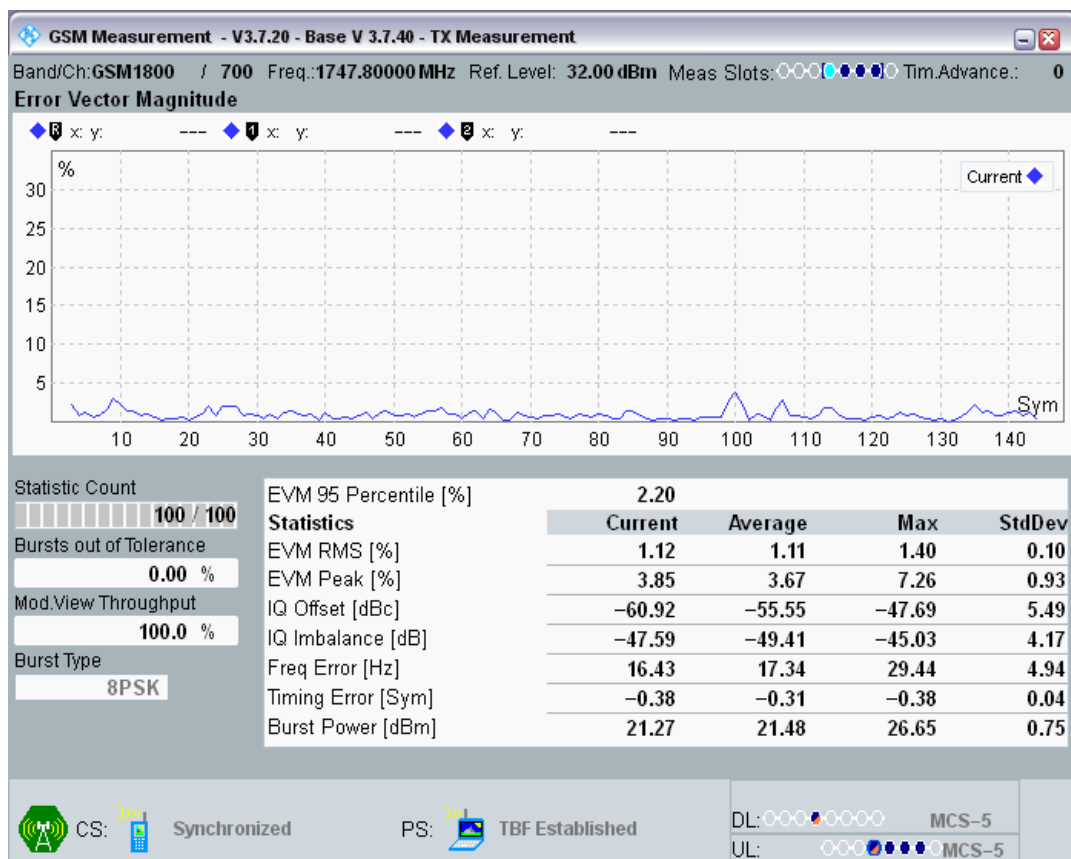


DCS1800 Channel=885 Gamma=5;5;5;5 HT100.png

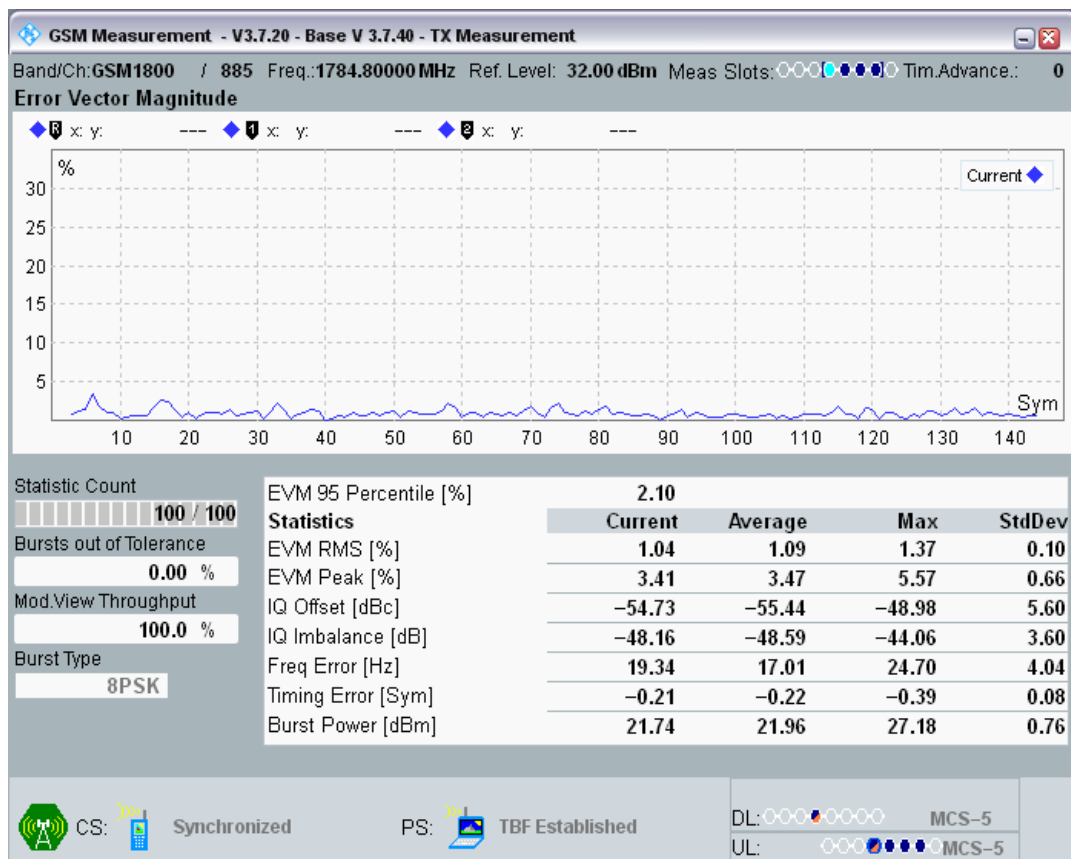


DCS1800 Channel=885 Gamma=5;5;5;5 RA130.png

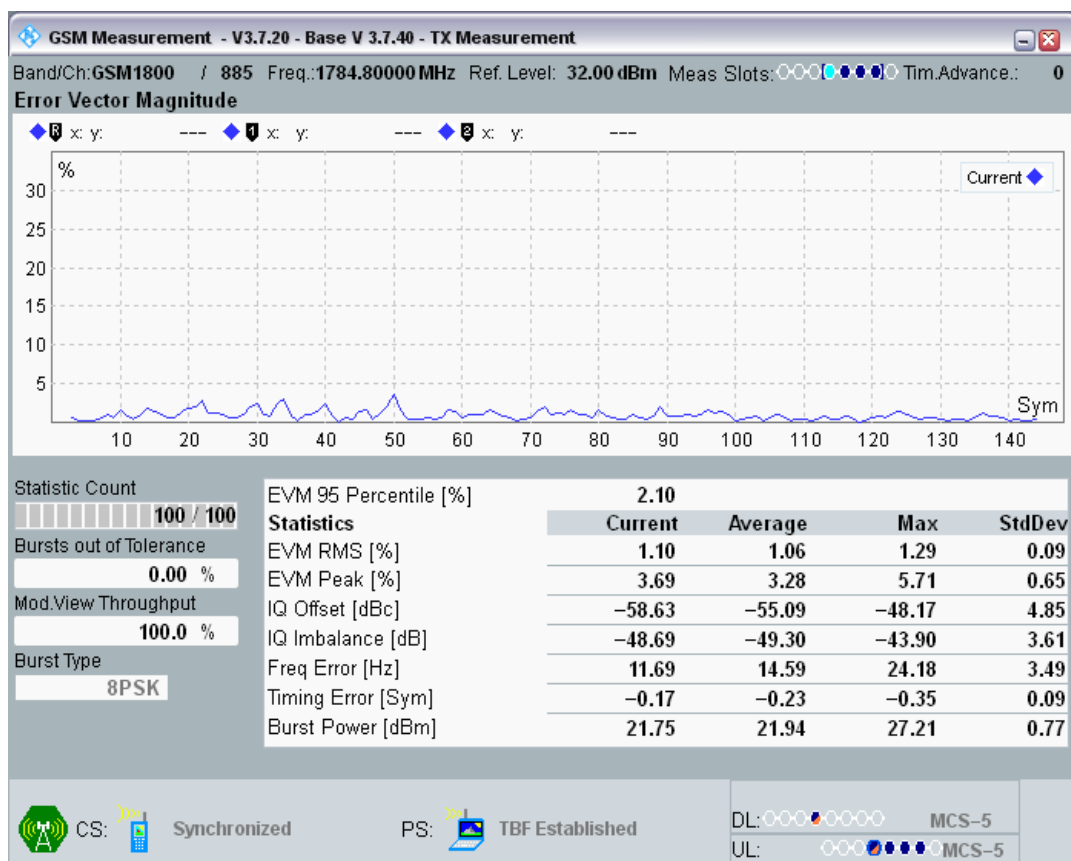

DCS1800 Channel=885 Gamma=5;5;5;5 TU1\_5.png

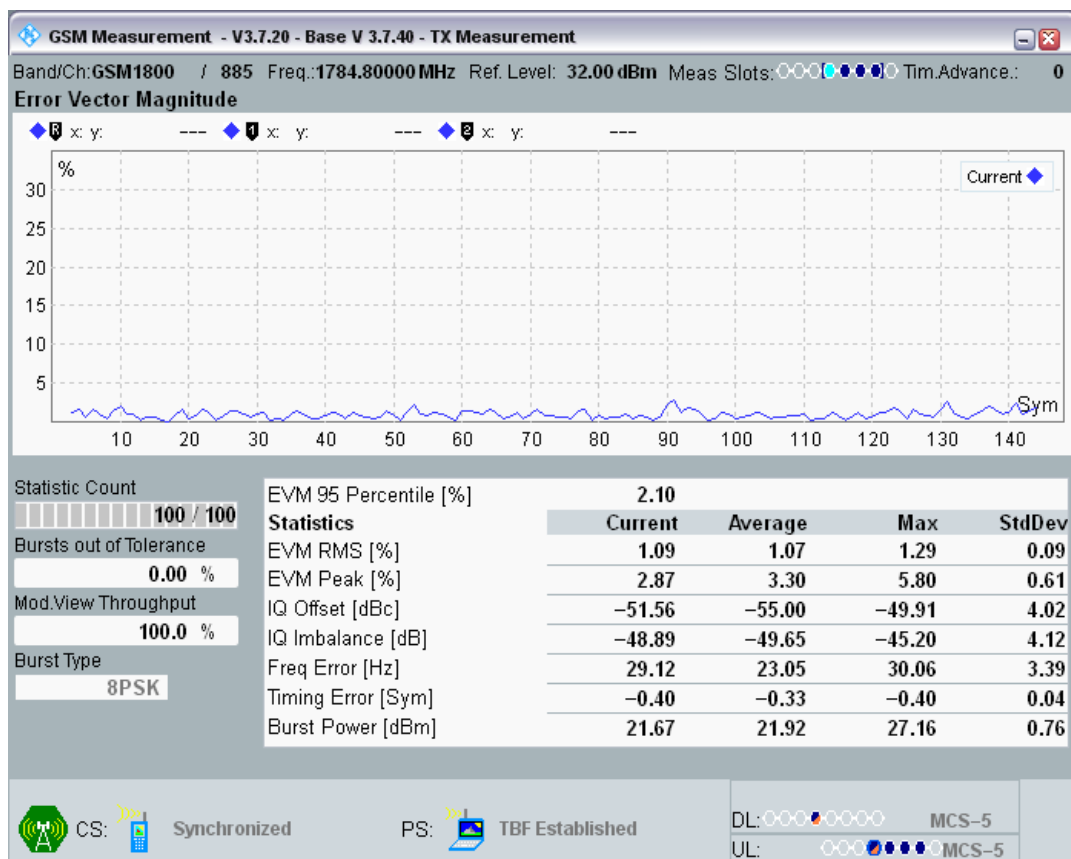

DCS1800 Channel=885 Gamma=5;5;5;5 TU50.png

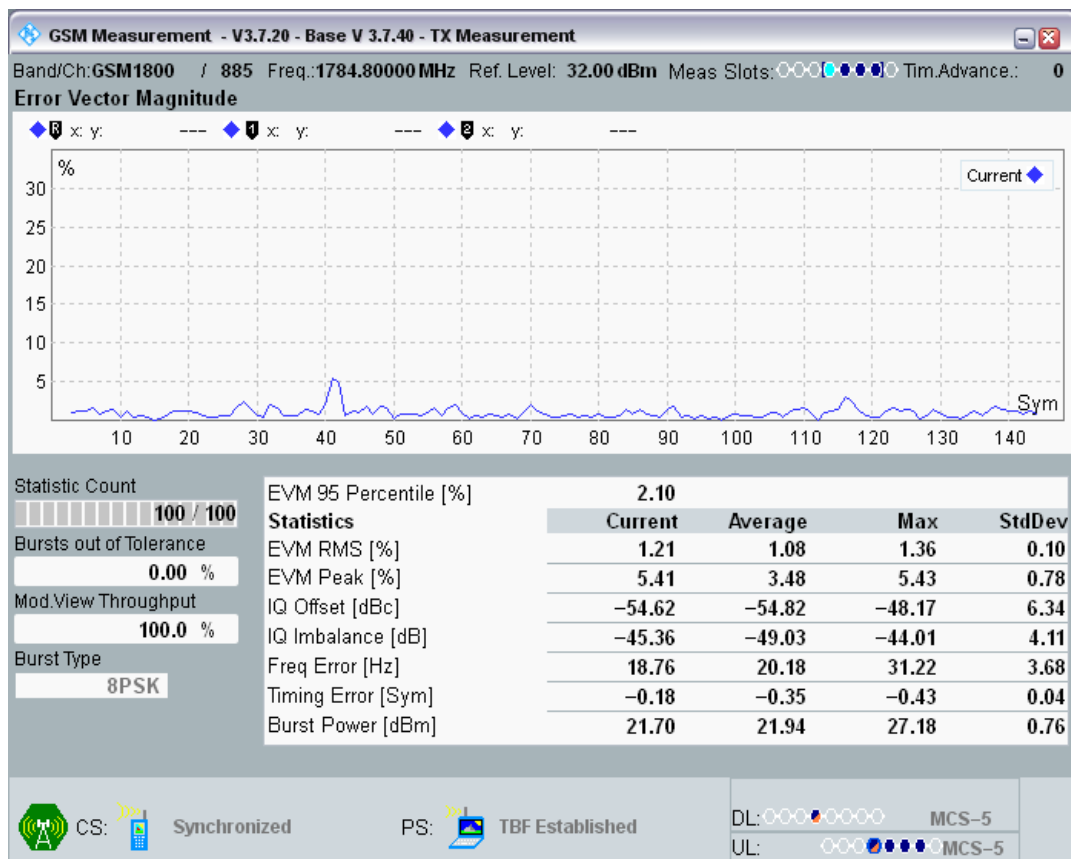

**Clause 4.2.28 EGPRS Transmitter output power**

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	24.40527	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	24.16251	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	23.66058	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	23.71631	18	27	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	22.41022	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	22.51437	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot3	22.17514	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot4	21.50351	18	27	PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	21.33957	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	20.8237	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	20.81671	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	20.69351	18	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	20.9653	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	21.01733	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	20.26108	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot4	20.14536	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	19.05618	16	22	PASS

GSM900	975	880.2	10;10;10;10	Power slot2	@	18.58374	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot3	@	18.04312	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power slot4	@	18.24594	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power slot1	@	16.86887	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot2	@	16.64969	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot3	@	16.20892	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power slot4	@	16.04926	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power slot1	@	14.49359	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot2	@	14.25256	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot3	@	13.56149	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot4	@	14.11603	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power slot1	@	12.87076	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot2	@	12.51169	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot3	@	11.77466	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot4	@	11.66739	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power slot1	@	10.2399	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot2	@	9.545776	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot3	@	9.050934	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot4	@	9.099121	6	16	PASS



GSM900	975	880.2	15;15;15;15	PvT	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot1	8.052582	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot2	7.11499	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot3	6.828857	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot4	6.700165	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot1	5.76944	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot2	5.067413	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot3	5.343903	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot4	5.586243	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot1	3.499115	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot2	3.490479	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot3	2.963074	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	2.716644	0	10	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	23.58359	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	23.78644	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	22.52621	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot4	22.83145	18	27	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	21.95398	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	21.30957	18	27	PASS
GSM900	60	902	7;7;7;7	Power @	21.49988	18	27	PASS

				slot3				
GSM900	60	902	7;7;7;7	Power @ slot4	21.16122	18	27	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	20.10809	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	20.00241	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	20.23874	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	20.06839	18	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS
GSM900	60	902	9;9;9;9	Power @ slot1	20.03705	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot2	18.83511	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot3	18.97055	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot4	18.78094	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS
GSM900	60	902	10;10;10;10	Power @ slot1	18.50665	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot2	18.22433	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot3	17.86194	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot4	17.0737	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power @ slot1	15.58228	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot2	15.29675	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot3	15.47266	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot4	15.21918	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power @ slot1	14.10568	12	18	PASS

GSM900	60	902	12;12;12;12	Power slot2	@	13.7081	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot3	@	13.43985	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot4	@	12.92365	12	18	PASS
GSM900	60	902	13;13;13;13	PvT		-	-	-	PASS
GSM900	60	902	13;13;13;13	Power slot1	@	11.42389	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot2	@	11.43039	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot3	@	10.91345	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot4	@	10.99472	10	16	PASS
GSM900	60	902	14;14;14;14	PvT		-	-	-	PASS
GSM900	60	902	14;14;14;14	Power slot1	@	9.119629	6	16	PASS
GSM900	60	902	14;14;14;14	Power slot2	@	8.174316	6	16	PASS
GSM900	60	902	14;14;14;14	Power slot3	@	8.58078	6	16	PASS
GSM900	60	902	14;14;14;14	Power slot4	@	8.125946	6	16	PASS
GSM900	60	902	15;15;15;15	PvT		-	-	-	PASS
GSM900	60	902	15;15;15;15	Power slot1	@	7.012146	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot2	@	6.811371	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot3	@	6.445465	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot4	@	6.300385	4	14	PASS
GSM900	60	902	16;16;16;16	PvT		-	-	-	PASS
GSM900	60	902	16;16;16;16	Power slot1	@	5.249756	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot2	@	5.069824	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot3	@	5.226257	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot4	@	4.630371	2	12	PASS

GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power @ slot1	3.195007	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot2	2.725708	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot3	2.666473	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot4	2.407562	0	10	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot1	23.58636	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot2	23.31879	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot3	22.62045	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot4	22.72076	18	27	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	21.76703	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot2	22.0191	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot3	21.05487	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	20.99429	18	27	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	20.83191	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot2	20.28967	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot3	20.18539	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	19.70026	18	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	20.18616	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	19.92664	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @	20.09418	18	24	PASS

				slot3				
GSM900	124	914.8	9;9;9;9	Power @ slot4	19.34973	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	18.50119	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	18.3266	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	18.08081	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	18.01477	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	16.04248	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	16.06744	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	15.59064	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	15.51837	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	14.1561	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	13.98874	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	14.19534	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	13.65118	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot1	11.52518	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot2	11.37115	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	11.13992	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	11.49377	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	9.151398	6	16	PASS

GSM900	124	914.8	14;14;14;14	Power slot2	@	8.881531	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power slot3	@	8.672699	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power slot4	@	7.876404	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT		-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power slot1	@	7.826813	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power slot2	@	7.116852	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power slot3	@	7.044525	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power slot4	@	6.245392	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT		-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power slot1	@	5.396973	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power slot2	@	4.69104	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power slot3	@	4.45929	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power slot4	@	4.64035	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT		-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power slot1	@	3.161194	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot2	@	3.018829	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot3	@	2.822693	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot4	@	2.427704	0	10	PASS
DCS1800	512	1710.2	5;5;5;5	PvT		-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot1	@	20.60349	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot2	@	20.43112	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot3	@	20.65427	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot4	@	20.46991	16	26	PASS

DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	22.57819	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	22.12131	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	21.98648	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	21.78476	17	26	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	21.53775	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	21.66879	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	21.09064	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot4	20.78931	17	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot1	20.19885	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot2	19.47797	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	19.53607	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	19.55292	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	18.32394	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	18.20065	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	18.27484	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	17.72916	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot1	16.4202	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot2	16.38104	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	16.27524	13	19	PASS

				slot3				
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	15.9201	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	14.06131	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	14.01944	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	13.61398	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot4	13.16205	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot1	12.43726	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot2	12.04623	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot3	11.71048	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot4	11.88956	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT	-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot1	10.33356	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot2	9.546173	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot3	9.336609	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot4	9.325897	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT	-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot1	8.074463	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot2	7.721527	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot3	7.234161	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot4	7.769714	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT	-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot1	5.898712	2	10	PASS



DCS1800	512	1710.2	15;15;15;15	Power slot2	@	5.638672	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot3	@	5.23114	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot4	@	5.120453	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT		-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot1	@	3.150696	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot2	@	2.725281	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot3	@	2.626465	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot4	@	2.330231	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT		-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot1	@	0.7103882	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot2	@	1.05072	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot3	@	0.2523193	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot4	@	0.6139221	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT		-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot1	@	0.3487549	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot2	@	-0.763092	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot3	@	-0.2074585	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot4	@	-0.759552	-5	5	PASS
DCS1800	700	1747.8	5;5;5;5	PvT		-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot1	@	20.99738	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot2	@	20.56561	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot3	@	21.03207	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot4	@	20.5553	16	26	PASS

DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot1	22.61737	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot2	21.82816	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot3	21.92194	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot4	21.54141	17	26	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot1	21.59262	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot2	21.57544	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot3	21.84268	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot4	21.3566	17	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot1	20.34668	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot2	20.27075	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot3	20.12366	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot4	19.86185	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot1	18.55313	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot2	18.31406	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot3	18.42526	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot4	17.92969	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot1	16.73407	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot2	16.30142	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @	16.19891	13	19	PASS

				slot3				
DCS1800	700	1747.8	10;10;10;10	Power @ slot4	16.62054	13	19	PASS
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	14.38617	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	14.44662	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	14.07159	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	13.62106	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	12.08359	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	12.1445	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	11.92935	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	11.42374	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot1	10.23822	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot2	10.06604	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	9.451935	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	9.414215	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	8.296234	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	8.033905	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	8.10437	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	8.283813	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	6.333771	2	10	PASS

DCS1800	700	1747.8	15;15;15;15	Power slot2	@	5.726807	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot3	@	5.796478	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot4	@	5.845795	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT		-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot1	@	3.538269	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot2	@	3.298431	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot3	@	3.233307	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot4	@	3.135101	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT		-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot1	@	1.344055	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot2	@	1.31424	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot3	@	1.377106	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot4	@	1.246277	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT		-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot1	@	0.4240723	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot2	@	0.7156982	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot3	@	-0.1616516	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot4	@	-0.1812744	-5	5	PASS
DCS1800	885	1784.8	5;5;5;5	PvT		-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power slot1	@	21.36505	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power slot2	@	21.34503	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power slot3	@	21.04886	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power slot4	@	21.08371	16	26	PASS

DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	22.86044	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	22.74887	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	22.25031	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	22.37146	17	26	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	22.07007	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	21.81543	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	22.314	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	21.57944	17	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	20.72067	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	20.33527	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	19.88794	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	20.27933	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	18.95517	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	19.01123	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	17.88757	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	18.23337	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	16.642	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	16.10117	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	16.9776	13	19	PASS


				slot3				
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	16.40921	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	14.40442	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	14.82379	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	13.85785	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	14.46304	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	12.75217	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	12.82495	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	12.78409	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	12.33673	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	10.64011	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	10.47055	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	9.834259	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	9.842194	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	8.795776	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	8.548798	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	8.233856	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot4	7.849487	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	7.142426	2	10	PASS

DCS1800	885	1784.8	15;15;15;15	Power slot2 @	6.570343	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot3 @	6.009216	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot4 @	6.259186	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot1 @	4.055878	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot2 @	4.009186	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot3 @	3.828278	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot4 @	3.136444	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot1 @	2.306213	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot2 @	1.954254	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot3 @	1.920563	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot4 @	1.009674	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot1 @	0.8545532	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot2 @	0.7632141	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot3 @	0.04812622	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot4 @	0.2939453	-5	5	PASS

GSM900 Channel=124 Gamma=17;17;17;17.png




GSM900 Channel=124 Gamma=6;6;6;6.png

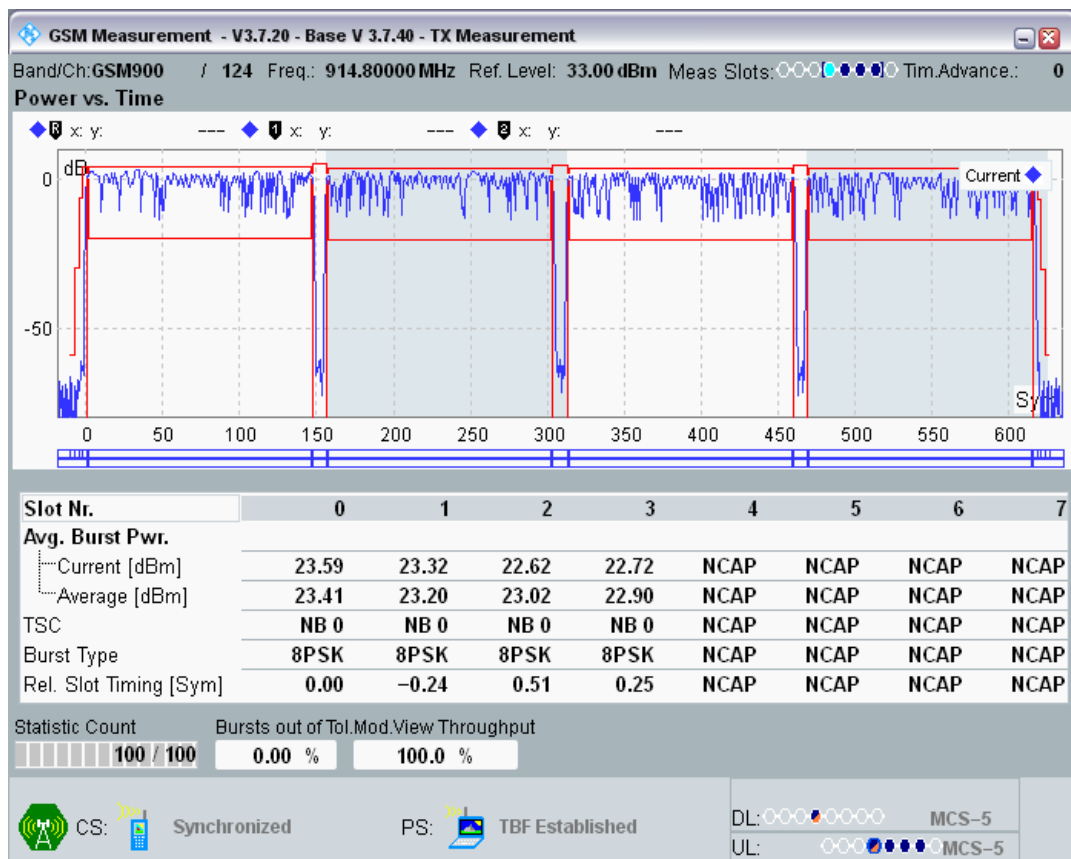




GSM900 Channel=60 Gamma=17;17;17;17.png

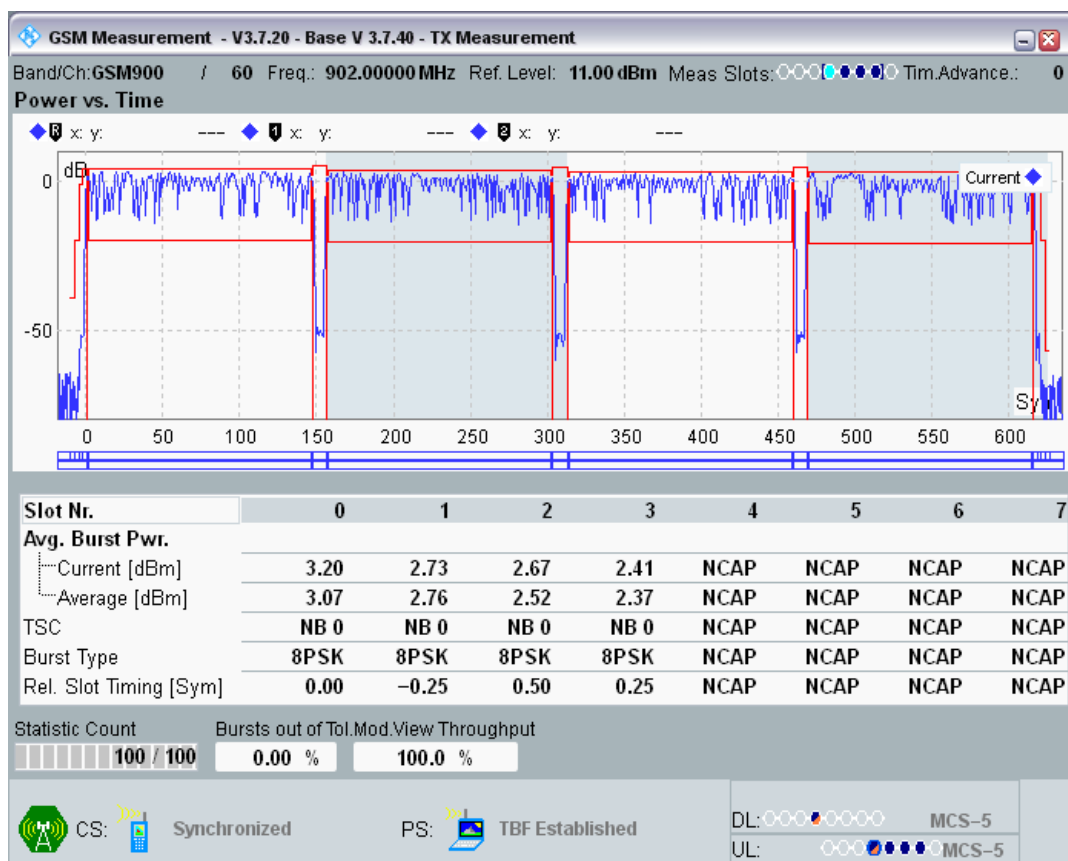


GSM900 Channel=60 Gamma=6;6;6;6.png



GSM900 Channel=975 Gamma=17;17;17;17.png

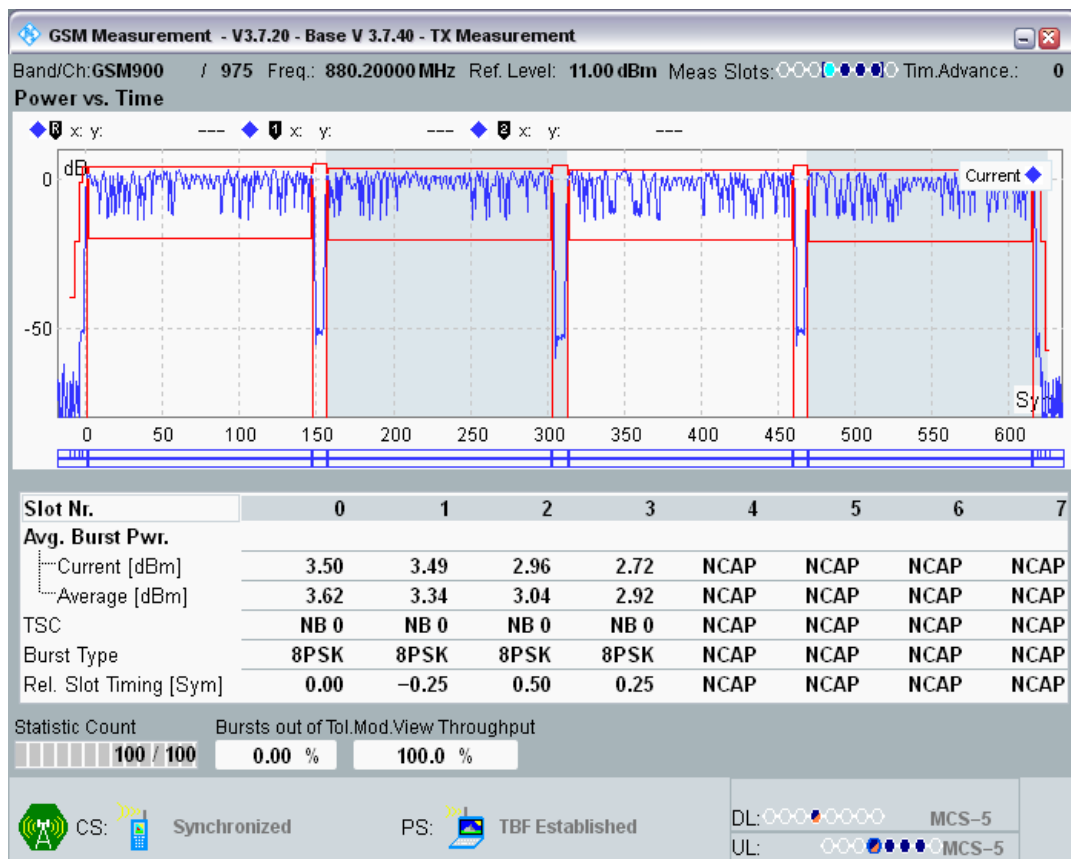


GSM900 Channel=975 Gamma=6;6;6;6.png

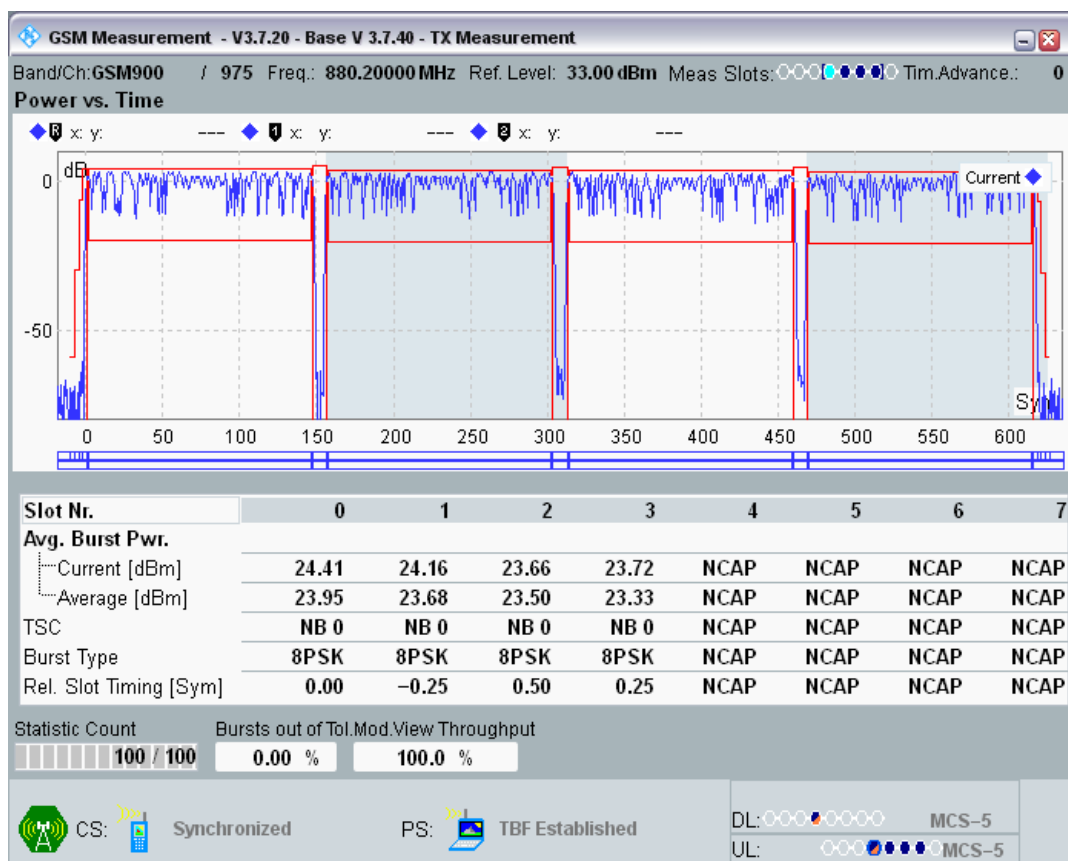


DCS1800 Channel=512 Gamma=18;18;18;18.png




DCS1800 Channel=512 Gamma=5;5;5;5.png

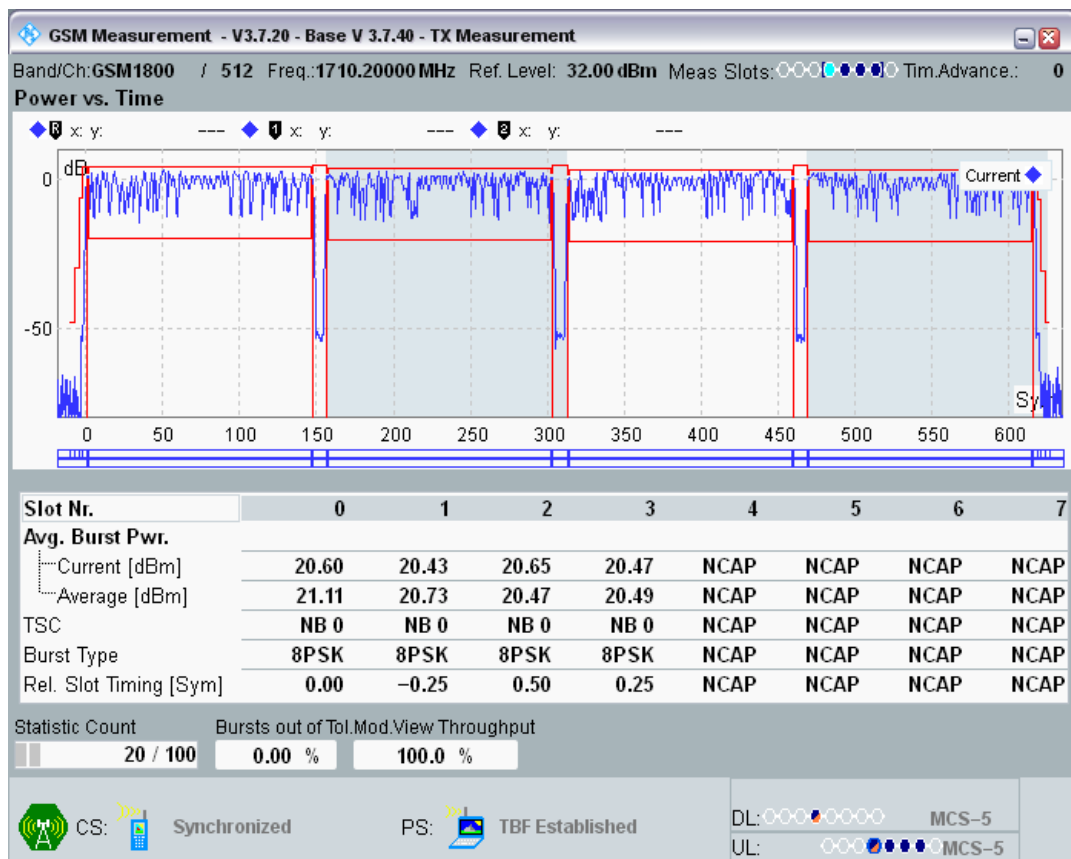


DCS1800 Channel=700 Gamma=18;18;18;18.png

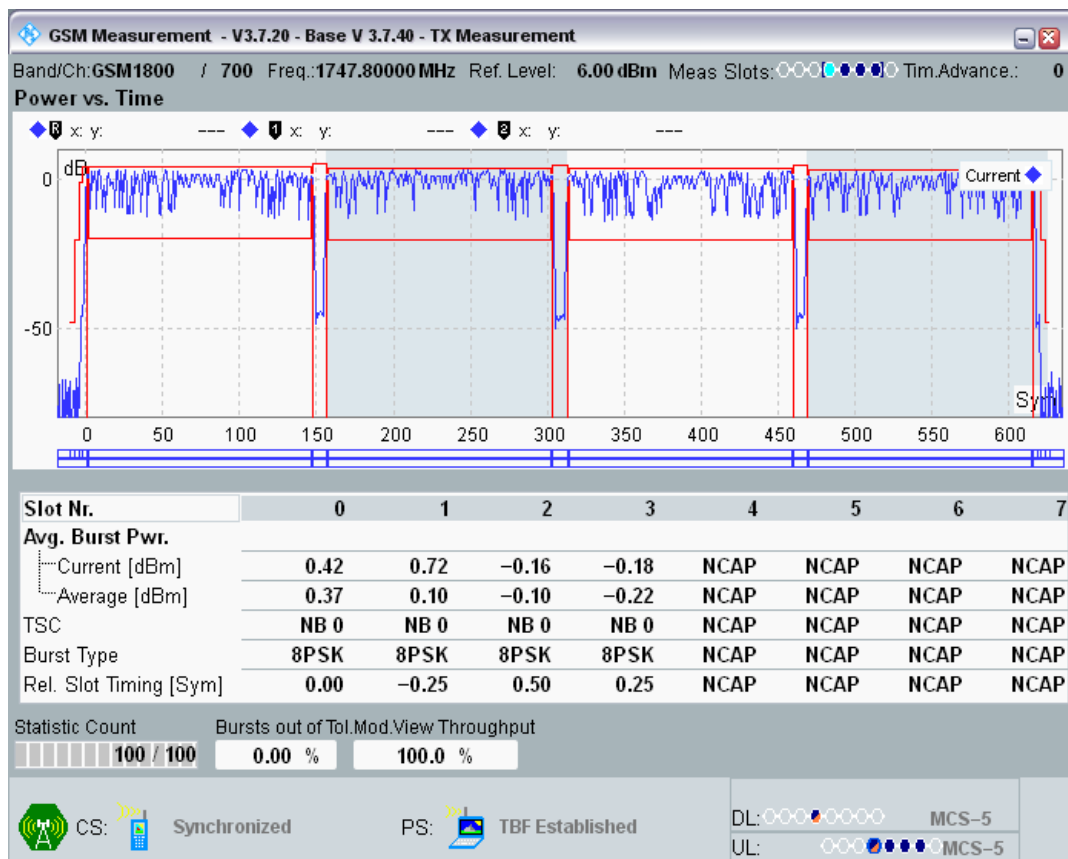


DCS1800 Channel=700 Gamma=5;5;5;5.png

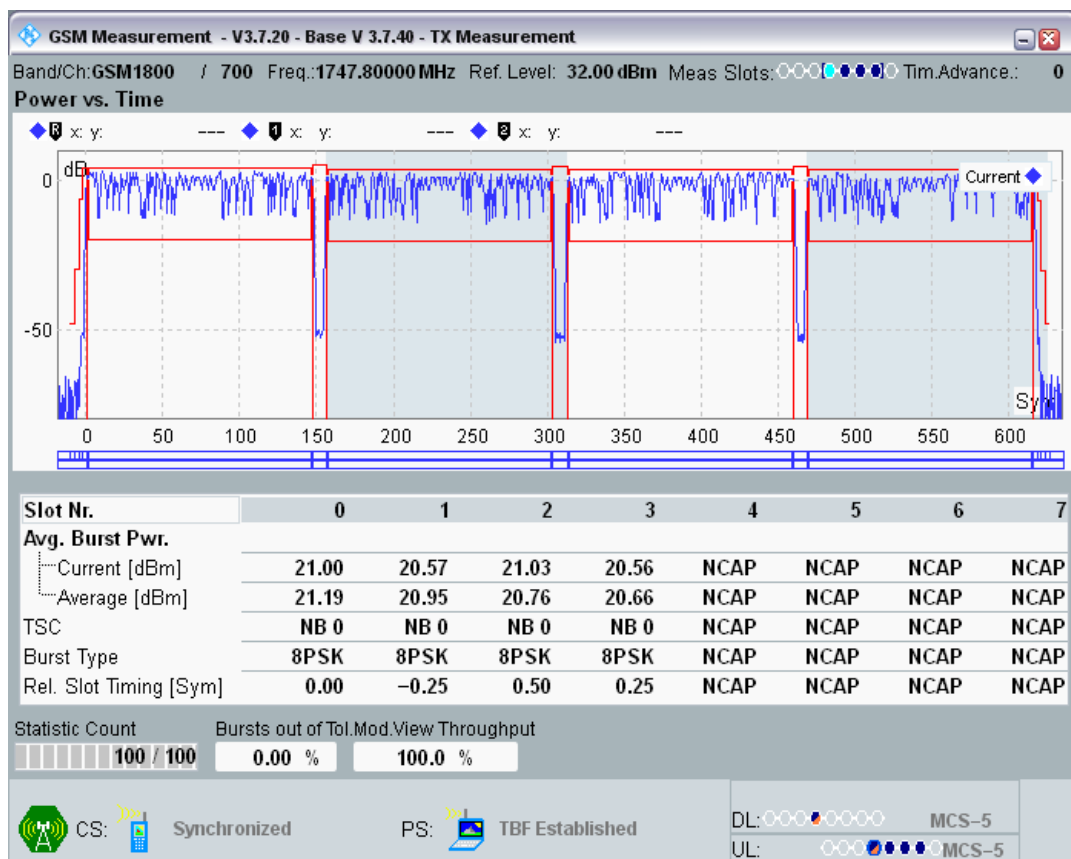

DCS1800 Channel=885 Gamma=18;18;18;18.png

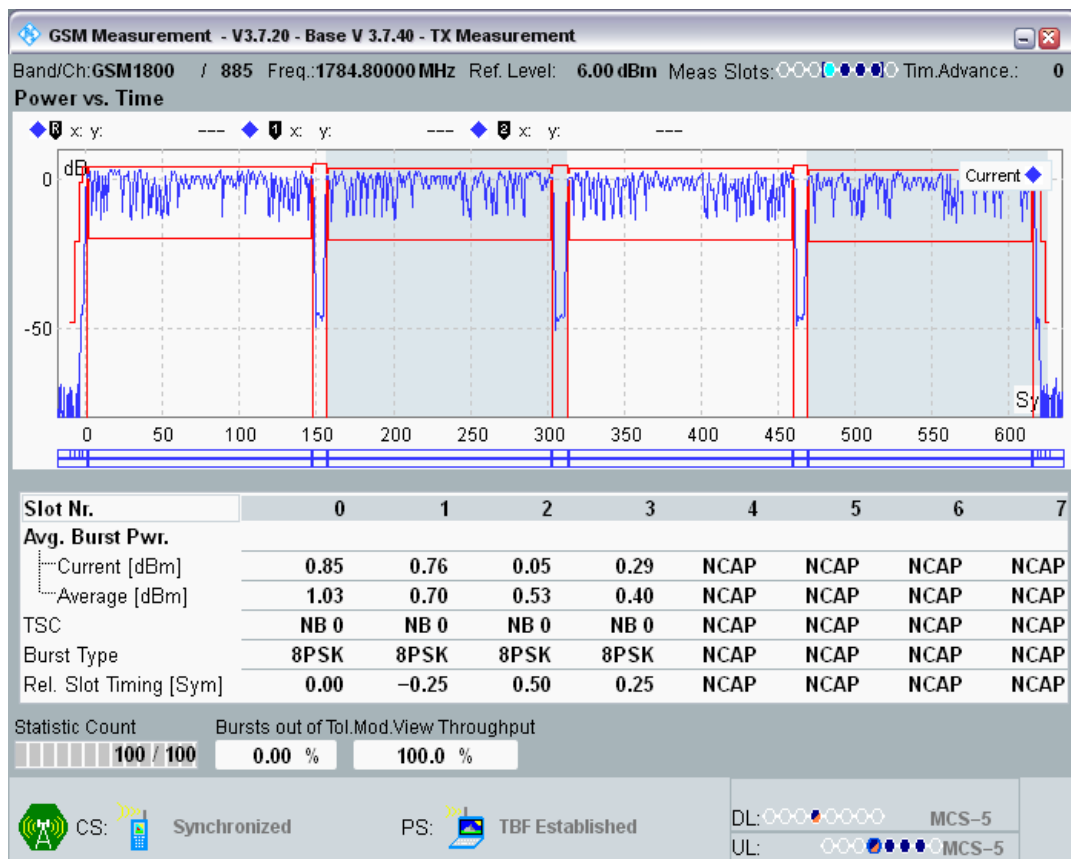

DCS1800 Channel=885 Gamma=5;5;5;5.png

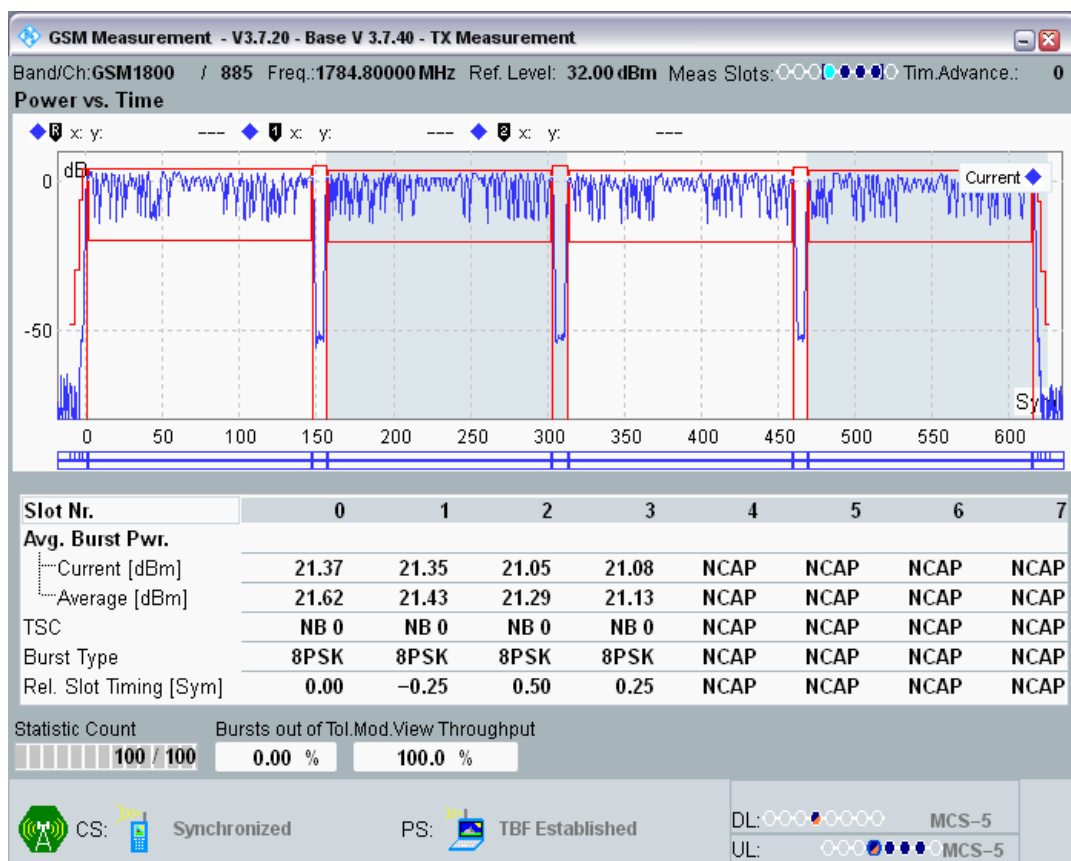

### Clause 4.2.29 Modulation Spectrum in EGPRS configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-76.61	-60	-62.68	-51	PASS
GSM900	975	880.2	6;6;6;6	-1600 KHz	-75.40	-60	-61.46	-51	PASS
GSM900	975	880.2	6;6;6;6	-1400 KHz	-75.24	-60	-61.30	-51	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-74.55	-60	-60.62	-51	PASS
GSM900	975	880.2	6;6;6;6	-1000 KHz	-73.70	-60	-59.76	-51	PASS
GSM900	975	880.2	6;6;6;6	-800 KHz	-72.43	-60	-58.50	-51	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-71.24	-60	-57.30	-51	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-68.11	-60	-54.17	-36	PASS
GSM900	975	880.2	6;6;6;6	-250 KHz	-43.62	-33	-29.69	-36	PASS

GSM900	975	880.2	6;6;6;6	-200 KHz	-37.92	-30	-23.99	-36	PASS
GSM900	975	880.2	6;6;6;6	-100 KHz	-7.97	0.5	5.97	-36	PASS
GSM900	975	880.2	6;6;6;6	100 KHz	-8.28	0.5	5.66	-36	PASS
GSM900	975	880.2	6;6;6;6	200 KHz	-37.97	-30	-24.03	-36	PASS
GSM900	975	880.2	6;6;6;6	250 KHz	-43.70	-33	-29.77	-36	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-68.03	-60	-54.09	-36	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-71.42	-60	-57.48	-51	PASS
GSM900	975	880.2	6;6;6;6	800 KHz	-72.56	-60	-58.62	-51	PASS
GSM900	975	880.2	6;6;6;6	1000 KHz	-73.67	-60	-59.73	-51	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-74.71	-60	-60.77	-51	PASS
GSM900	975	880.2	6;6;6;6	1400 KHz	-75.50	-60	-61.56	-51	PASS
GSM900	975	880.2	6;6;6;6	1600 KHz	-75.57	-60	-61.63	-51	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-76.58	-60	-62.64	-51	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-75.52	-60	-63.00	-51	PASS
GSM900	60	902	6;6;6;6	-1600 KHz	-74.71	-60	-62.19	-51	PASS
GSM900	60	902	6;6;6;6	-1400 KHz	-74.67	-60	-62.15	-51	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-73.91	-60	-61.38	-51	PASS
GSM900	60	902	6;6;6;6	-1000 KHz	-72.99	-60	-60.46	-51	PASS
GSM900	60	902	6;6;6;6	-800 KHz	-72.35	-60	-59.83	-51	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-70.60	-60	-58.07	-51	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-67.93	-60	-55.41	-36	PASS
GSM900	60	902	6;6;6;6	-250 KHz	-43.80	-33	-31.28	-36	PASS
GSM900	60	902	6;6;6;6	-200 KHz	-38.21	-30	-25.69	-36	PASS
GSM900	60	902	6;6;6;6	-100 KHz	-8.06	0.5	4.46	-36	PASS




GSM900	60	902	6;6;6;6	100 KHz	-8.07	0.5	4.45	-36	PASS
GSM900	60	902	6;6;6;6	200 KHz	-38.44	-30	-25.91	-36	PASS
GSM900	60	902	6;6;6;6	250 KHz	-43.98	-33	-31.46	-36	PASS
GSM900	60	902	6;6;6;6	400 KHz	-67.90	-60	-55.38	-36	PASS
GSM900	60	902	6;6;6;6	600 KHz	-71.00	-60	-58.48	-51	PASS
GSM900	60	902	6;6;6;6	800 KHz	-72.13	-60	-59.60	-51	PASS
GSM900	60	902	6;6;6;6	1000 KHz	-73.27	-60	-60.74	-51	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-74.09	-60	-61.56	-51	PASS
GSM900	60	902	6;6;6;6	1400 KHz	-74.91	-60	-62.38	-51	PASS
GSM900	60	902	6;6;6;6	1600 KHz	-74.64	-60	-62.12	-51	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-75.82	-60	-63.30	-51	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-75.43	-60	-63.16	-51	PASS
GSM900	124	914.8	6;6;6;6	-1600 KHz	-74.59	-60	-62.32	-51	PASS
GSM900	124	914.8	6;6;6;6	-1400 KHz	-74.65	-60	-62.38	-51	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-73.83	-60	-61.56	-51	PASS
GSM900	124	914.8	6;6;6;6	-1000 KHz	-73.19	-60	-60.92	-51	PASS
GSM900	124	914.8	6;6;6;6	-800 KHz	-71.85	-60	-59.58	-51	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-70.68	-60	-58.41	-51	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-67.91	-60	-55.64	-36	PASS
GSM900	124	914.8	6;6;6;6	-250 KHz	-43.58	-33	-31.31	-36	PASS
GSM900	124	914.8	6;6;6;6	-200 KHz	-38.01	-30	-25.74	-36	PASS
GSM900	124	914.8	6;6;6;6	-100 KHz	-7.89	0.5	4.38	-36	PASS
GSM900	124	914.8	6;6;6;6	100 KHz	-7.90	0.5	4.37	-36	PASS
GSM900	124	914.8	6;6;6;6	200 KHz	-38.21	-30	-25.93	-36	PASS
GSM900	124	914.8	6;6;6;6	250 KHz	-43.80	-33	-31.53	-36	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-68.07	-60	-55.80	-36	PASS

GSM900	124	914.8	6;6;6;6	600 KHz	-70.75	-60	-58.48	-51	PASS
GSM900	124	914.8	6;6;6;6	800 KHz	-72.15	-60	-59.88	-51	PASS
GSM900	124	914.8	6;6;6;6	1000 KHz	-73.07	-60	-60.80	-51	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-74.09	-60	-61.81	-51	PASS
GSM900	124	914.8	6;6;6;6	1400 KHz	-74.69	-60	-62.42	-51	PASS
GSM900	124	914.8	6;6;6;6	1600 KHz	-74.60	-60	-62.33	-51	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-75.45	-60	-63.18	-51	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-75.62	-60	-63.02	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1600 KHz	-75.04	-60	-62.43	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1400 KHz	-74.29	-60	-61.68	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-73.36	-60	-60.75	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1000 KHz	-72.75	-60	-60.14	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-800 KHz	-71.49	-60	-58.88	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-70.00	-60	-57.39	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-67.40	-60	-54.79	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-250 KHz	-43.05	-33	-30.44	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-200 KHz	-38.69	-30	-26.09	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-100 KHz	-7.72	0.5	4.88	-36	PASS
DCS1800	512	1710.2	5;5;5;5	100 KHz	-7.76	0.5	4.84	-36	PASS
DCS1800	512	1710.2	5;5;5;5	200 KHz	-38.86	-30	-26.25	-36	PASS
DCS1800	512	1710.2	5;5;5;5	250 KHz	-42.54	-33	-29.93	-36	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-67.58	-60	-54.97	-36	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-70.35	-60	-57.75	-56	PASS
DCS1800	512	1710.2	5;5;5;5	800 KHz	-71.62	-60	-59.02	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1000 KHz	-72.72	-60	-60.11	-56	PASS


DCS1800	512	1710.2	5;5;5;5	1200 KHz	-73.70	-60	-61.09	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1400 KHz	-74.51	-60	-61.90	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1600 KHz	-75.25	-60	-62.65	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-75.87	-60	-63.26	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-75.64	-60	-62.85	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1600 KHz	-75.31	-60	-62.51	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1400 KHz	-74.50	-60	-61.71	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-73.35	-60	-60.56	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1000 KHz	-72.71	-60	-59.91	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-800 KHz	-71.86	-60	-59.06	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-70.25	-60	-57.45	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-67.33	-60	-54.53	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-250 KHz	-42.70	-33	-29.90	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-200 KHz	-38.63	-30	-25.83	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-100 KHz	-7.88	0.5	4.91	-36	PASS
DCS1800	700	1747.8	5;5;5;5	100 KHz	-7.75	0.5	5.04	-36	PASS
DCS1800	700	1747.8	5;5;5;5	200 KHz	-38.89	-30	-26.09	-36	PASS
DCS1800	700	1747.8	5;5;5;5	250 KHz	-42.86	-33	-30.06	-36	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-67.41	-60	-54.61	-36	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-70.37	-60	-57.57	-56	PASS
DCS1800	700	1747.8	5;5;5;5	800 KHz	-71.70	-60	-58.91	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1000 KHz	-72.76	-60	-59.96	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-73.75	-60	-60.96	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1400 KHz	-74.98	-60	-62.18	-56	PASS

DCS1800	700	1747.8	5;5;5;5	1600 KHz	-75.13	-60	-62.34	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-75.89	-60	-63.09	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-75.96	-60	-62.65	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1600 KHz	-75.40	-60	-62.10	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1400 KHz	-74.62	-60	-61.31	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-73.41	-60	-60.11	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1000 KHz	-72.79	-60	-59.49	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-800 KHz	-71.51	-60	-58.20	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-70.26	-60	-56.95	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-67.21	-60	-53.91	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-250 KHz	-42.77	-33	-29.47	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-200 KHz	-38.73	-30	-25.42	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-100 KHz	-8.18	0.5	5.12	-36	PASS
DCS1800	885	1784.8	5;5;5;5	100 KHz	-7.70	0.5	5.61	-36	PASS
DCS1800	885	1784.8	5;5;5;5	200 KHz	-39.14	-30	-25.84	-36	PASS
DCS1800	885	1784.8	5;5;5;5	250 KHz	-42.85	-33	-29.55	-36	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-67.21	-60	-53.90	-36	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-70.04	-60	-56.74	-56	PASS
DCS1800	885	1784.8	5;5;5;5	800 KHz	-71.65	-60	-58.34	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1000 KHz	-72.81	-60	-59.51	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-73.73	-60	-60.43	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1400 KHz	-74.71	-60	-61.41	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1600 KHz	-75.36	-60	-62.06	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-76.28	-60	-62.98	-56	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

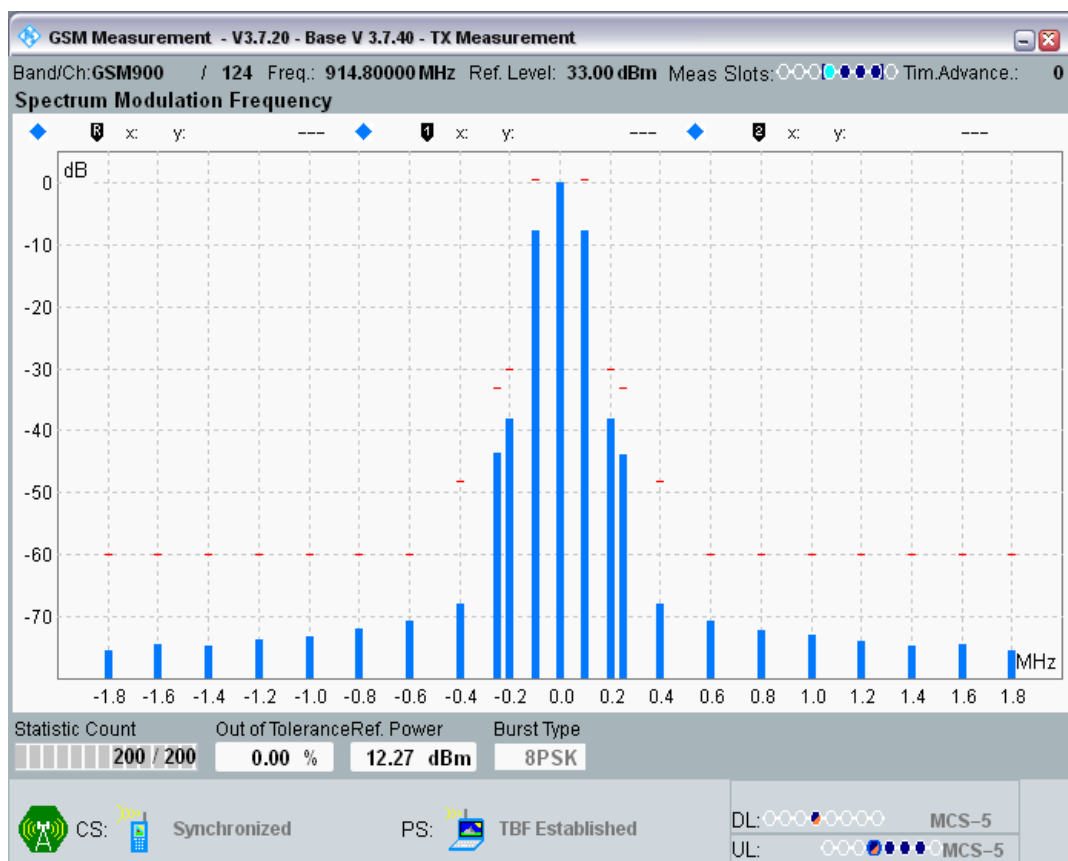


GSM900 Channel=60 Gamma=6;6;6;6.png

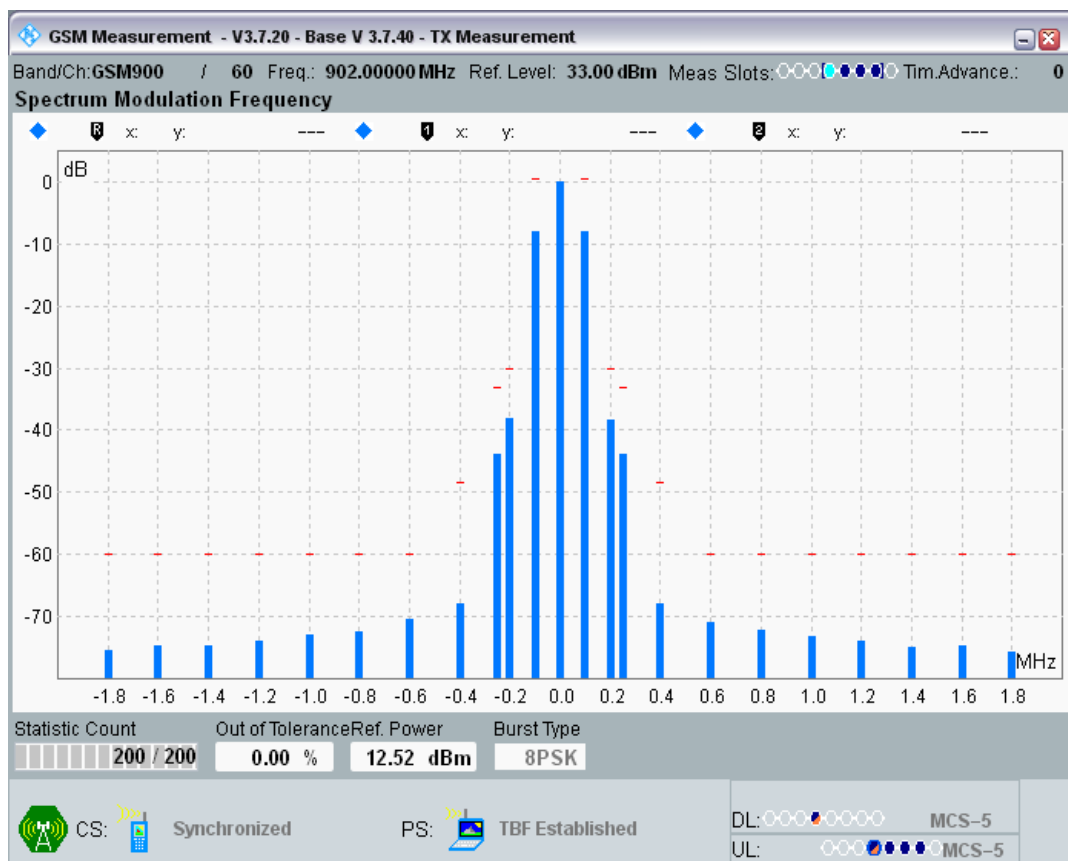


GSM900 Channel=975 Gamma=6;6;6;6.png

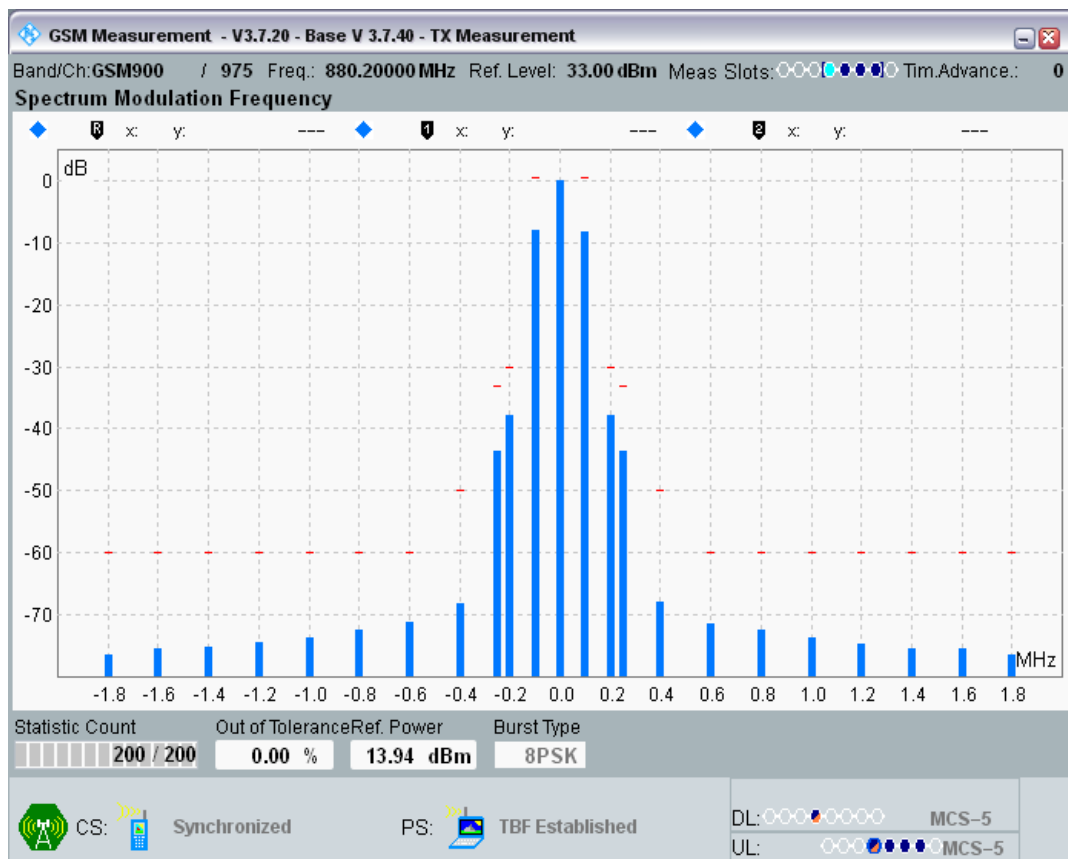


DCS1800 Channel=512 Gamma=5;5;5;5.png

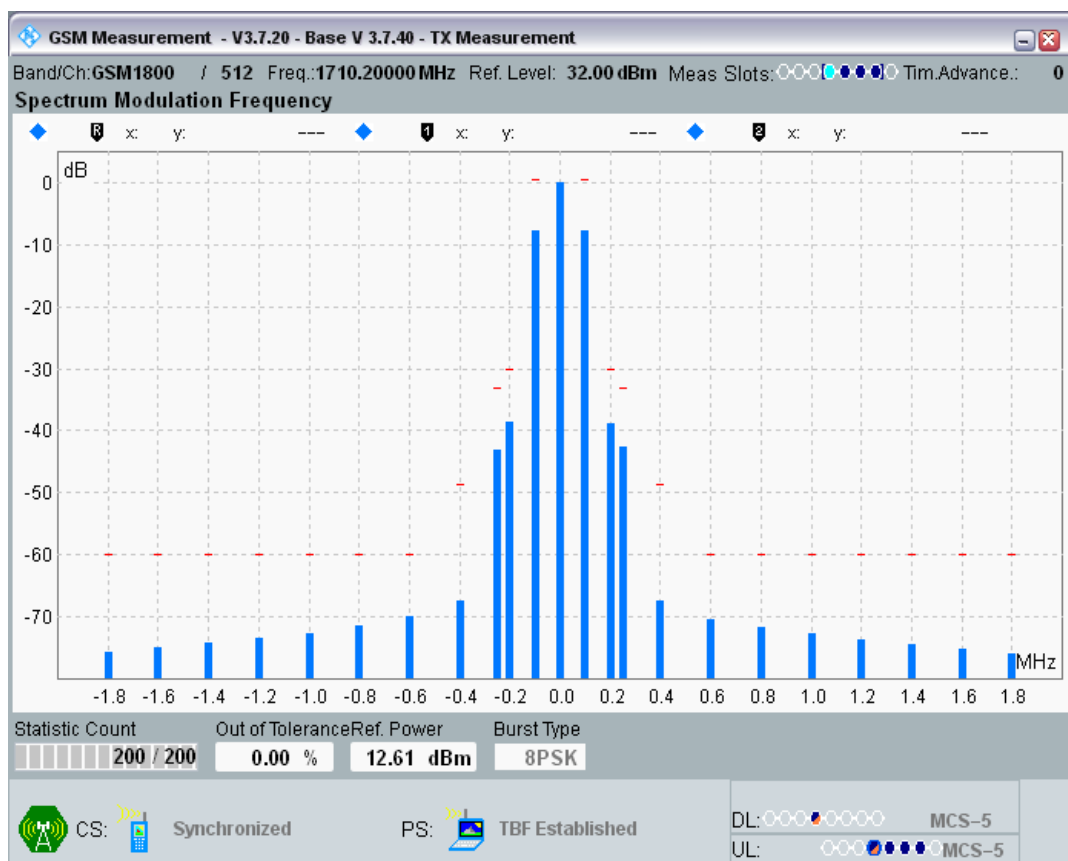

DCS1800 Channel=700 Gamma=5;5;5;5.png

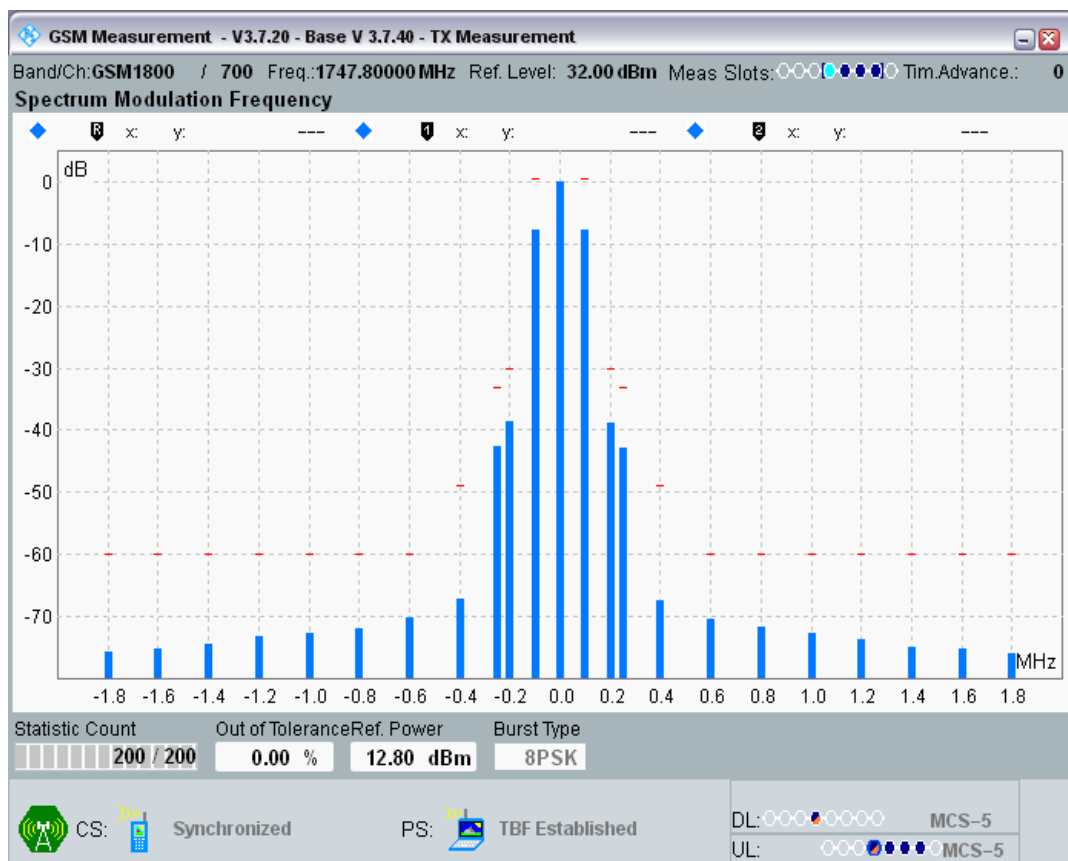

DCS1800 Channel=885 Gamma=5;5;5;5.png

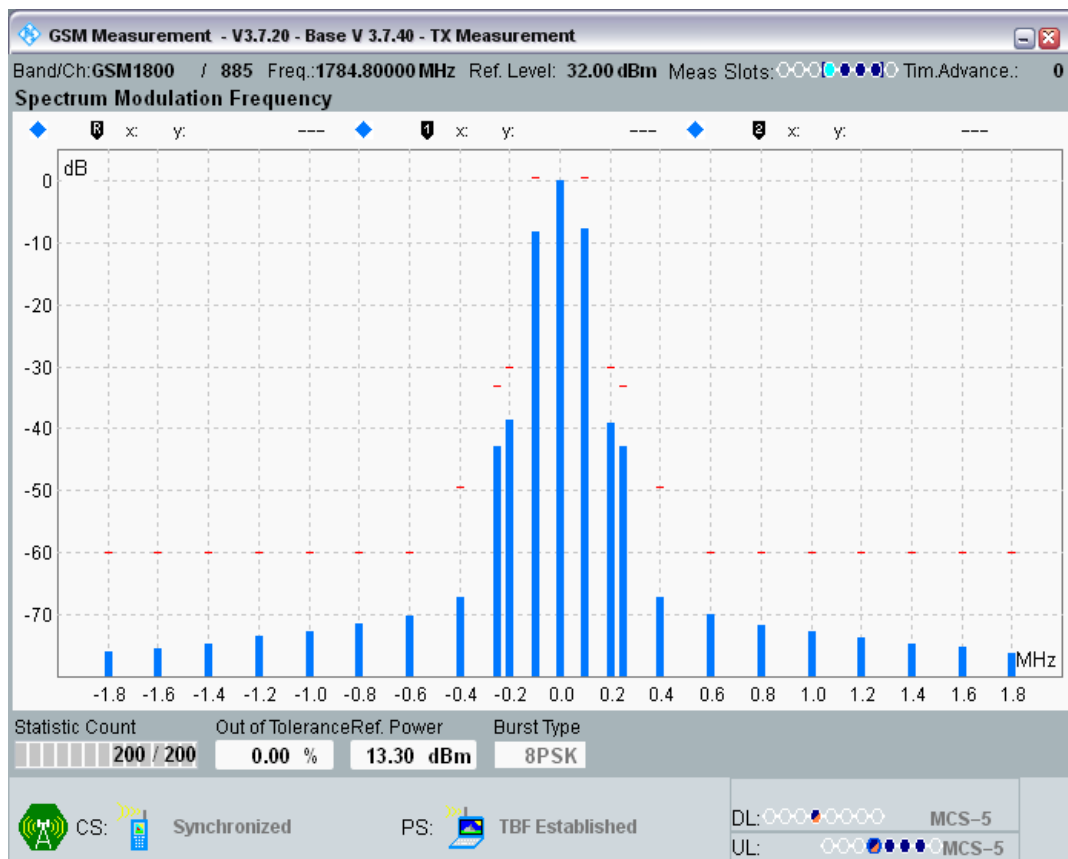




**Clause 4.2.29 Switching Spectrum in EGPRS configuration**


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-51.41	-24	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-49.06	-21	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-46.01	-21	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-41.97	-19	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-41.95	-19	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-46.14	-21	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-48.97	-21	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-51.26	-24	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-51.85	-24	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-49.91	-21	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-47.16	-21	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-43.74	-19	PASS
GSM900	60	902	6;6;6;6	400 KHz	-43.99	-19	PASS
GSM900	60	902	6;6;6;6	600 KHz	-47.07	-21	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-51.02	-21	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-52.32	-24	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-50.75	-24	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-50.52	-21	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-46.25	-21	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-44.09	-19	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-44.89	-19	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-46.70	-21	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-50.52	-21	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-51.13	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-49.44	-27	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-48.27	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-45.13	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-42.05	-22	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-42.40	-22	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-46.34	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-50.64	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-51.66	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-50.08	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-49.14	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-45.21	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-43.46	-22	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-42.67	-22	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-46.37	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-49.51	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-51.19	-27	PASS

DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-50.98	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-49.69	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-44.97	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-42.90	-22	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-42.92	-22	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-43.55	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-48.00	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-51.35	-27	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

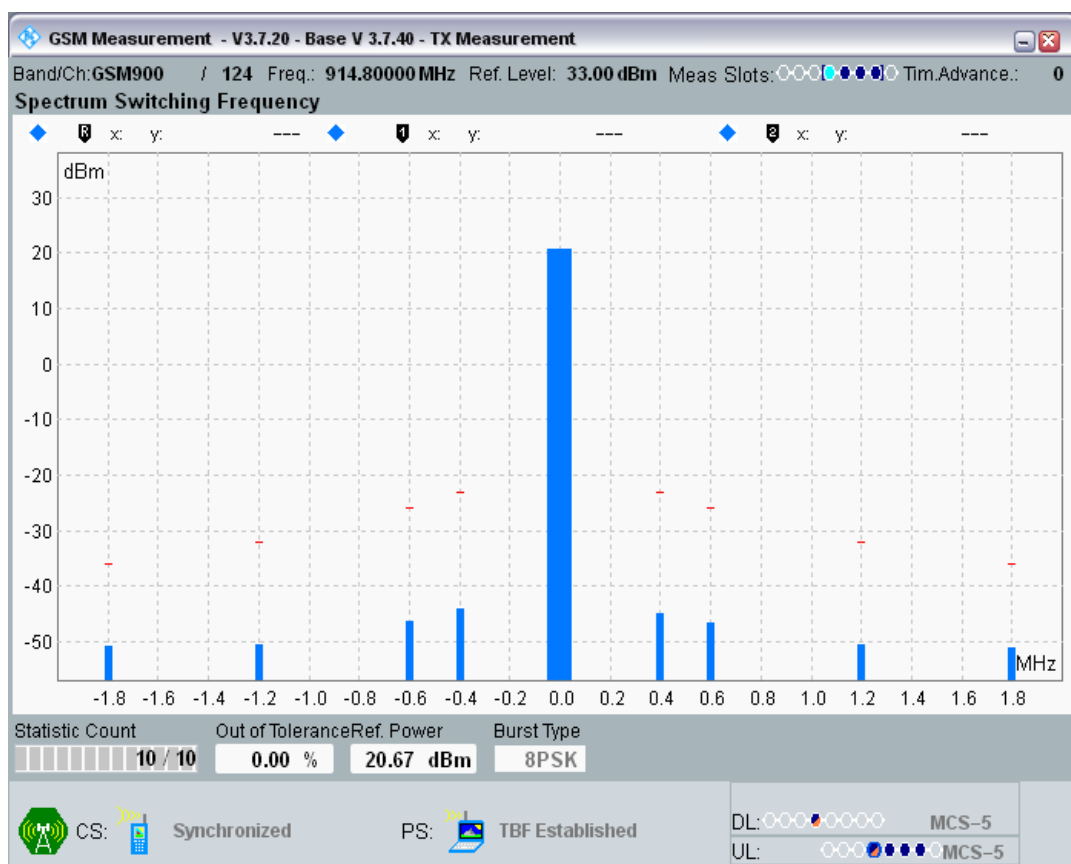


GSM900 Channel=60 Gamma=6;6;6;6.png

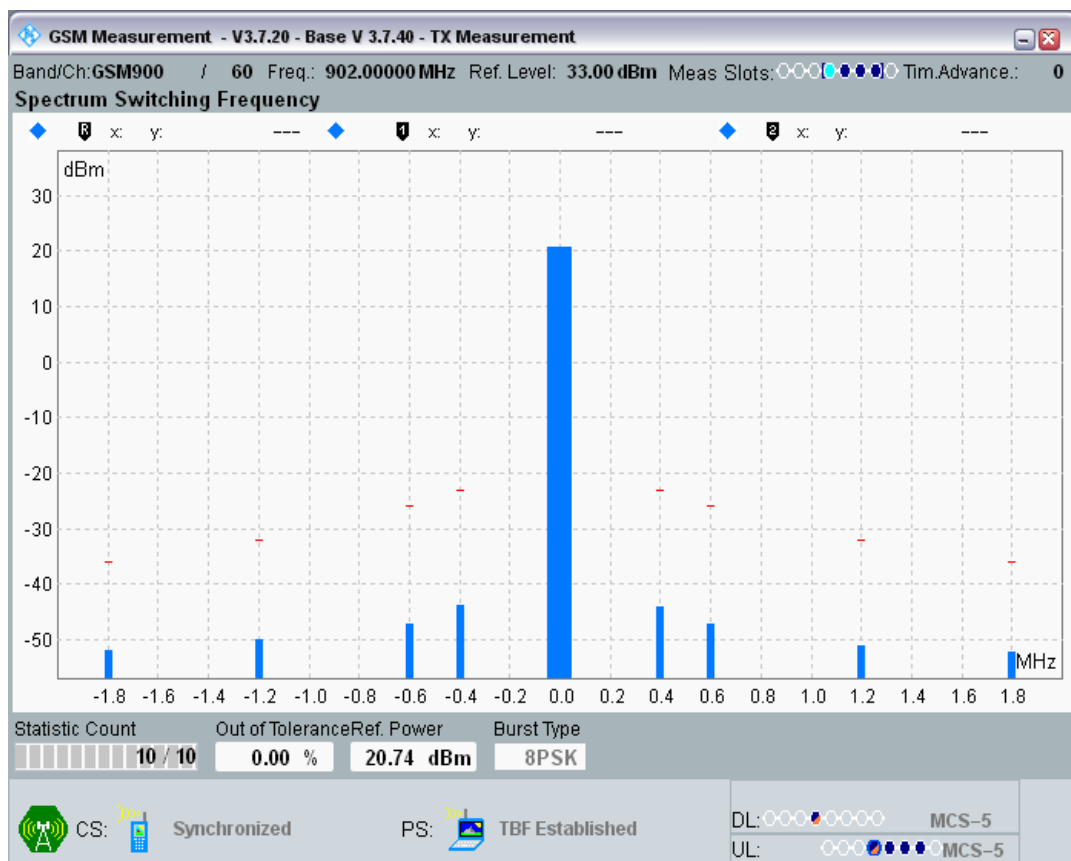


GSM900 Channel=975 Gamma=6;6;6;6.png

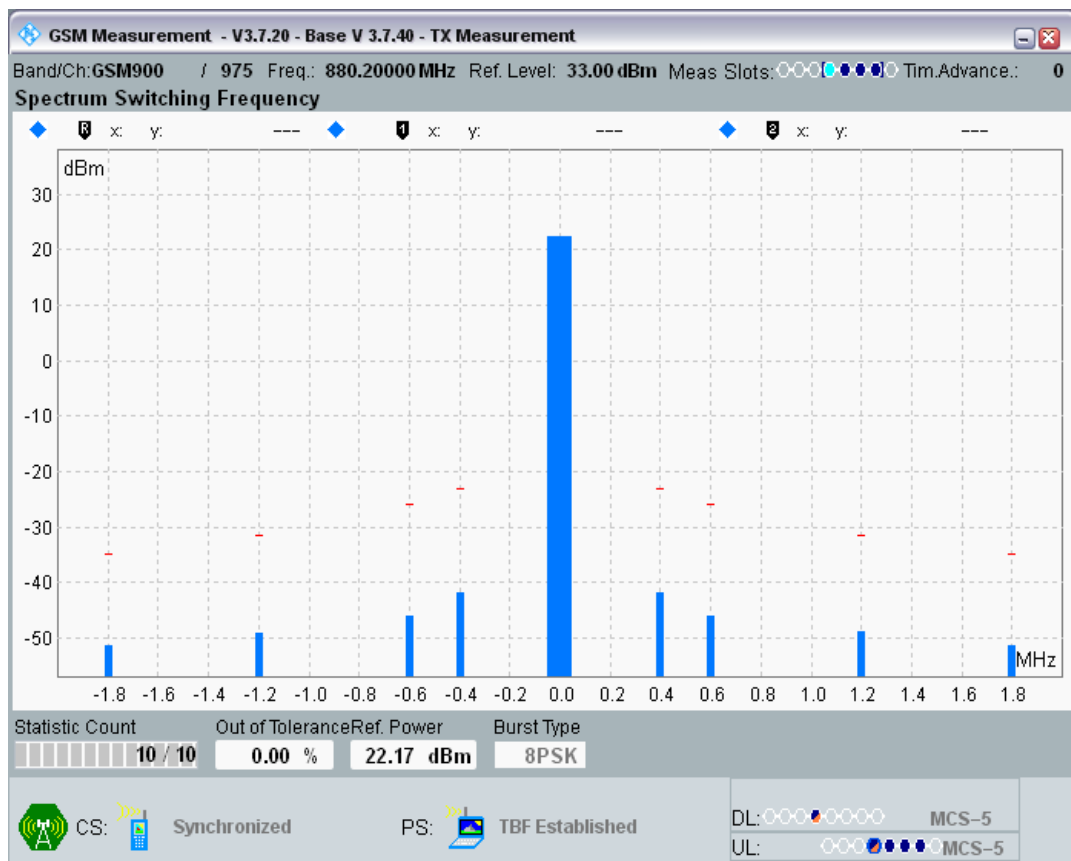


DCS1800 Channel=512 Gamma=5;5;5;5.png

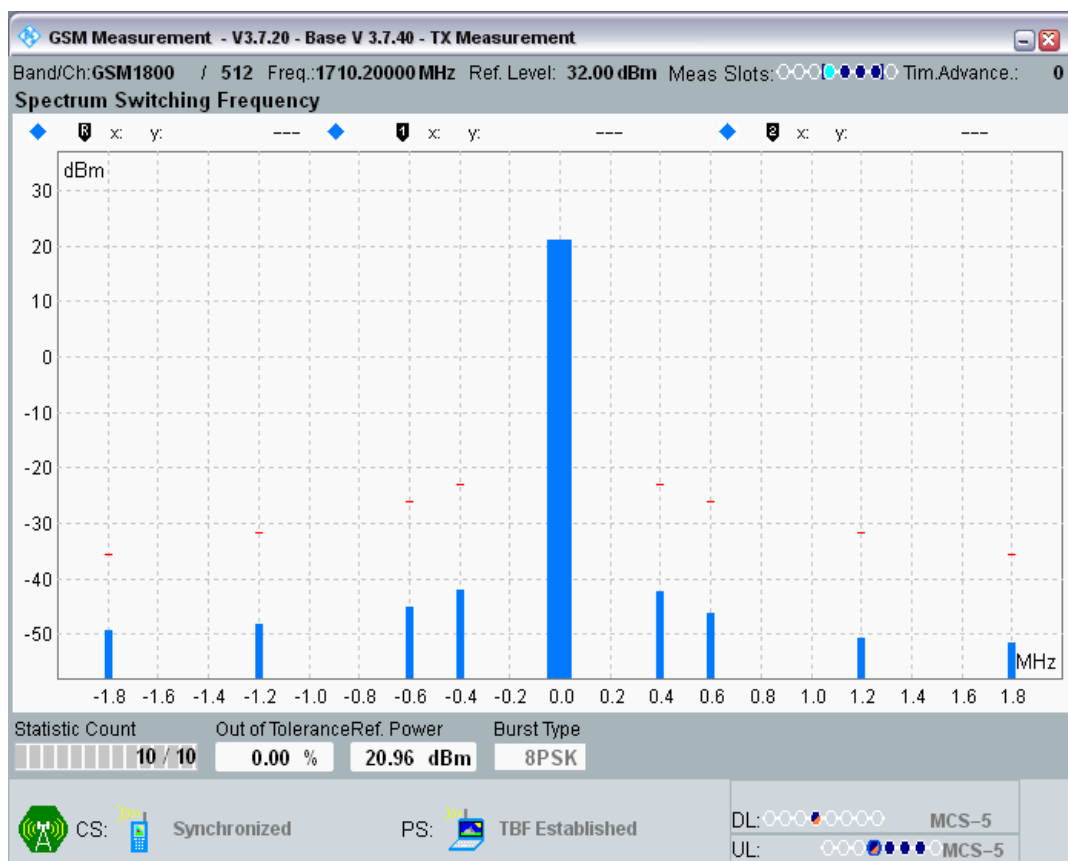

DCS1800 Channel=700 Gamma=5;5;5;5.png

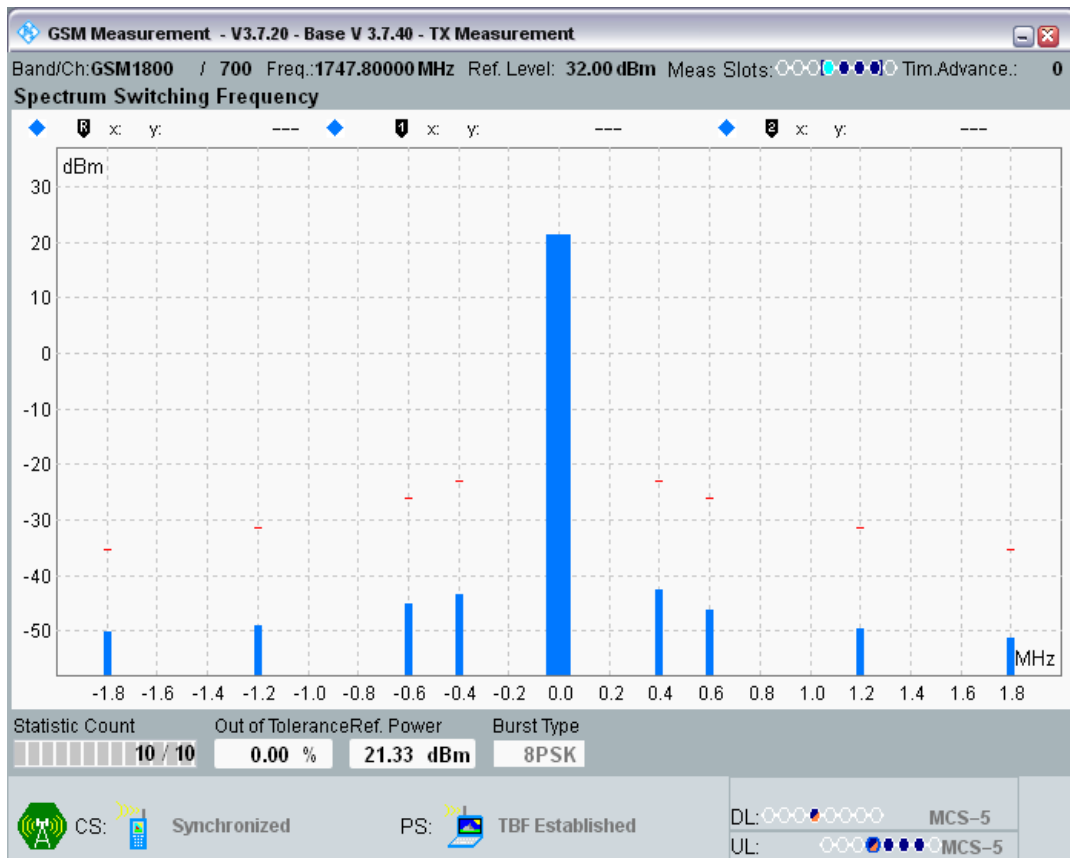

DCS1800 Channel=885 Gamma=5;5;5;5.png

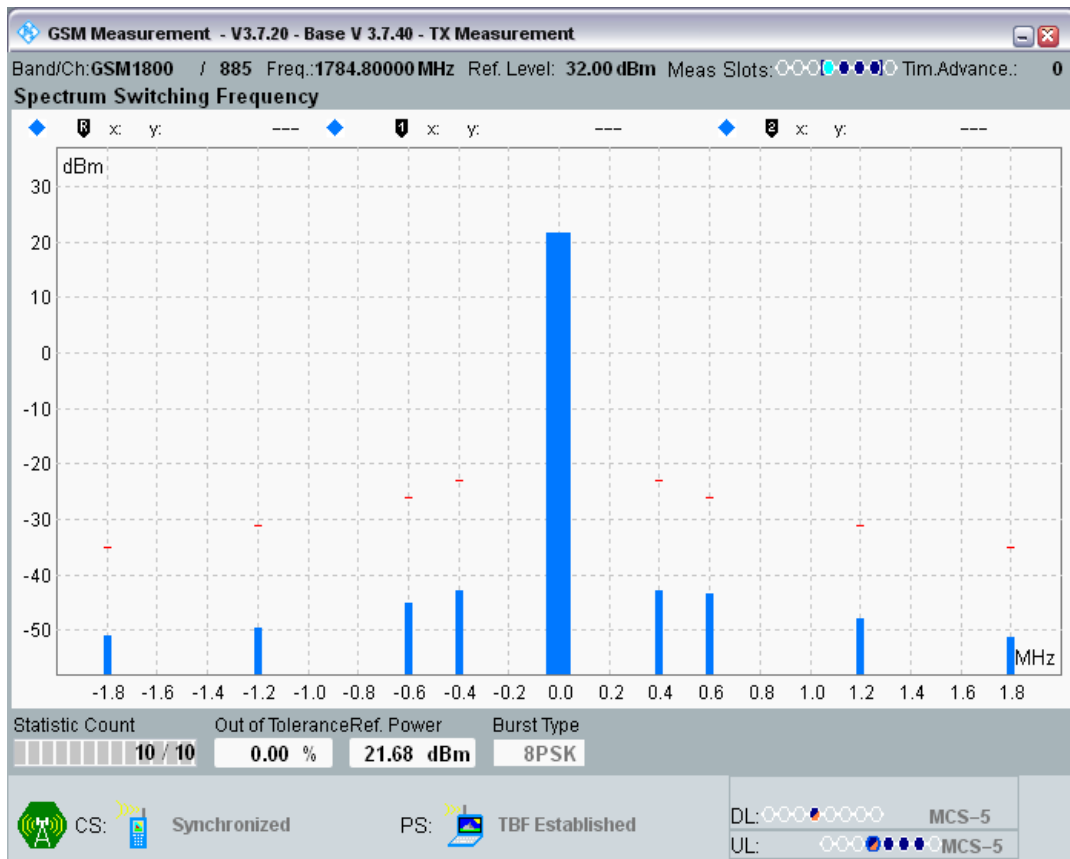

## Clause 4.2.34 Intermodulation rejection - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Code Scheme	Interfer1 Freq (MHz)	Interfer1 Level (dBm)	Interfer2 Freq (MHz)	Interfer2 Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	PDTCH MCS-1	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-1	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-2	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-2	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-3	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-3	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-4	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-4	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-5	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-5	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-6	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-6	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-7	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-7	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-8	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-8	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-9	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-9	916	-49	916.8	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-1	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH	947.8	-49	948.6	-50	0.00	10	PASS

				MCS-1							
GSM900	60	902	947	PDTCH MCS-2	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-2	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-3	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-3	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-4	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-4	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-5	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-5	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-6	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-6	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-7	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-7	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-8	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-8	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-9	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-9	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-1	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-1	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-2	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-2	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	10	PASS

				MCS-3							
GSM900	124	914.8	959.8	PDTCH MCS-3	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-4	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-4	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-5	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-5	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-6	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-6	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-7	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-7	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-8	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-8	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-9	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-9	960.6	-49	961.4	-50	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-1	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-1	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-2	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-2	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-3	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-3	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-4	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH	1806	-49	1806.8	-49	0.00	10	PASS



				MCS-4							
DCS1800	512	1710.2	1805.2	PDTCH MCS-5	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-5	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-6	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-6	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-7	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-7	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-8	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-8	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-9	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-9	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-1	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-1	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-2	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-2	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-3	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-3	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-4	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-4	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-5	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-5	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH	1842	-49	1841.2	-49	0.00	10	PASS

				MCS-6							
DCS1800	700	1747.8	1842.8	PDTCH MCS-6	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-7	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-7	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-8	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-8	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-9	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-9	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-1	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-1	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-2	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-2	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-3	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-3	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-4	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-4	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-5	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-5	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-6	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-6	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-7	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-49	0.00	10	PASS

				MCS-7							
DCS1800	885	1784.8	1879.8	PDTCH MCS-8	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-8	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-9	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-9	1880.6	-49	1881.4	-49	0.00	10	PASS

## Clause 4.2.34 Intermodulation rejection - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Code Scheme	Interfer1 Freq (MHz)	Interfer1 Level (dBm)	Interfer2 Freq (MHz)	Interfer2 Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	USF MCS-1	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-1	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-2	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-2	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-3	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-3	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-4	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-4	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-5	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-5	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-6	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-6	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-7	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-7	916	-49	916.8	-50	0.00	1	PASS

GSM900	975	880.2	915.2	USF MCS-8	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-8	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-9	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-9	916	-49	916.8	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-1	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-1	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-2	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-2	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-3	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-3	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-4	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-4	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-5	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-5	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-6	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-6	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-7	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-7	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-8	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-8	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-9	946.2	-49	945.4	-50	0.00	1	PASS

GSM900	60	902	947	USF MCS-9	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-1	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-1	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-2	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-2	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-3	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-3	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-4	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-4	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-5	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-5	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-6	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-6	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-7	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-7	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-8	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-8	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-9	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-9	960.6	-49	961.4	-50	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-1	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-1	1806	-49	1806.8	-49	0.00	1	PASS

DCS1800	512	1710.2	1805.2	USF MCS-2	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-2	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-3	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-3	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-4	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-4	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-5	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-5	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-6	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-6	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-7	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-7	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-8	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-8	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-9	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-9	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-1	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-1	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-2	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-2	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-3	1842	-49	1841.2	-49	0.00	1	PASS

DCS1800	700	1747.8	1842.8	USF MCS-3	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-4	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-4	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-5	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-5	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-6	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-6	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-7	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-7	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-8	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-8	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-9	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-9	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-1	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-1	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-2	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-2	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-3	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-3	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-4	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-4	1880.6	-49	1881.4	-49	0.00	1	PASS

DCS1800	885	1784.8	1879.8	USF MCS-5	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-5	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-6	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-6	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-7	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-7	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-8	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-8	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-9	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-9	1880.6	-49	1881.4	-49	0.00	1	PASS

### Clause 4.2.40 Adjacent channel rejection - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Interfer Freq (MHz)	Interfer Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	915	-96.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	915.4	-96.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	914.8	-63.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	915.6	-63.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	915	-97.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	915.4	-97.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	914.8	-63.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	915.6	-63.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	915	-99.5	0.00	10	PASS



GSM900	975	880.2	915.2	Static	PDTCH MCS-7	915.4	-99.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	914.8	-65.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	915.6	-65.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	915	-102	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	915.4	-102	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	914.8	-67	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	915.6	-67	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	915	-92	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	915.4	-92	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	914.8	-57.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	915.6	-57.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	946.8	-96.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	947.2	-96.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	946.6	-63.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	947.4	-63.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	946.8	-97.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	947.2	-97.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	946.6	-63.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	947.4	-63.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	946.8	-99.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	947.2	-99.5	0.00	10	PASS

GSM900	60	902	947	Static	PDTCH MCS-7	946.6	-65.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	947.4	-65.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	946.8	-102	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	947.2	-102	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	946.6	-67	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	947.4	-67	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	946.8	-92	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	947.2	-92	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	946.6	-57.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	947.4	-57.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	959.6	-96.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	960	-96.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	959.4	-63.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	960.2	-63.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	959.6	-97.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	960	-97.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	959.4	-63.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	960.2	-63.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	959.6	-99.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	960	-99.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	959.4	-65.5	0.00	10	PASS

GSM900	124	914.8	959.8	Static	PDTCH MCS-7	960.2	-65.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	959.6	-102	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	960	-102	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	959.4	-67	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	960.2	-67	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	959.6	-92	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	960	-92	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	959.4	-57.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	960.2	-57.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	1805	-96.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	1805.4	-96.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	1804.8	-63.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	1805.6	-63.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	1805	-97.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	1805.4	-97.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	1804.8	-63.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	1805.6	-63.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	1805	-99.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	1805.4	-99.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	1804.8	-65.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	1805.6	-65.5	0.00	10	PASS

DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	1805	-102	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	1805.4	-102	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	1804.8	-67	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	1805.6	-67	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	1805	-92	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	1805.4	-92	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	1804.8	-57.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	1805.6	-57.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	1842.6	-96.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	1843	-96.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	1842.4	-63.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	1843.2	-63.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	1842.6	-97.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	1843	-97.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	1842.4	-63.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	1843.2	-63.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	1842.6	-99.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	1843	-99.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	1842.4	-65.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	1843.2	-65.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	1842.6	-102	0.00	10	PASS

DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	1843	-102	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	1842.4	-67	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	1843.2	-67	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	1842.6	-92	8.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	1843	-92	2.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	1842.4	-57.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	1843.2	-57.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	1879.6	-96.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	1880	-96.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	1879.4	-63.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	1880.2	-63.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	1879.6	-97.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	1880	-97.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	1879.4	-63.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	1880.2	-63.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	1879.6	-99.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	1880	-99.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	1879.4	-65.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	1880.2	-65.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	1879.6	-102	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	1880	-102	0.00	10	PASS

DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	1879.4	-67	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	1880.2	-67	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	1879.6	-92	1.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	1880	-92	4.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	1879.4	-57.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	1880.2	-57.5	0.00	10	PASS

#### Clause 4.2.40 Adjacent channel rejection - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Interfer Freq (MHz)	Interfer Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	USF MCS-4	915	-100	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-4	915.4	-100	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-4	914.8	-68	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-4	915.6	-68	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	946.8	-100	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	947.2	-100	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	946.6	-68	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	947.4	-68	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	959.6	-100	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	960	-100	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	959.4	-68	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	960.2	-68	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	1805	-100	0.00	1	PASS

DCS1800	512	1710.2	1805.2	Static	USF MCS-4	1805.4	-100	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	1804.8	-68	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	1805.6	-68	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	1842.6	-100	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	1843	-100	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	1842.4	-68	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	1843.2	-68	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	1879.6	-100	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	1880	-100	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	1879.4	-68	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	1880.2	-68	0.00	1	PASS

### Clause 4.2.45 Minimum Input level for Reference Performance - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	-98	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	-96	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	-93	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	-86	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	-98	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	-96	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	-93	0.00	10	PASS

GSM900	60	902	947	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	-86	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	-98	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	-96	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	-93	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	-86	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	-98	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	-96	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	-93	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	-86	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	-98	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	-96	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	-93	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	-86	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	-98	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	-96	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	-93	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	-90.5	0.00	10	PASS



DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	-86	0.00	10	PASS
---------	-----	--------	--------	--------	----------------	-----	------	----	------

## Clause 4.2.45 Minimum Input level for Reference Performance - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	USF MCS-1	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-2	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-3	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-4	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-1	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-2	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-3	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-1	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-2	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-3	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-1	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-2	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-3	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-1	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-2	-104	0.00	1	PASS

DCS1800	700	1747.8	1842.8	Static	USF MCS-3	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-1	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-2	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-3	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	-104	0.00	1	PASS