

Test Data


Clause 4.2.1 Transmitter-Frequency error and phase error

Band	Channel	Frequency (MHz)	PCL	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	5	Frequency Error (Hz)	9.78	-88.02	88.02	PASS
GSM900	975	880.2	5	RMS Phase Error (Degree)	0.65	0	5	PASS
GSM900	975	880.2	5	Peak Phase Error (Degree)	1.80	0	20	PASS
GSM900	60	902	5	Frequency Error (Hz)	9.14	-90.2	90.2	PASS
GSM900	60	902	5	RMS Phase Error (Degree)	0.68	0	5	PASS
GSM900	60	902	5	Peak Phase Error (Degree)	1.88	0	20	PASS
GSM900	124	914.8	5	Frequency Error (Hz)	10.88	-91.48	91.48	PASS
GSM900	124	914.8	5	RMS Phase Error (Degree)	0.56	0	5	PASS
GSM900	124	914.8	5	Peak Phase Error (Degree)	1.61	0	20	PASS
DCS1800	512	1710.2	0	Frequency Error (Hz)	9.62	-171.02	171.02	PASS
DCS1800	512	1710.2	0	RMS Phase Error (Degree)	0.60	0	5	PASS
DCS1800	512	1710.2	0	Peak Phase Error (Degree)	1.82	0	20	PASS
DCS1800	700	1747.8	0	Frequency Error (Hz)	9.91	-174.78	174.78	PASS
DCS1800	700	1747.8	0	RMS Phase Error (Degree)	0.59	0	5	PASS
DCS1800	700	1747.8	0	Peak Phase Error (Degree)	1.90	0	20	PASS
DCS1800	885	1784.8	0	Frequency Error (Hz)	7.97	-178.48	178.48	PASS
DCS1800	885	1784.8	0	RMS Phase Error (Degree)	0.59	0	5	PASS
DCS1800	885	1784.8	0	Peak Phase Error (Degree)	1.80	0	20	PASS


GSM900 Channel=124 PCL=5.png




GSM900 Channel=60 PCL=5.png

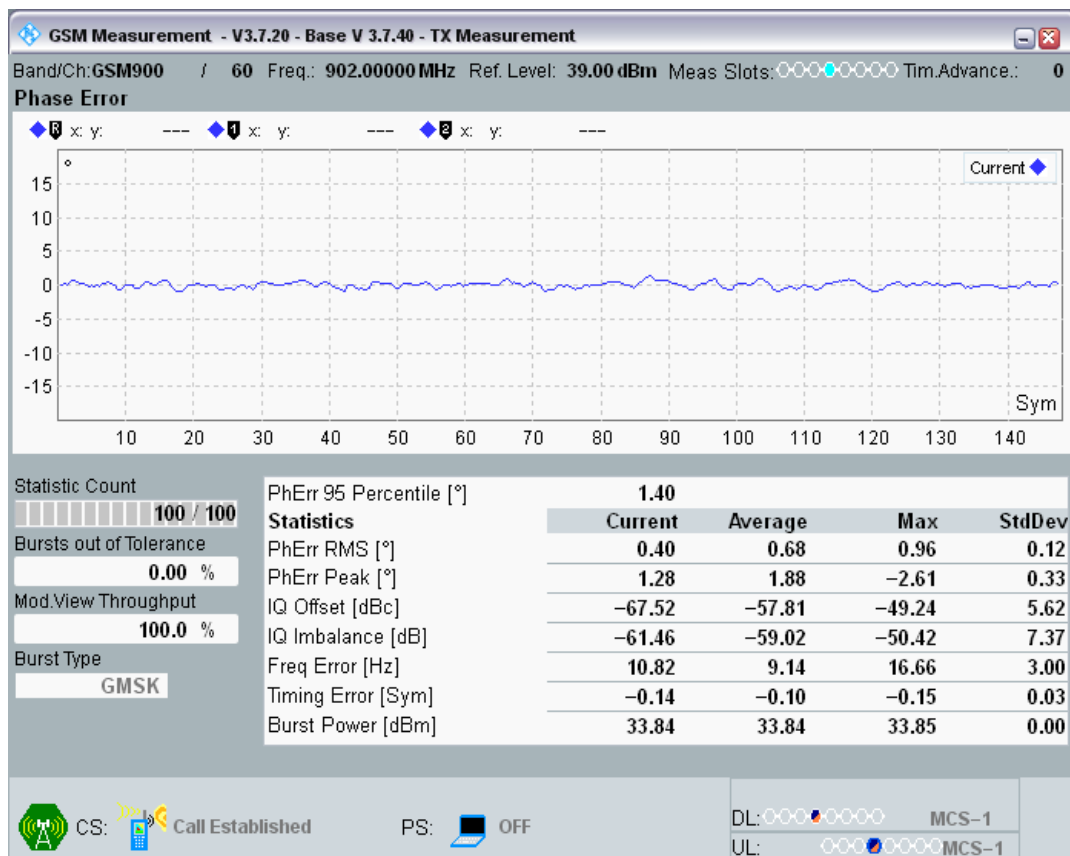


GSM900 Channel=975 PCL=5.png

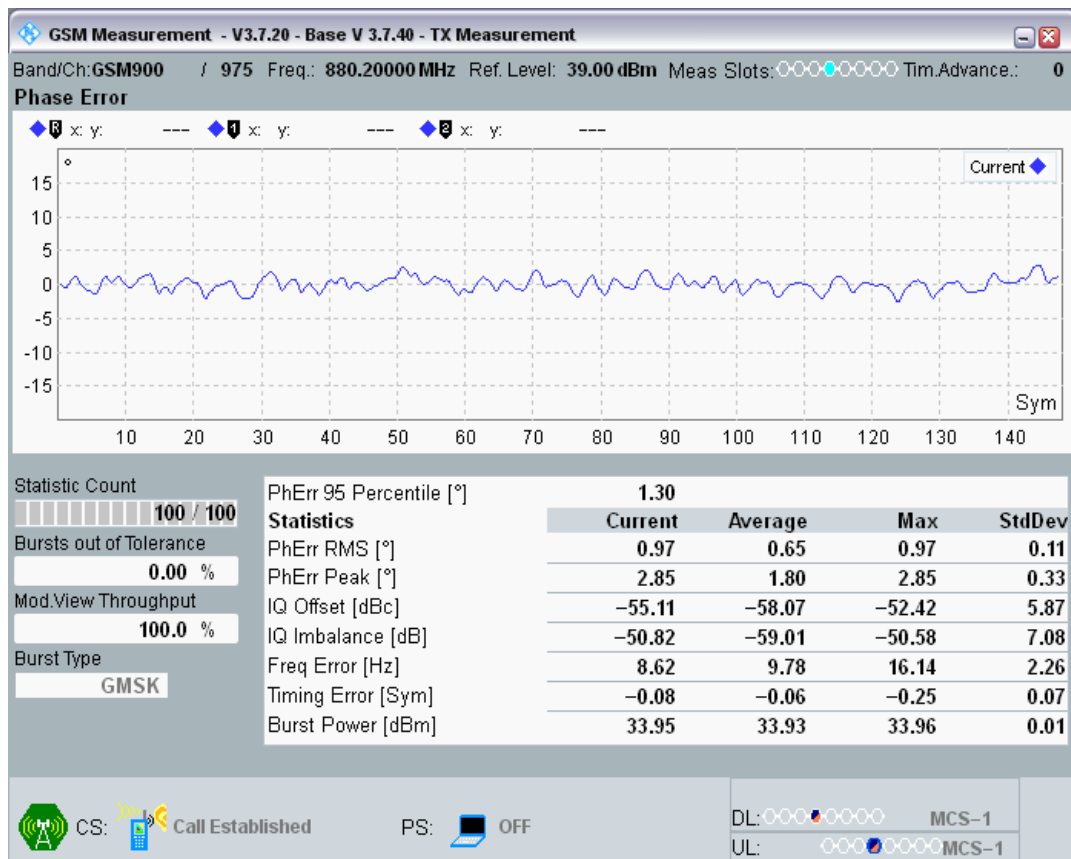


DCS1800 Channel=512 PCL=0.png

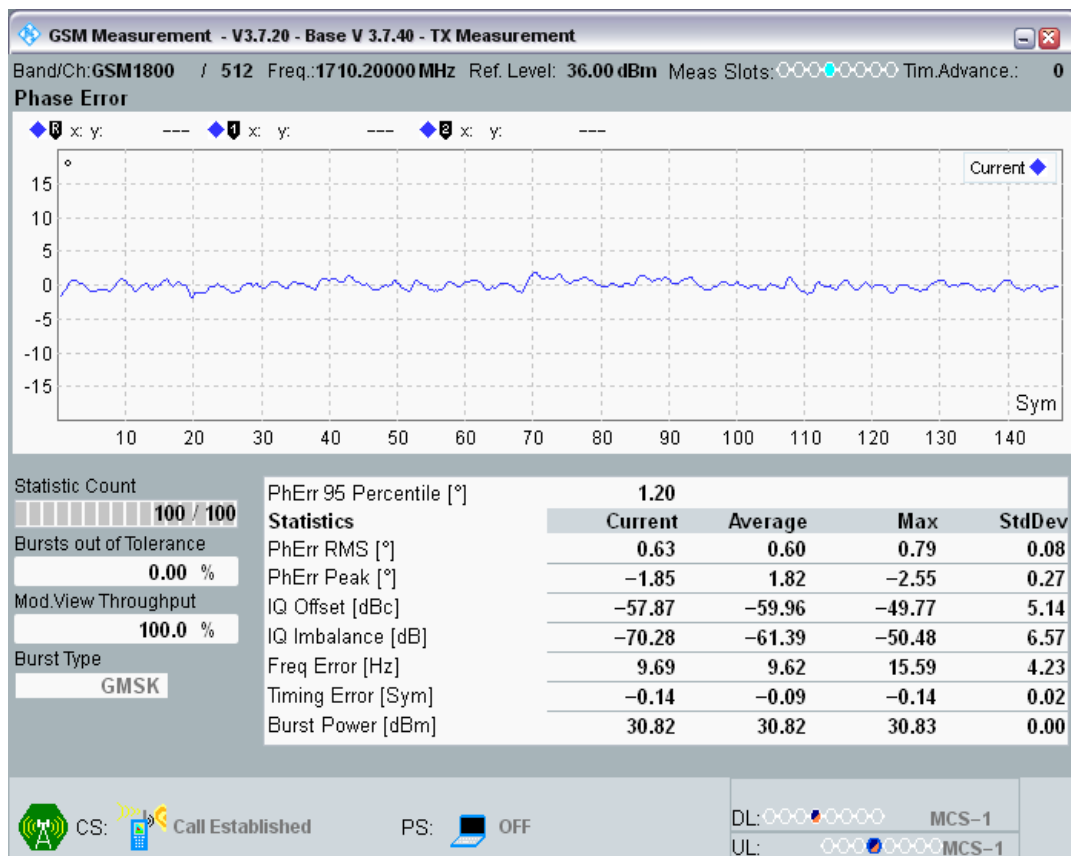

DCS1800 Channel=700 PCL=0.png

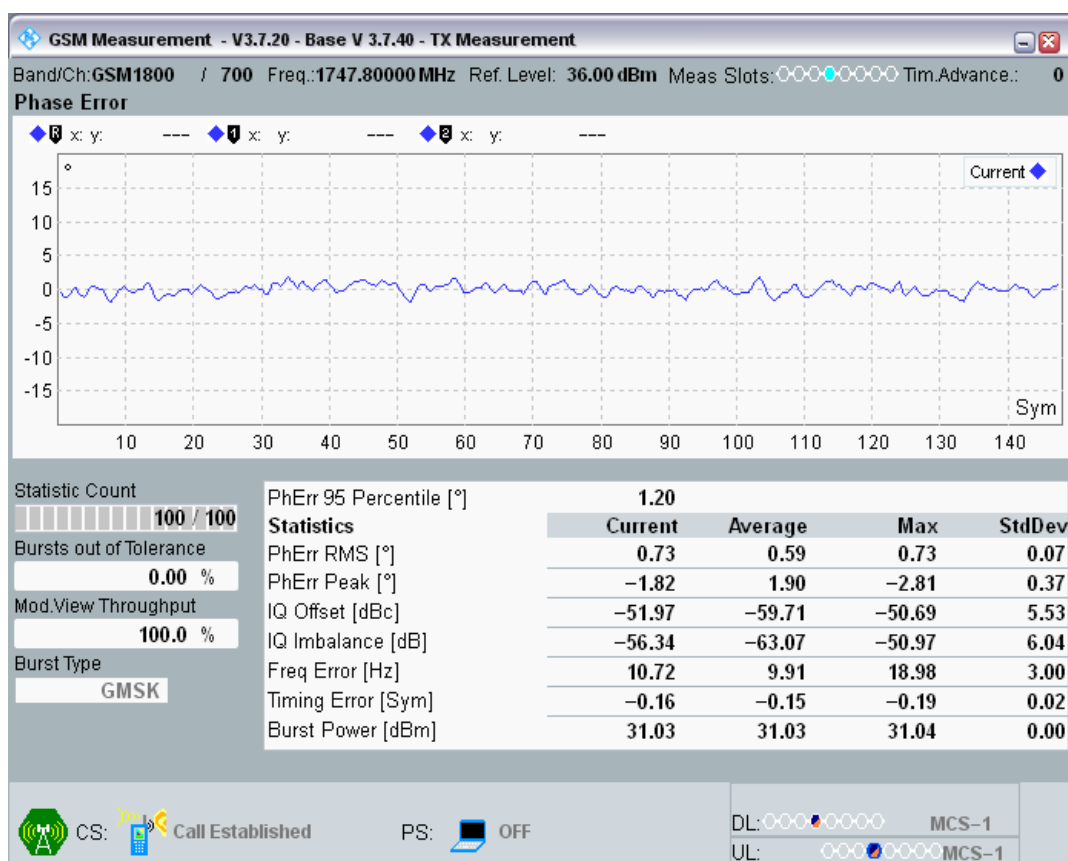


DCS1800 Channel=885 PCL=0.png

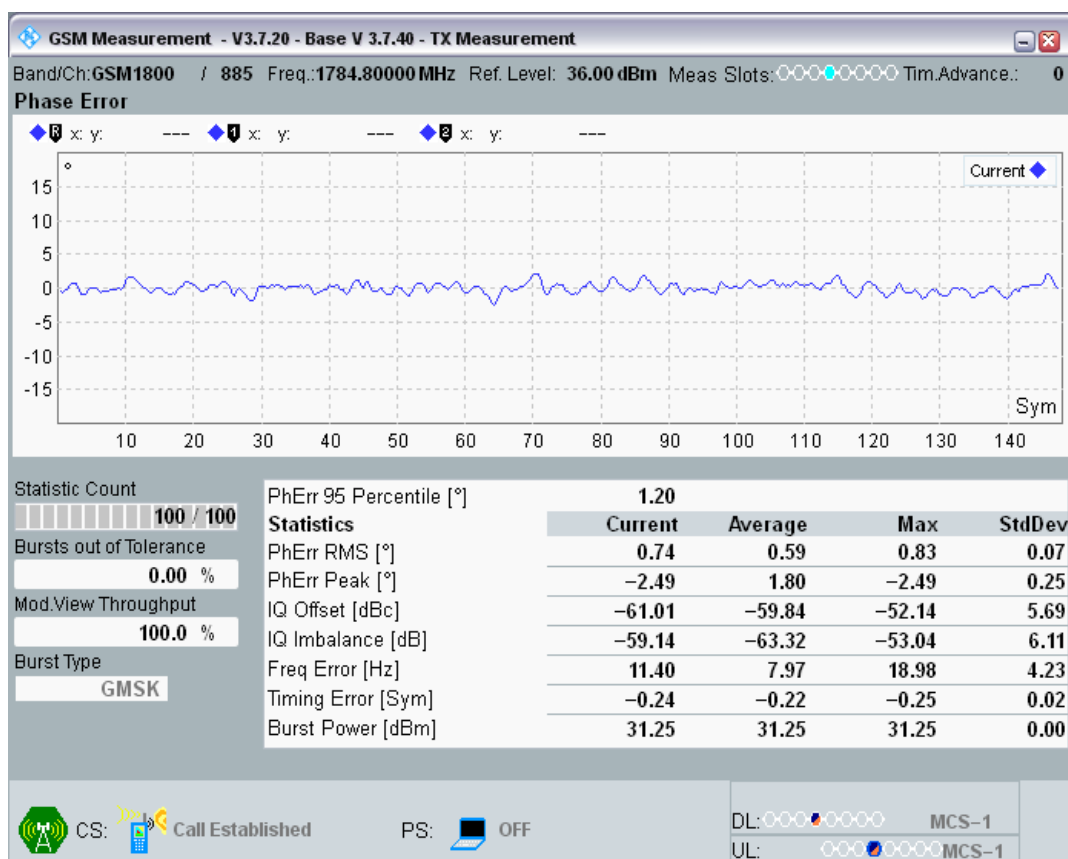


Clause 4.2.2 Transmitter-Frequency error under multi path and interference conditions

Band	Type	Channel	Frequency (MHz)	PCL	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
DCS1800	RA130	512	1710.2	0	11.30	-400	400	PASS
DCS1800	RA130	700	1747.8	0	10.82	-400	400	PASS
DCS1800	RA130	885	1784.8	0	10.98	-400	400	PASS
DCS1800	HT100	512	1710.2	0	9.65	-350	350	PASS
DCS1800	HT100	700	1747.8	0	8.43	-350	350	PASS
DCS1800	HT100	885	1784.8	0	9.17	-350	350	PASS
DCS1800	TU50	512	1710.2	0	9.01	-260	260	PASS
DCS1800	TU50	700	1747.8	0	10.17	-260	260	PASS
DCS1800	TU50	885	1784.8	0	11.33	-260	260	PASS
DCS1800	TU1_5	512	1710.2	0	9.98	-320	320	PASS
DCS1800	TU1_5	700	1747.8	0	12.20	-320	320	PASS
DCS1800	TU1_5	885	1784.8	0	12.07	-320	320	PASS
GSM900	RA250	975	880.2	5	10.59	-300	300	PASS
GSM900	RA250	60	902	5	10.88	-300	300	PASS
GSM900	RA250	124	914.8	5	6.88	-300	300	PASS
GSM900	HT100	975	880.2	5	11.91	-180	180	PASS
GSM900	HT100	60	902	5	12.37	-180	180	PASS
GSM900	HT100	124	914.8	5	12.95	-180	180	PASS
GSM900	TU50	975	880.2	5	11.91	-160	160	PASS
GSM900	TU50	60	902	5	12.20	-160	160	PASS
GSM900	TU50	124	914.8	5	11.72	-160	160	PASS
GSM900	TU3	975	880.2	5	11.01	-230	230	PASS
GSM900	TU3	60	902	5	12.17	-230	230	PASS
GSM900	TU3	124	914.8	5	9.30	-230	230	PASS


DCS1800 Channel=512 PCL=0 HT100.png

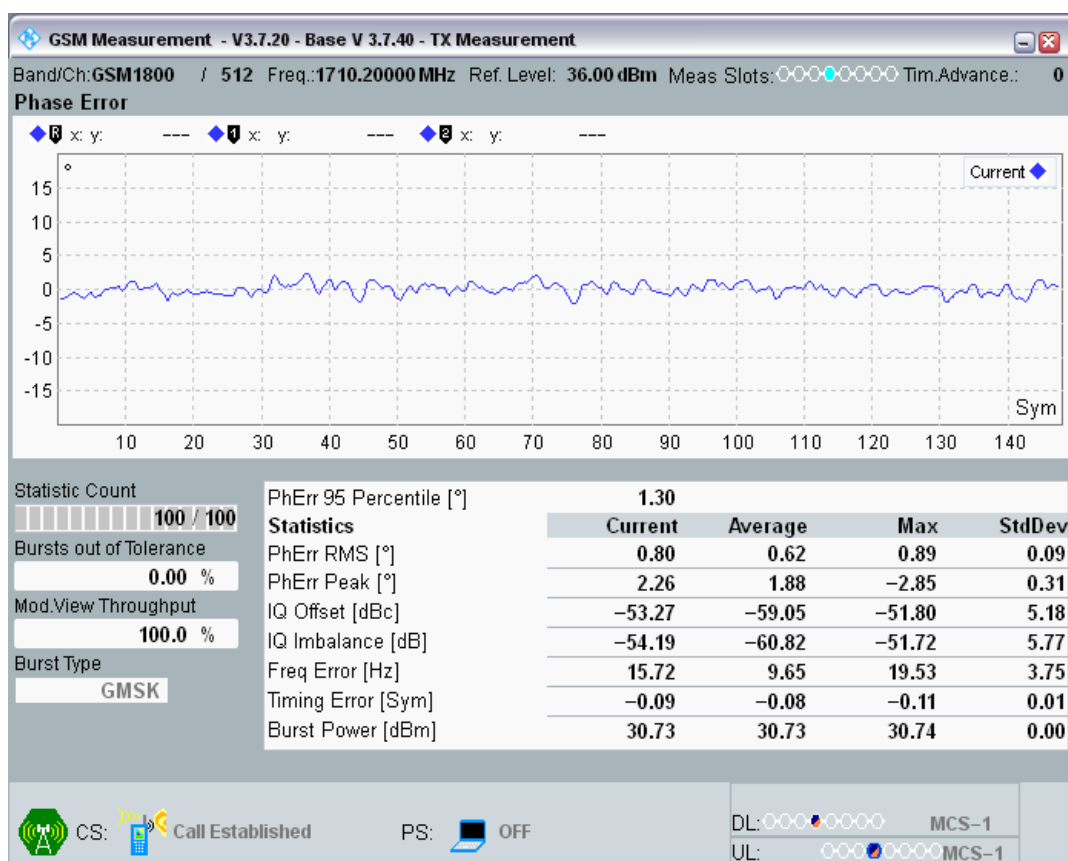


DCS1800 Channel=512 PCL=0 RA130.png

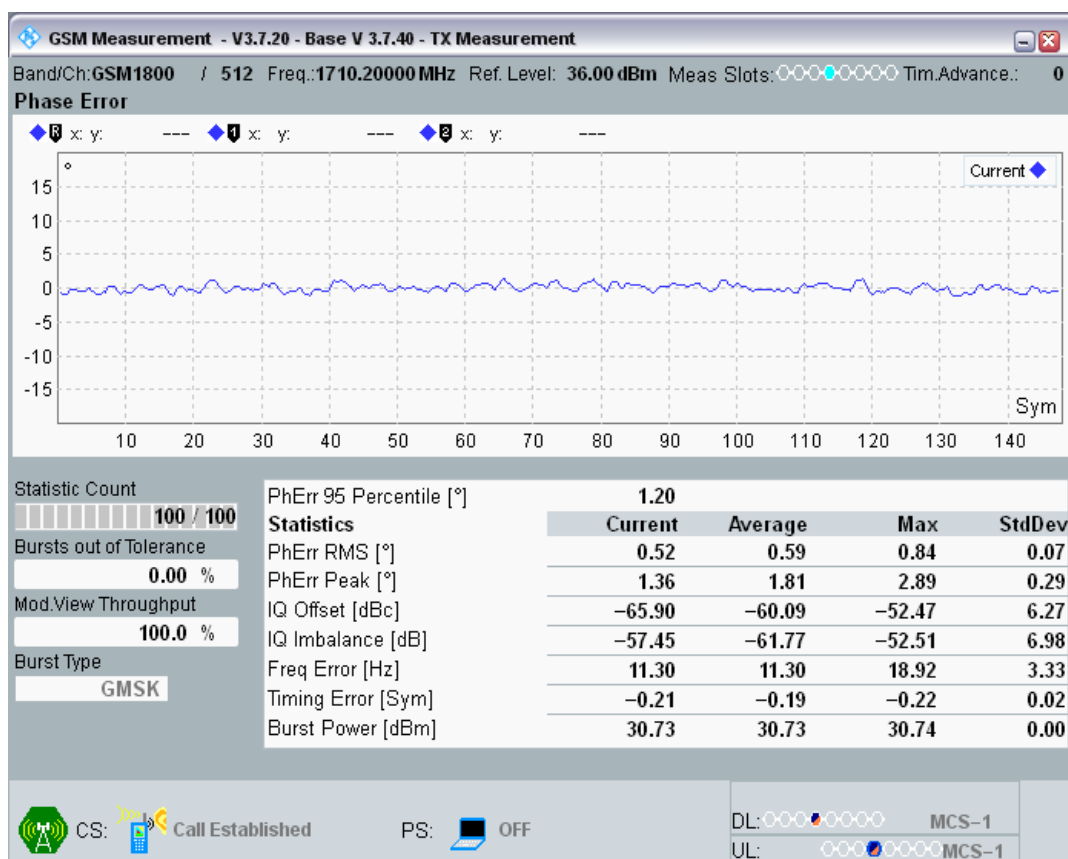


DCS1800 Channel=512 PCL=0 TU1_5.png

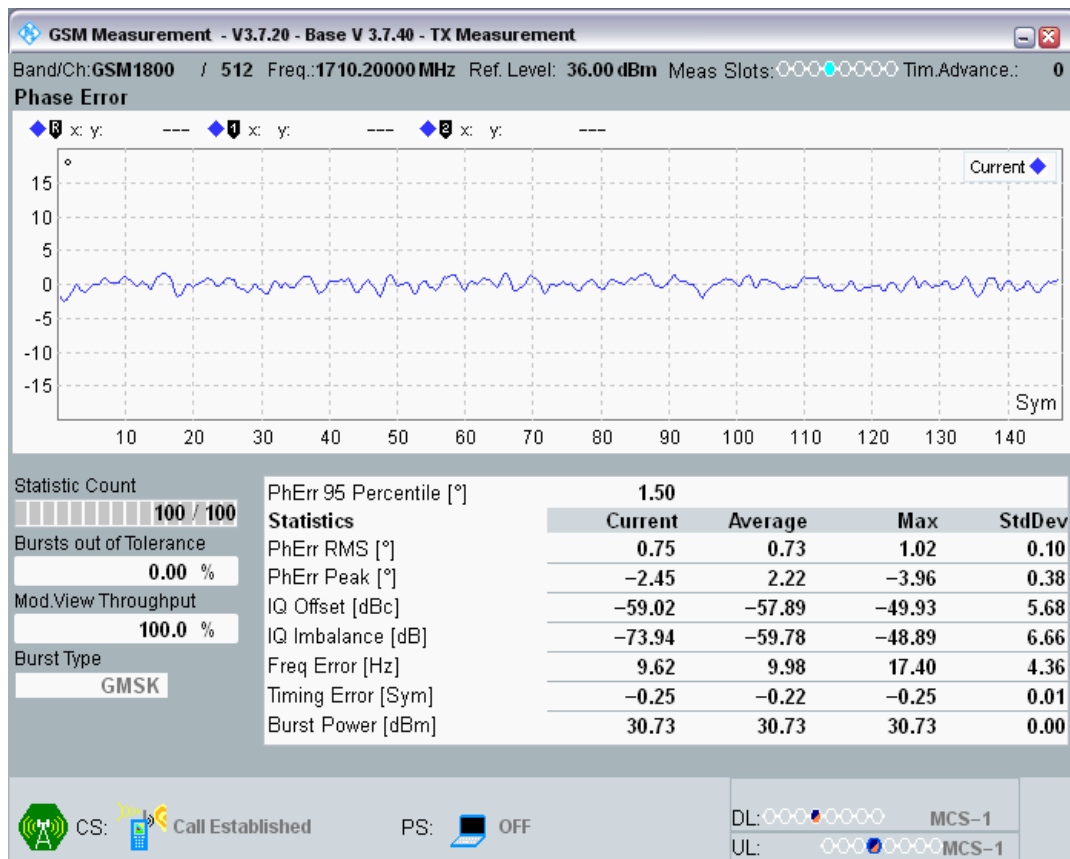


DCS1800 Channel=512 PCL=0 TU50.png

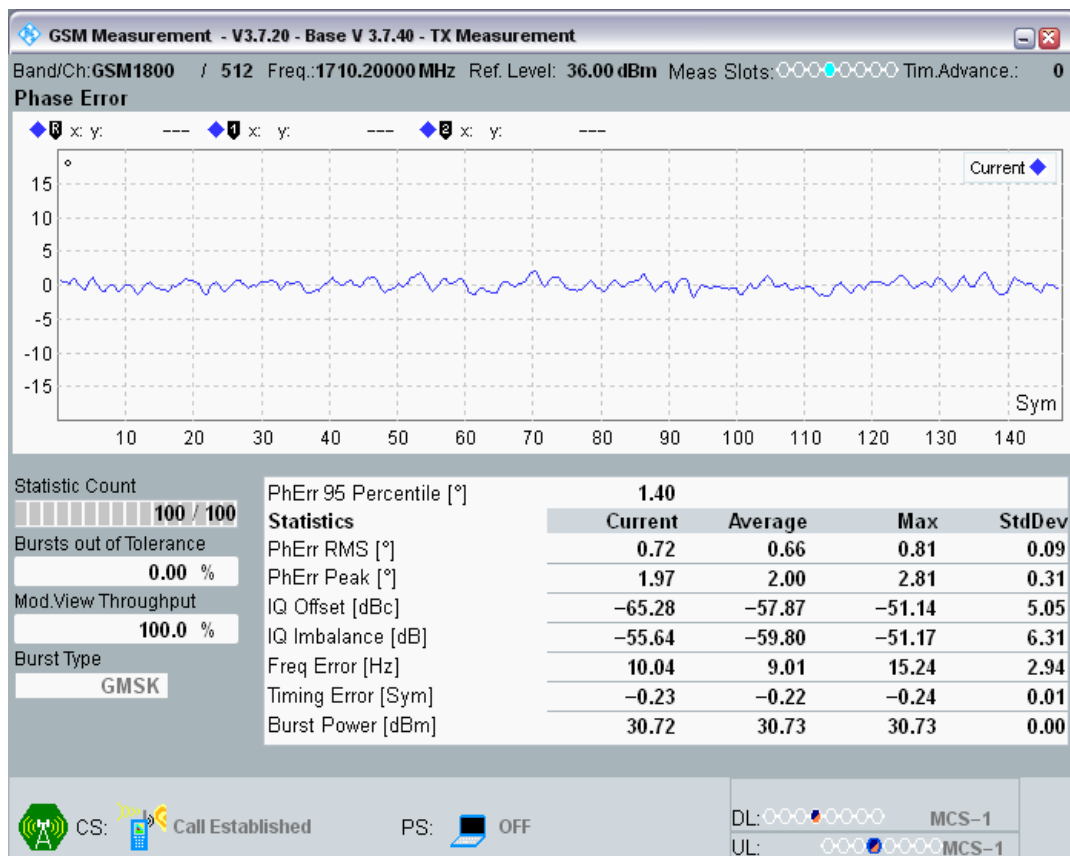


DCS1800 Channel=700 PCL=0 HT100.png

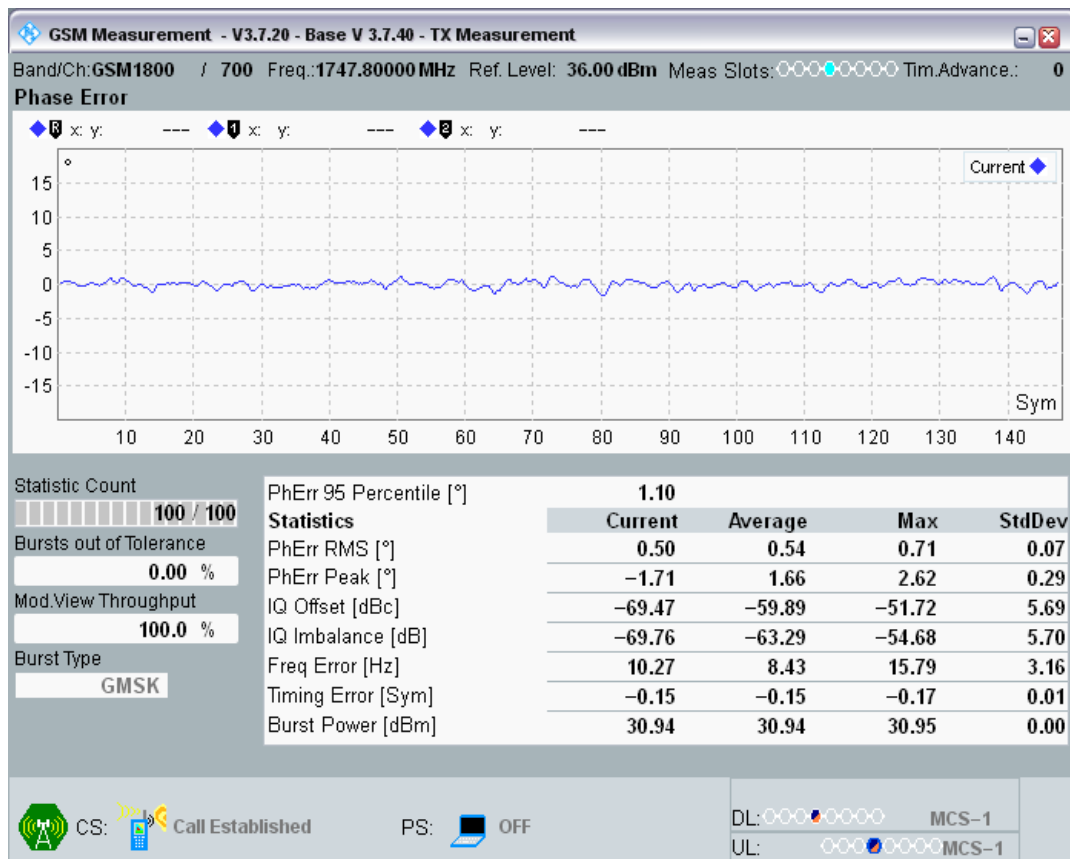

DCS1800 Channel=700 PCL=0 RA130.png

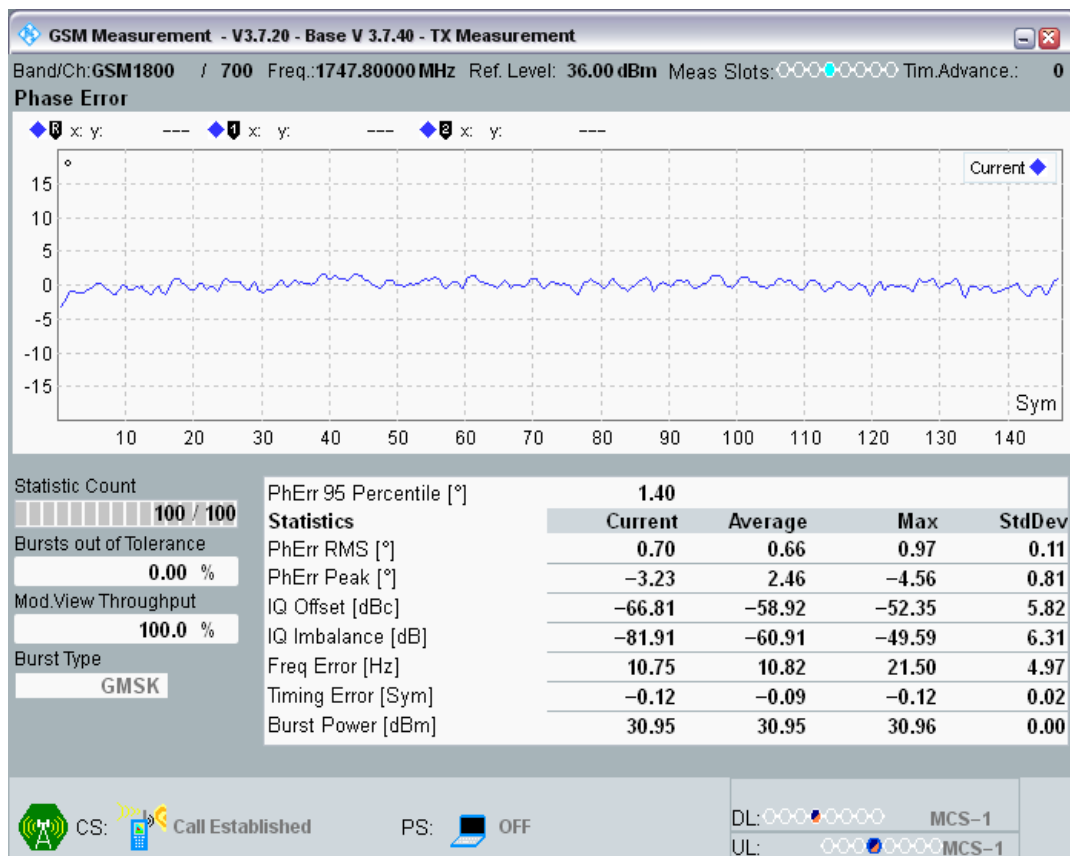


DCS1800 Channel=700 PCL=0 TU1_5.png

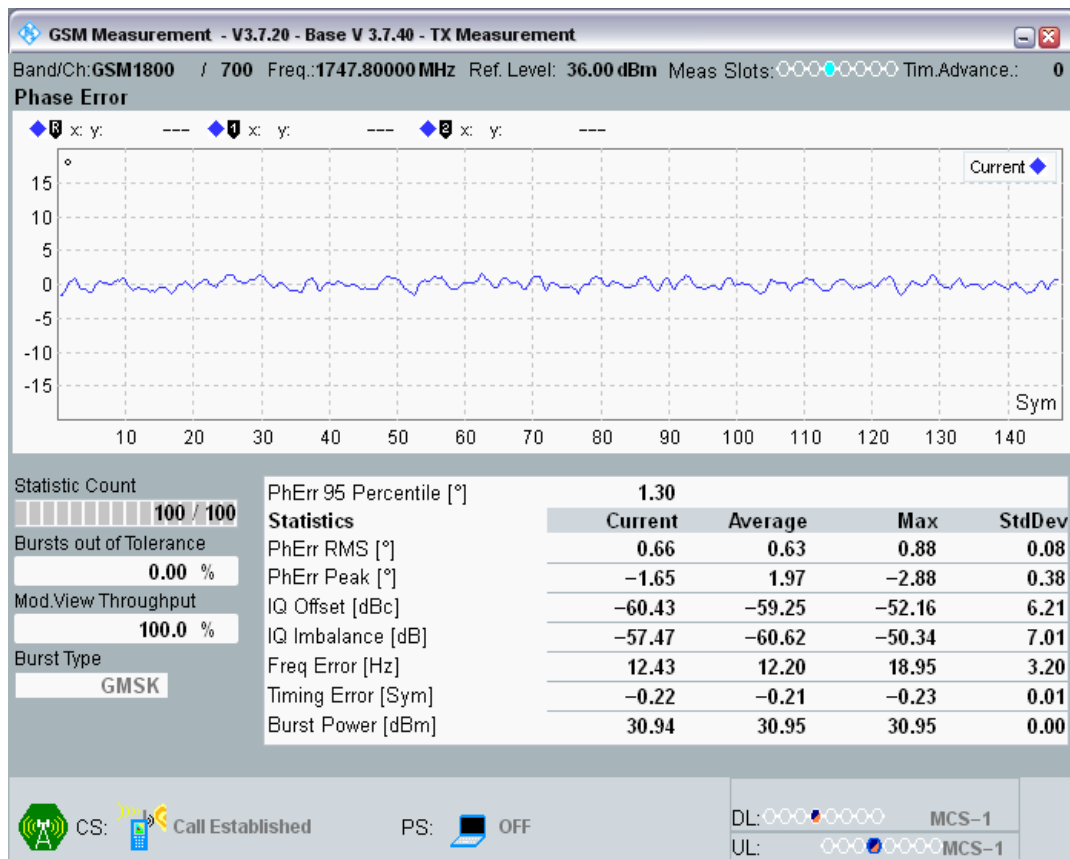


DCS1800 Channel=700 PCL=0 TU50.png




DCS1800 Channel=885 PCL=0 HT100.png

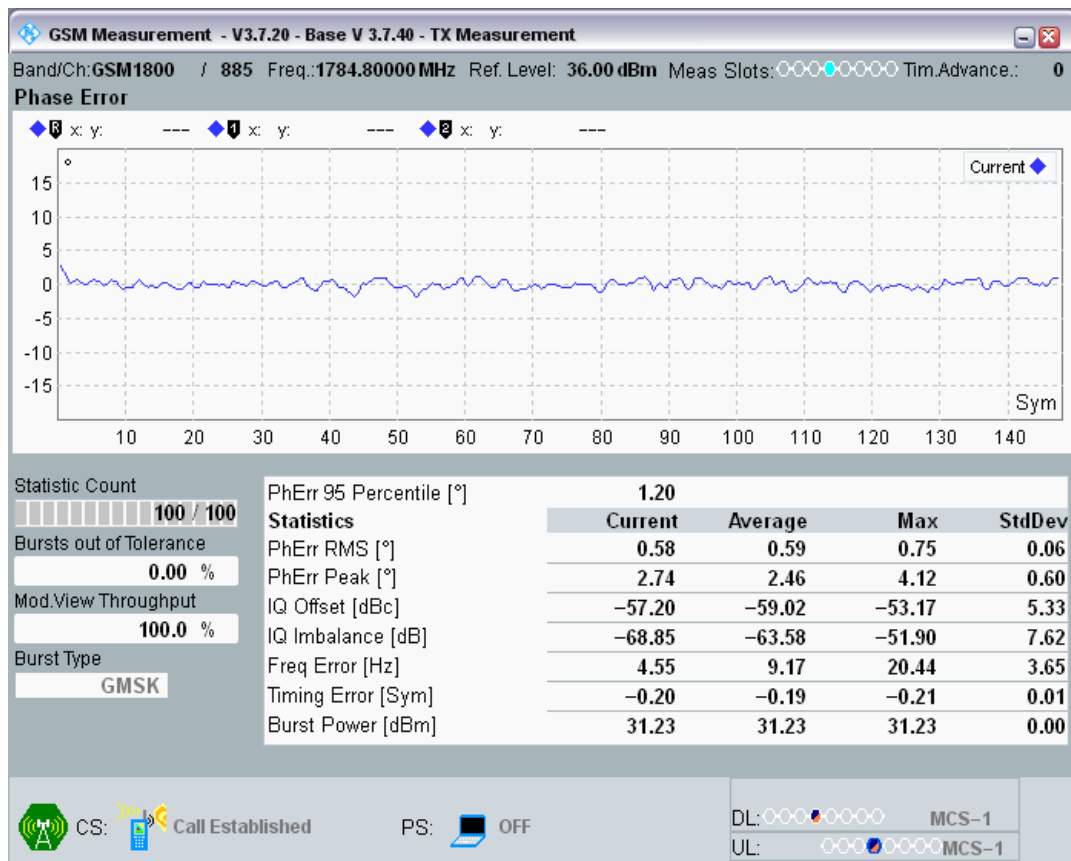

DCS1800 Channel=885 PCL=0 RA130.png

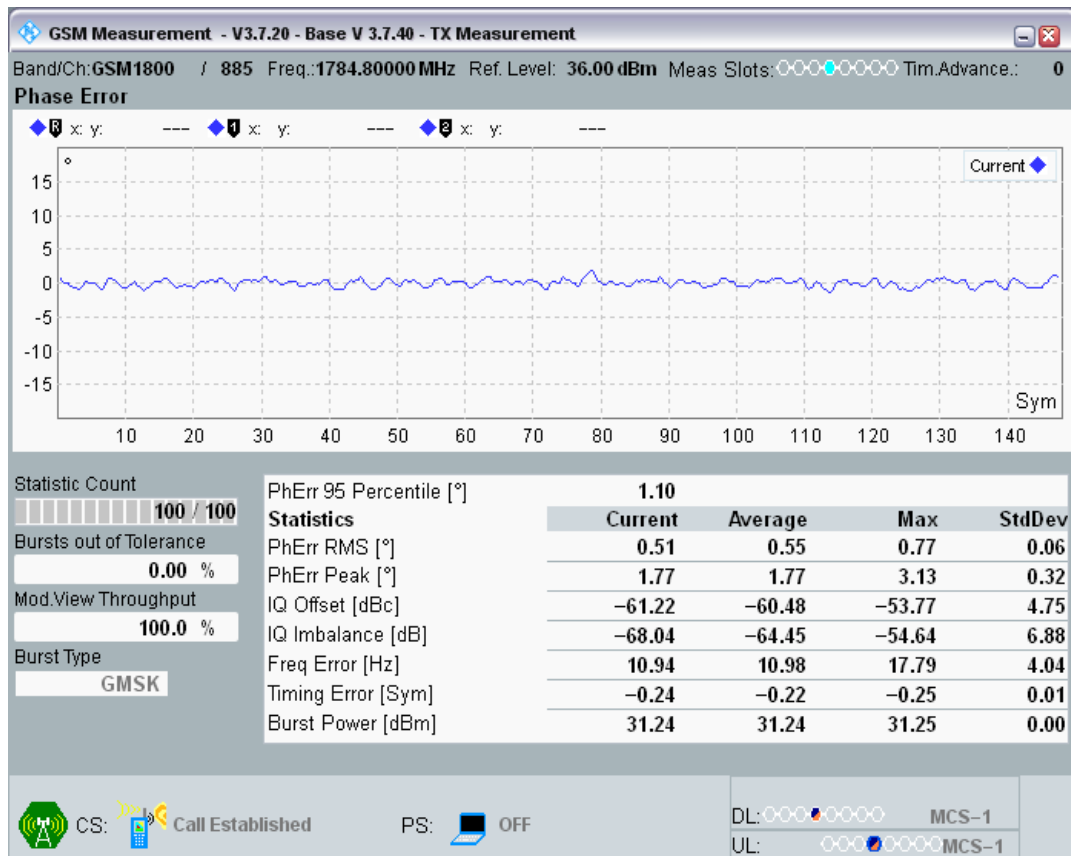


DCS1800 Channel=885 PCL=0 TU1_5.png

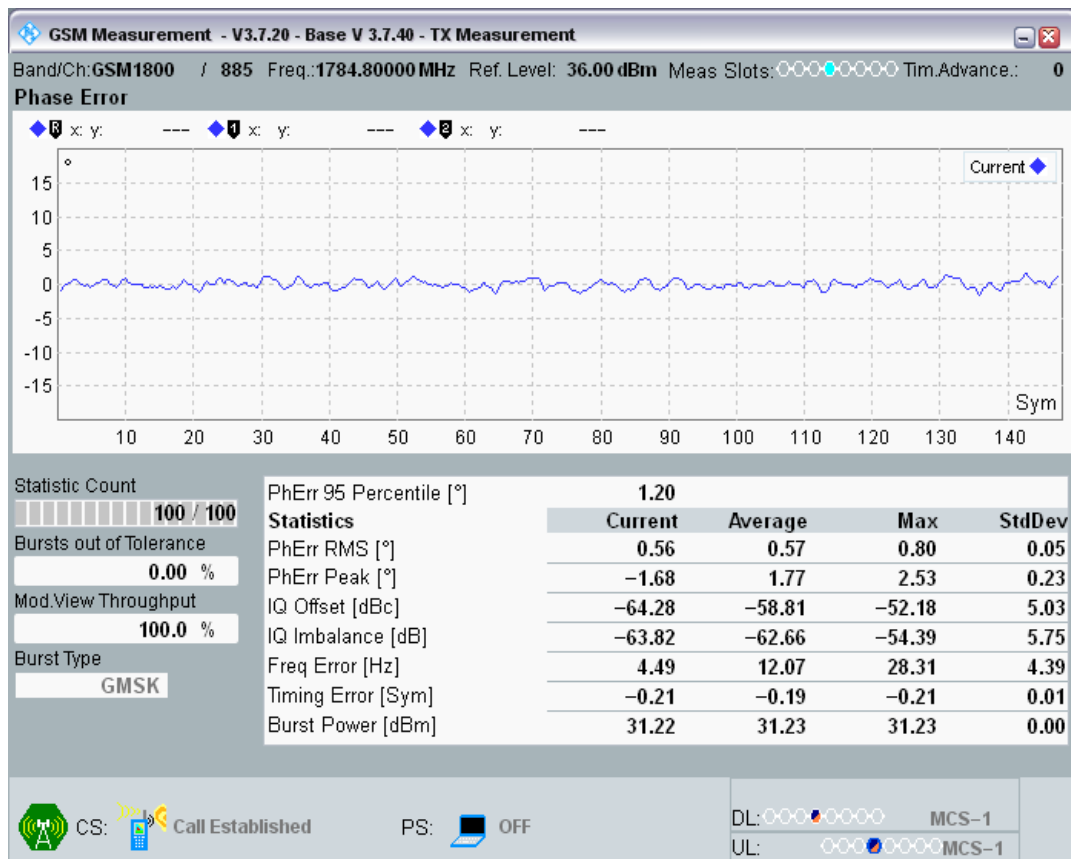


DCS1800 Channel=885 PCL=0 TU50.png




GSM900 Channel=124 PCL=5 HT100.png

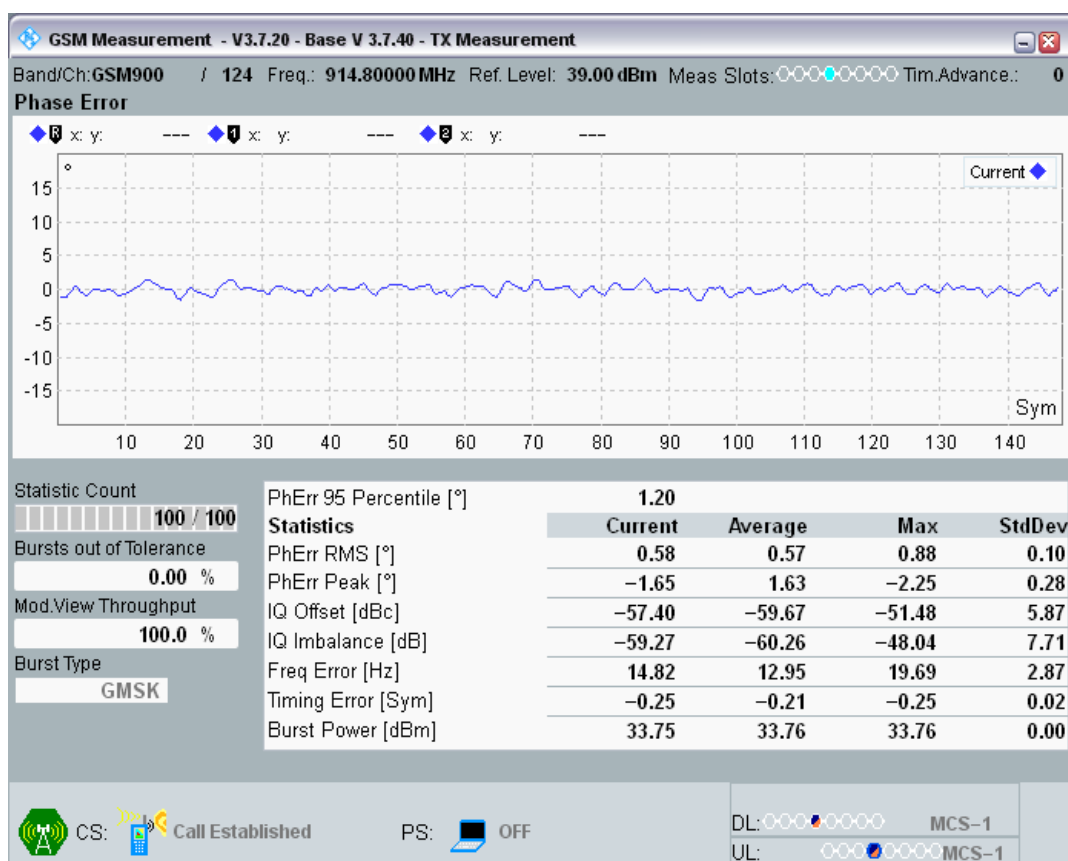


GSM900 Channel=124 PCL=5 RA250.png

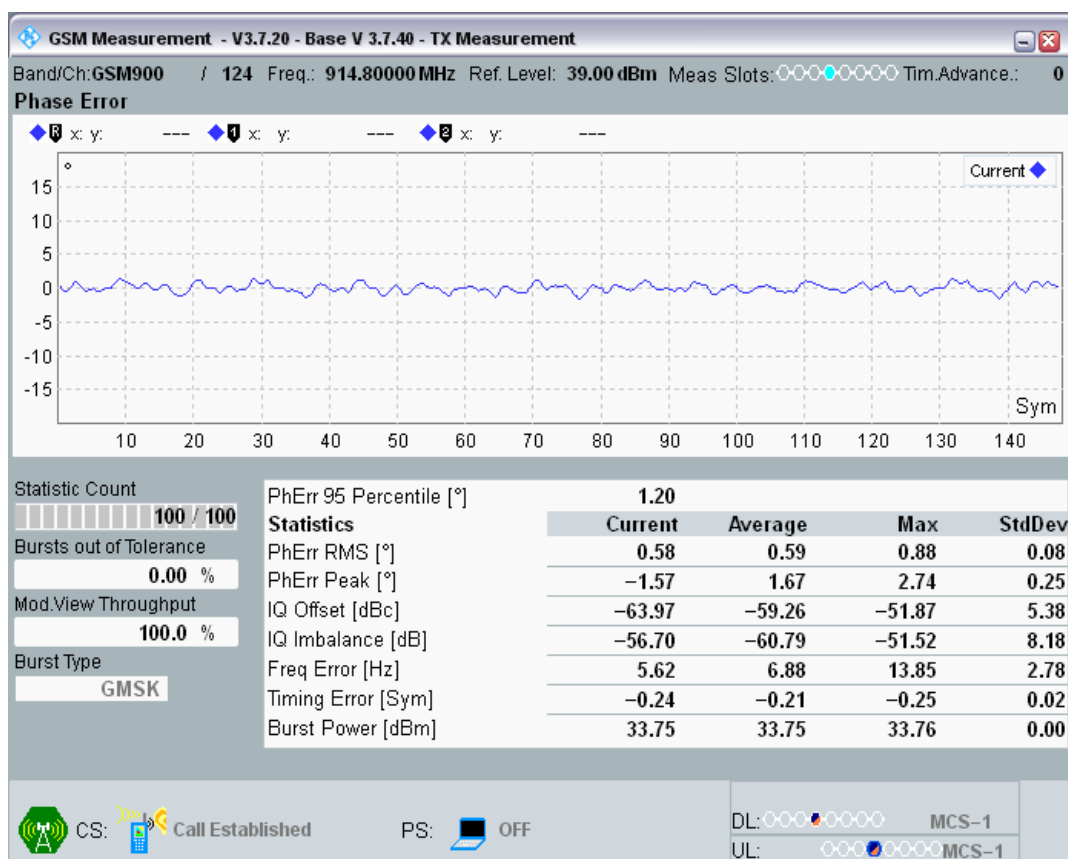


GSM900 Channel=124 PCL=5 TU3.png

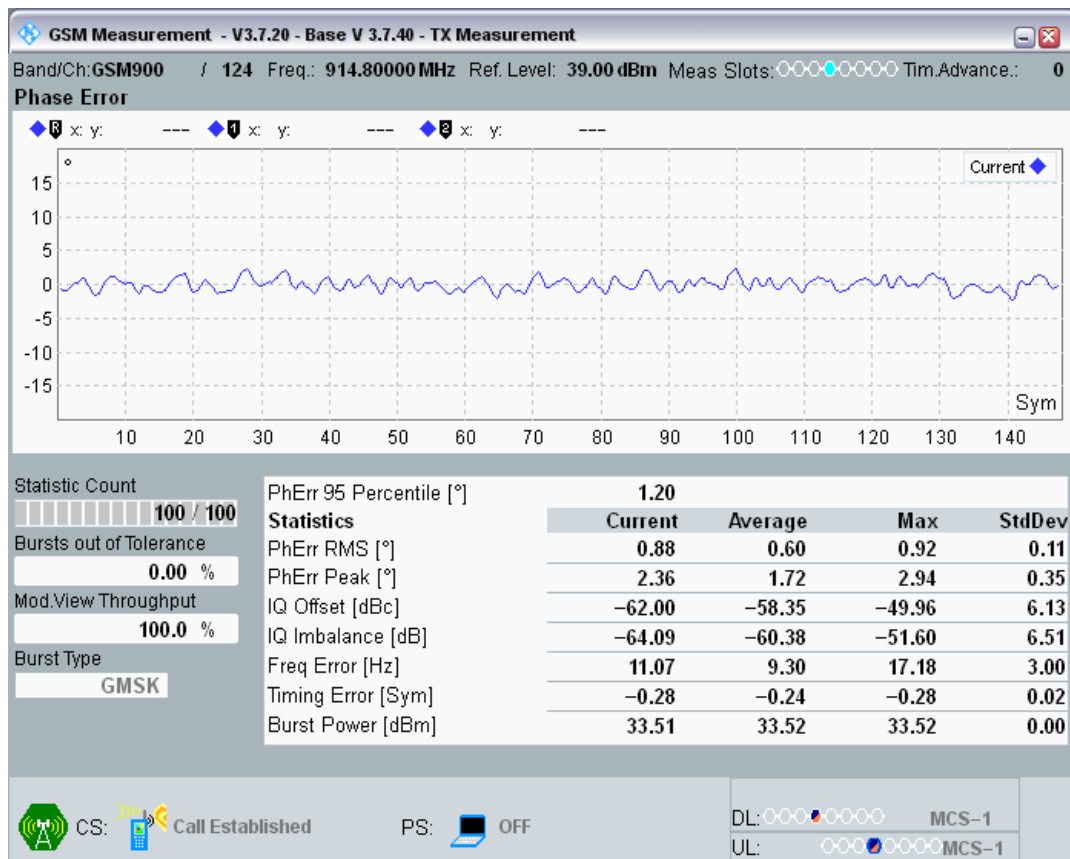


GSM900 Channel=124 PCL=5 TU50.png

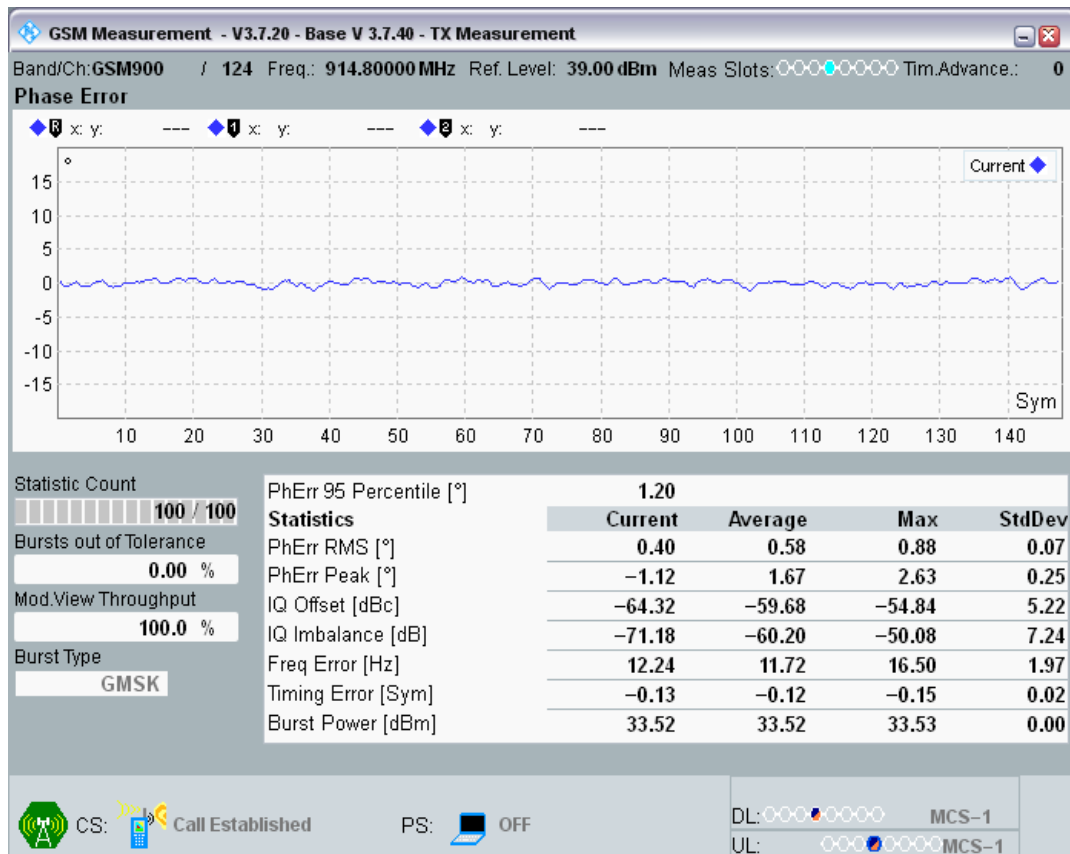


GSM900 Channel=60 PCL=5 HT100.png

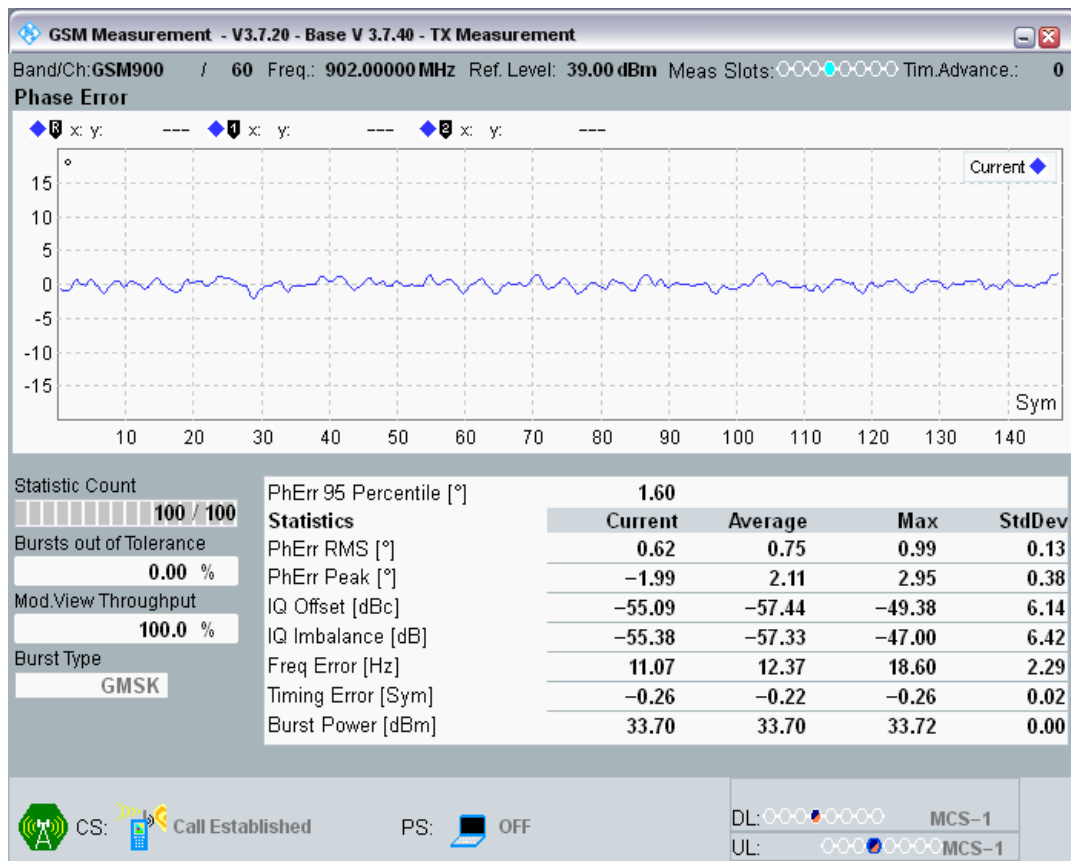


GSM900 Channel=60 PCL=5 RA250.png

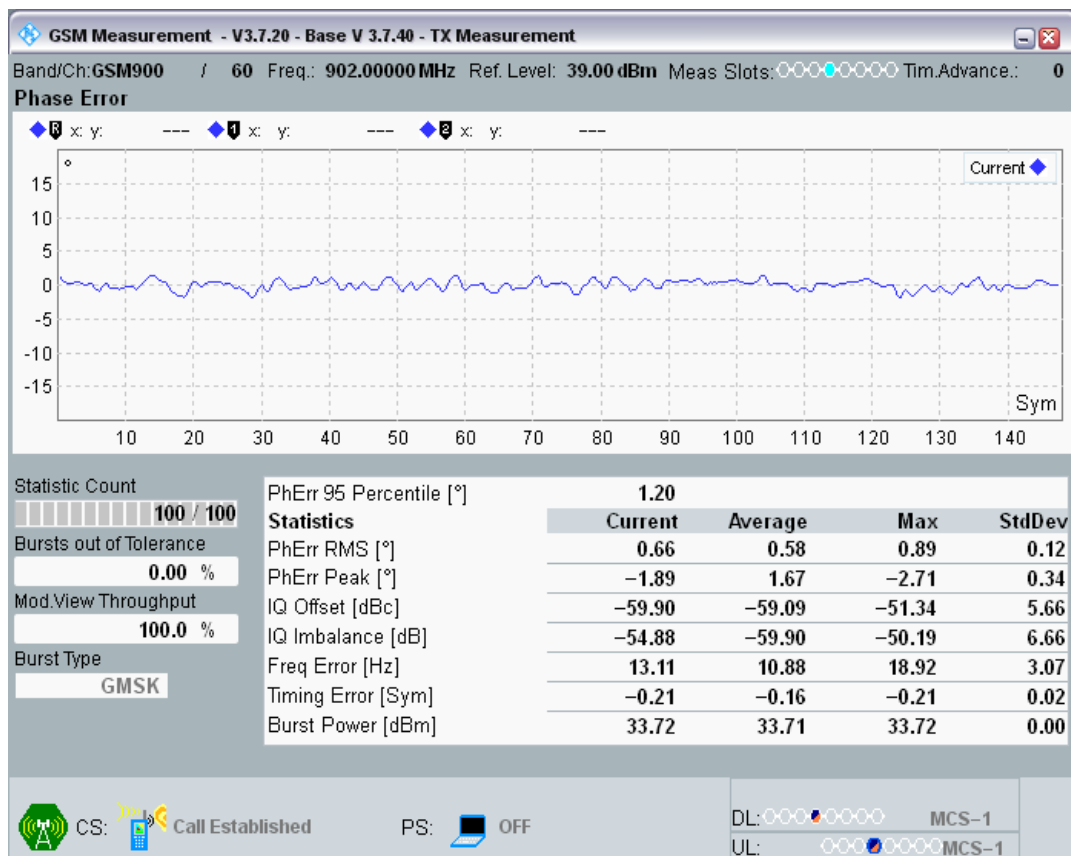


GSM900 Channel=60 PCL=5 TU3.png

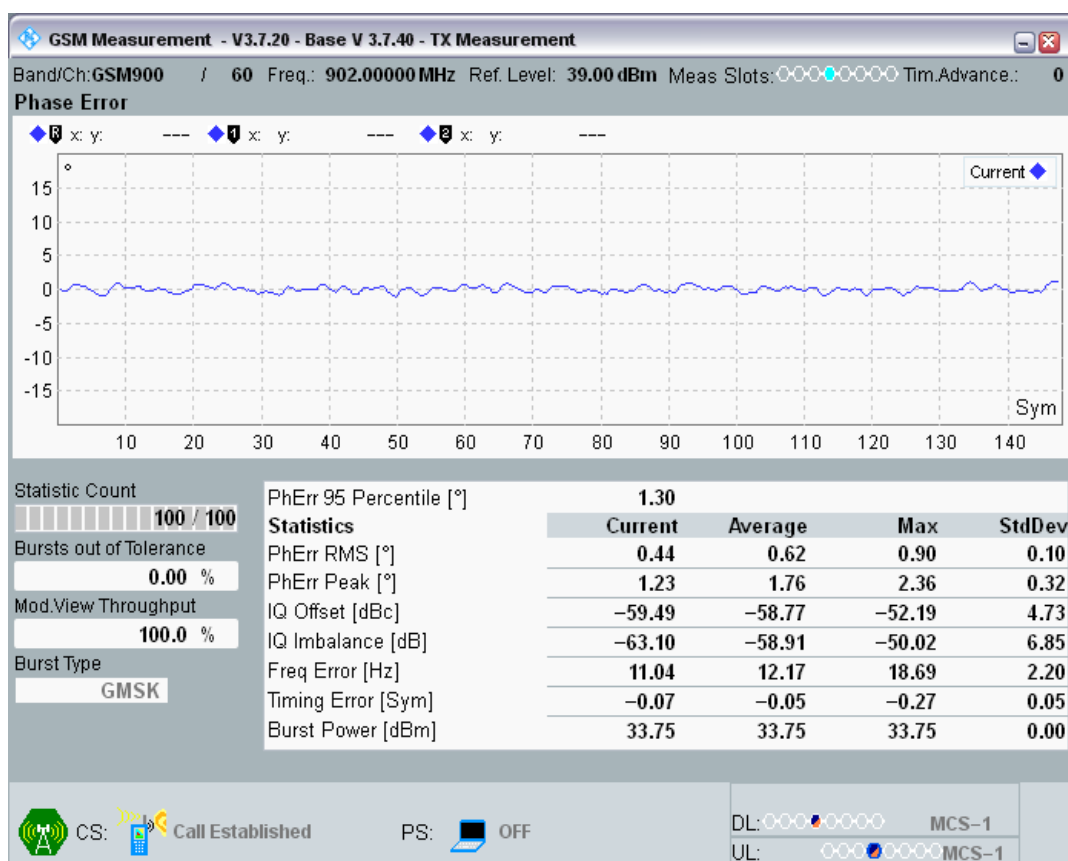


GSM900 Channel=60 PCL=5 TU50.png

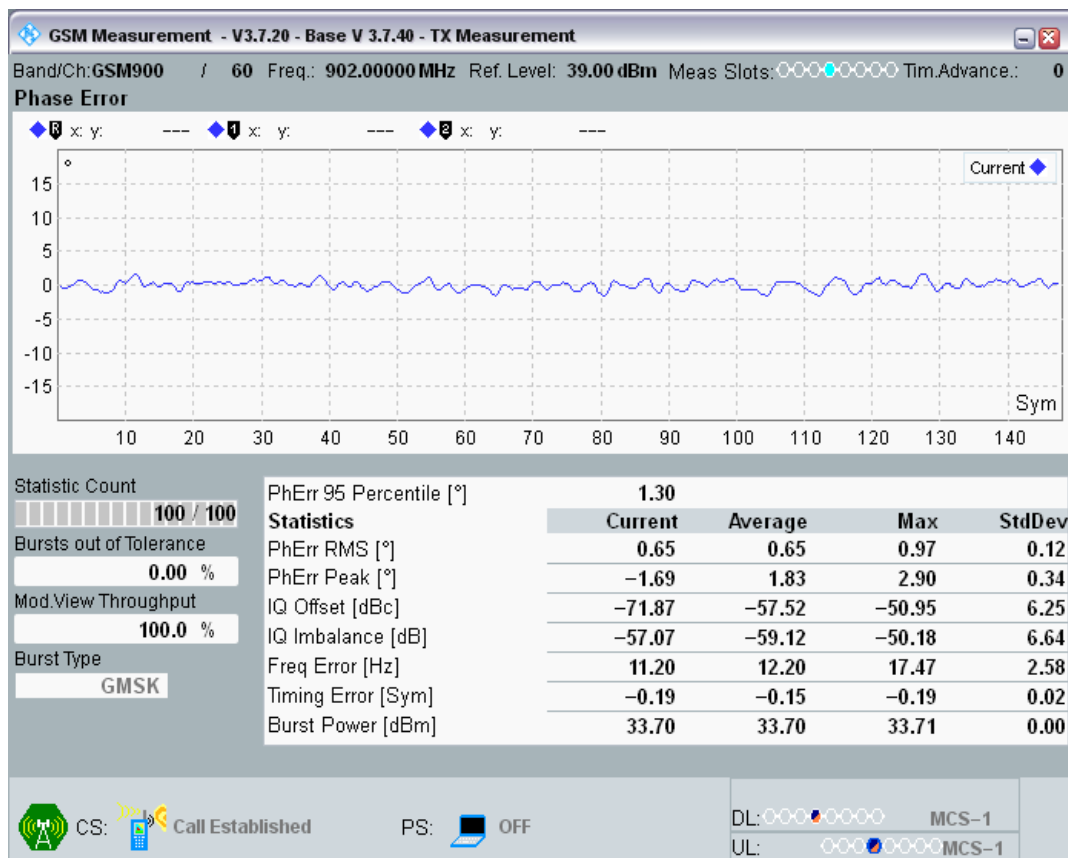


GSM900 Channel=975 PCL=5 HT100.png

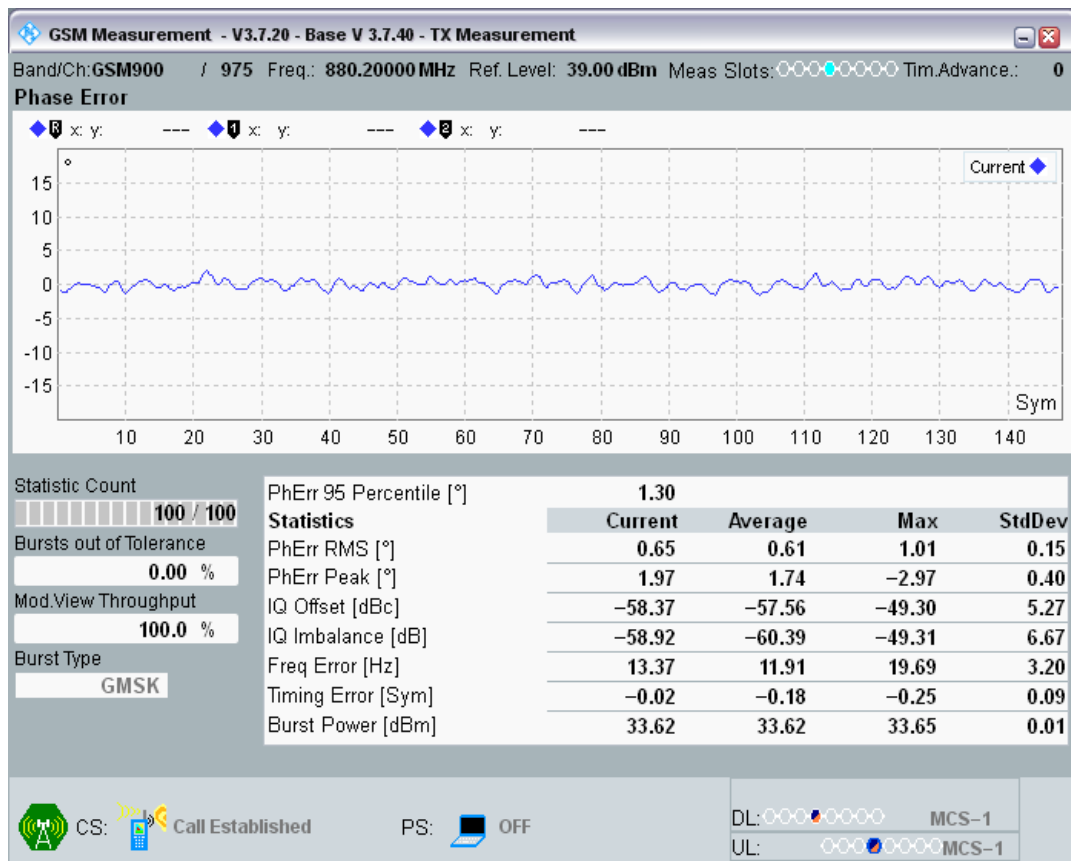


GSM900 Channel=975 PCL=5 RA250.png

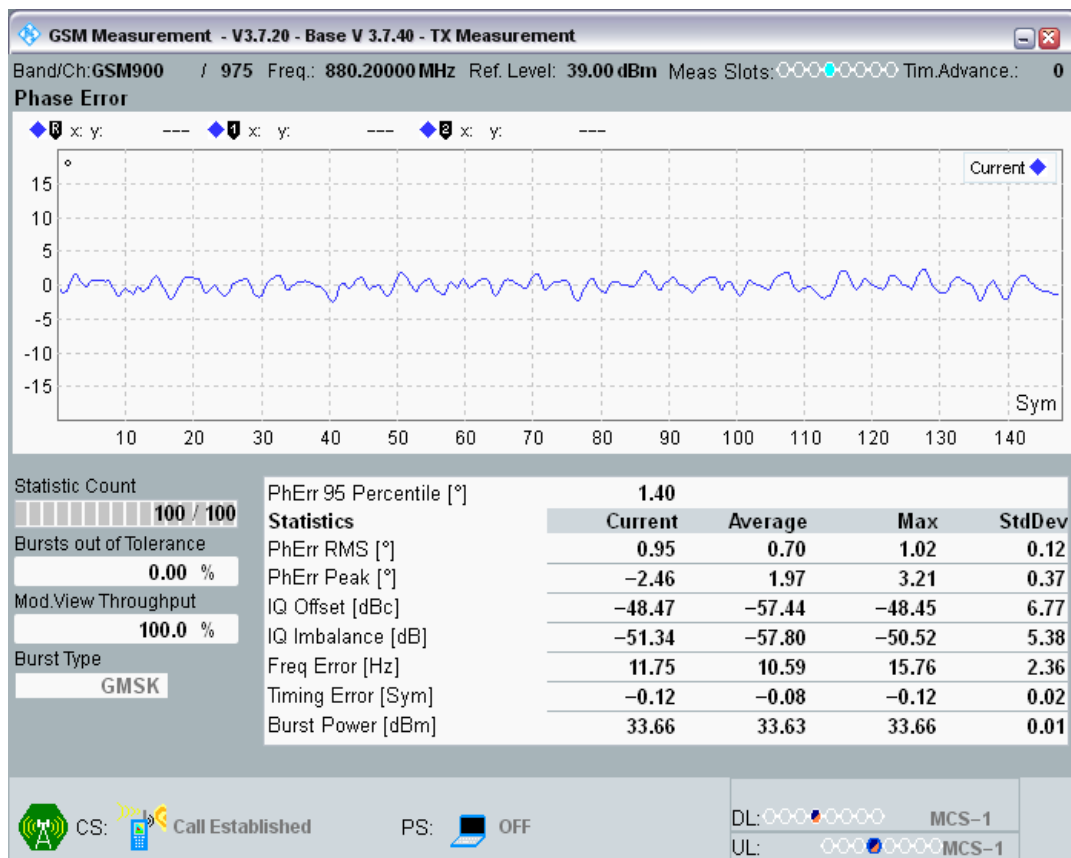

GSM900 Channel=975 PCL=5 TU3.png

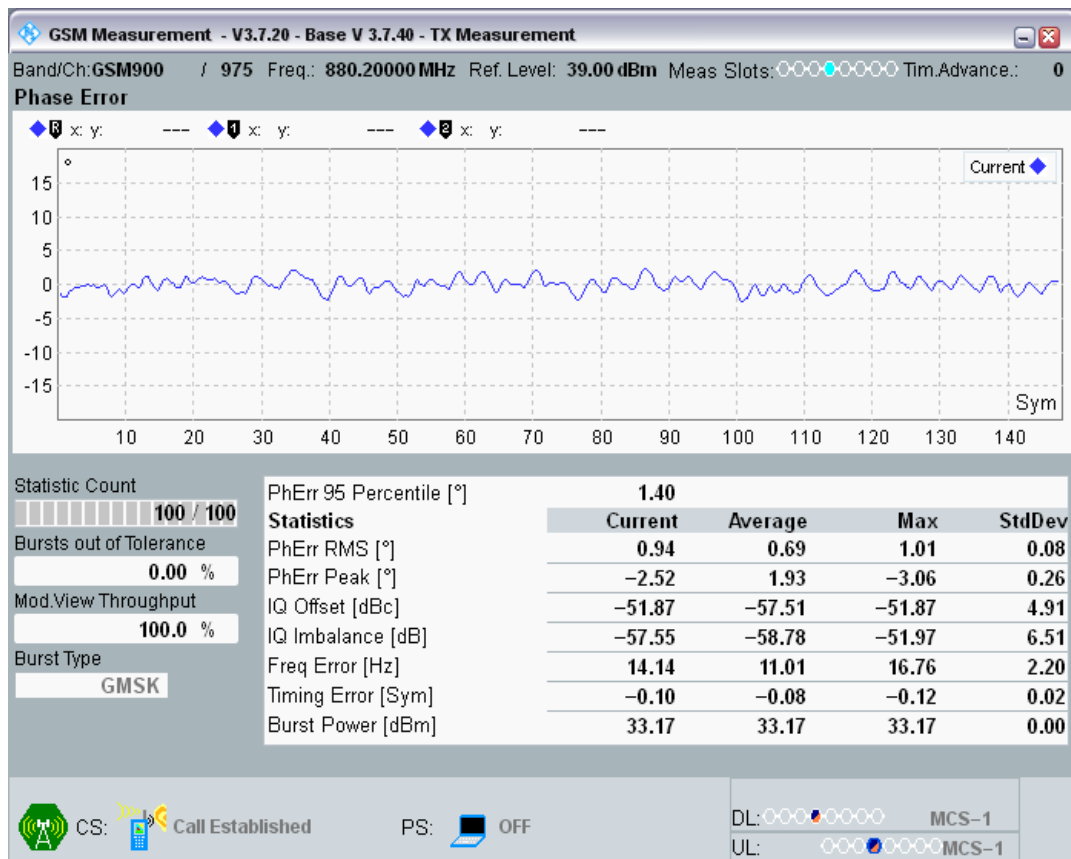

GSM900 Channel=975 PCL=5 TU50.png

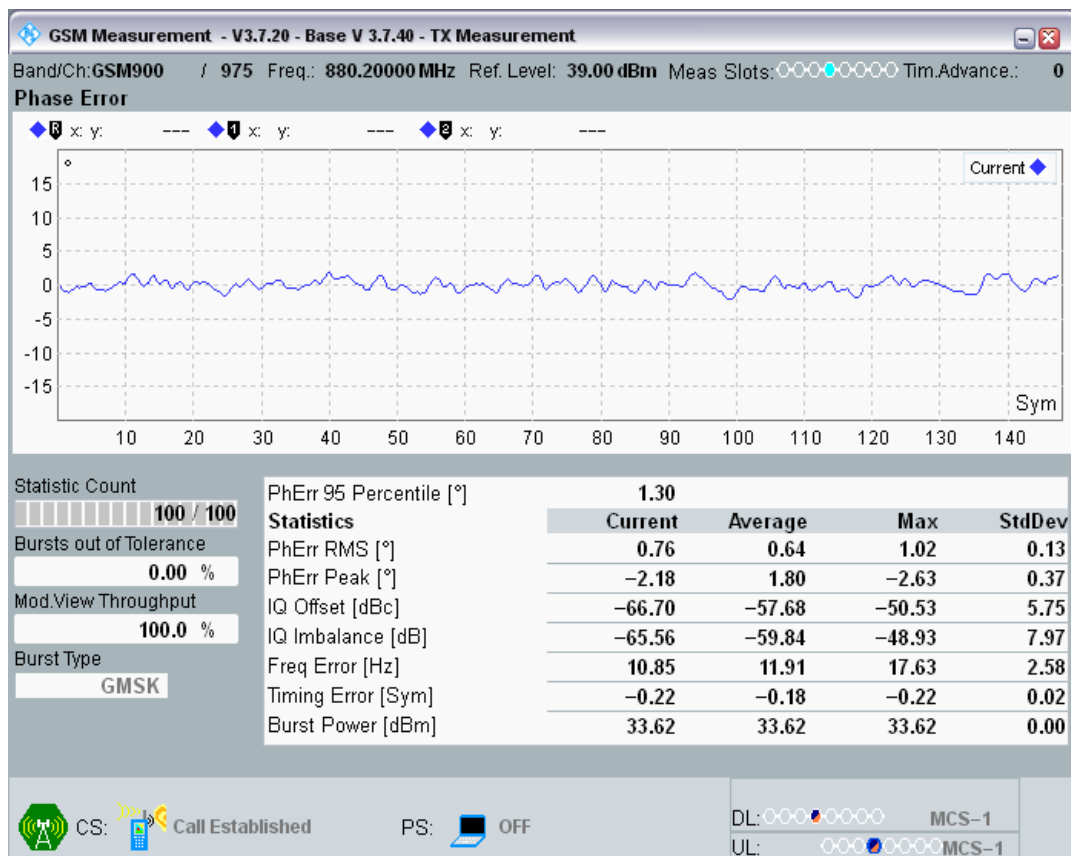

Clause 4.2.5 Transmitter output power and burst timing

Band	Channel	Frequency (MHz)	PCL	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
DCS1800	512	1710.2	0	Power	30.6582	28	32	PASS
DCS1800	512	1710.2	0	PvT	-	-	-	PASS
DCS1800	512	1710.2	1	Power	28.68018	25	31	PASS
DCS1800	512	1710.2	1	PvT	-	-	-	PASS
DCS1800	512	1710.2	2	Power	26.68561	23	29	PASS
DCS1800	512	1710.2	2	PvT	-	-	-	PASS
DCS1800	512	1710.2	3	Power	24.68759	21	27	PASS
DCS1800	512	1710.2	3	PvT	-	-	-	PASS
DCS1800	512	1710.2	4	Power	22.69031	19	25	PASS
DCS1800	512	1710.2	4	PvT	-	-	-	PASS
DCS1800	512	1710.2	5	Power	20.68463	17	23	PASS
DCS1800	512	1710.2	5	PvT	-	-	-	PASS
DCS1800	512	1710.2	6	Power	18.72482	15	21	PASS
DCS1800	512	1710.2	6	PvT	-	-	-	PASS
DCS1800	512	1710.2	7	Power	16.75037	13	19	PASS
DCS1800	512	1710.2	7	PvT	-	-	-	PASS
DCS1800	512	1710.2	8	Power	14.79376	11	17	PASS
DCS1800	512	1710.2	8	PvT	-	-	-	PASS
DCS1800	512	1710.2	9	Power	12.86514	8	16	PASS
DCS1800	512	1710.2	9	PvT	-	-	-	PASS
DCS1800	512	1710.2	10	Power	10.94363	6	14	PASS
DCS1800	512	1710.2	10	PvT	-	-	-	PASS
DCS1800	512	1710.2	11	Power	9.064331	4	12	PASS
DCS1800	512	1710.2	11	PvT	-	-	-	PASS
DCS1800	512	1710.2	12	Power	7.035156	2	10	PASS
DCS1800	512	1710.2	12	PvT	-	-	-	PASS
DCS1800	512	1710.2	13	Power	5.49823	0	8	PASS
DCS1800	512	1710.2	13	PvT	-	-	-	PASS
DCS1800	512	1710.2	14	Power	3.104004	-3	7	PASS
DCS1800	512	1710.2	14	PvT	-	-	-	PASS
DCS1800	512	1710.2	15	Power	1.347504	-5	5	PASS
DCS1800	512	1710.2	15	PvT	-	-	-	PASS
DCS1800	700	1747.8	0	Power	30.91245	28	32	PASS
DCS1800	700	1747.8	0	PvT	-	-	-	PASS
DCS1800	700	1747.8	1	Power	28.90326	25	31	PASS
DCS1800	700	1747.8	1	PvT	-	-	-	PASS
DCS1800	700	1747.8	2	Power	26.88861	23	29	PASS
DCS1800	700	1747.8	2	PvT	-	-	-	PASS
DCS1800	700	1747.8	3	Power	24.92221	21	27	PASS
DCS1800	700	1747.8	3	PvT	-	-	-	PASS
DCS1800	700	1747.8	4	Power	22.91208	19	25	PASS

DCS1800	700	1747.8	4	PvT	-	-	-	PASS
DCS1800	700	1747.8	5	Power	20.89279	17	23	PASS
DCS1800	700	1747.8	5	PvT	-	-	-	PASS
DCS1800	700	1747.8	6	Power	18.9198	15	21	PASS
DCS1800	700	1747.8	6	PvT	-	-	-	PASS
DCS1800	700	1747.8	7	Power	16.94742	13	19	PASS
DCS1800	700	1747.8	7	PvT	-	-	-	PASS
DCS1800	700	1747.8	8	Power	14.95837	11	17	PASS
DCS1800	700	1747.8	8	PvT	-	-	-	PASS
DCS1800	700	1747.8	9	Power	13.08441	8	16	PASS
DCS1800	700	1747.8	9	PvT	-	-	-	PASS
DCS1800	700	1747.8	10	Power	11.02652	6	14	PASS
DCS1800	700	1747.8	10	PvT	-	-	-	PASS
DCS1800	700	1747.8	11	Power	9.067078	4	12	PASS
DCS1800	700	1747.8	11	PvT	-	-	-	PASS
DCS1800	700	1747.8	12	Power	7.048706	2	10	PASS
DCS1800	700	1747.8	12	PvT	-	-	-	PASS
DCS1800	700	1747.8	13	Power	5.443024	0	8	PASS
DCS1800	700	1747.8	13	PvT	-	-	-	PASS
DCS1800	700	1747.8	14	Power	2.897797	-3	7	PASS
DCS1800	700	1747.8	14	PvT	-	-	-	PASS
DCS1800	700	1747.8	15	Power	1.061493	-5	5	PASS
DCS1800	700	1747.8	15	PvT	-	-	-	PASS
DCS1800	885	1784.8	0	Power	31.13416	28	32	PASS
DCS1800	885	1784.8	0	PvT	-	-	-	PASS
DCS1800	885	1784.8	1	Power	29.09836	25	31	PASS
DCS1800	885	1784.8	1	PvT	-	-	-	PASS
DCS1800	885	1784.8	2	Power	27.03506	23	29	PASS
DCS1800	885	1784.8	2	PvT	-	-	-	PASS
DCS1800	885	1784.8	3	Power	25.05453	21	27	PASS
DCS1800	885	1784.8	3	PvT	-	-	-	PASS
DCS1800	885	1784.8	4	Power	23.03333	19	25	PASS
DCS1800	885	1784.8	4	PvT	-	-	-	PASS
DCS1800	885	1784.8	5	Power	20.99368	17	23	PASS
DCS1800	885	1784.8	5	PvT	-	-	-	PASS
DCS1800	885	1784.8	6	Power	19.00891	15	21	PASS
DCS1800	885	1784.8	6	PvT	-	-	-	PASS
DCS1800	885	1784.8	7	Power	17.04446	13	19	PASS
DCS1800	885	1784.8	7	PvT	-	-	-	PASS
DCS1800	885	1784.8	8	Power	15.02484	11	17	PASS
DCS1800	885	1784.8	8	PvT	-	-	-	PASS
DCS1800	885	1784.8	9	Power	13.16205	8	16	PASS
DCS1800	885	1784.8	9	PvT	-	-	-	PASS

DCS1800	885	1784.8	10	Power	11.02432	6	14	PASS
DCS1800	885	1784.8	10	PvT	-	-	-	PASS
DCS1800	885	1784.8	11	Power	8.968842	4	12	PASS
DCS1800	885	1784.8	11	PvT	-	-	-	PASS
DCS1800	885	1784.8	12	Power	6.86203	2	10	PASS
DCS1800	885	1784.8	12	PvT	-	-	-	PASS
DCS1800	885	1784.8	13	Power	5.13974	0	8	PASS
DCS1800	885	1784.8	13	PvT	-	-	-	PASS
DCS1800	885	1784.8	14	Power	2.422699	-3	7	PASS
DCS1800	885	1784.8	14	PvT	-	-	-	PASS
DCS1800	885	1784.8	15	Power	0.2564087	-5	5	PASS
DCS1800	885	1784.8	15	PvT	-	-	-	PASS
GSM900	975	880.2	5	Power	33.29251	31	35	PASS
GSM900	975	880.2	5	PvT	-	-	-	PASS
GSM900	975	880.2	6	Power	32.09213	28	34	PASS
GSM900	975	880.2	6	PvT	-	-	-	PASS
GSM900	975	880.2	7	Power	30.08307	26	32	PASS
GSM900	975	880.2	7	PvT	-	-	-	PASS
GSM900	975	880.2	8	Power	28.11536	24	30	PASS
GSM900	975	880.2	8	PvT	-	-	-	PASS
GSM900	975	880.2	9	Power	26.08908	22	28	PASS
GSM900	975	880.2	9	PvT	-	-	-	PASS
GSM900	975	880.2	10	Power	24.03098	20	26	PASS
GSM900	975	880.2	10	PvT	-	-	-	PASS
GSM900	975	880.2	11	Power	22.0694	18	24	PASS
GSM900	975	880.2	11	PvT	-	-	-	PASS
GSM900	975	880.2	12	Power	20.03665	16	22	PASS
GSM900	975	880.2	12	PvT	-	-	-	PASS
GSM900	975	880.2	13	Power	18.04285	14	20	PASS
GSM900	975	880.2	13	PvT	-	-	-	PASS
GSM900	975	880.2	14	Power	16.09073	12	18	PASS
GSM900	975	880.2	14	PvT	-	-	-	PASS
GSM900	975	880.2	15	Power	13.83884	10	16	PASS
GSM900	975	880.2	15	PvT	-	-	-	PASS
GSM900	975	880.2	16	Power	11.89999	6	16	PASS
GSM900	975	880.2	16	PvT	-	-	-	PASS
GSM900	975	880.2	17	Power	9.923523	4	14	PASS
GSM900	975	880.2	17	PvT	-	-	-	PASS
GSM900	975	880.2	18	Power	7.422852	2	12	PASS
GSM900	975	880.2	18	PvT	-	-	-	PASS
GSM900	975	880.2	19	Power	5.360168	0	10	PASS
GSM900	975	880.2	19	PvT	-	-	-	PASS
GSM900	60	902	5	Power	33.72946	31	35	PASS


GSM900	60	902	5	PvT	-	-	-	PASS
GSM900	60	902	6	Power	32.01538	28	34	PASS
GSM900	60	902	6	PvT	-	-	-	PASS
GSM900	60	902	7	Power	29.99637	26	32	PASS
GSM900	60	902	7	PvT	-	-	-	PASS
GSM900	60	902	8	Power	28.02188	24	30	PASS
GSM900	60	902	8	PvT	-	-	-	PASS
GSM900	60	902	9	Power	25.98038	22	28	PASS
GSM900	60	902	9	PvT	-	-	-	PASS
GSM900	60	902	10	Power	23.96631	20	26	PASS
GSM900	60	902	10	PvT	-	-	-	PASS
GSM900	60	902	11	Power	21.9325	18	24	PASS
GSM900	60	902	11	PvT	-	-	-	PASS
GSM900	60	902	12	Power	19.98334	16	22	PASS
GSM900	60	902	12	PvT	-	-	-	PASS
GSM900	60	902	13	Power	17.95361	14	20	PASS
GSM900	60	902	13	PvT	-	-	-	PASS
GSM900	60	902	14	Power	15.93793	12	18	PASS
GSM900	60	902	14	PvT	-	-	-	PASS
GSM900	60	902	15	Power	13.86212	10	16	PASS
GSM900	60	902	15	PvT	-	-	-	PASS
GSM900	60	902	16	Power	11.90808	6	16	PASS
GSM900	60	902	16	PvT	-	-	-	PASS
GSM900	60	902	17	Power	9.94751	4	14	PASS
GSM900	60	902	17	PvT	-	-	-	PASS
GSM900	60	902	18	Power	7.40274	2	12	PASS
GSM900	60	902	18	PvT	-	-	-	PASS
GSM900	60	902	19	Power	5.422363	0	10	PASS
GSM900	60	902	19	PvT	-	-	-	PASS
GSM900	124	914.8	5	Power	33.64816	31	35	PASS
GSM900	124	914.8	5	PvT	-	-	-	PASS
GSM900	124	914.8	6	Power	31.97025	28	34	PASS
GSM900	124	914.8	6	PvT	-	-	-	PASS
GSM900	124	914.8	7	Power	29.89905	26	32	PASS
GSM900	124	914.8	7	PvT	-	-	-	PASS
GSM900	124	914.8	8	Power	27.92682	24	30	PASS
GSM900	124	914.8	8	PvT	-	-	-	PASS
GSM900	124	914.8	9	Power	25.87988	22	28	PASS
GSM900	124	914.8	9	PvT	-	-	-	PASS
GSM900	124	914.8	10	Power	23.80902	20	26	PASS
GSM900	124	914.8	10	PvT	-	-	-	PASS
GSM900	124	914.8	11	Power	21.82272	18	24	PASS
GSM900	124	914.8	11	PvT	-	-	-	PASS

GSM900	124	914.8	12	Power	19.76373	16	22	PASS
GSM900	124	914.8	12	PvT	-	-	-	PASS
GSM900	124	914.8	13	Power	17.78314	14	20	PASS
GSM900	124	914.8	13	PvT	-	-	-	PASS
GSM900	124	914.8	14	Power	15.71436	12	18	PASS
GSM900	124	914.8	14	PvT	-	-	-	PASS
GSM900	124	914.8	15	Power	13.81924	10	16	PASS
GSM900	124	914.8	15	PvT	-	-	-	PASS
GSM900	124	914.8	16	Power	11.80246	6	16	PASS
GSM900	124	914.8	16	PvT	-	-	-	PASS
GSM900	124	914.8	17	Power	9.870667	4	14	PASS
GSM900	124	914.8	17	PvT	-	-	-	PASS
GSM900	124	914.8	18	Power	7.091583	2	12	PASS
GSM900	124	914.8	18	PvT	-	-	-	PASS
GSM900	124	914.8	19	Power	5.037109	0	10	PASS
GSM900	124	914.8	19	PvT	-	-	-	PASS


DCS1800 Channel=512 PCL=0.png




DCS1800 Channel=512 PCL=15.png

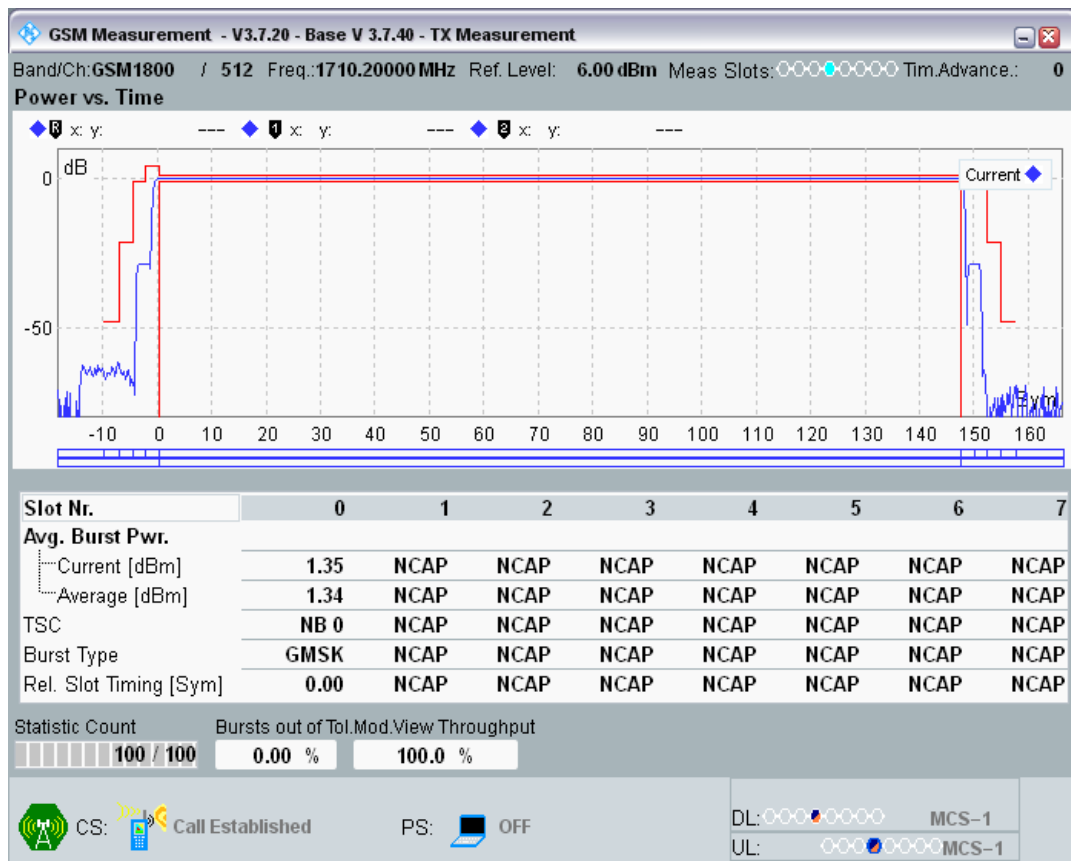

DCS1800 Channel=700 PCL=0.png

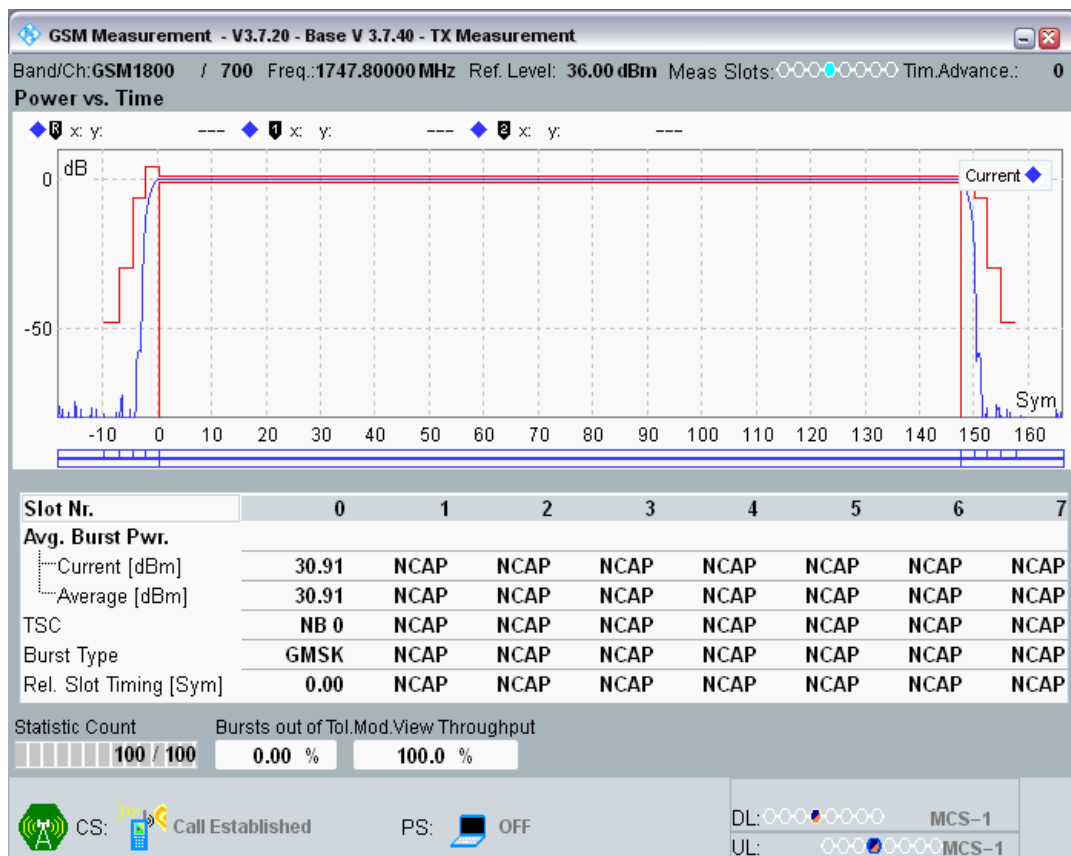


DCS1800 Channel=700 PCL=15.png

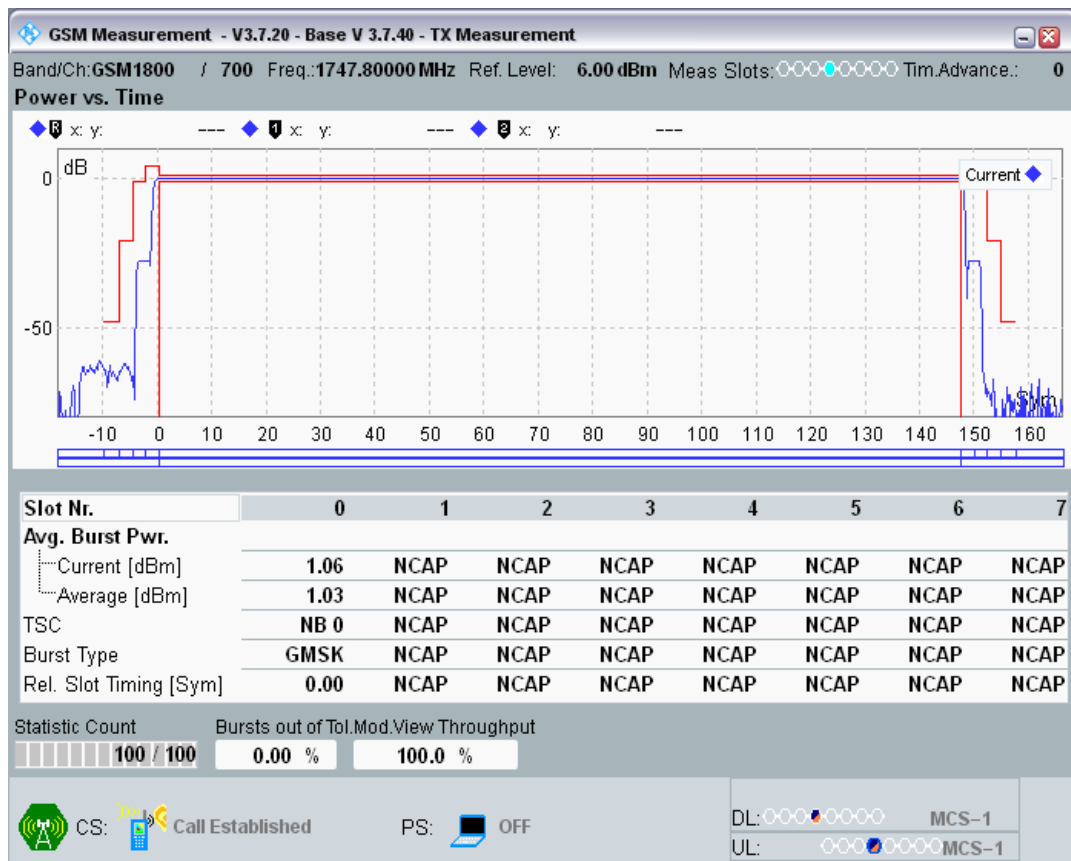


DCS1800 Channel=885 PCL=0.png




DCS1800 Channel=885 PCL=15.png

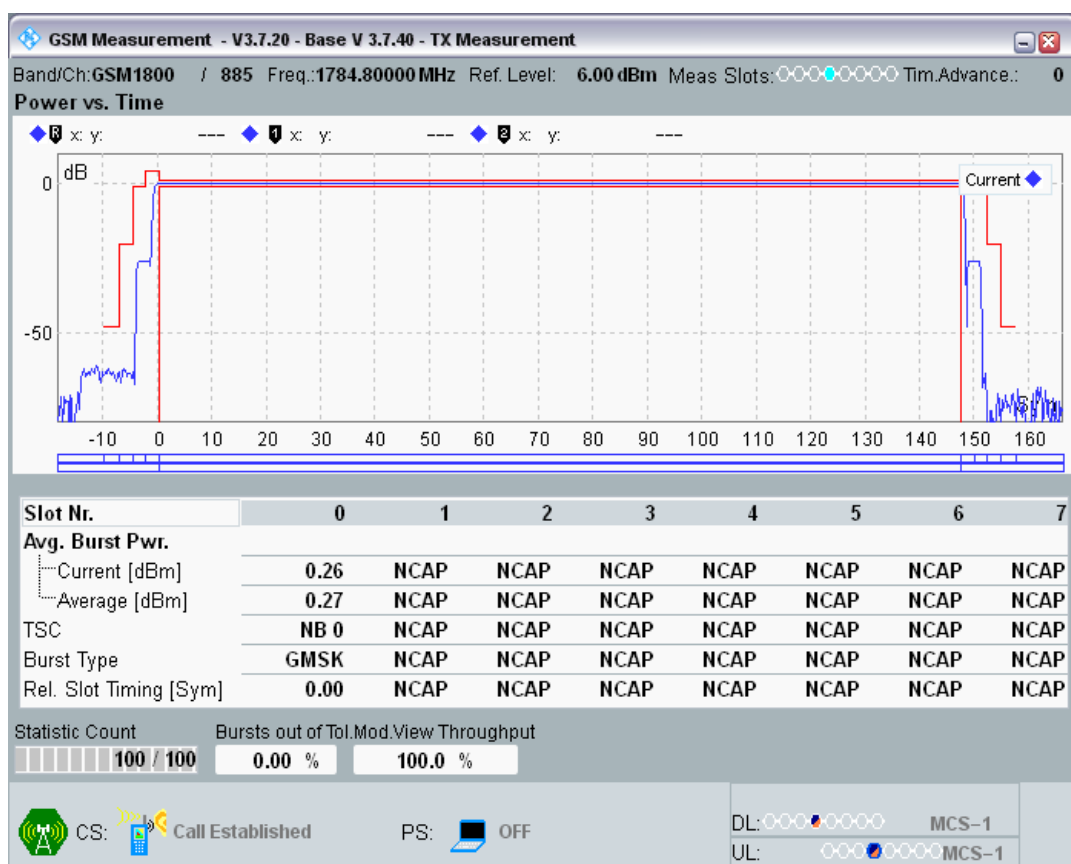

GSM900 Channel=124 PCL=19.png

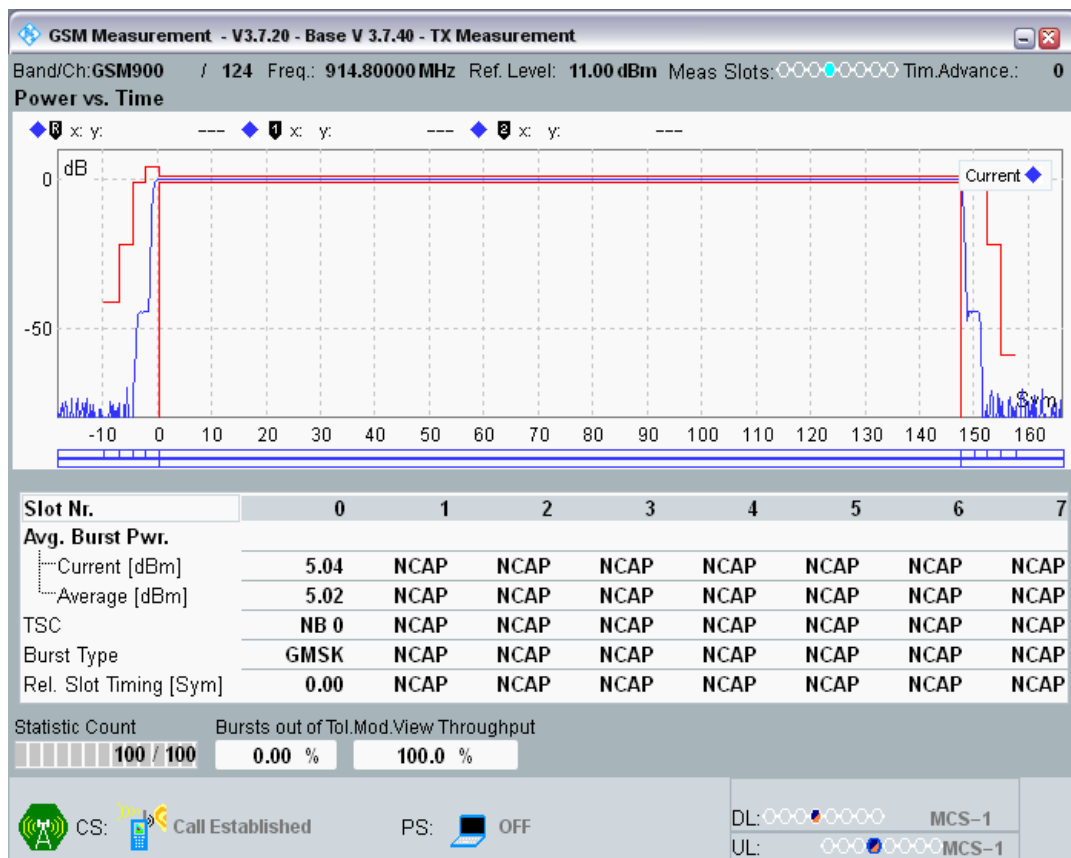


GSM900 Channel=124 PCL=5.png

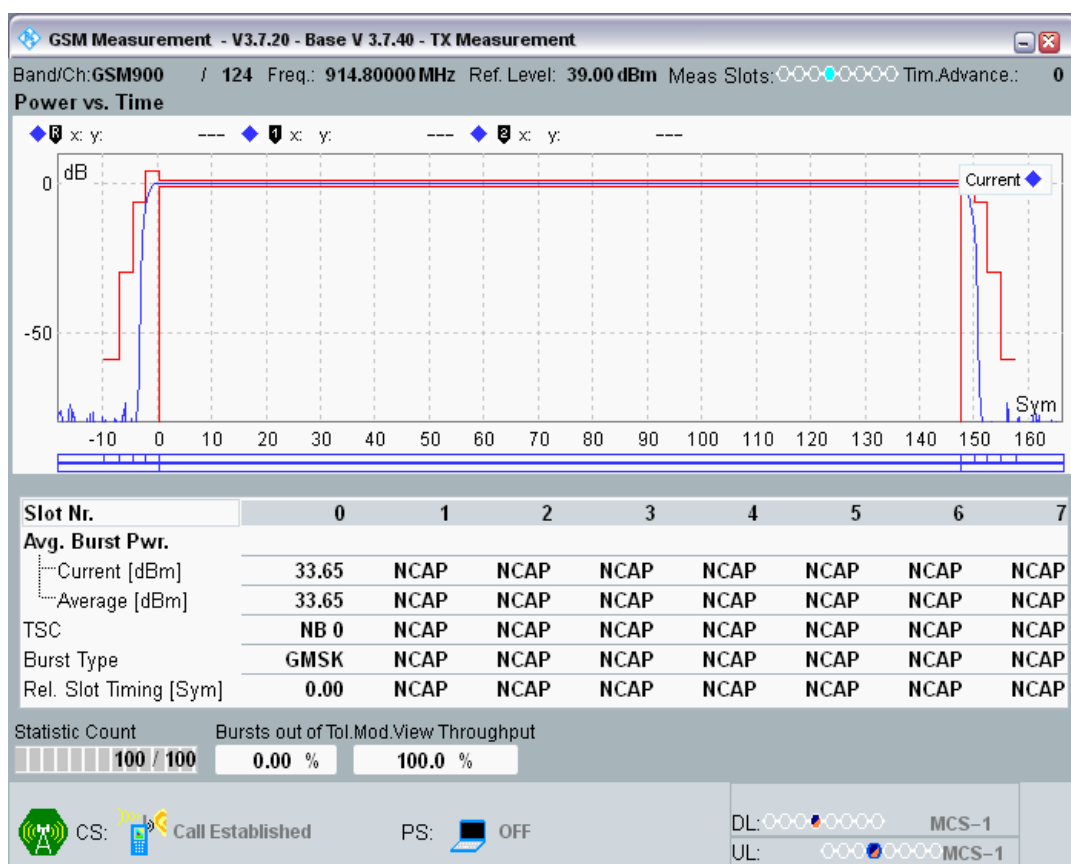


GSM900 Channel=60 PCL=19.png




GSM900 Channel=60 PCL=5.png

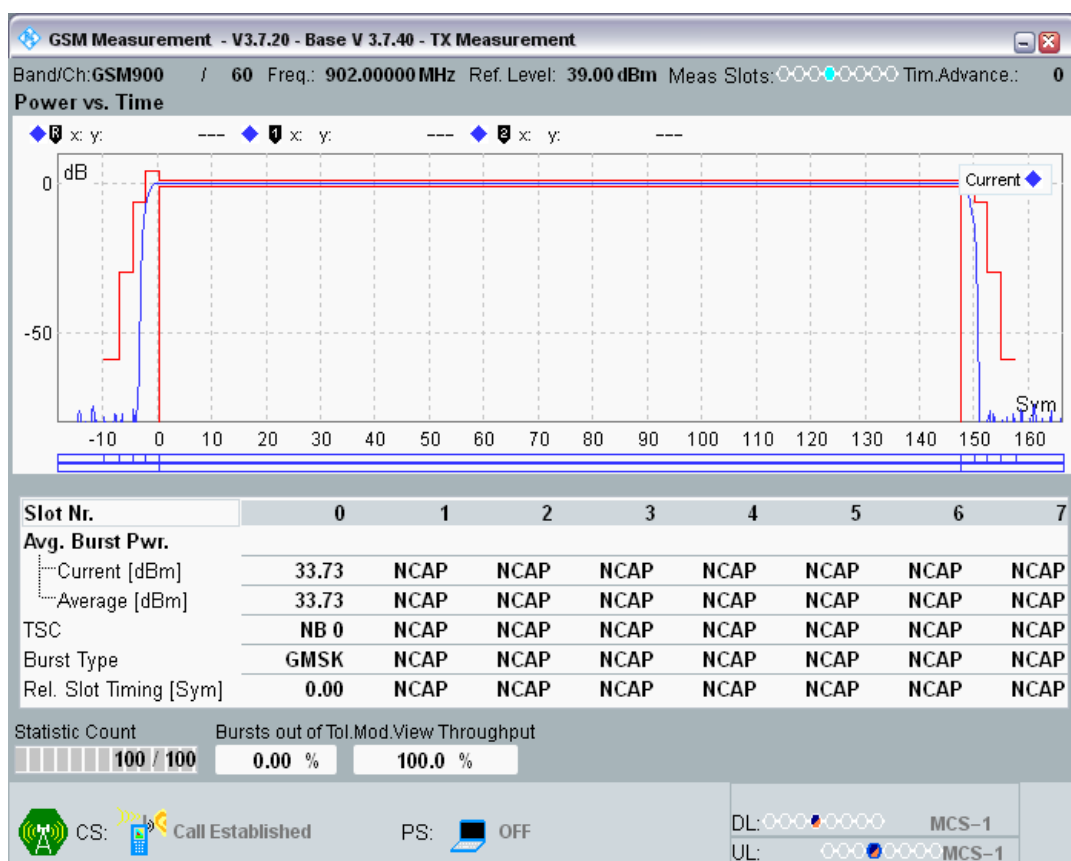

GSM900 Channel=975 PCL=19.png

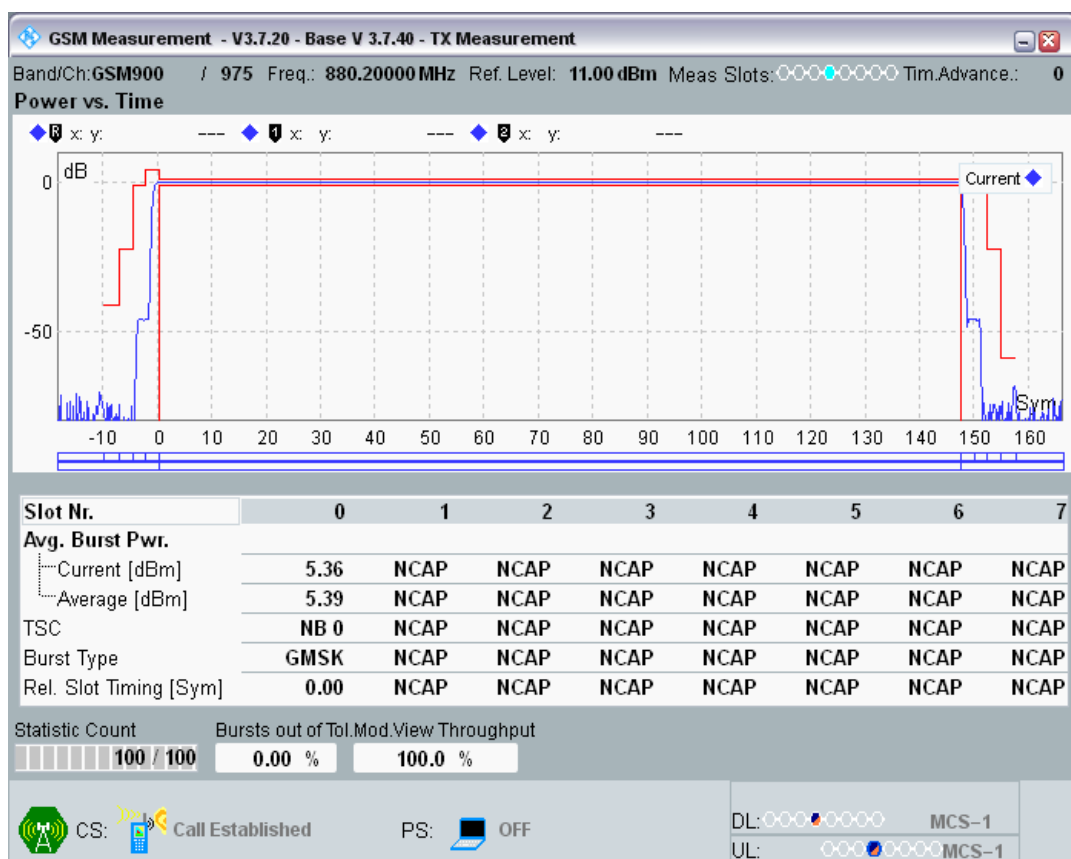

GSM900 Channel=975 PCL=5.png

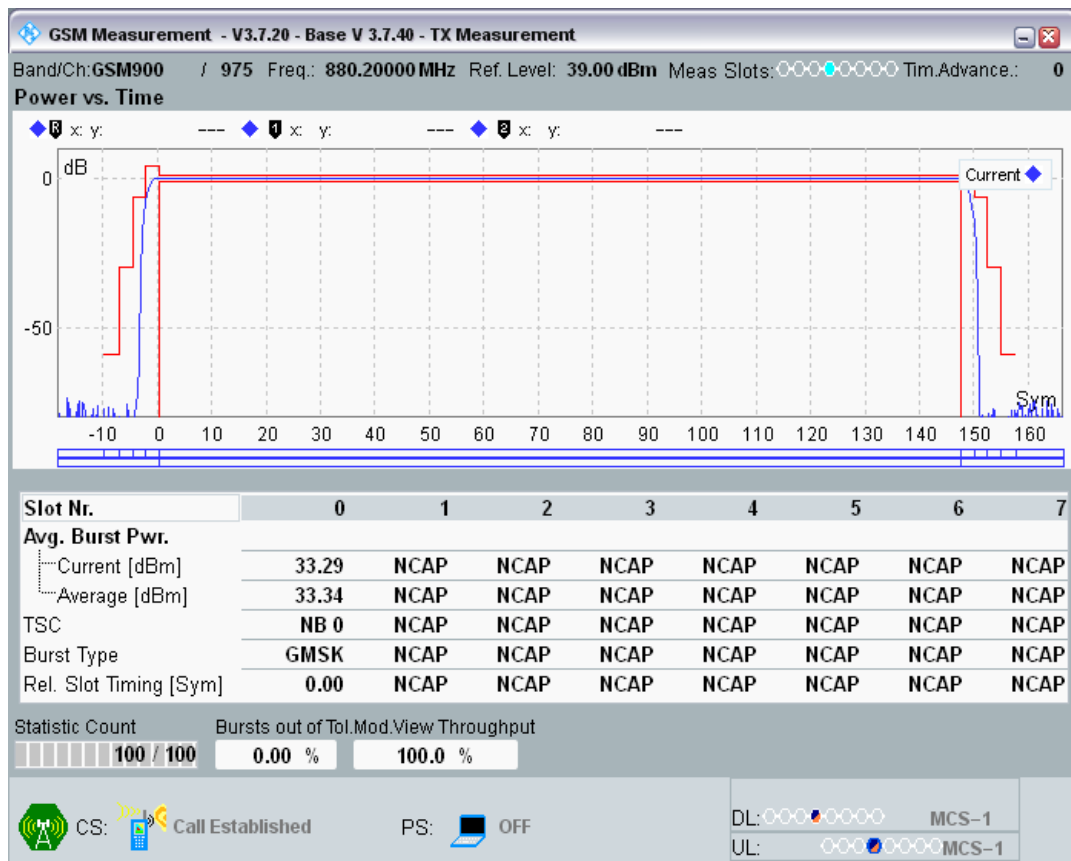

Clause 4.2.6 Transmitter-Modulation Spectrum


Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-81.24	-60	-58.34	-56	PASS
DCS1800	512	1710.2	0	-1600 KHz	-81.04	-60	-58.15	-56	PASS
DCS1800	512	1710.2	0	-1400 KHz	-80.08	-60	-57.18	-56	PASS
DCS1800	512	1710.2	0	-1200 KHz	-79.43	-60	-56.53	-56	PASS
DCS1800	512	1710.2	0	-1000 KHz	-77.25	-60	-54.36	-56	PASS
DCS1800	512	1710.2	0	-800 KHz	-76.49	-60	-53.59	-56	PASS
DCS1800	512	1710.2	0	-600 KHz	-74.20	-60	-51.31	-56	PASS
DCS1800	512	1710.2	0	-400 KHz	-68.45	-60	-45.55	-36	PASS
DCS1800	512	1710.2	0	-250 KHz	-41.20	-33	-18.30	-36	PASS
DCS1800	512	1710.2	0	-200 KHz	-36.61	-30	-13.71	-36	PASS
DCS1800	512	1710.2	0	-100 KHz	-8.83	0.5	14.06	-36	PASS
DCS1800	512	1710.2	0	100 KHz	-9.01	0.5	13.89	-36	PASS
DCS1800	512	1710.2	0	200 KHz	-36.73	-30	-13.83	-36	PASS
DCS1800	512	1710.2	0	250 KHz	-40.95	-33	-18.05	-36	PASS
DCS1800	512	1710.2	0	400 KHz	-68.25	-60	-45.35	-36	PASS
DCS1800	512	1710.2	0	600 KHz	-74.37	-60	-51.48	-56	PASS
DCS1800	512	1710.2	0	800 KHz	-76.51	-60	-53.61	-56	PASS
DCS1800	512	1710.2	0	1000 KHz	-77.18	-60	-54.29	-56	PASS
DCS1800	512	1710.2	0	1200 KHz	-79.06	-60	-56.17	-56	PASS

DCS1800	512	1710.2	0	1400 KHz	-79.90	-60	-57.01	-56	PASS
DCS1800	512	1710.2	0	1600 KHz	-81.10	-60	-58.20	-56	PASS
DCS1800	512	1710.2	0	1800 KHz	-81.70	-60	-58.80	-56	PASS
DCS1800	700	1747.8	0	-1800 KHz	-81.40	-60	-58.52	-56	PASS
DCS1800	700	1747.8	0	-1600 KHz	-80.93	-60	-58.05	-56	PASS
DCS1800	700	1747.8	0	-1400 KHz	-80.11	-60	-57.24	-56	PASS
DCS1800	700	1747.8	0	-1200 KHz	-79.32	-60	-56.45	-56	PASS
DCS1800	700	1747.8	0	-1000 KHz	-77.24	-60	-54.37	-56	PASS
DCS1800	700	1747.8	0	-800 KHz	-76.68	-60	-53.81	-56	PASS
DCS1800	700	1747.8	0	-600 KHz	-74.21	-60	-51.33	-56	PASS
DCS1800	700	1747.8	0	-400 KHz	-68.55	-60	-45.67	-36	PASS
DCS1800	700	1747.8	0	-250 KHz	-40.88	-33	-18.00	-36	PASS
DCS1800	700	1747.8	0	-200 KHz	-36.31	-30	-13.43	-36	PASS
DCS1800	700	1747.8	0	-100 KHz	-8.90	0.5	13.98	-36	PASS
DCS1800	700	1747.8	0	100 KHz	-8.66	0.5	14.22	-36	PASS
DCS1800	700	1747.8	0	200 KHz	-36.41	-30	-13.53	-36	PASS
DCS1800	700	1747.8	0	250 KHz	-40.89	-33	-18.01	-36	PASS
DCS1800	700	1747.8	0	400 KHz	-68.39	-60	-45.51	-36	PASS
DCS1800	700	1747.8	0	600 KHz	-73.82	-60	-50.94	-56	PASS
DCS1800	700	1747.8	0	800 KHz	-76.26	-60	-53.39	-56	PASS
DCS1800	700	1747.8	0	1000 KHz	-77.51	-60	-54.63	-56	PASS
DCS1800	700	1747.8	0	1200 KHz	-79.31	-60	-56.43	-56	PASS
DCS1800	700	1747.8	0	1400 KHz	-79.61	-60	-56.73	-56	PASS
DCS1800	700	1747.8	0	1600 KHz	-80.87	-60	-57.99	-56	PASS
DCS1800	700	1747.8	0	1800 KHz	-81.37	-60	-58.49	-56	PASS
DCS1800	885	1784.8	0	-1800 KHz	-81.40	-60	-58.29	-56	PASS
DCS1800	885	1784.8	0	-1600 KHz	-81.07	-60	-57.96	-56	PASS
DCS1800	885	1784.8	0	-1400 KHz	-80.34	-60	-57.23	-56	PASS
DCS1800	885	1784.8	0	-1200 KHz	-79.42	-60	-56.32	-56	PASS
DCS1800	885	1784.8	0	-1000 KHz	-77.38	-60	-54.27	-56	PASS
DCS1800	885	1784.8	0	-800 KHz	-76.34	-60	-53.23	-56	PASS
DCS1800	885	1784.8	0	-600 KHz	-73.82	-60	-50.72	-56	PASS
DCS1800	885	1784.8	0	-400 KHz	-68.18	-60	-45.07	-36	PASS
DCS1800	885	1784.8	0	-250 KHz	-41.04	-33	-17.93	-36	PASS
DCS1800	885	1784.8	0	-200 KHz	-36.57	-30	-13.46	-36	PASS
DCS1800	885	1784.8	0	-100 KHz	-8.73	0.5	14.38	-36	PASS
DCS1800	885	1784.8	0	100 KHz	-8.46	0.5	14.65	-36	PASS
DCS1800	885	1784.8	0	200 KHz	-36.59	-30	-13.48	-36	PASS
DCS1800	885	1784.8	0	250 KHz	-40.98	-33	-17.87	-36	PASS
DCS1800	885	1784.8	0	400 KHz	-68.19	-60	-45.08	-36	PASS
DCS1800	885	1784.8	0	600 KHz	-73.89	-60	-50.78	-56	PASS
DCS1800	885	1784.8	0	800 KHz	-76.22	-60	-53.11	-56	PASS
DCS1800	885	1784.8	0	1000 KHz	-77.56	-60	-54.46	-56	PASS


DCS1800	885	1784.8	0	1200 KHz	-79.08	-60	-55.97	-56	PASS
DCS1800	885	1784.8	0	1400 KHz	-79.97	-60	-56.86	-56	PASS
DCS1800	885	1784.8	0	1600 KHz	-80.93	-60	-57.82	-56	PASS
DCS1800	885	1784.8	0	1800 KHz	-81.31	-60	-58.21	-56	PASS
GSM900	975	880.2	5	-1800 KHz	-82.35	-60	-56.58	-51	PASS
GSM900	975	880.2	5	-1600 KHz	-82.22	-60	-56.44	-51	PASS
GSM900	975	880.2	5	-1400 KHz	-81.36	-60	-55.58	-51	PASS
GSM900	975	880.2	5	-1200 KHz	-80.63	-60	-54.85	-51	PASS
GSM900	975	880.2	5	-1000 KHz	-79.45	-60	-53.67	-51	PASS
GSM900	975	880.2	5	-800 KHz	-78.18	-60	-52.40	-51	PASS
GSM900	975	880.2	5	-600 KHz	-76.14	-60	-50.36	-51	PASS
GSM900	975	880.2	5	-400 KHz	-70.73	-60	-44.95	-36	PASS
GSM900	975	880.2	5	-250 KHz	-41.25	-33	-15.47	-36	PASS
GSM900	975	880.2	5	-200 KHz	-36.44	-30	-10.66	-36	PASS
GSM900	975	880.2	5	-100 KHz	-8.58	0.5	17.20	-36	PASS
GSM900	975	880.2	5	100 KHz	-8.58	0.5	17.20	-36	PASS
GSM900	975	880.2	5	200 KHz	-36.65	-30	-10.87	-36	PASS
GSM900	975	880.2	5	250 KHz	-41.10	-33	-15.32	-36	PASS
GSM900	975	880.2	5	400 KHz	-71.02	-60	-45.24	-36	PASS
GSM900	975	880.2	5	600 KHz	-76.21	-60	-50.44	-51	PASS
GSM900	975	880.2	5	800 KHz	-78.34	-60	-52.56	-51	PASS
GSM900	975	880.2	5	1000 KHz	-79.78	-60	-54.01	-51	PASS
GSM900	975	880.2	5	1200 KHz	-80.60	-60	-54.82	-51	PASS
GSM900	975	880.2	5	1400 KHz	-81.07	-60	-55.29	-51	PASS
GSM900	975	880.2	5	1600 KHz	-82.20	-60	-56.42	-51	PASS
GSM900	975	880.2	5	1800 KHz	-82.54	-60	-56.76	-51	PASS
GSM900	60	902	5	-1800 KHz	-82.58	-60	-56.73	-51	PASS
GSM900	60	902	5	-1600 KHz	-82.25	-60	-56.40	-51	PASS
GSM900	60	902	5	-1400 KHz	-81.58	-60	-55.73	-51	PASS
GSM900	60	902	5	-1200 KHz	-80.99	-60	-55.14	-51	PASS
GSM900	60	902	5	-1000 KHz	-80.10	-60	-54.25	-51	PASS
GSM900	60	902	5	-800 KHz	-78.45	-60	-52.60	-51	PASS
GSM900	60	902	5	-600 KHz	-76.52	-60	-50.67	-51	PASS
GSM900	60	902	5	-400 KHz	-70.86	-60	-45.01	-36	PASS
GSM900	60	902	5	-250 KHz	-41.07	-33	-15.22	-36	PASS
GSM900	60	902	5	-200 KHz	-36.70	-30	-10.85	-36	PASS
GSM900	60	902	5	-100 KHz	-8.74	0.5	17.11	-36	PASS
GSM900	60	902	5	100 KHz	-8.90	0.5	16.95	-36	PASS
GSM900	60	902	5	200 KHz	-36.61	-30	-10.76	-36	PASS
GSM900	60	902	5	250 KHz	-41.16	-33	-15.31	-36	PASS
GSM900	60	902	5	400 KHz	-70.96	-60	-45.11	-36	PASS
GSM900	60	902	5	600 KHz	-76.43	-60	-50.58	-51	PASS
GSM900	60	902	5	800 KHz	-78.52	-60	-52.67	-51	PASS

GSM900	60	902	5	1000 KHz	-79.99	-60	-54.14	-51	PASS
GSM900	60	902	5	1200 KHz	-80.81	-60	-54.96	-51	PASS
GSM900	60	902	5	1400 KHz	-81.34	-60	-55.49	-51	PASS
GSM900	60	902	5	1600 KHz	-82.28	-60	-56.43	-51	PASS
GSM900	60	902	5	1800 KHz	-82.48	-60	-56.63	-51	PASS
GSM900	124	914.8	5	-1800 KHz	-81.22	-60	-55.55	-51	PASS
GSM900	124	914.8	5	-1600 KHz	-82.50	-60	-56.83	-51	PASS
GSM900	124	914.8	5	-1400 KHz	-81.83	-60	-56.16	-51	PASS
GSM900	124	914.8	5	-1200 KHz	-81.28	-60	-55.61	-51	PASS
GSM900	124	914.8	5	-1000 KHz	-80.43	-60	-54.76	-51	PASS
GSM900	124	914.8	5	-800 KHz	-78.77	-60	-53.10	-51	PASS
GSM900	124	914.8	5	-600 KHz	-76.95	-60	-51.28	-51	PASS
GSM900	124	914.8	5	-400 KHz	-70.89	-60	-45.22	-36	PASS
GSM900	124	914.8	5	-250 KHz	-40.99	-33	-15.32	-36	PASS
GSM900	124	914.8	5	-200 KHz	-36.39	-30	-10.72	-36	PASS
GSM900	124	914.8	5	-100 KHz	-8.46	0.5	17.21	-36	PASS
GSM900	124	914.8	5	100 KHz	-8.59	0.5	17.08	-36	PASS
GSM900	124	914.8	5	200 KHz	-36.35	-30	-10.69	-36	PASS
GSM900	124	914.8	5	250 KHz	-40.89	-33	-15.22	-36	PASS
GSM900	124	914.8	5	400 KHz	-71.26	-60	-45.59	-36	PASS
GSM900	124	914.8	5	600 KHz	-76.83	-60	-51.16	-51	PASS
GSM900	124	914.8	5	800 KHz	-78.82	-60	-53.15	-51	PASS
GSM900	124	914.8	5	1000 KHz	-80.34	-60	-54.67	-51	PASS
GSM900	124	914.8	5	1200 KHz	-81.37	-60	-55.70	-51	PASS
GSM900	124	914.8	5	1400 KHz	-81.20	-60	-55.53	-51	PASS
GSM900	124	914.8	5	1600 KHz	-82.70	-60	-57.03	-51	PASS
GSM900	124	914.8	5	1800 KHz	-81.40	-60	-55.73	-51	PASS


DCS1800 Channel=512 PCL=0.png

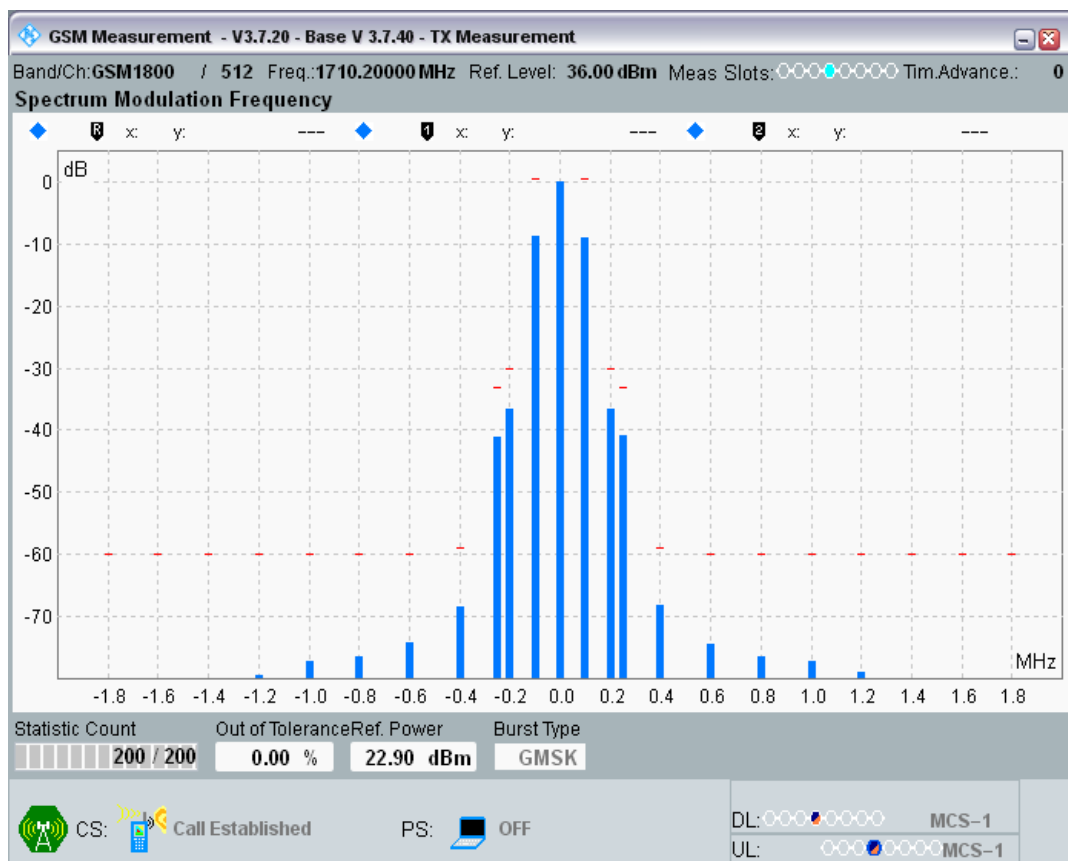


DCS1800 Channel=700 PCL=0.png

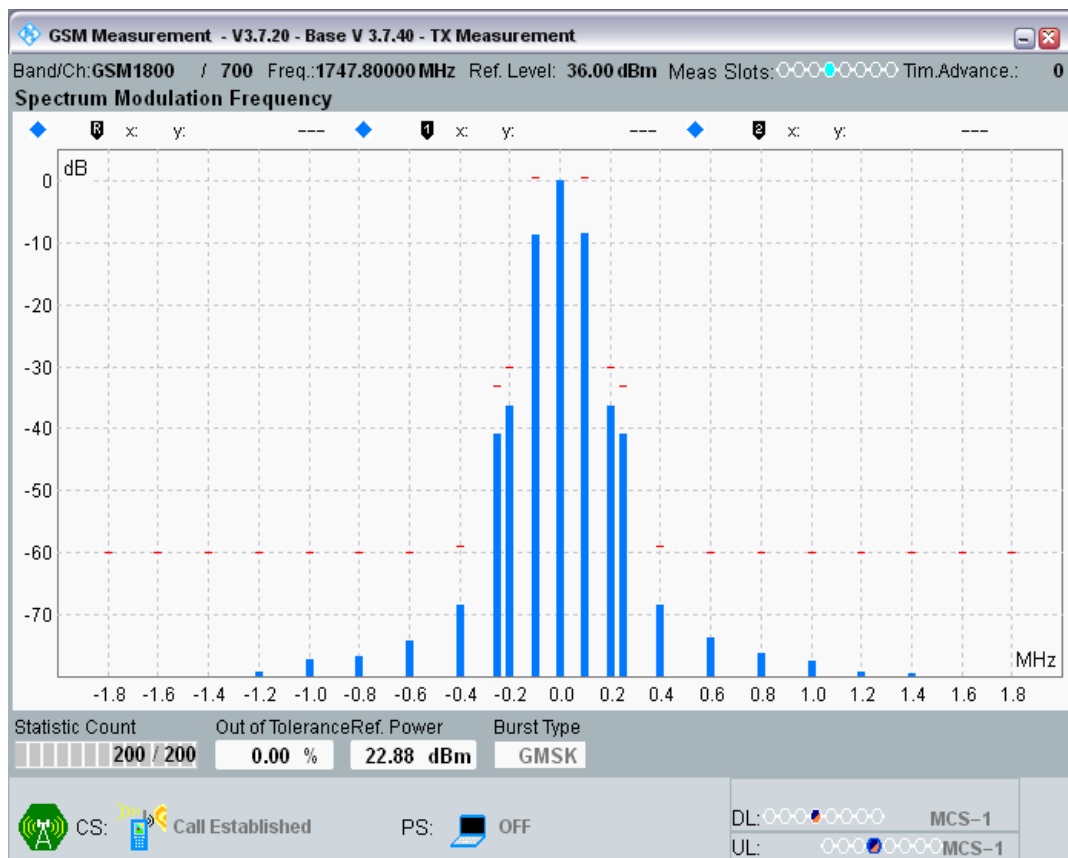


DCS1800 Channel=885 PCL=0.png

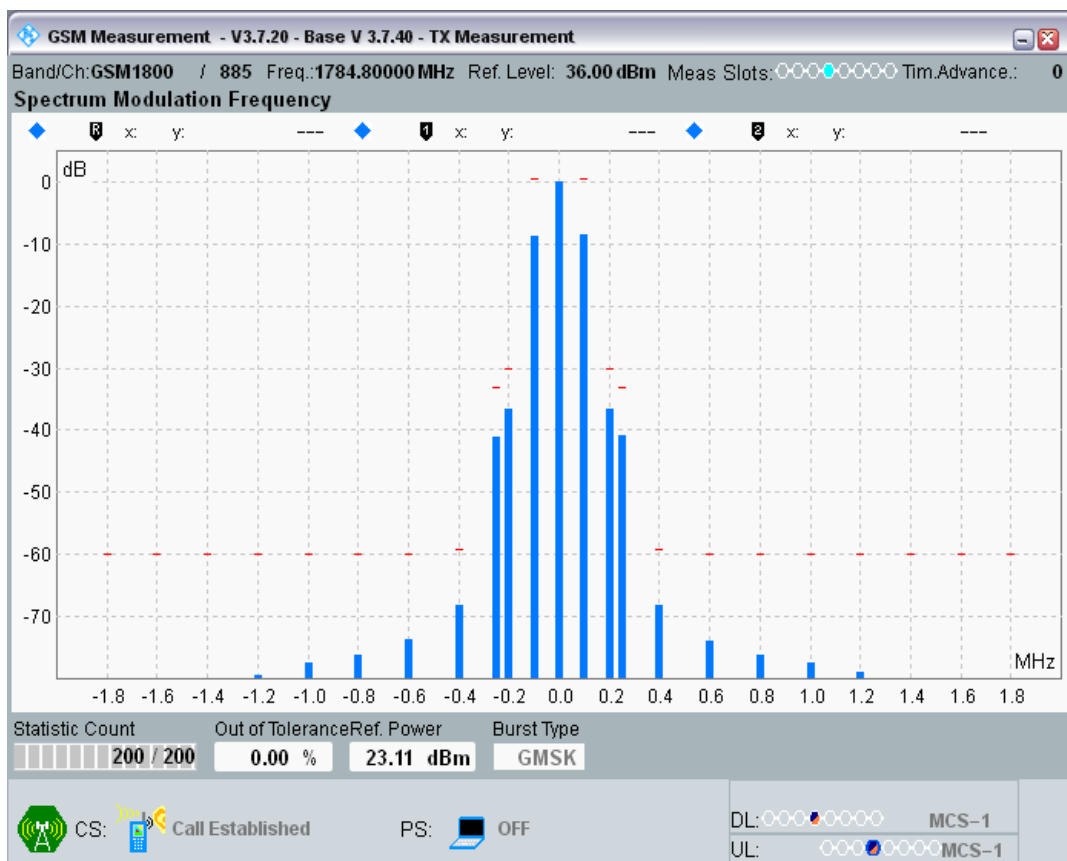


GSM900 Channel=124 PCL=5.png

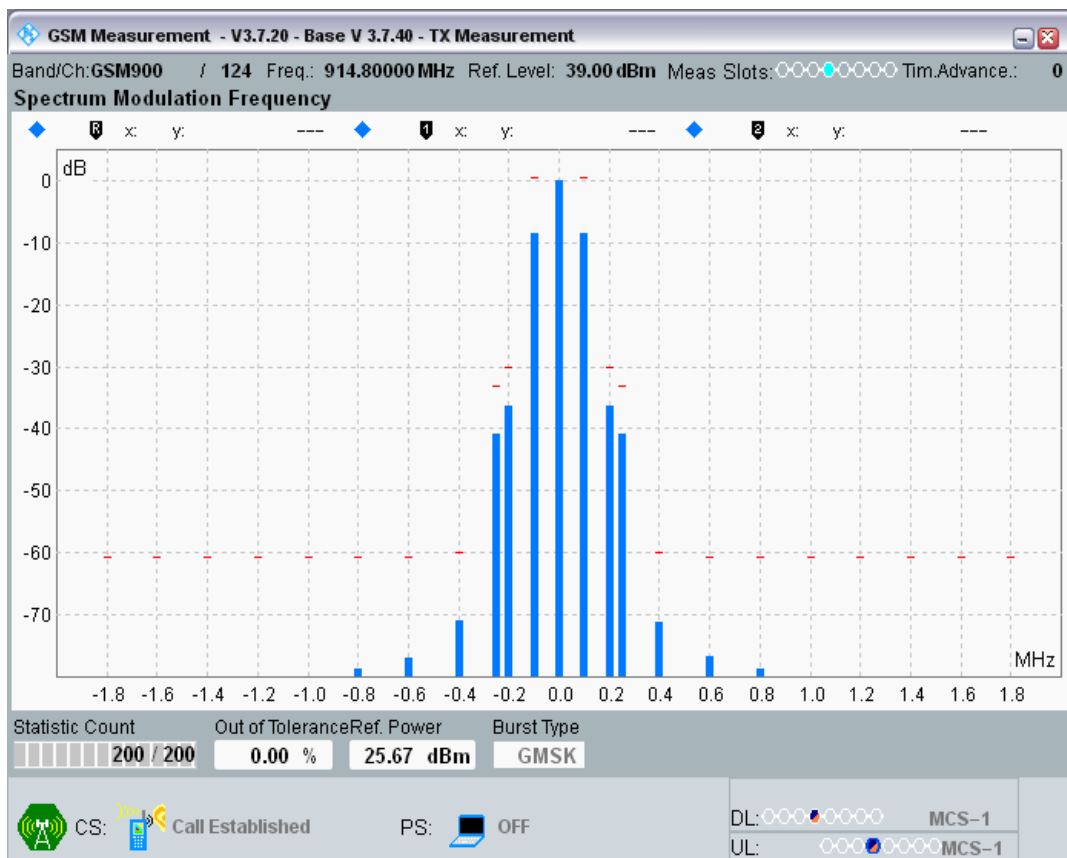

GSM900 Channel=60 PCL=5.png

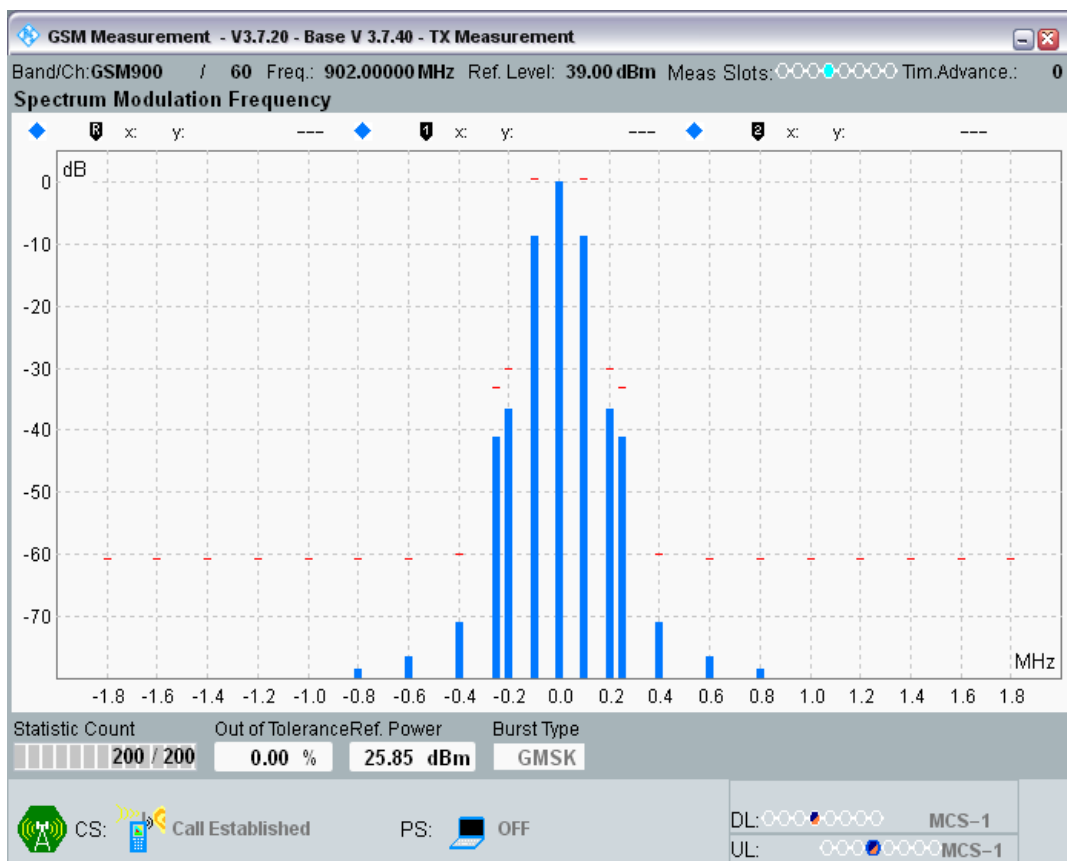

GSM900 Channel=975 PCL=5.png

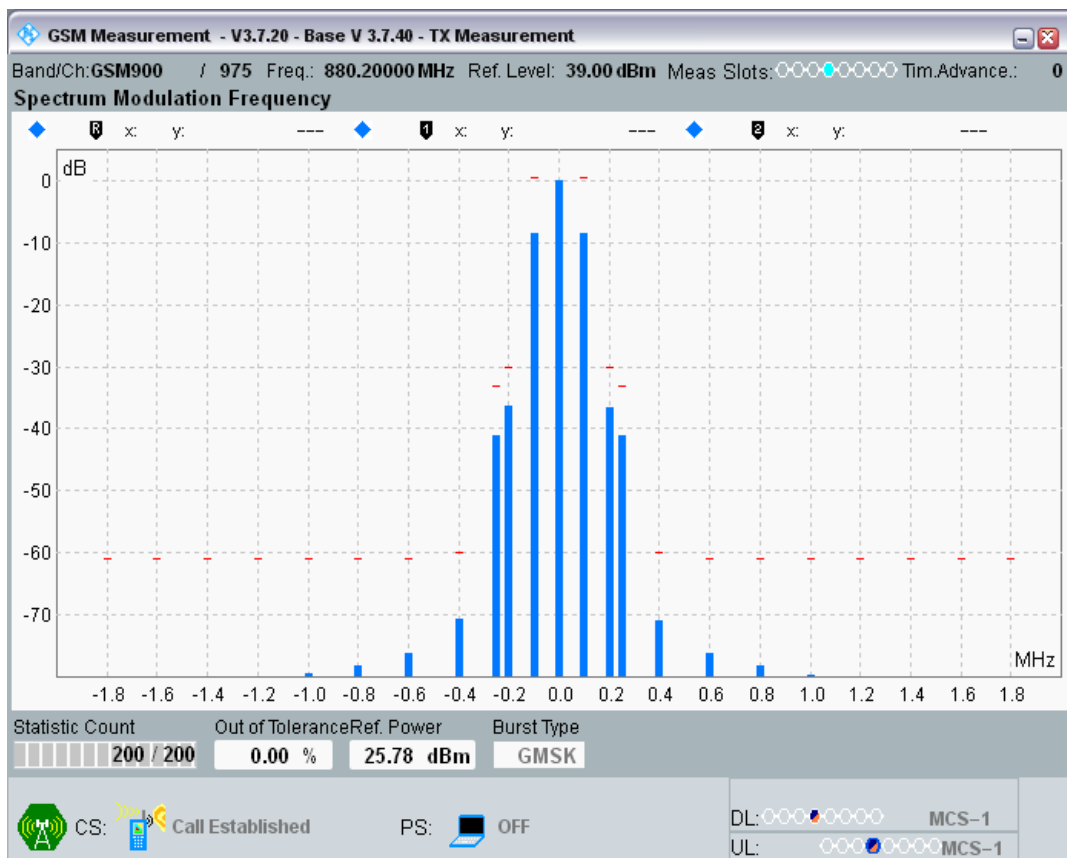


Clause 4.2.6 Transmitter-Switching Spectrum


Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-46.94	-27	PASS
DCS1800	512	1710.2	0	-1200 KHz	-44.19	-24	PASS
DCS1800	512	1710.2	0	-600 KHz	-39.71	-24	PASS
DCS1800	512	1710.2	0	-400 KHz	-30.62	-22	PASS
DCS1800	512	1710.2	0	400 KHz	-28.50	-22	PASS
DCS1800	512	1710.2	0	600 KHz	-35.23	-24	PASS
DCS1800	512	1710.2	0	1200 KHz	-38.98	-24	PASS
DCS1800	512	1710.2	0	1800 KHz	-46.76	-27	PASS
DCS1800	700	1747.8	0	-1800 KHz	-47.68	-27	PASS
DCS1800	700	1747.8	0	-1200 KHz	-41.92	-24	PASS
DCS1800	700	1747.8	0	-600 KHz	-38.23	-24	PASS
DCS1800	700	1747.8	0	-400 KHz	-31.67	-22	PASS
DCS1800	700	1747.8	0	400 KHz	-29.20	-22	PASS
DCS1800	700	1747.8	0	600 KHz	-34.31	-24	PASS
DCS1800	700	1747.8	0	1200 KHz	-38.18	-24	PASS
DCS1800	700	1747.8	0	1800 KHz	-46.79	-27	PASS
DCS1800	885	1784.8	0	-1800 KHz	-47.75	-27	PASS
DCS1800	885	1784.8	0	-1200 KHz	-44.19	-24	PASS
DCS1800	885	1784.8	0	-600 KHz	-36.92	-24	PASS
DCS1800	885	1784.8	0	-400 KHz	-30.63	-22	PASS
DCS1800	885	1784.8	0	400 KHz	-28.71	-22	PASS
DCS1800	885	1784.8	0	600 KHz	-34.39	-24	PASS
DCS1800	885	1784.8	0	1200 KHz	-37.21	-24	PASS
DCS1800	885	1784.8	0	1800 KHz	-47.48	-27	PASS
GSM900	975	880.2	5	-1800 KHz	-44.29	-24	PASS
GSM900	975	880.2	5	-1200 KHz	-38.29	-21	PASS
GSM900	975	880.2	5	-600 KHz	-37.07	-21	PASS
GSM900	975	880.2	5	-400 KHz	-27.10	-19	PASS
GSM900	975	880.2	5	400 KHz	-27.42	-19	PASS
GSM900	975	880.2	5	600 KHz	-30.14	-21	PASS
GSM900	975	880.2	5	1200 KHz	-32.89	-21	PASS
GSM900	975	880.2	5	1800 KHz	-45.53	-24	PASS
GSM900	60	902	5	-1800 KHz	-45.32	-24	PASS
GSM900	60	902	5	-1200 KHz	-38.81	-21	PASS
GSM900	60	902	5	-600 KHz	-35.02	-21	PASS
GSM900	60	902	5	-400 KHz	-25.80	-19	PASS
GSM900	60	902	5	400 KHz	-26.86	-19	PASS
GSM900	60	902	5	600 KHz	-30.96	-21	PASS
GSM900	60	902	5	1200 KHz	-32.72	-21	PASS
GSM900	60	902	5	1800 KHz	-45.21	-24	PASS
GSM900	124	914.8	5	-1800 KHz	-45.63	-24	PASS

GSM900	124	914.8	5	-1200 KHz	-38.52	-21	PASS
GSM900	124	914.8	5	-600 KHz	-36.04	-21	PASS
GSM900	124	914.8	5	-400 KHz	-25.98	-19	PASS
GSM900	124	914.8	5	400 KHz	-26.80	-19	PASS
GSM900	124	914.8	5	600 KHz	-31.55	-21	PASS
GSM900	124	914.8	5	1200 KHz	-32.59	-21	PASS
GSM900	124	914.8	5	1800 KHz	-43.16	-24	PASS


DCS1800 Channel=512 PCL=0.png

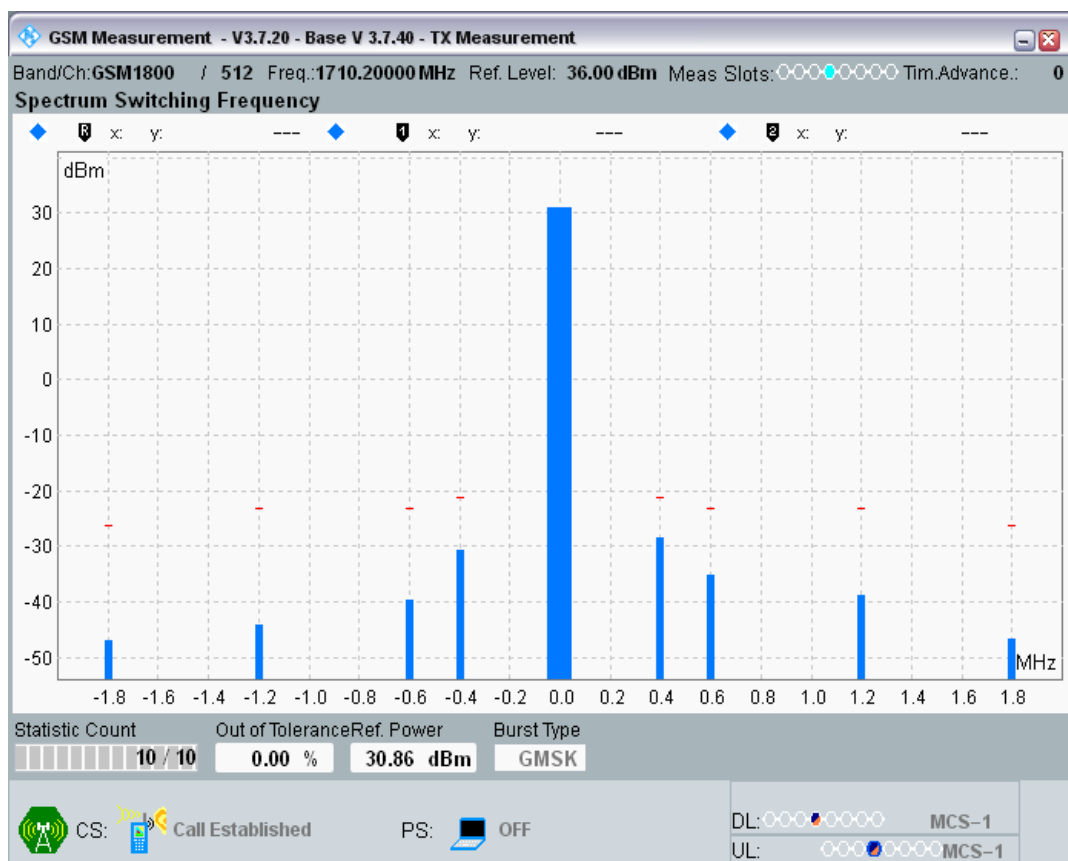


DCS1800 Channel=700 PCL=0.png

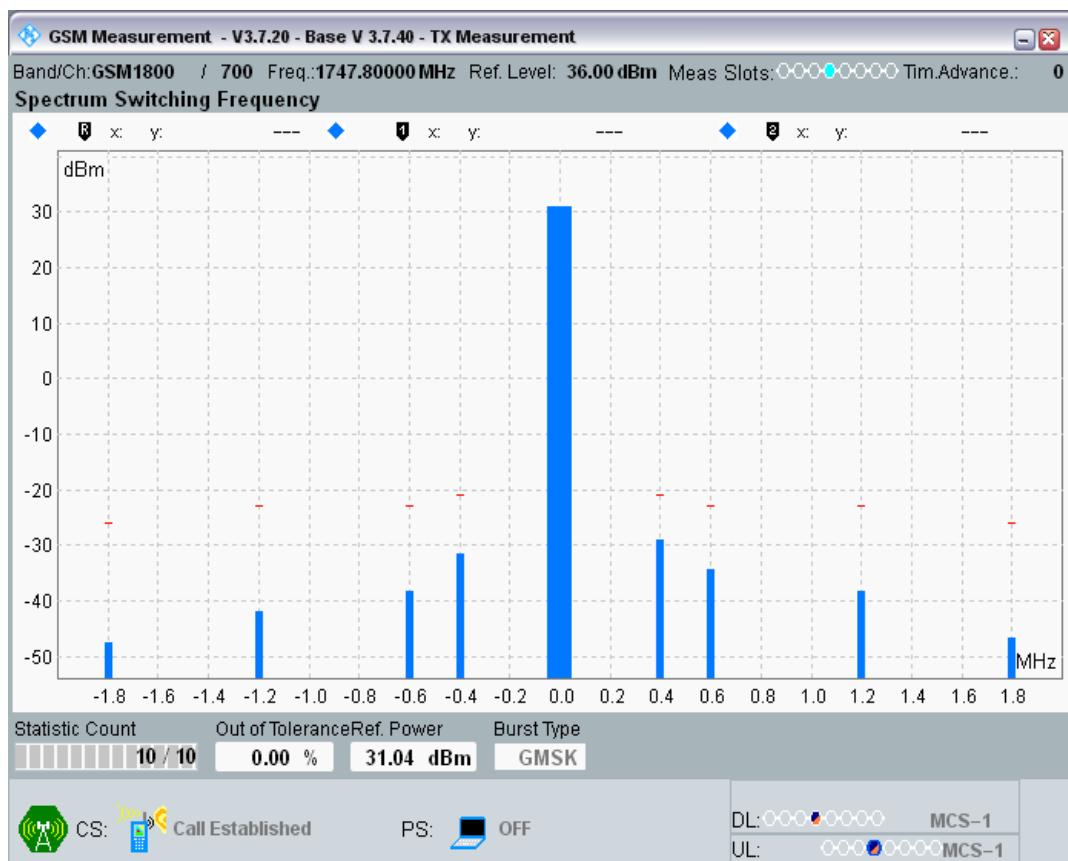


DCS1800 Channel=885 PCL=0.png

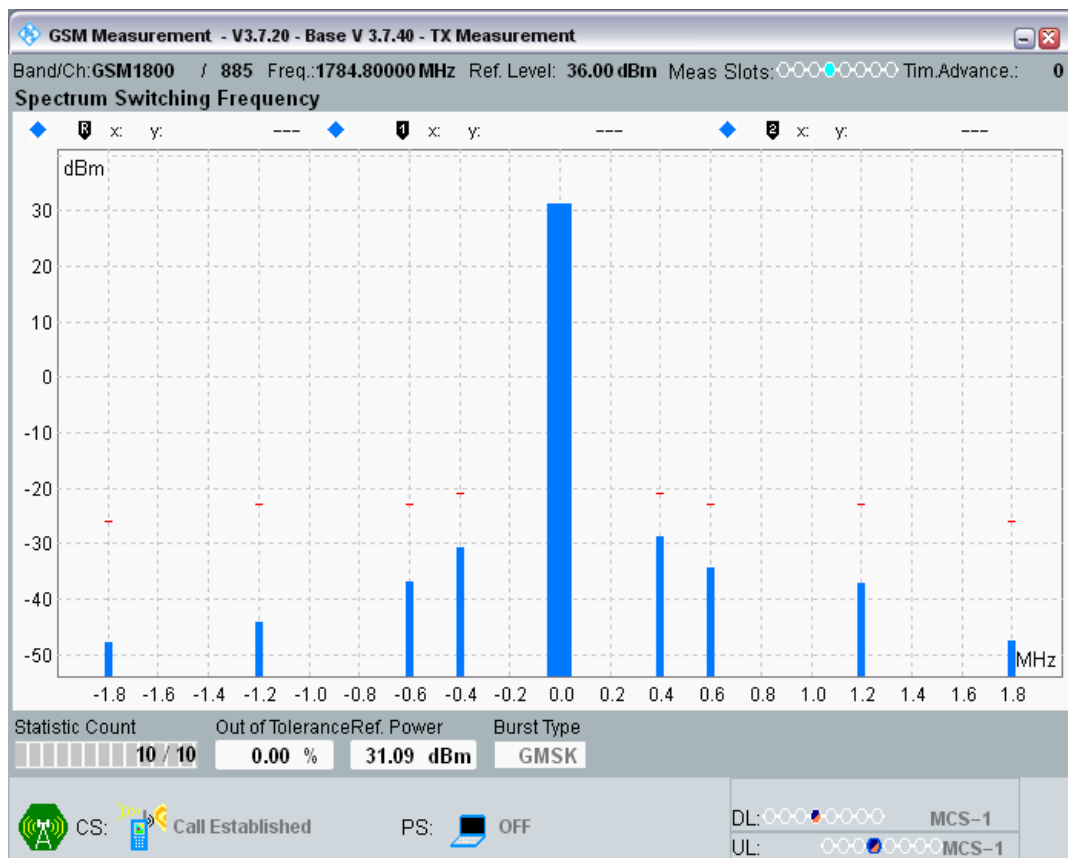


GSM900 Channel=124 PCL=5.png

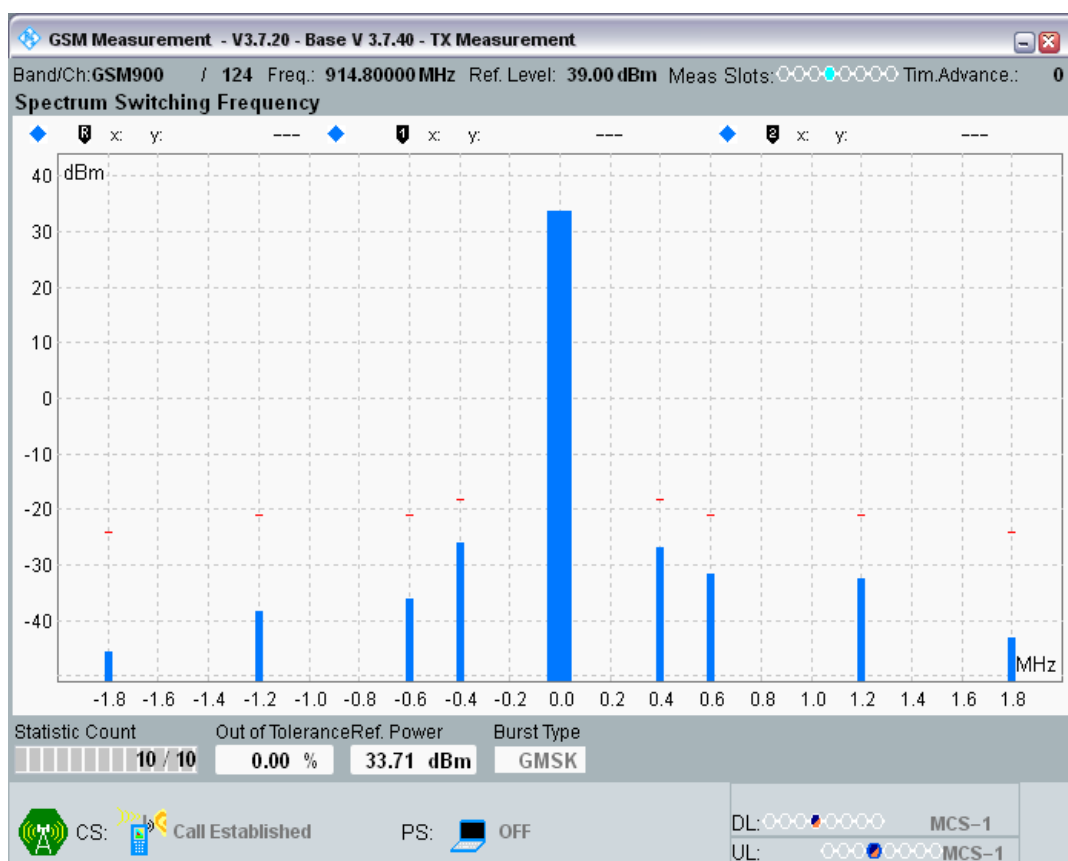

GSM900 Channel=60 PCL=5.png

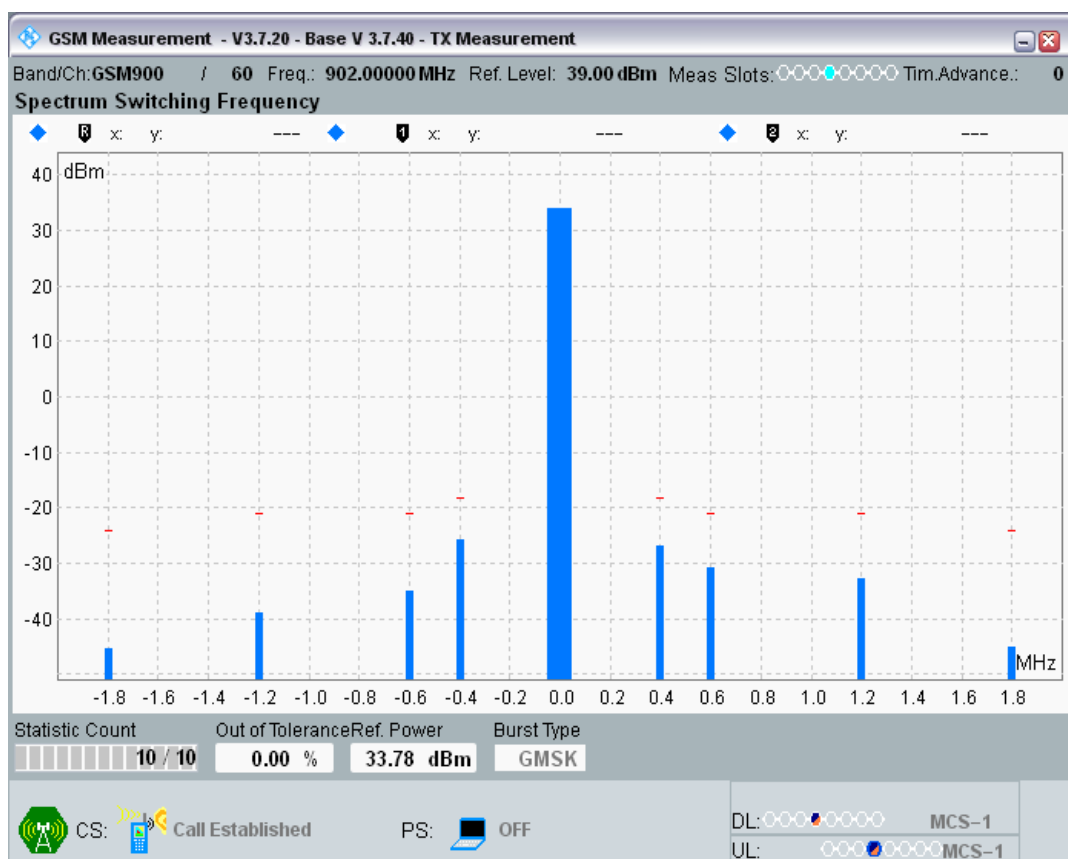

GSM900 Channel=975 PCL=5.png

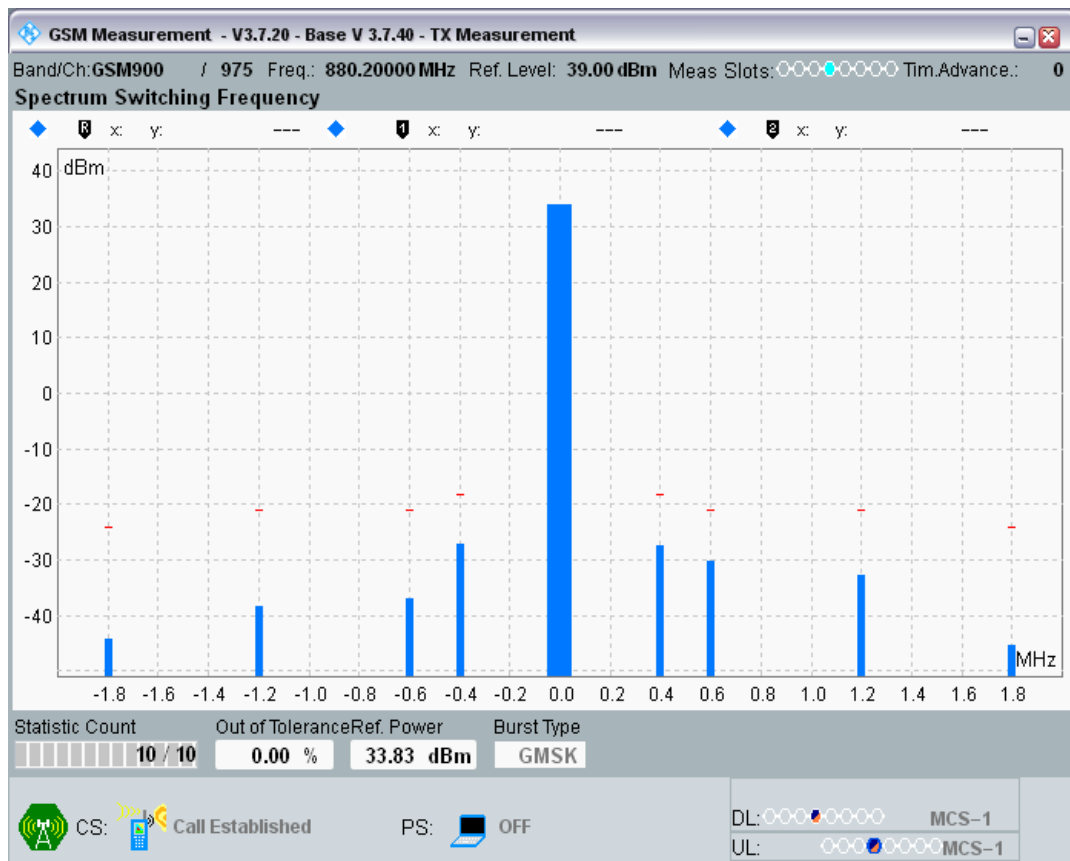


Clause 4.2.12 Conducted spurious emissions - MS allocated a channel

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.11	-79.78	-36	PASS
DCS1800	700	1747.8	0	50MHz - 500MHz	100	265.7	-90.42	-36	PASS
DCS1800	700	1747.8	0	500MHz - 1000MHz	3000	833.5	-63.50	-36	PASS
DCS1800	700	1747.8	0	1000MHz - 1680MHz	3000	1677.28	-67.78	-30	PASS
DCS1800	700	1747.8	0	1680MHz - 1690MHz	1000	1681.29	-71.77	-30	PASS
DCS1800	700	1747.8	0	1690MHz - 1700MHz	300	1693.89	-75.72	-30	PASS
DCS1800	700	1747.8	0	1700MHz - 1710MHz	100	1707	-89.82	-30	PASS
DCS1800	700	1747.8	0	1785MHz - 1795MHz	100	1787.57	-89.78	-30	PASS
DCS1800	700	1747.8	0	1795MHz - 1805MHz	300	1796.1	-83.85	-30	PASS
DCS1800	700	1747.8	0	1800MHz - 4000MHz	3000	1852.8	-70.61	-30	PASS
DCS1800	700	1747.8	0	4000MHz - 5242.283951	3000	5242.283951	-55.32	-30	PASS

				12750MHz					
GSM900	60	902	5	0.1MHz - 50MHz	10	0.11	-79.92	-36	PASS
GSM900	60	902	5	50MHz - 500MHz	100	466.8	-90.58	-36	PASS
GSM900	60	902	5	500MHz - 850MHz	3000	833.9	-64.04	-36	PASS
GSM900	60	902	5	850MHz - 860MHz	1000	851.93	-70.40	-36	PASS
GSM900	60	902	5	860MHz - 870MHz	300	863.76	-75.12	-30	PASS
GSM900	60	902	5	870MHz - 880MHz	100	871.71	-91.72	-36	PASS
GSM900	60	902	5	915MHz - 925MHz	100	921.49	-90.90	-36	PASS
GSM900	60	902	5	960MHz - 1000MHz	3000	979.72	-67.49	-36	PASS
GSM900	60	902	5	1000MHz - 2000MHz	3000	1804	-46.18	-30	PASS
GSM900	60	902	5	2000MHz - 12750MHz	3000	2705.065587	-49.63	-30	PASS


DCS1800 Channel=700 PCL=0.png

Conducted spurious emissions

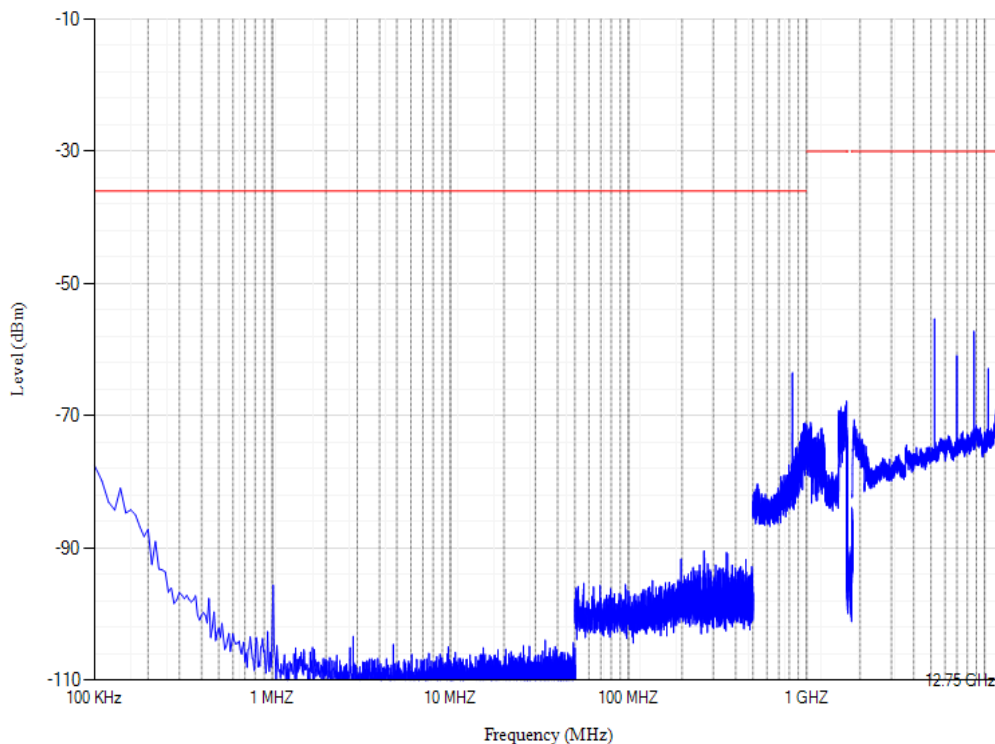

GSM900 Channel=60 PCL=5.png

Conducted spurious emissions

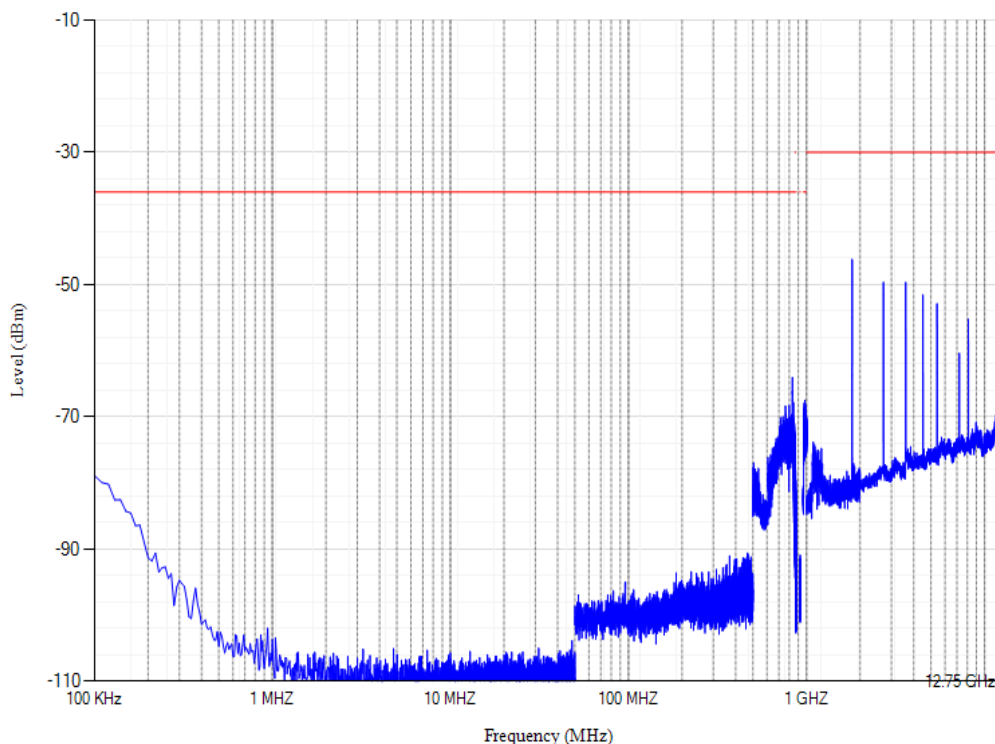


Clause 4.2.13 Conducted spurious emission - MS in idle mode

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur (MHz)	Freq	Spur (dBm)	Level	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.11		-79.39		-57	PASS
DCS1800	700	1747.8	0	50MHz - 880MHz	100	833.3		-68.18		-57	PASS
DCS1800	700	1747.8	0	880MHz - 915MHz	100	893.125		-92.03		-59	PASS
DCS1800	700	1747.8	0	915MHz - 1000MHz	100	918.4		-92.91		-57	PASS
DCS1800	700	1747.8	0	1000MHz - 1710MHz	100	1578.5		-90.17		-47	PASS
DCS1800	700	1747.8	0	1710MHz - 1785MHz	100	1775.55		-90.32		-53	PASS
DCS1800	700	1747.8	0	1785MHz - 12750MHz	100	11917.20825		-81.69		-47	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.11		-78.76		-57	PASS
GSM900	60	902	5	50MHz - 880MHz	100	834		-61.67		-57	PASS
GSM900	60	902	5	880MHz - 915MHz	100	903.38		-93.05		-59	PASS
GSM900	60	902	5	915MHz - 1000MHz	100	947.81		-88.47		-57	PASS
GSM900	60	902	5	1000MHz -	100	1584.6		-91.36		-47	PASS

				1710MHz						
GSM900	60	902	5	1710MHz	-	100	1774.725	-91.10	-53	PASS
				1785MHz						
GSM900	60	902	5	1785MHz	-	100	12401.313	-81.56	-47	PASS
				12750MHz						


DCS1800 Channel=700 PCL=0.png

Conducted spurious emissions

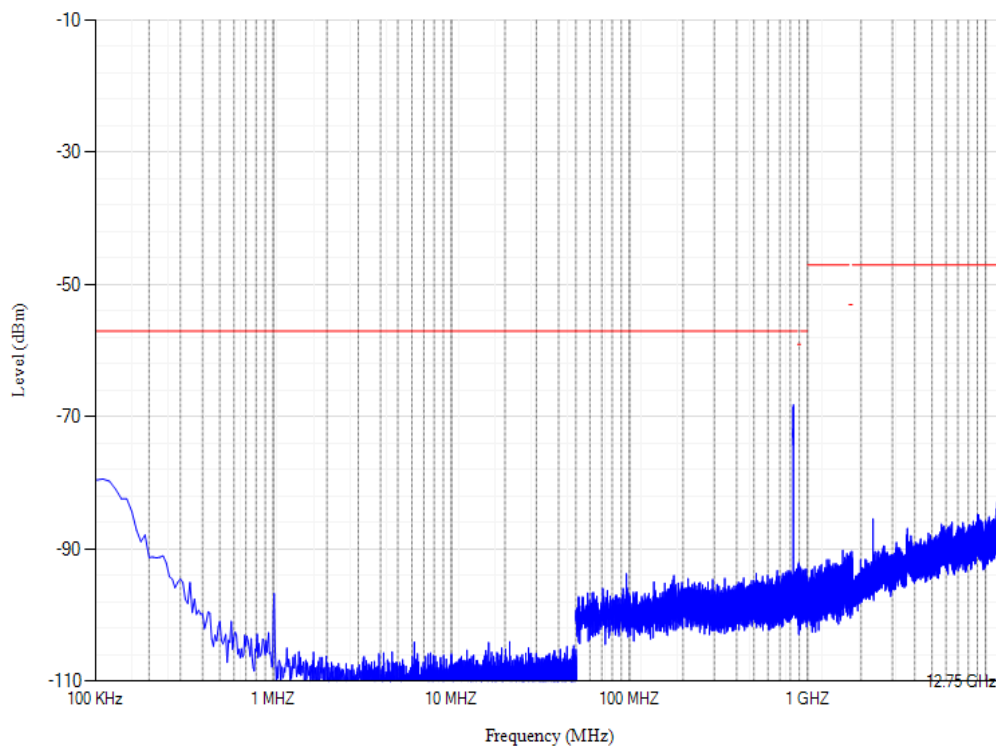

GSM900 Channel=60 PCL=5.png


Conducted spurious emissions

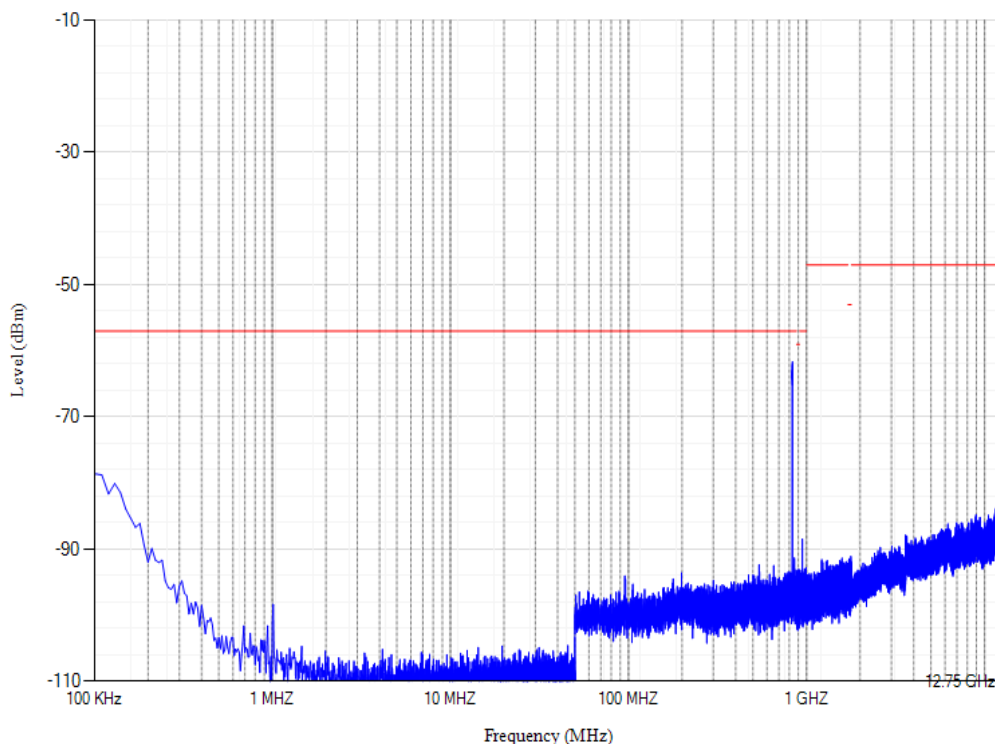


Clause 4.2.4 Frequency error and phase error in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	3;3;3;3	Frequency Error (Hz)	10.20	-88.02	88.02	PASS
GSM900	975	880.2	3;3;3;3	RMS Phase Error (Degree)	0.67	0	5	PASS
GSM900	975	880.2	3;3;3;3	Peak Phase Error (Degree)	1.88	0	20	PASS
GSM900	60	902	3;3;3;3	Frequency Error (Hz)	7.81	-90.2	90.2	PASS
GSM900	60	902	3;3;3;3	RMS Phase Error (Degree)	0.60	0	5	PASS
GSM900	60	902	3;3;3;3	Peak Phase Error (Degree)	1.72	0	20	PASS
GSM900	124	914.8	3;3;3;3	Frequency Error (Hz)	5.13	-91.48	91.48	PASS
GSM900	124	914.8	3;3;3;3	RMS Phase Error (Degree)	0.61	0	5	PASS
GSM900	124	914.8	3;3;3;3	Peak Phase Error (Degree)	1.79	0	20	PASS
DCS1800	512	1710.2	3;3;3;3	Frequency Error (Hz)	12.04	-171.02	171.02	PASS
DCS1800	512	1710.2	3;3;3;3	RMS Phase Error (Degree)	0.62	0	5	PASS
DCS1800	512	1710.2	3;3;3;3	Peak Phase Error (Degree)	1.85	0	20	PASS
DCS1800	700	1747.8	3;3;3;3	Frequency Error (Hz)	8.46	-174.78	174.78	PASS
DCS1800	700	1747.8	3;3;3;3	RMS Phase Error (Degree)	0.61	0	5	PASS
DCS1800	700	1747.8	3;3;3;3	Peak Phase Error (Degree)	2.66	0	20	PASS
DCS1800	885	1784.8	3;3;3;3	Frequency Error (Hz)	4.42	-178.48	178.48	PASS
DCS1800	885	1784.8	3;3;3;3	RMS Phase Error (Degree)	0.59	0	5	PASS
DCS1800	885	1784.8	3;3;3;3	Peak Phase Error (Degree)	2.00	0	20	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

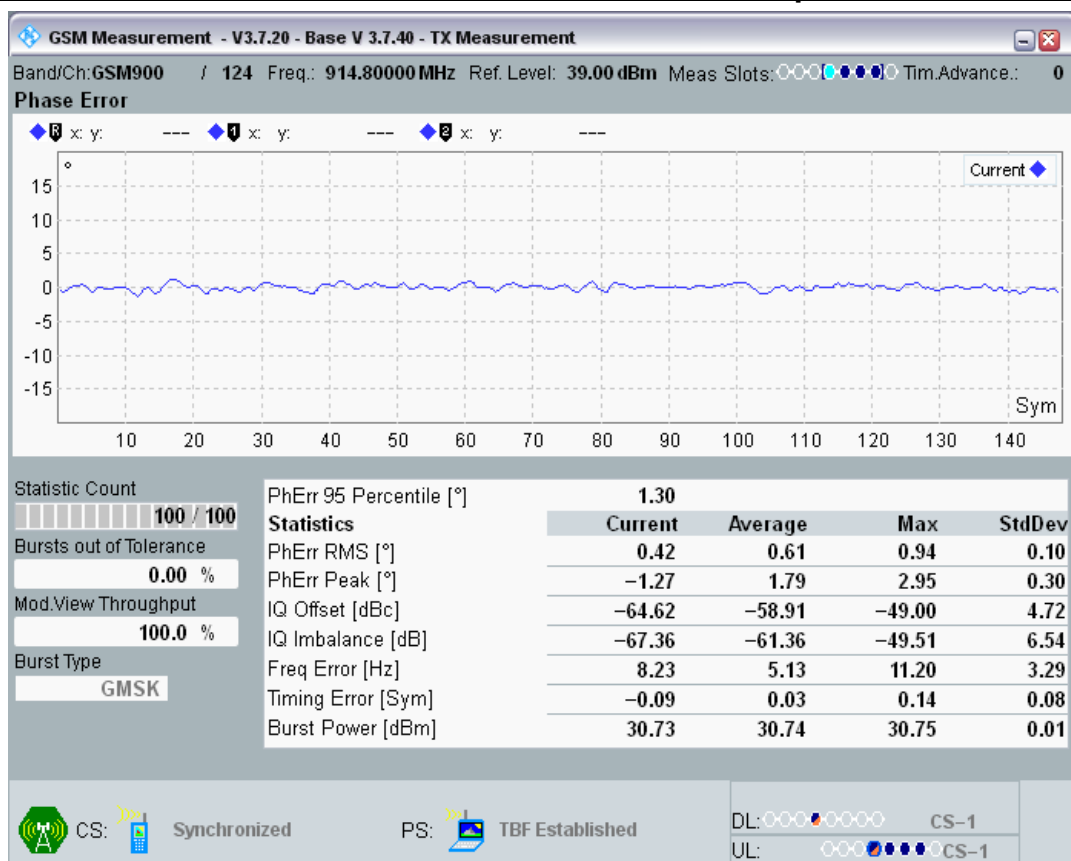


GSM900 Channel=60 Gamma=3;3;3;3.png

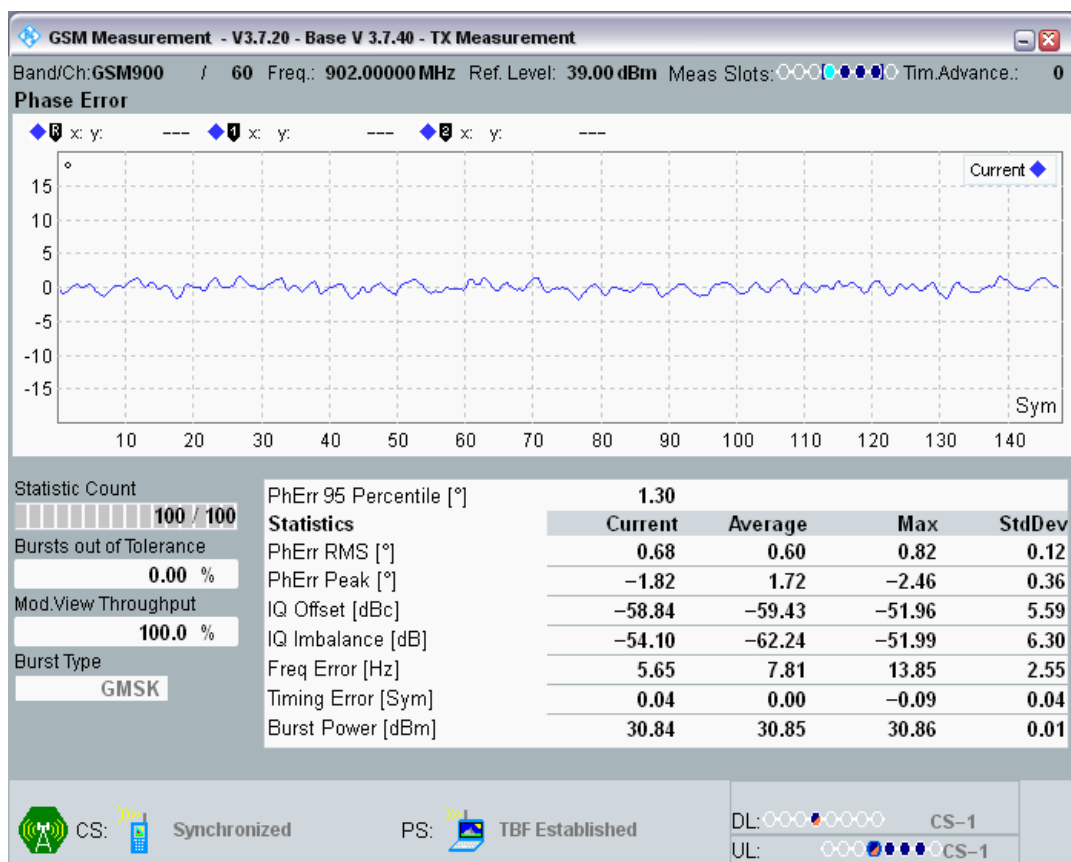


GSM900 Channel=975 Gamma=3;3;3;3.png

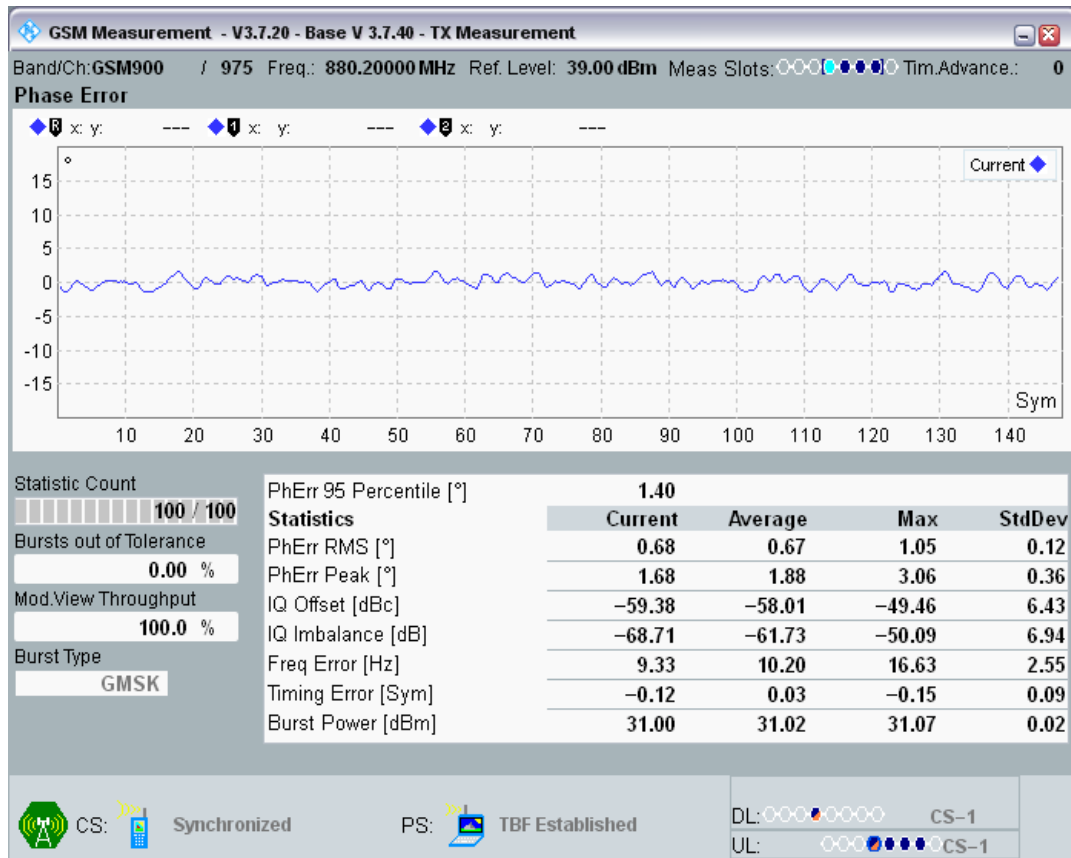


DCS1800 Channel=512 Gamma=3;3;3;3.png

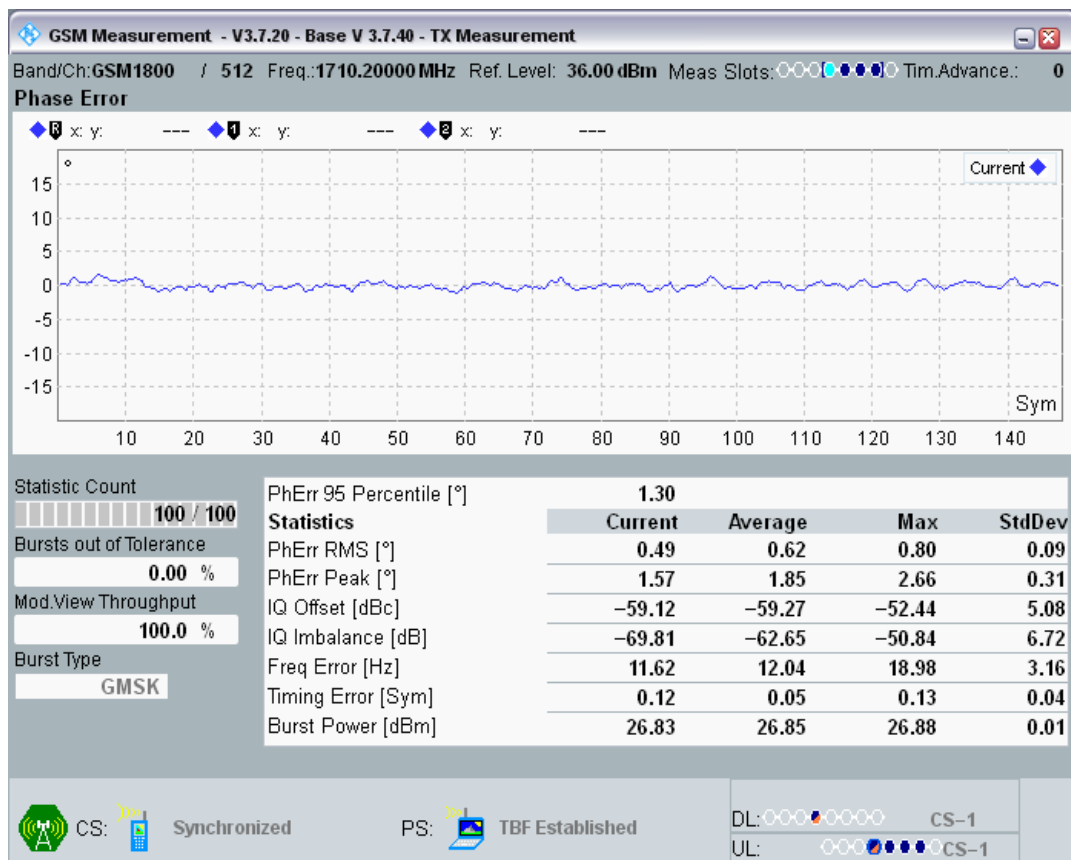

DCS1800 Channel=700 Gamma=3;3;3;3.png

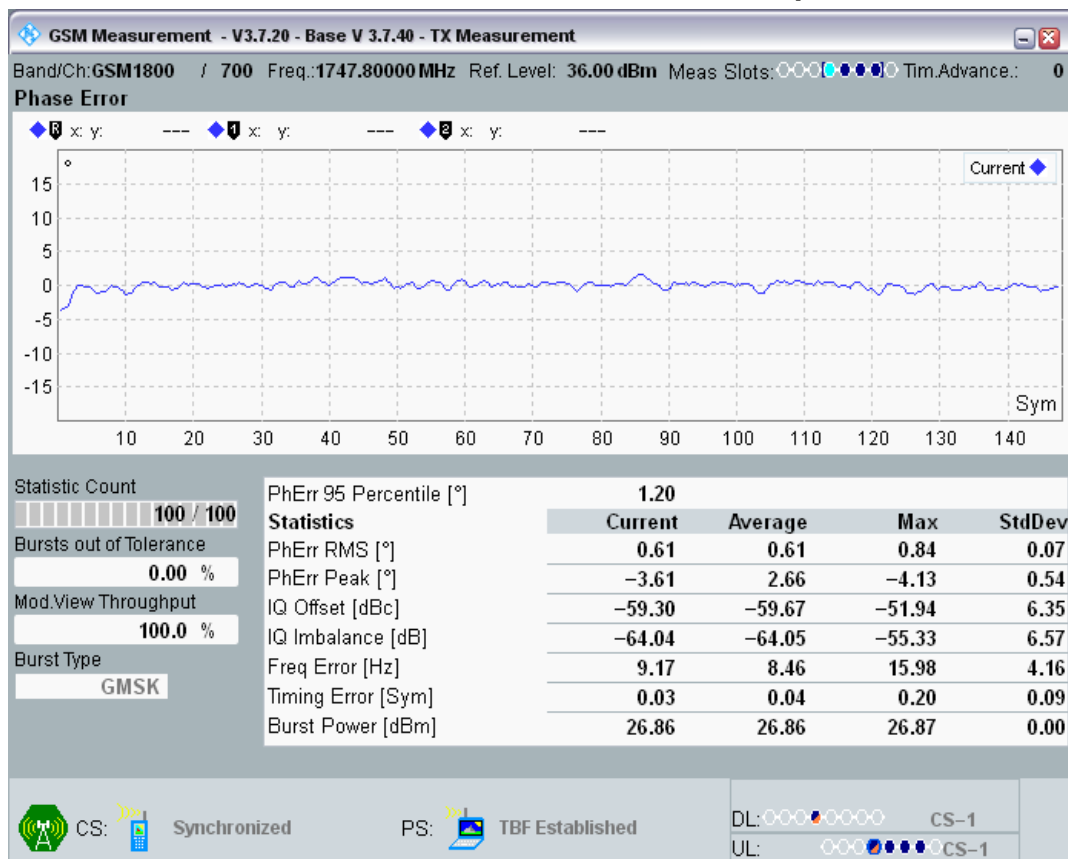

DCS1800 Channel=885 Gamma=3;3;3;3.png

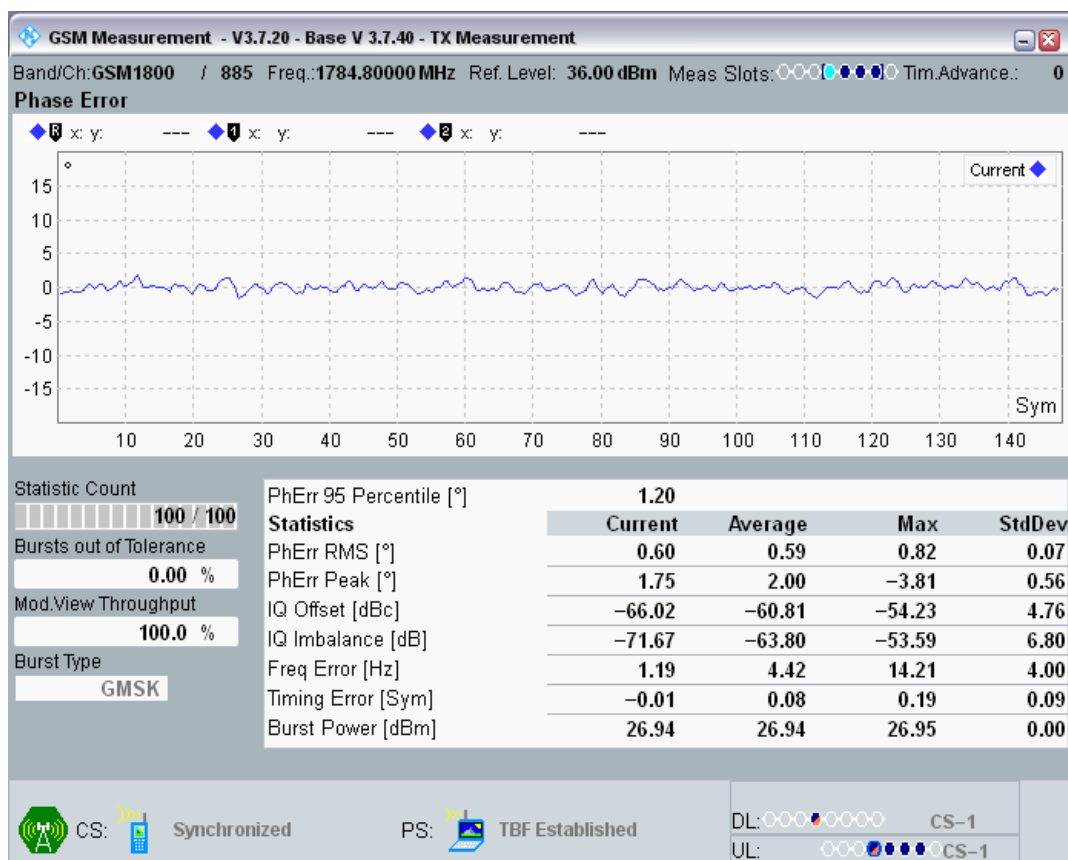

Clause 4.2.10 Transmitter output power in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	PvT	-	-	-	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot1	30.80548	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot2	30.79688	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot3	30.79108	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot4	30.78229	25	32	PASS
GSM900	975	880.2	4;4;4;4	PvT	-	-	-	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot1	30.84204	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot2	30.82175	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot3	30.80728	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot4	30.82001	24	33	PASS
GSM900	975	880.2	5;5;5;5	PvT	-	-	-	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot1	30.82004	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot2	30.79053	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot3	30.80377	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot4	30.80087	24	32	PASS
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	28.90549	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	28.89053	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	28.89774	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	28.90656	24	30	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	26.92081	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	26.91721	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot3	26.91245	22	28	PASS

				slot3				
GSM900	975	880.2	7;7;7;7	Power @ slot4	26.91205	22	28	PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	24.90585	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	24.90375	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	24.89484	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	24.89603	20	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	22.92365	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	22.93179	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	22.92923	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot4	22.9187	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	20.95209	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot2	20.94104	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot3	20.94547	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot4	20.92664	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot1	18.93051	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot2	18.94101	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot3	18.92996	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot4	18.93781	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot1	17.02444	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot2	17.02716	12	18	PASS

GSM900	975	880.2	12;12;12;12	Power slot3	@	17.03601	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power slot4	@	17.02783	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT		-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power slot1	@	14.72324	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot2	@	14.72568	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot3	@	14.71722	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power slot4	@	14.71652	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT		-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power slot1	@	12.83609	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot2	@	12.82889	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot3	@	12.82303	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot4	@	12.83871	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT		-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power slot1	@	11.03726	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot2	@	11.03015	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot3	@	11.04599	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot4	@	11.00079	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT		-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power slot1	@	8.606659	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot2	@	8.588776	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot3	@	8.586884	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot4	@	8.574951	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT		-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power slot1	@	6.763245	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power	@	6.751465	0	10	PASS

				slot2				
GSM900	975	880.2	17;17;17;17	Power @ slot3	6.71582	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	6.720184	0	10	PASS
GSM900	60	902	3;3;3;3	PvT	-	-	-	PASS
GSM900	60	902	3;3;3;3	Power @ slot1	30.75497	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot2	30.74356	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot3	30.74213	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot4	30.73285	25	32	PASS
GSM900	60	902	4;4;4;4	PvT	-	-	-	PASS
GSM900	60	902	4;4;4;4	Power @ slot1	30.72653	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot2	30.71866	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot3	30.71277	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot4	30.70258	24	33	PASS
GSM900	60	902	5;5;5;5	PvT	-	-	-	PASS
GSM900	60	902	5;5;5;5	Power @ slot1	30.70331	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot2	30.7001	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot3	30.69019	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot4	30.6824	24	32	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	28.75629	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	28.74924	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	28.74933	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot4	28.73715	24	30	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	26.78436	22	28	PASS

GSM900	60	902	7;7;7;7	Power slot2	@	26.7807	22	28	PASS
GSM900	60	902	7;7;7;7	Power slot3	@	26.77106	22	28	PASS
GSM900	60	902	7;7;7;7	Power slot4	@	26.77142	22	28	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power slot1	@	24.77994	20	26	PASS
GSM900	60	902	8;8;8;8	Power slot2	@	24.78079	20	26	PASS
GSM900	60	902	8;8;8;8	Power slot3	@	24.77402	20	26	PASS
GSM900	60	902	8;8;8;8	Power slot4	@	24.76547	20	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	-	PASS
GSM900	60	902	9;9;9;9	Power slot1	@	22.78827	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot2	@	22.78824	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot3	@	22.78687	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot4	@	22.78445	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	-	PASS
GSM900	60	902	10;10;10;10	Power slot1	@	20.81915	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot2	@	20.83038	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot3	@	20.81027	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot4	@	20.82043	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power slot1	@	18.79446	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot2	@	18.78525	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot3	@	18.79547	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot4	@	18.784	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power	@	16.84283	12	18	PASS

				slot1				
GSM900	60	902	12;12;12;12	Power @	16.84967	12	18	PASS
				slot2				
GSM900	60	902	12;12;12;12	Power @	16.84937	12	18	PASS
				slot3				
GSM900	60	902	12;12;12;12	Power @	16.85547	12	18	PASS
				slot4				
GSM900	60	902	13;13;13;13	PvT	-	-	-	PASS
GSM900	60	902	13;13;13;13	Power @	14.73572	10	16	PASS
				slot1				
GSM900	60	902	13;13;13;13	Power @	14.72504	10	16	PASS
				slot2				
GSM900	60	902	13;13;13;13	Power @	14.73035	10	16	PASS
				slot3				
GSM900	60	902	13;13;13;13	Power @	14.74329	10	16	PASS
				slot4				
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Power @	12.82648	6	16	PASS
				slot1				
GSM900	60	902	14;14;14;14	Power @	12.8385	6	16	PASS
				slot2				
GSM900	60	902	14;14;14;14	Power @	12.8443	6	16	PASS
				slot3				
GSM900	60	902	14;14;14;14	Power @	12.8269	6	16	PASS
				slot4				
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Power @	10.98511	4	14	PASS
				slot1				
GSM900	60	902	15;15;15;15	Power @	10.96872	4	14	PASS
				slot2				
GSM900	60	902	15;15;15;15	Power @	10.98819	4	14	PASS
				slot3				
GSM900	60	902	15;15;15;15	Power @	10.97699	4	14	PASS
				slot4				
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Power @	8.581238	2	12	PASS
				slot1				
GSM900	60	902	16;16;16;16	Power @	8.564972	2	12	PASS
				slot2				
GSM900	60	902	16;16;16;16	Power @	8.545502	2	12	PASS
				slot3				
GSM900	60	902	16;16;16;16	Power @	8.551117	2	12	PASS
				slot4				
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS

GSM900	60	902	17;17;17;17	Power slot1	@	6.726196	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot2	@	6.687592	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot3	@	6.688385	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot4	@	6.687439	0	10	PASS
GSM900	124	914.8	3;3;3;3	PvT	-	-	-	-	PASS
GSM900	124	914.8	3;3;3;3	Power slot1	@	30.67697	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power slot2	@	30.63882	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power slot3	@	30.63446	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power slot4	@	30.64615	25	32	PASS
GSM900	124	914.8	4;4;4;4	PvT	-	-	-	-	PASS
GSM900	124	914.8	4;4;4;4	Power slot1	@	30.66385	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power slot2	@	30.65906	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power slot3	@	30.65045	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power slot4	@	30.64301	24	33	PASS
GSM900	124	914.8	5;5;5;5	PvT	-	-	-	-	PASS
GSM900	124	914.8	5;5;5;5	Power slot1	@	30.60834	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power slot2	@	30.59061	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power slot3	@	30.59235	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power slot4	@	30.58063	24	32	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power slot1	@	28.66245	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power slot2	@	28.66354	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power slot3	@	28.65347	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power slot4	@	28.63672	24	30	PASS

GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	26.68527	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot2	26.68179	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot3	26.67432	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	26.66766	22	28	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	24.60889	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot2	24.59683	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot3	24.60751	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	24.61273	20	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	22.64871	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	22.64984	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	22.65735	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	22.64899	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	20.6076	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	20.60971	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	20.60556	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	20.6113	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	18.64597	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	18.63437	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	18.62561	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	18.63437	14	20	PASS

				slot4				
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	16.59845	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	16.59265	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	16.59381	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	16.60663	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot1	14.66101	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot2	14.65344	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	14.67154	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	14.65732	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	12.67941	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	12.68817	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	12.67651	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	12.68253	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	10.80078	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	10.78235	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	10.79019	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot4	10.77283	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	8.283691	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	8.263794	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot3	8.258667	2	12	PASS

GSM900	124	914.8	16;16;16;16	Power slot4	@	8.261505	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT		-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power slot1	@	6.326721	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot2	@	6.332275	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot3	@	6.353912	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power slot4	@	6.333862	0	10	PASS
DCS1800	512	1710.2	3;3;3;3	PvT		-	-	-	PASS
DCS1800	512	1710.2	3;3;3;3	Power slot1	@	26.68945	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power slot2	@	26.67749	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power slot3	@	26.67807	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power slot4	@	26.67267	22	29	PASS
DCS1800	512	1710.2	4;4;4;4	PvT		-	-	-	PASS
DCS1800	512	1710.2	4;4;4;4	Power slot1	@	26.69666	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power slot2	@	26.69427	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power slot3	@	26.6882	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power slot4	@	26.70328	21	30	PASS
DCS1800	512	1710.2	5;5;5;5	PvT		-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot1	@	26.70798	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot2	@	26.69632	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot3	@	26.70953	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power slot4	@	26.69995	21	29	PASS
DCS1800	512	1710.2	6;6;6;6	PvT		-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot1	@	24.69931	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power slot2	@	24.69876	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power	@	24.68457	21	27	PASS

				slot3				
DCS1800	512	1710.2	6;6;6;6	Power @	24.69086	21	27	PASS
				slot4				
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @	22.68811	19	25	PASS
				slot1				
DCS1800	512	1710.2	7;7;7;7	Power @	22.69986	19	25	PASS
				slot2				
DCS1800	512	1710.2	7;7;7;7	Power @	22.70087	19	25	PASS
				slot3				
DCS1800	512	1710.2	7;7;7;7	Power @	22.68619	19	25	PASS
				slot4				
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @	20.71869	17	23	PASS
				slot1				
DCS1800	512	1710.2	8;8;8;8	Power @	20.72543	17	23	PASS
				slot2				
DCS1800	512	1710.2	8;8;8;8	Power @	20.73282	17	23	PASS
				slot3				
DCS1800	512	1710.2	8;8;8;8	Power @	20.73361	17	23	PASS
				slot4				
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @	18.71063	15	21	PASS
				slot1				
DCS1800	512	1710.2	9;9;9;9	Power @	18.7735	15	21	PASS
				slot2				
DCS1800	512	1710.2	9;9;9;9	Power @	18.77399	15	21	PASS
				slot3				
DCS1800	512	1710.2	9;9;9;9	Power @	18.79861	15	21	PASS
				slot4				
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @	16.76978	13	19	PASS
				slot1				
DCS1800	512	1710.2	10;10;10;10	Power @	16.77866	13	19	PASS
				slot2				
DCS1800	512	1710.2	10;10;10;10	Power @	16.77252	13	19	PASS
				slot3				
DCS1800	512	1710.2	10;10;10;10	Power @	16.77359	13	19	PASS
				slot4				
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @	14.82059	11	17	PASS
				slot1				
DCS1800	512	1710.2	11;11;11;11	Power @	14.82983	11	17	PASS
				slot2				

DCS1800	512	1710.2	11;11;11;11	Power slot3	@	14.83383	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power slot4	@	14.84219	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT		-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot1	@	12.87256	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot2	@	12.90686	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot3	@	12.88873	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot4	@	12.89545	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT		-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot1	@	11.01489	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot2	@	11.00772	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot3	@	11.01086	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot4	@	11.00909	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT		-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot1	@	9.144135	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot2	@	9.149872	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot3	@	9.156647	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot4	@	9.147217	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT		-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot1	@	7.154236	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot2	@	7.178192	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot3	@	7.169098	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot4	@	7.179321	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT		-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot1	@	5.632568	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power	@	5.632965	0	8	PASS

				slot2				
DCS1800	512	1710.2	16;16;16;16	Power @ slot3	5.652435	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot4	5.658081	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT	-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot1	3.318634	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot2	3.319794	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot3	3.295563	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot4	3.302399	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT	-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot1	1.560913	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot2	1.573395	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot3	1.56427	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot4	1.548737	-5	5	PASS
DCS1800	700	1747.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot1	26.7655	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot2	26.75394	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot3	26.76349	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot4	26.75659	22	29	PASS
DCS1800	700	1747.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot1	26.75208	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot2	26.74313	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot3	26.72794	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot4	26.73477	21	30	PASS
DCS1800	700	1747.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot1	26.76755	21	29	PASS

DCS1800	700	1747.8	5;5;5;5	Power slot2	@	26.7608	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot3	@	26.73868	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot4	@	26.7507	21	29	PASS
DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot1	@	24.77609	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot2	@	24.78845	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot3	@	24.78171	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot4	@	24.76859	21	27	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot1	@	22.77805	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot2	@	22.78253	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot3	@	22.77795	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot4	@	22.78091	19	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot1	@	20.74661	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot2	@	20.77759	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot3	@	20.77328	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot4	@	20.78201	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot1	@	18.8063	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot2	@	18.87607	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot3	@	18.87726	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot4	@	18.87225	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power	@	16.81894	13	19	PASS

				slot1				
DCS1800	700	1747.8	10;10;10;10	Power @	16.85379	13	19	PASS
				slot2				
DCS1800	700	1747.8	10;10;10;10	Power @	16.83344	13	19	PASS
				slot3				
DCS1800	700	1747.8	10;10;10;10	Power @	16.84552	13	19	PASS
				slot4				
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @	14.85086	11	17	PASS
				slot1				
DCS1800	700	1747.8	11;11;11;11	Power @	14.86847	11	17	PASS
				slot2				
DCS1800	700	1747.8	11;11;11;11	Power @	14.87253	11	17	PASS
				slot3				
DCS1800	700	1747.8	11;11;11;11	Power @	14.87595	11	17	PASS
				slot4				
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @	13.01953	8	16	PASS
				slot1				
DCS1800	700	1747.8	12;12;12;12	Power @	13.03189	8	16	PASS
				slot2				
DCS1800	700	1747.8	12;12;12;12	Power @	13.02463	8	16	PASS
				slot3				
DCS1800	700	1747.8	12;12;12;12	Power @	13.04672	8	16	PASS
				slot4				
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @	10.99786	6	14	PASS
				slot1				
DCS1800	700	1747.8	13;13;13;13	Power @	11.00879	6	14	PASS
				slot2				
DCS1800	700	1747.8	13;13;13;13	Power @	11.01385	6	14	PASS
				slot3				
DCS1800	700	1747.8	13;13;13;13	Power @	11.01108	6	14	PASS
				slot4				
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @	9.058197	4	12	PASS
				slot1				
DCS1800	700	1747.8	14;14;14;14	Power @	9.075134	4	12	PASS
				slot2				
DCS1800	700	1747.8	14;14;14;14	Power @	9.069	4	12	PASS
				slot3				
DCS1800	700	1747.8	14;14;14;14	Power @	9.062897	4	12	PASS
				slot4				
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS

DCS1800	700	1747.8	15;15;15;15	Power slot1	@	7.074554	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot2	@	7.096863	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot3	@	7.091614	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot4	@	7.076324	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT		-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot1	@	5.528931	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot2	@	5.523346	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot3	@	5.515198	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot4	@	5.538208	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT		-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot1	@	3.01593	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot2	@	3.033356	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot3	@	3.016296	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power slot4	@	3.023285	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT		-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot1	@	1.164246	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot2	@	1.19809	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot3	@	1.184875	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power slot4	@	1.179199	-5	5	PASS
DCS1800	885	1784.8	3;3;3;3	PvT		-	-	-	PASS
DCS1800	885	1784.8	3;3;3;3	Power slot1	@	26.86011	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power slot2	@	26.83884	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power slot3	@	26.85382	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power slot4	@	26.84995	22	29	PASS


DCS1800	885	1784.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot1	26.84155	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot2	26.84933	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot3	26.83276	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot4	26.8295	21	30	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	26.77786	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	26.77991	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	26.77917	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	26.7644	21	29	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	24.79364	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	24.78491	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	24.77972	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	24.77737	21	27	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	22.79266	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	22.79846	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	22.80283	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	22.79233	19	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	20.77197	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	20.77524	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	20.78592	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	20.76862	17	23	PASS

				slot4				
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	18.7616	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	18.83011	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	18.83011	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	18.8407	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	16.80746	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	16.82538	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	16.83441	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	16.81866	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	14.78748	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	14.79269	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	14.7912	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	14.78439	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	12.92719	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	12.92307	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	12.92212	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	12.9314	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	10.8367	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	10.84329	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	10.85175	6	14	PASS


DCS1800	885	1784.8	13;13;13;13	Power slot4	@	10.84476	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT		-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot1	@	8.81781	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot2	@	8.820923	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot3	@	8.827362	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power slot4	@	8.829987	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT		-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot1	@	6.696716	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot2	@	6.701202	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot3	@	6.698181	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power slot4	@	6.698792	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT		-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot1	@	5.028931	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot2	@	5.044281	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot3	@	5.030396	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power slot4	@	5.05365	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT		-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot1	@	2.32959	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot2	@	2.338654	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot3	@	2.331696	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power slot4	@	2.339569	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT		-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot1	@	0.2185059	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power slot2	@	0.2139587	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power	@	0.2230835	-5	5	PASS

				slot3				
DCS1800	885	1784.8	18;18;18;18	Power @ slot4	0.2307129	-5	5	PASS


GSM900 Channel=124 Gamma=17;17;17;17.png

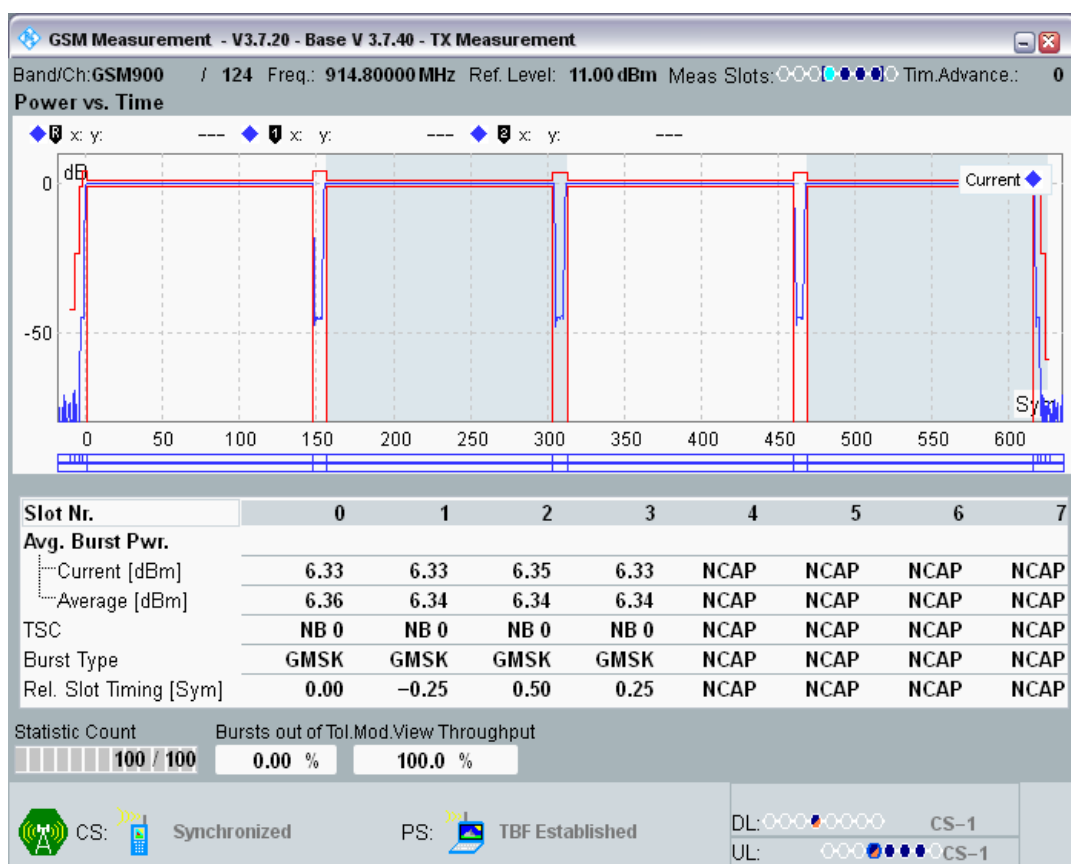

GSM900 Channel=124 Gamma=3;3;3;3.png

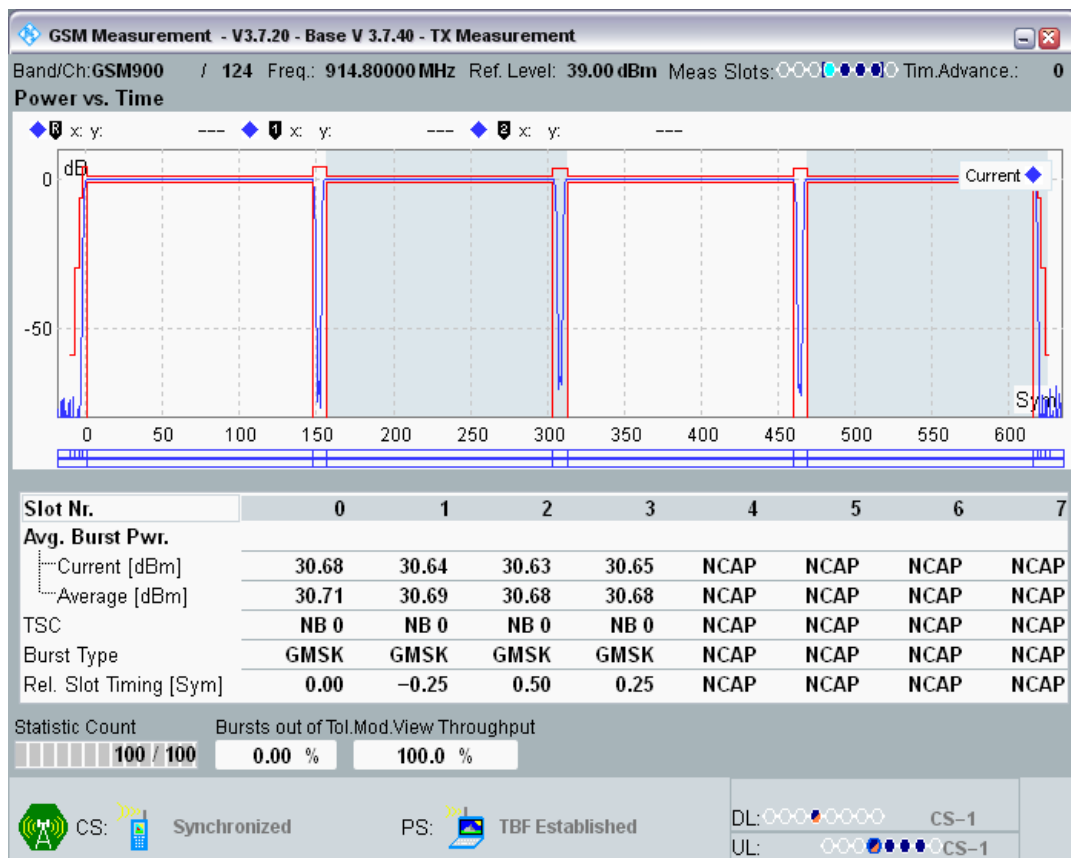


GSM900 Channel=60 Gamma=17;17;17;17.png

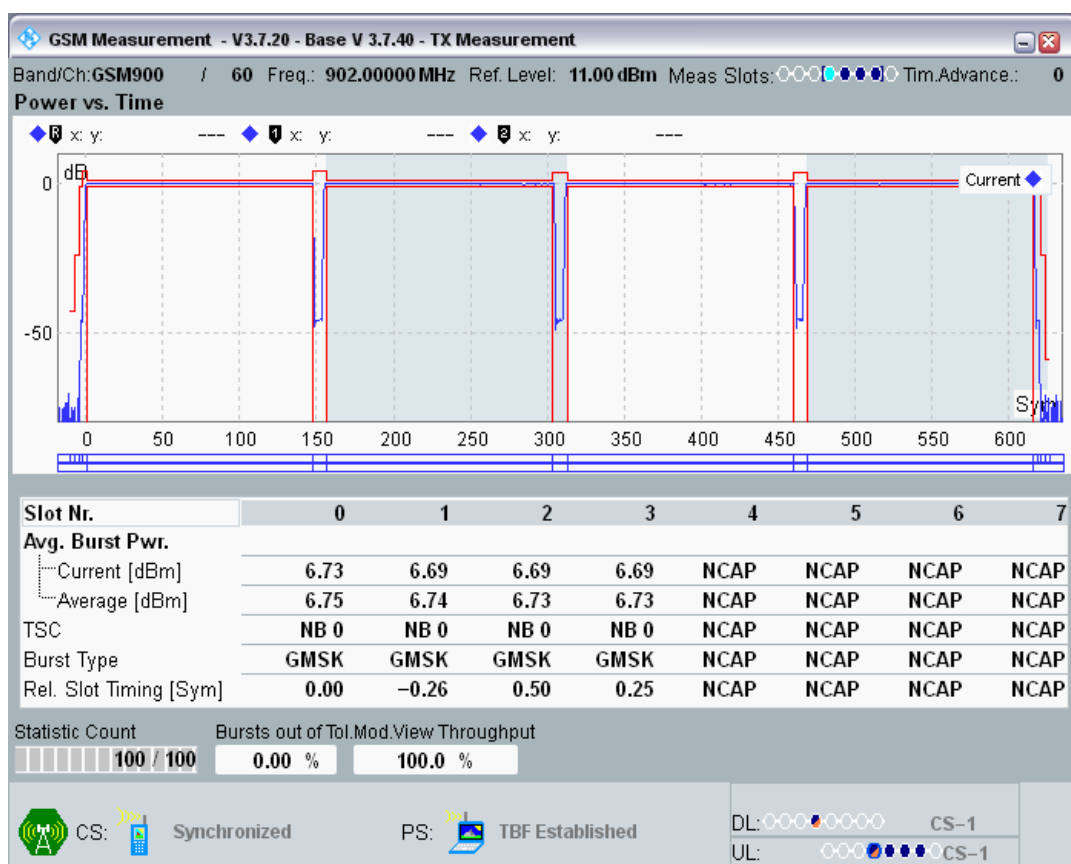


GSM900 Channel=60 Gamma=3;3;3;3.png




GSM900 Channel=975 Gamma=17;17;17;17.png

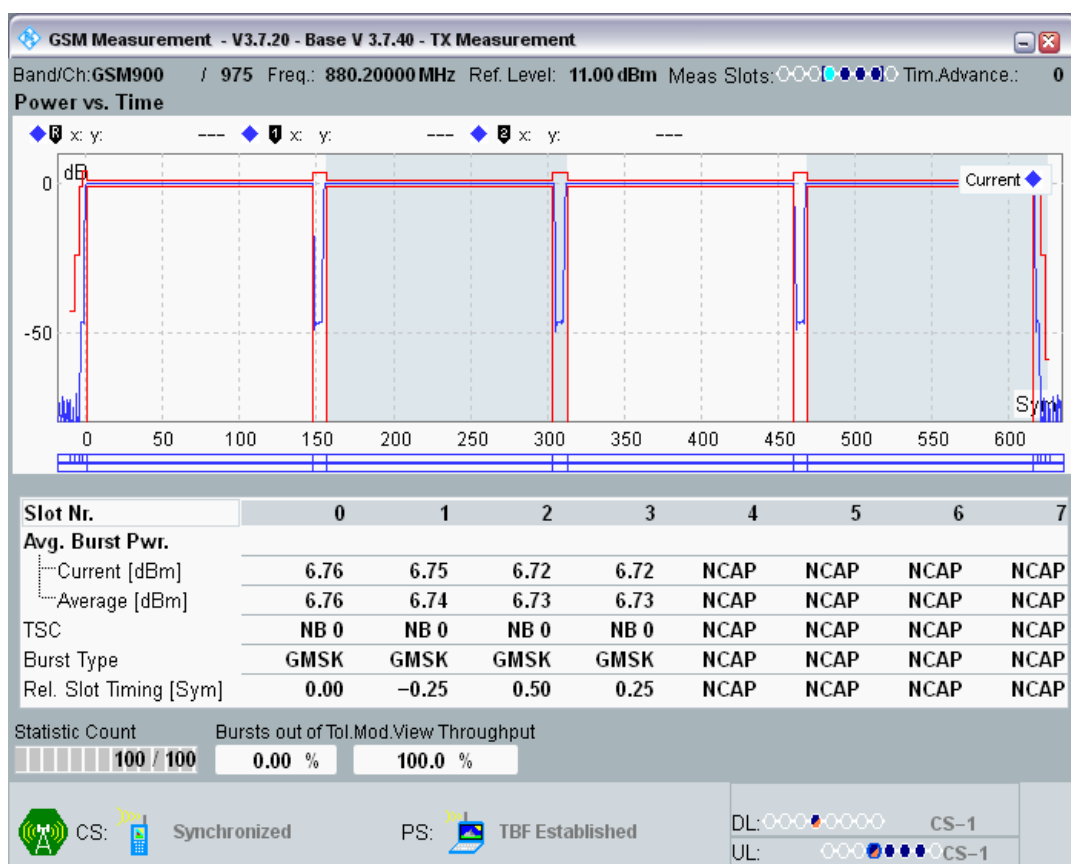


GSM900 Channel=975 Gamma=3;3;3;3.png

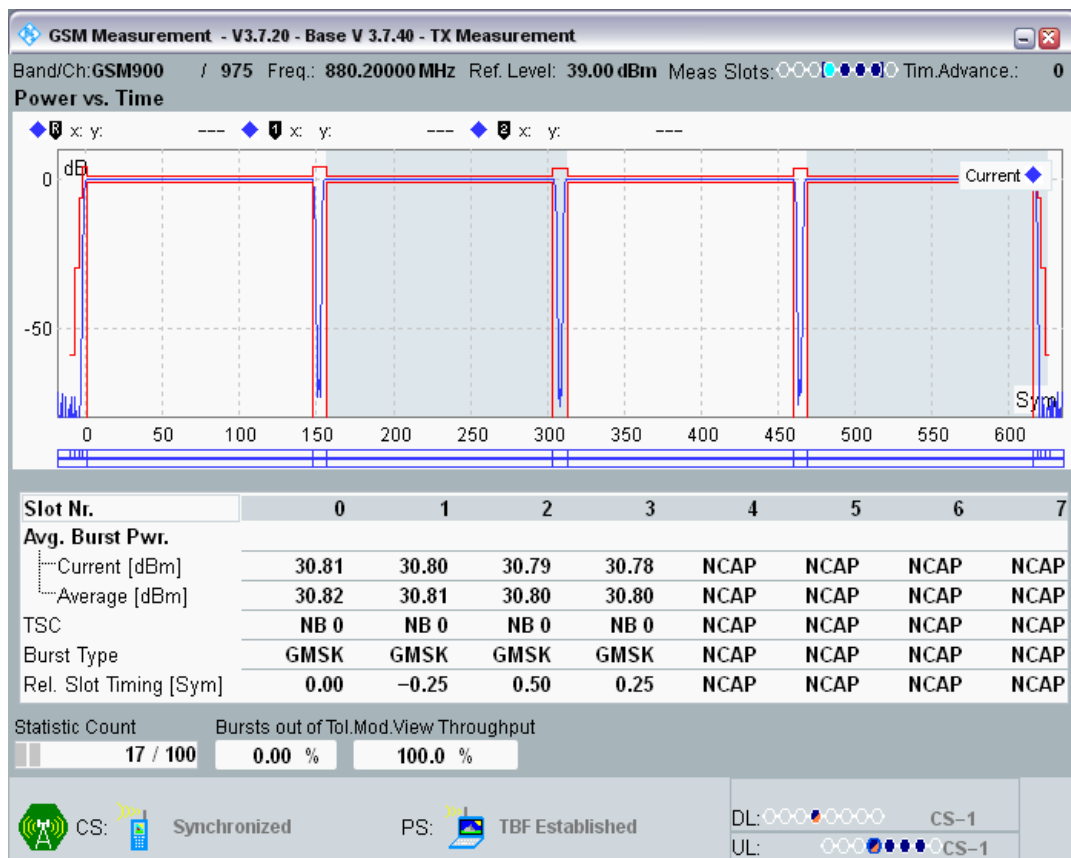


DCS1800 Channel=512 Gamma=18;18;18.png

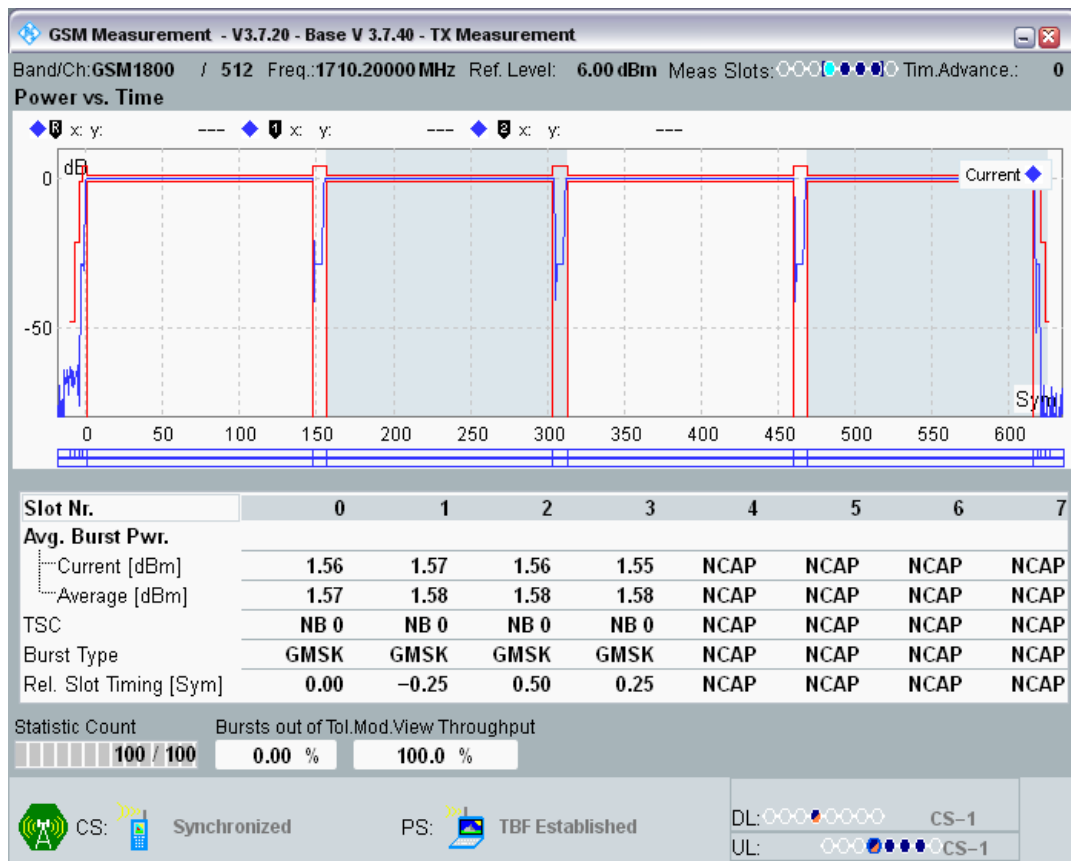

DCS1800 Channel=512 Gamma=3;3;3.png

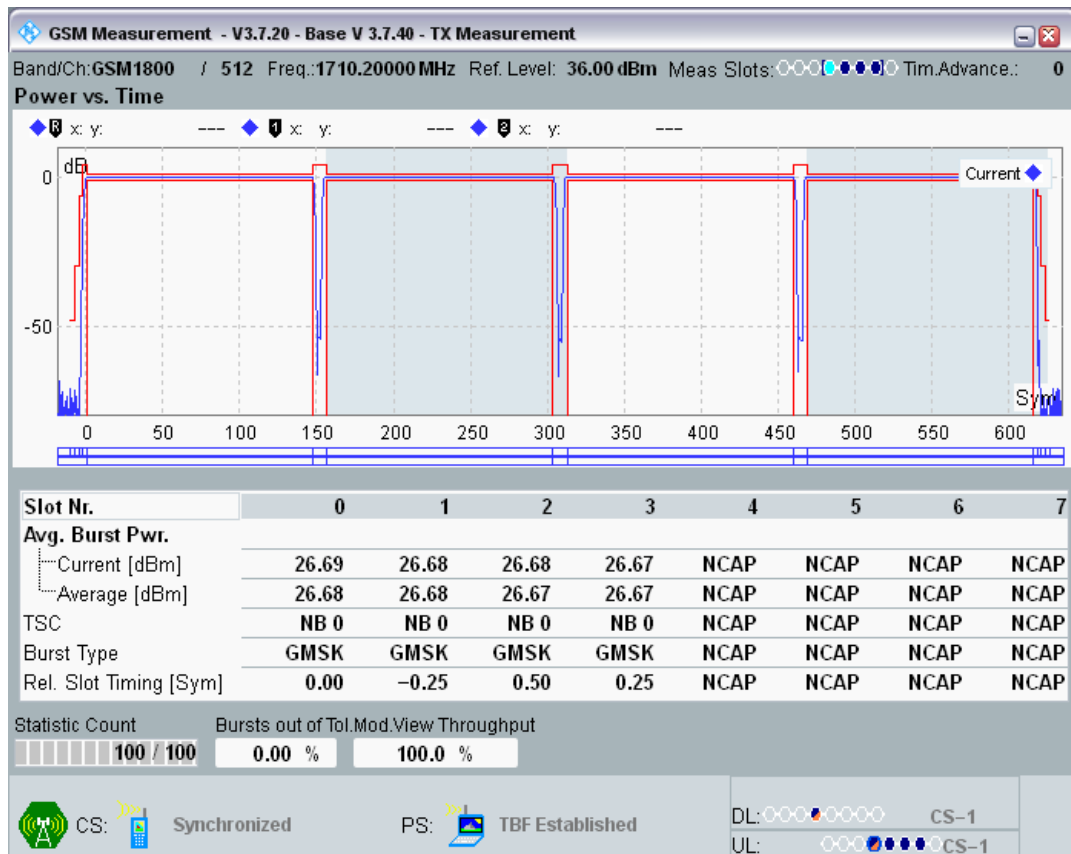


DCS1800 Channel=700 Gamma=18;18;18.png

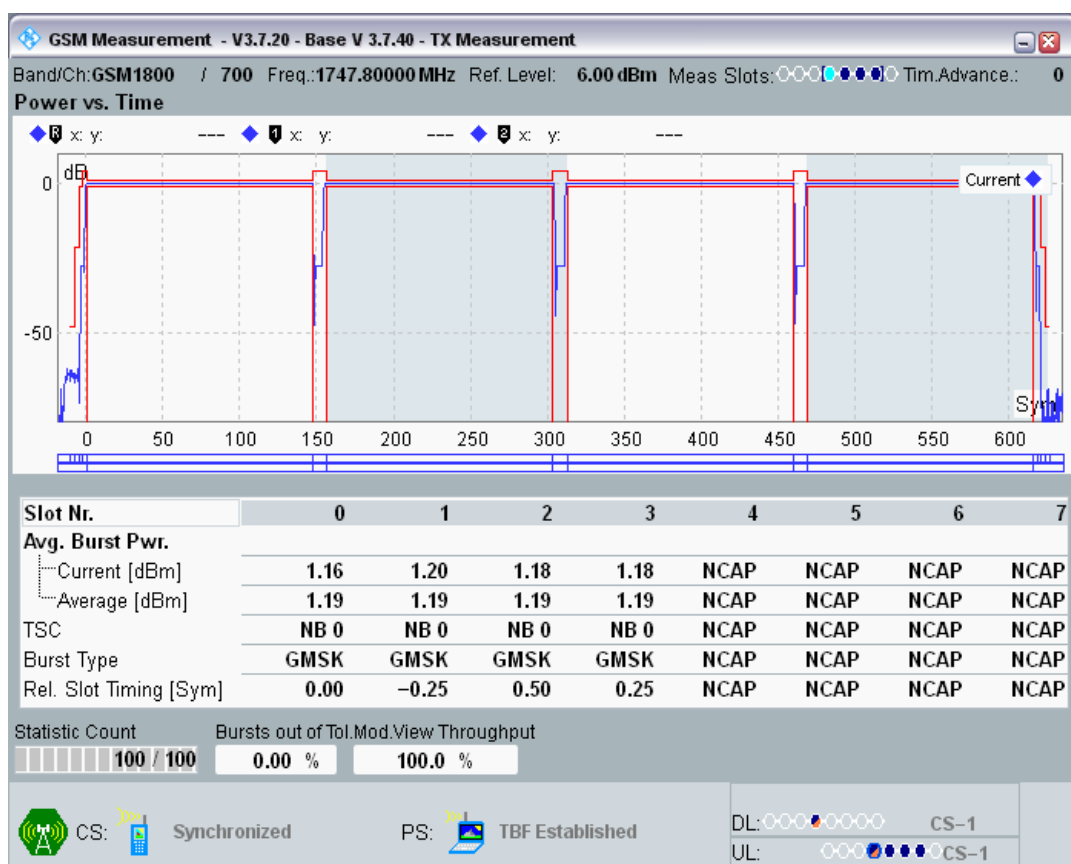

DCS1800 Channel=700 Gamma=3;3;3.png



DCS1800 Channel=885 Gamma=18;18;18.png

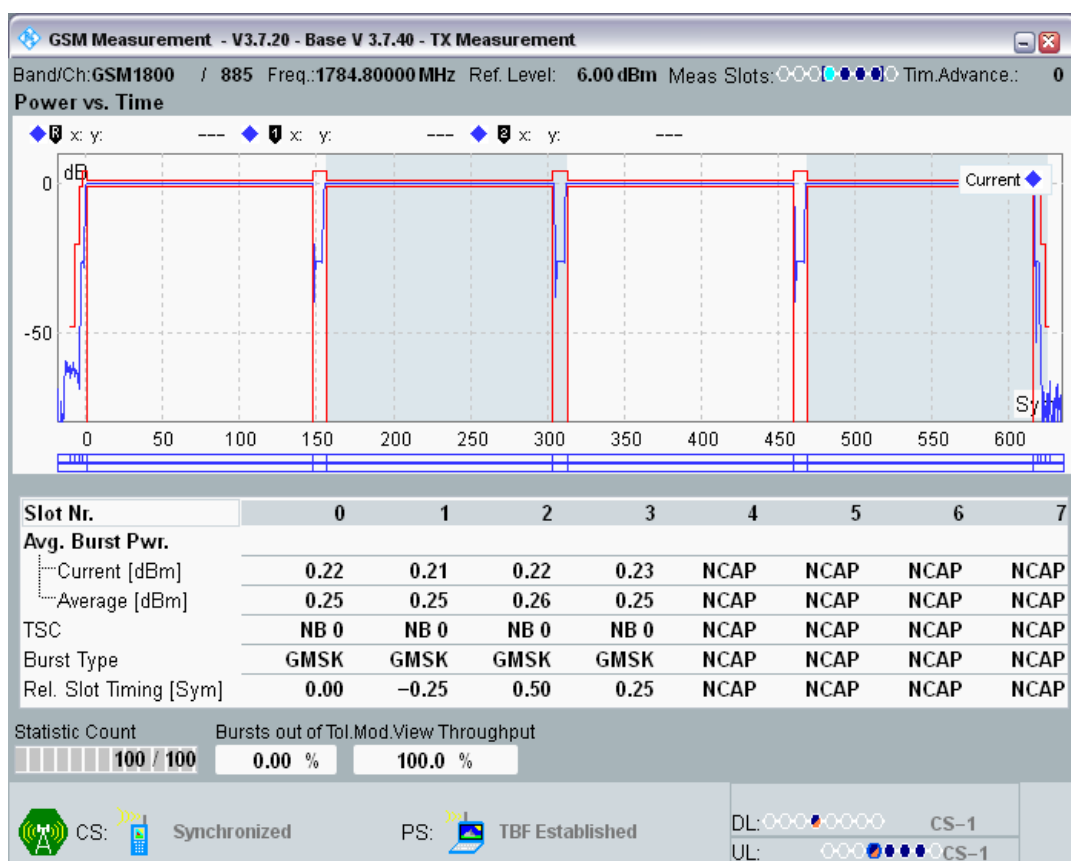

DCS1800 Channel=885 Gamma=3;3;3.png



Clause 4.2.11 Modulation Spectrum in GPRS multi slot configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-81.26	-60	-58.32	-51	PASS
GSM900	975	880.2	3;3;3;3	-1600 KHz	-80.99	-60	-58.05	-51	PASS
GSM900	975	880.2	3;3;3;3	-1400 KHz	-80.13	-60	-57.19	-51	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-79.73	-60	-56.79	-51	PASS
GSM900	975	880.2	3;3;3;3	-1000 KHz	-77.27	-60	-54.33	-51	PASS
GSM900	975	880.2	3;3;3;3	-800 KHz	-77.34	-60	-54.40	-51	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-75.57	-60	-52.62	-51	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-70.10	-60	-47.16	-36	PASS
GSM900	975	880.2	3;3;3;3	-250 KHz	-40.95	-33	-18.00	-36	PASS
GSM900	975	880.2	3;3;3;3	-200 KHz	-36.66	-30	-13.72	-36	PASS
GSM900	975	880.2	3;3;3;3	-100 KHz	-8.87	0.5	14.07	-36	PASS
GSM900	975	880.2	3;3;3;3	100 KHz	-8.56	0.5	14.38	-36	PASS
GSM900	975	880.2	3;3;3;3	200 KHz	-36.69	-30	-13.75	-36	PASS
GSM900	975	880.2	3;3;3;3	250 KHz	-40.88	-33	-17.94	-36	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-70.39	-60	-47.44	-36	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-75.55	-60	-52.61	-51	PASS
GSM900	975	880.2	3;3;3;3	800 KHz	-77.32	-60	-54.38	-51	PASS
GSM900	975	880.2	3;3;3;3	1000 KHz	-77.94	-60	-55.00	-51	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-79.63	-60	-56.69	-51	PASS
GSM900	975	880.2	3;3;3;3	1400 KHz	-79.79	-60	-56.85	-51	PASS
GSM900	975	880.2	3;3;3;3	1600 KHz	-80.99	-60	-58.05	-51	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-81.09	-60	-58.14	-51	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-80.68	-60	-57.98	-51	PASS
GSM900	60	902	3;3;3;3	-1600 KHz	-80.94	-60	-58.25	-51	PASS
GSM900	60	902	3;3;3;3	-1400 KHz	-79.74	-60	-57.05	-51	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-79.50	-60	-56.80	-51	PASS
GSM900	60	902	3;3;3;3	-1000 KHz	-77.12	-60	-54.42	-51	PASS
GSM900	60	902	3;3;3;3	-800 KHz	-77.50	-60	-54.80	-51	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-75.47	-60	-52.77	-51	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-70.11	-60	-47.41	-36	PASS
GSM900	60	902	3;3;3;3	-250 KHz	-40.67	-33	-17.97	-36	PASS
GSM900	60	902	3;3;3;3	-200 KHz	-36.44	-30	-13.75	-36	PASS
GSM900	60	902	3;3;3;3	-100 KHz	-8.37	0.5	14.33	-36	PASS
GSM900	60	902	3;3;3;3	100 KHz	-8.45	0.5	14.24	-36	PASS
GSM900	60	902	3;3;3;3	200 KHz	-36.30	-30	-13.60	-36	PASS
GSM900	60	902	3;3;3;3	250 KHz	-40.78	-33	-18.08	-36	PASS
GSM900	60	902	3;3;3;3	400 KHz	-70.38	-60	-47.68	-36	PASS
GSM900	60	902	3;3;3;3	600 KHz	-75.71	-60	-53.02	-51	PASS
GSM900	60	902	3;3;3;3	800 KHz	-77.59	-60	-54.90	-51	PASS
GSM900	60	902	3;3;3;3	1000 KHz	-77.80	-60	-55.10	-51	PASS

GSM900	60	902	3;3;3;3	1200 KHz	-79.29	-60	-56.59	-51	PASS
GSM900	60	902	3;3;3;3	1400 KHz	-79.55	-60	-56.85	-51	PASS
GSM900	60	902	3;3;3;3	1600 KHz	-80.83	-60	-58.14	-51	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-81.14	-60	-58.44	-51	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-80.21	-60	-57.48	-51	PASS
GSM900	124	914.8	3;3;3;3	-1600 KHz	-80.82	-60	-58.09	-51	PASS
GSM900	124	914.8	3;3;3;3	-1400 KHz	-80.12	-60	-57.38	-51	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-79.93	-60	-57.19	-51	PASS
GSM900	124	914.8	3;3;3;3	-1000 KHz	-77.79	-60	-55.06	-51	PASS
GSM900	124	914.8	3;3;3;3	-800 KHz	-77.91	-60	-55.18	-51	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-76.21	-60	-53.48	-51	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-70.43	-60	-47.70	-36	PASS
GSM900	124	914.8	3;3;3;3	-250 KHz	-40.81	-33	-18.08	-36	PASS
GSM900	124	914.8	3;3;3;3	-200 KHz	-36.72	-30	-13.98	-36	PASS
GSM900	124	914.8	3;3;3;3	-100 KHz	-8.49	0.5	14.24	-36	PASS
GSM900	124	914.8	3;3;3;3	100 KHz	-8.82	0.5	13.91	-36	PASS
GSM900	124	914.8	3;3;3;3	200 KHz	-36.55	-30	-13.82	-36	PASS
GSM900	124	914.8	3;3;3;3	250 KHz	-40.90	-33	-18.17	-36	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-70.59	-60	-47.86	-36	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-76.32	-60	-53.58	-51	PASS
GSM900	124	914.8	3;3;3;3	800 KHz	-78.03	-60	-55.30	-51	PASS
GSM900	124	914.8	3;3;3;3	1000 KHz	-78.37	-60	-55.64	-51	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-79.61	-60	-56.87	-51	PASS
GSM900	124	914.8	3;3;3;3	1400 KHz	-79.72	-60	-56.99	-51	PASS
GSM900	124	914.8	3;3;3;3	1600 KHz	-81.32	-60	-58.58	-51	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-80.43	-60	-57.69	-51	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-79.15	-60	-60.22	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1600 KHz	-79.33	-60	-60.40	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1400 KHz	-78.48	-60	-59.56	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-77.95	-60	-59.03	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1000 KHz	-75.70	-60	-56.78	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-800 KHz	-75.53	-60	-56.61	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-73.45	-60	-54.53	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-68.16	-60	-49.24	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-250 KHz	-40.87	-33	-21.95	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-200 KHz	-36.48	-30	-17.56	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-100 KHz	-8.78	0.5	10.15	-36	PASS
DCS1800	512	1710.2	3;3;3;3	100 KHz	-8.79	0.5	10.13	-36	PASS
DCS1800	512	1710.2	3;3;3;3	200 KHz	-36.67	-30	-17.75	-36	PASS
DCS1800	512	1710.2	3;3;3;3	250 KHz	-40.80	-33	-21.88	-36	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-67.94	-60	-49.02	-36	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-73.30	-60	-54.38	-56	PASS
DCS1800	512	1710.2	3;3;3;3	800 KHz	-75.70	-60	-56.78	-56	PASS


DCS1800	512	1710.2	3;3;3;3	1000 KHz	-76.37	-60	-57.45	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-77.61	-60	-58.68	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1400 KHz	-78.38	-60	-59.46	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1600 KHz	-79.45	-60	-60.53	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-79.03	-60	-60.11	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-78.60	-60	-59.85	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1600 KHz	-79.51	-60	-60.76	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1400 KHz	-78.59	-60	-59.85	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-77.84	-60	-59.09	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1000 KHz	-76.19	-60	-57.45	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-800 KHz	-75.80	-60	-57.06	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-73.33	-60	-54.58	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-68.23	-60	-49.48	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-250 KHz	-40.95	-33	-22.20	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-200 KHz	-36.51	-30	-17.77	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-100 KHz	-8.56	0.5	10.19	-36	PASS
DCS1800	700	1747.8	3;3;3;3	100 KHz	-8.55	0.5	10.19	-36	PASS
DCS1800	700	1747.8	3;3;3;3	200 KHz	-36.59	-30	-17.84	-36	PASS
DCS1800	700	1747.8	3;3;3;3	250 KHz	-40.70	-33	-21.96	-36	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-68.15	-60	-49.40	-36	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-73.41	-60	-54.66	-56	PASS
DCS1800	700	1747.8	3;3;3;3	800 KHz	-75.55	-60	-56.80	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1000 KHz	-76.13	-60	-57.39	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-77.52	-60	-58.77	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1400 KHz	-78.11	-60	-59.36	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1600 KHz	-79.43	-60	-60.68	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-79.10	-60	-60.36	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-79.28	-60	-60.27	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1600 KHz	-79.51	-60	-60.50	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1400 KHz	-78.45	-60	-59.44	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-78.04	-60	-59.03	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1000 KHz	-76.19	-60	-57.18	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-800 KHz	-75.65	-60	-56.64	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-73.32	-60	-54.32	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-67.99	-60	-48.98	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-250 KHz	-40.94	-33	-21.93	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-200 KHz	-36.72	-30	-17.71	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-100 KHz	-8.76	0.5	10.25	-36	PASS
DCS1800	885	1784.8	3;3;3;3	100 KHz	-9.11	0.5	9.90	-36	PASS
DCS1800	885	1784.8	3;3;3;3	200 KHz	-36.75	-30	-17.75	-36	PASS
DCS1800	885	1784.8	3;3;3;3	250 KHz	-40.84	-33	-21.83	-36	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-68.23	-60	-49.23	-36	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-73.26	-60	-54.25	-56	PASS

DCS1800	885	1784.8	3;3;3;3	800 KHz	-75.68	-60	-56.68	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1000 KHz	-76.15	-60	-57.14	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-77.89	-60	-58.88	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1400 KHz	-78.12	-60	-59.11	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1600 KHz	-79.47	-60	-60.46	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-79.16	-60	-60.15	-56	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

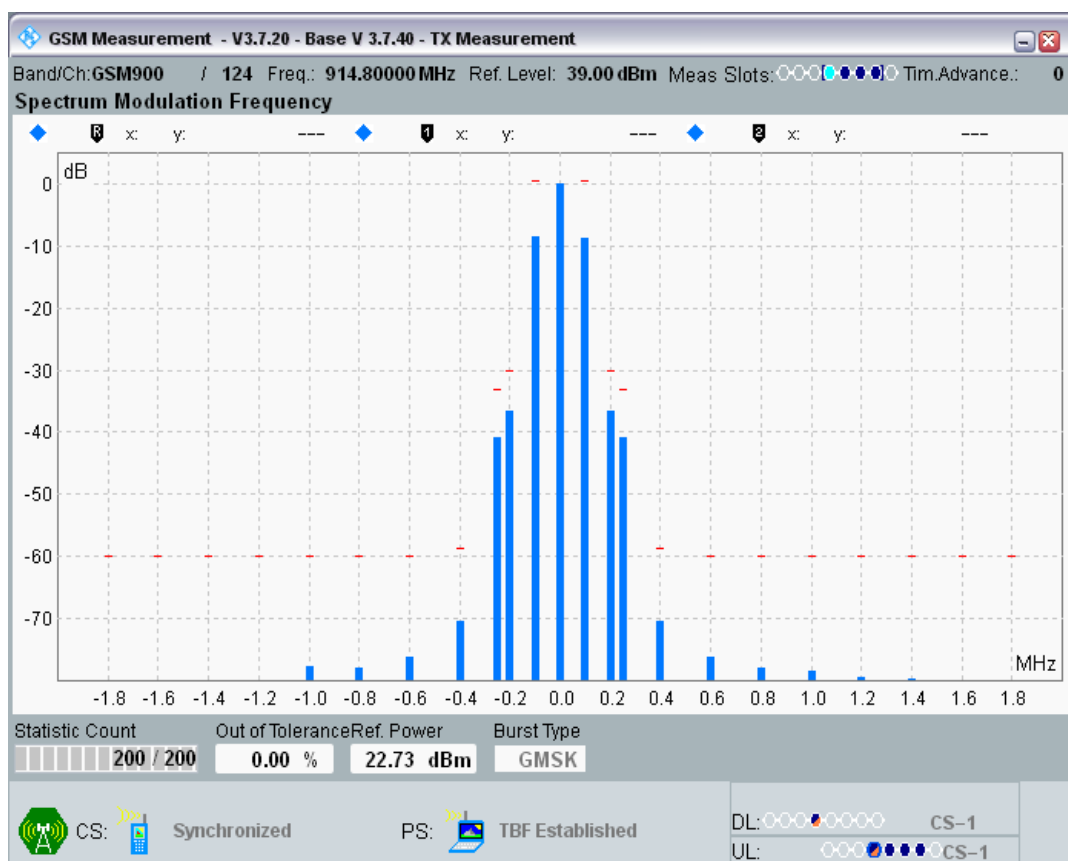


GSM900 Channel=60 Gamma=3;3;3;3.png

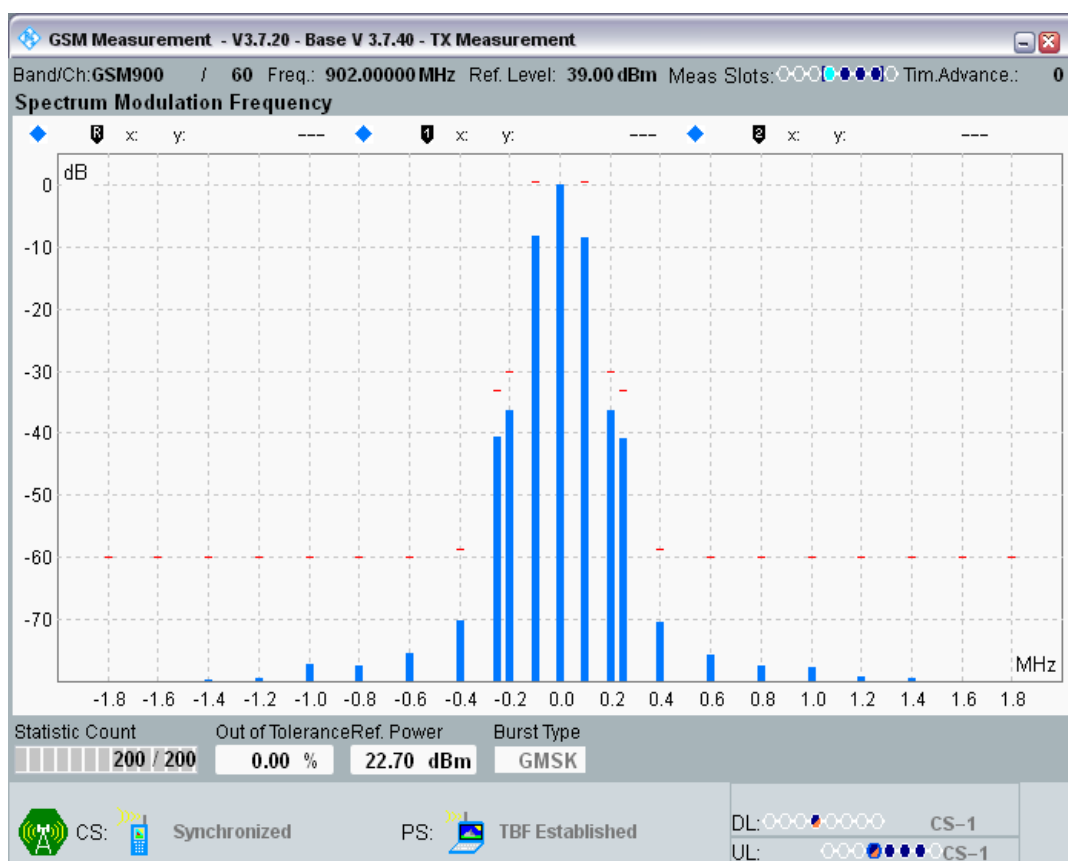


GSM900 Channel=975 Gamma=3;3;3;3.png

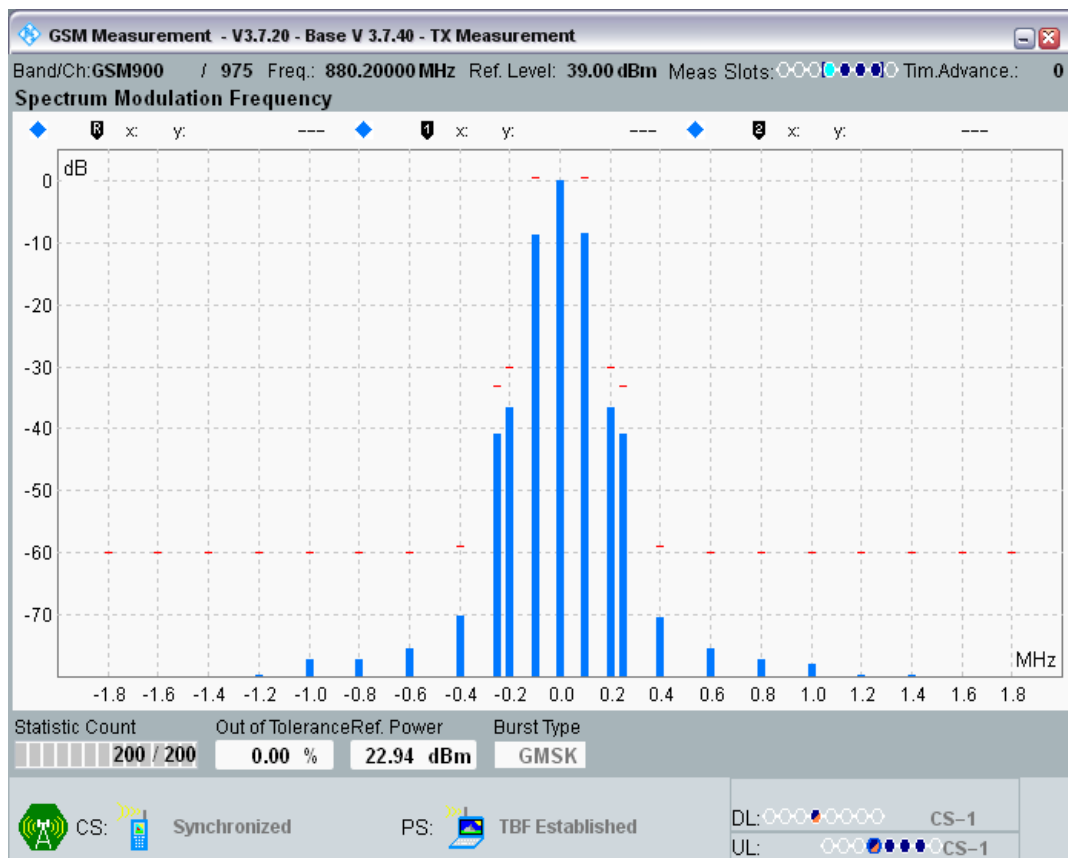


DCS1800 Channel=512 Gamma=3;3;3;3.png

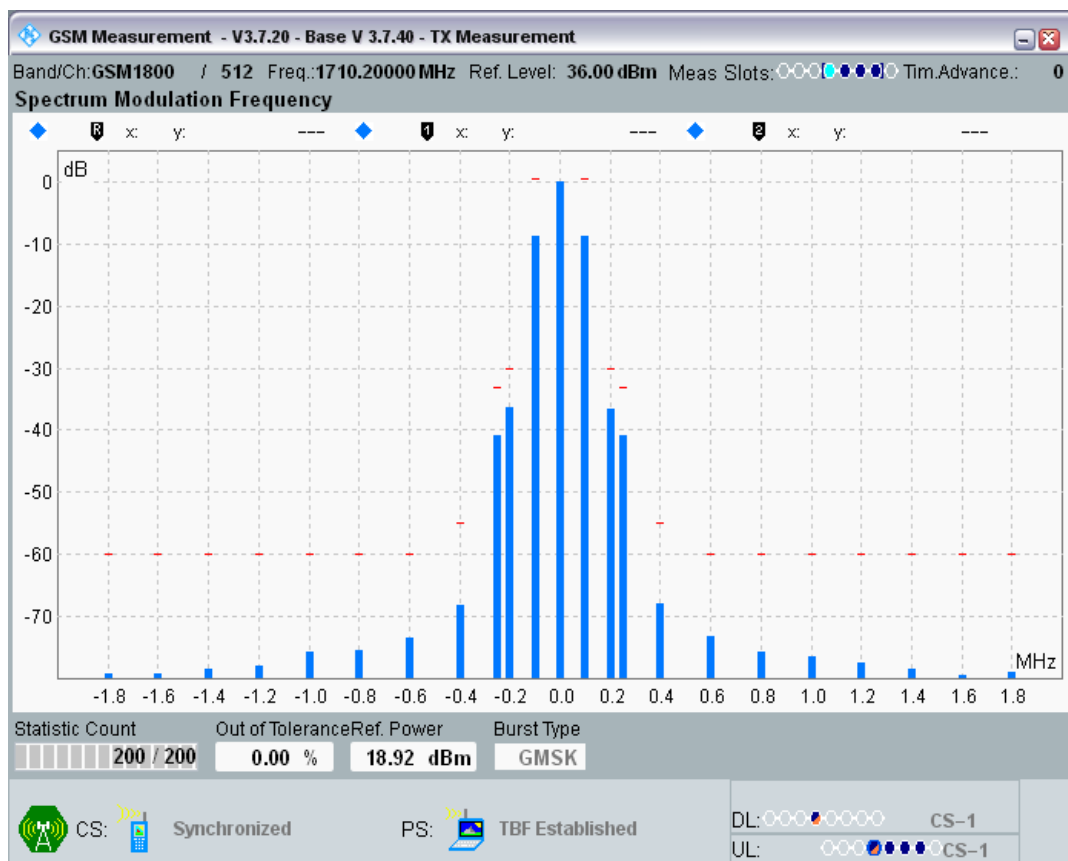

DCS1800 Channel=700 Gamma=3;3;3;3.png

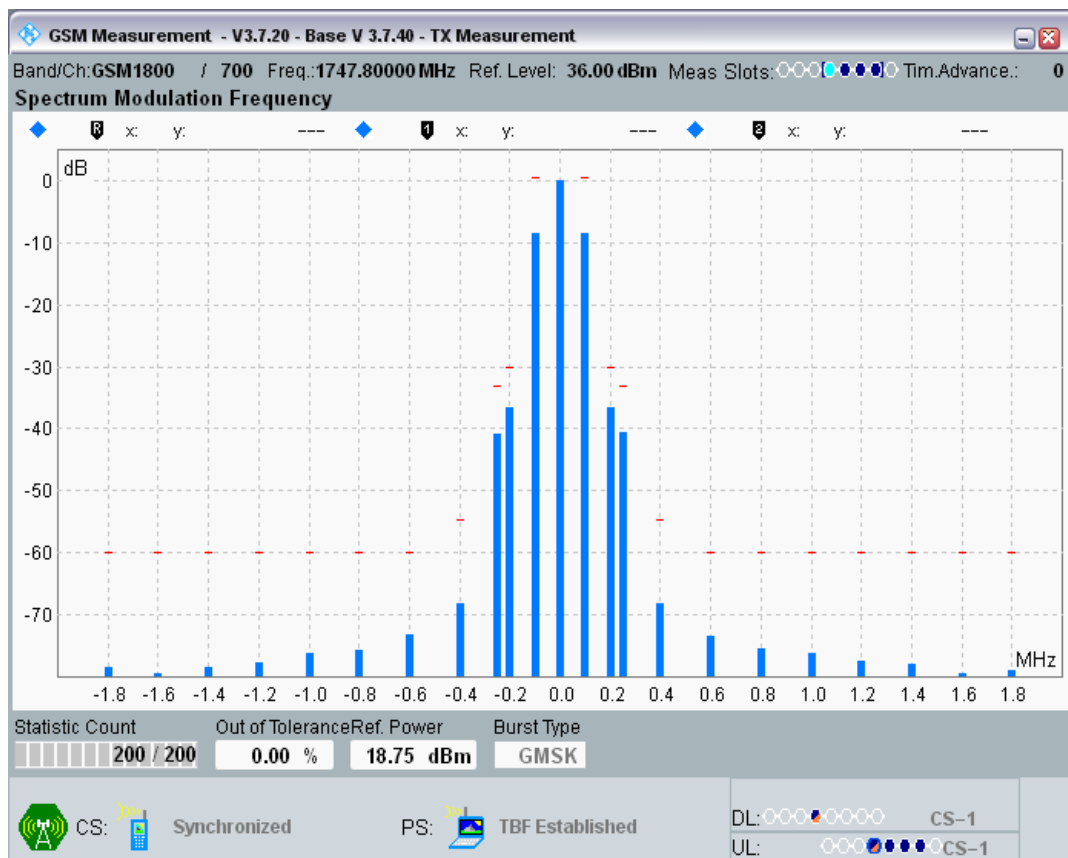

DCS1800 Channel=885 Gamma=3;3;3;3.png

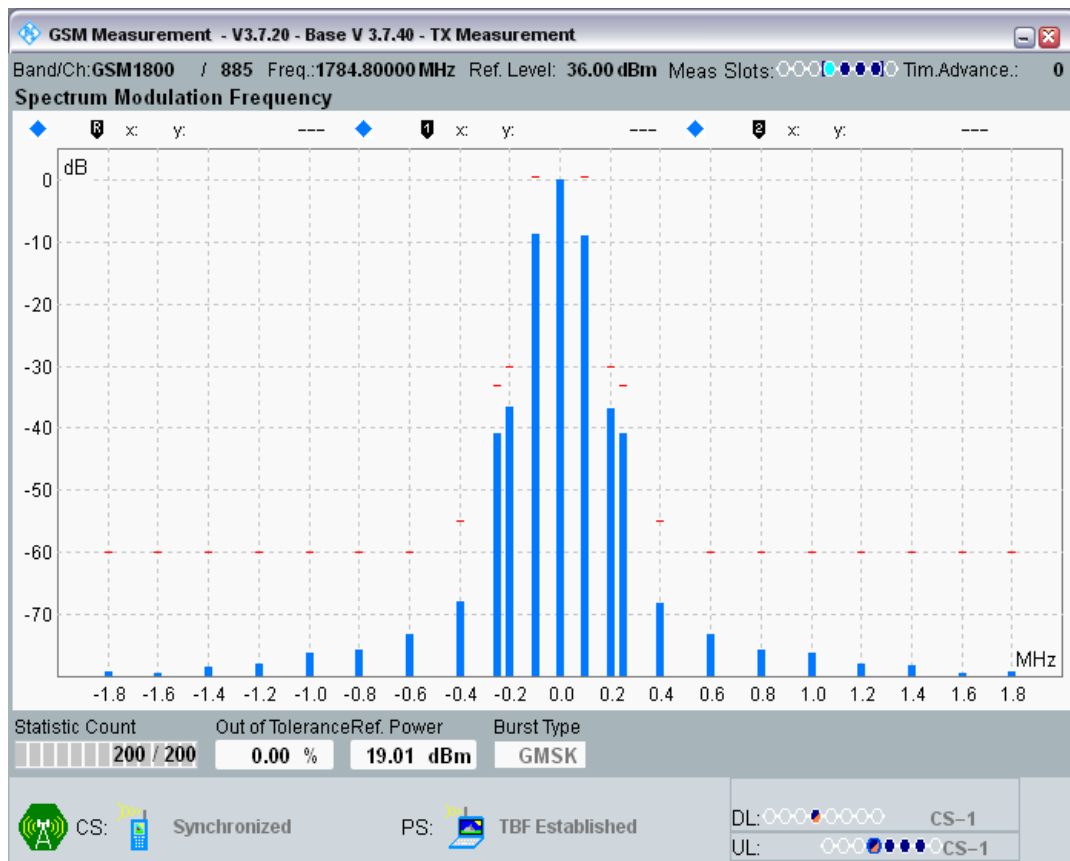


Clause 4.2.11 Switching Spectrum in GPRS multi slot configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-42.16	-24	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-35.89	-21	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-27.53	-21	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-26.79	-19	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-24.08	-19	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-26.19	-21	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-36.42	-21	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-42.23	-24	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-43.68	-24	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-36.81	-21	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-27.69	-21	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-26.60	-19	PASS
GSM900	60	902	3;3;3;3	400 KHz	-24.43	-19	PASS
GSM900	60	902	3;3;3;3	600 KHz	-25.81	-21	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-36.68	-21	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-43.35	-24	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-44.26	-24	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-36.77	-21	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-27.85	-21	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-26.56	-19	PASS

GSM900	124	914.8	3;3;3;3	400 KHz	-24.97	-19	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-26.01	-21	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-37.16	-21	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-44.09	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-48.02	-27	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-42.06	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-37.59	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-30.48	-22	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-24.12	-22	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-38.22	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-38.78	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-48.33	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-47.95	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-41.06	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-36.80	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-31.50	-22	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-24.73	-22	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-37.74	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-38.36	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-47.80	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-47.70	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-42.06	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-36.45	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-31.28	-22	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-25.83	-22	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-36.11	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-37.84	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-48.53	-27	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

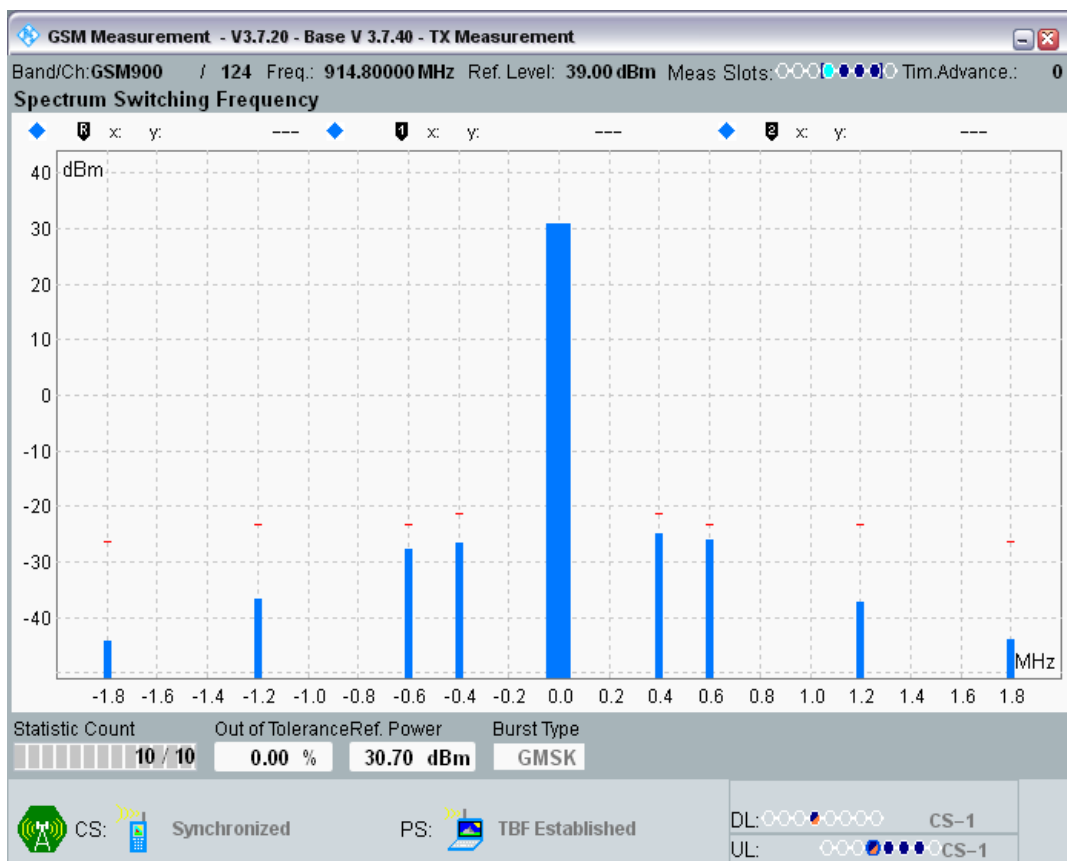


GSM900 Channel=60 Gamma=3;3;3;3.png

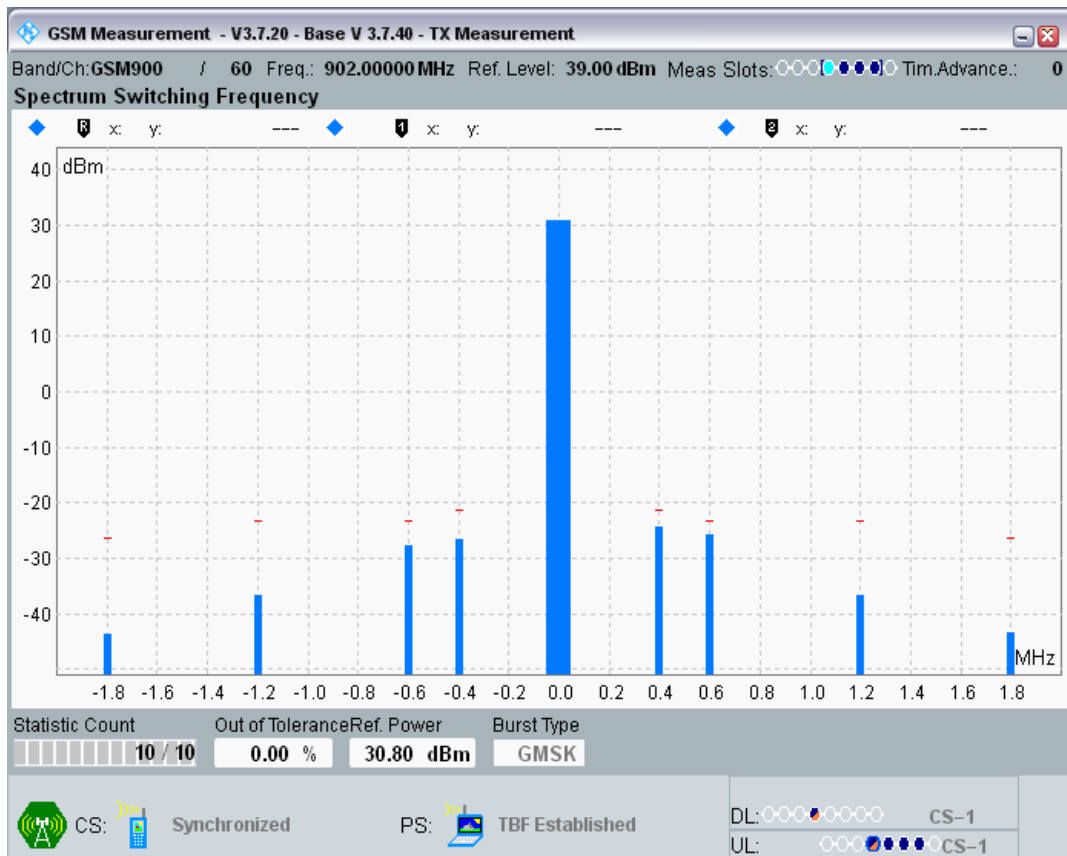


GSM900 Channel=975 Gamma=3;3;3;3.png

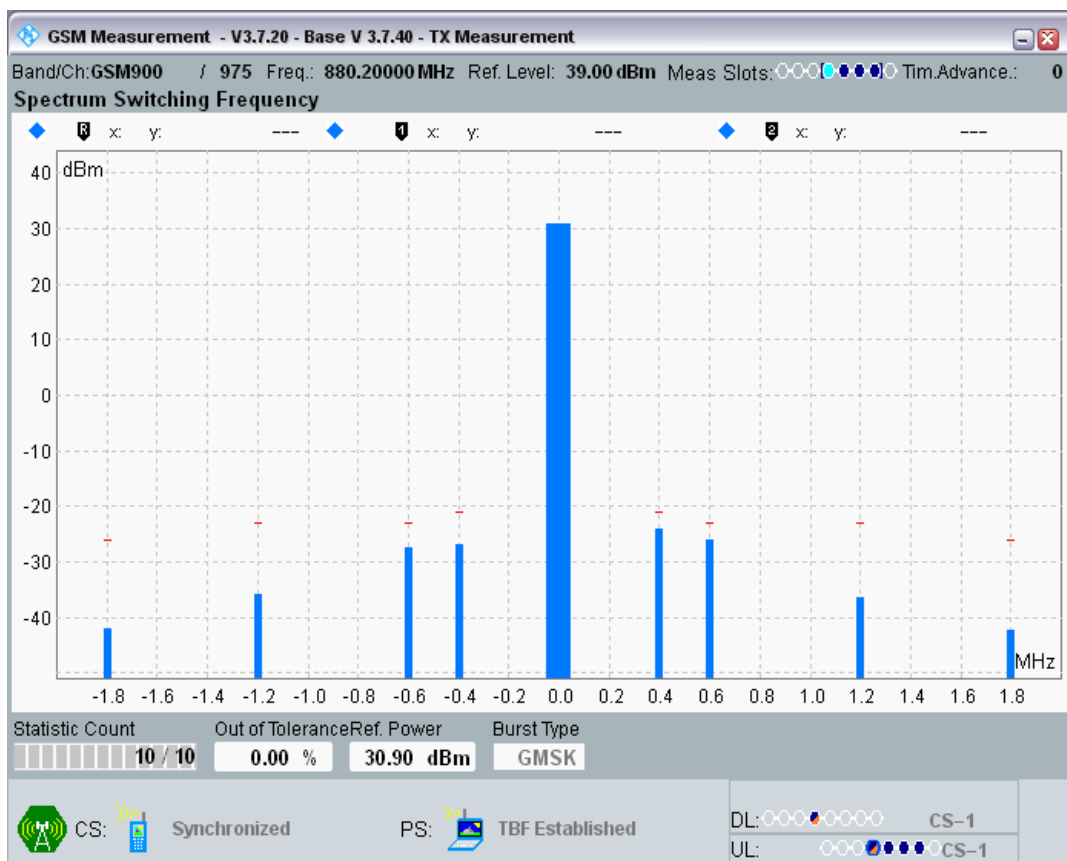


DCS1800 Channel=512 Gamma=3;3;3;3.png

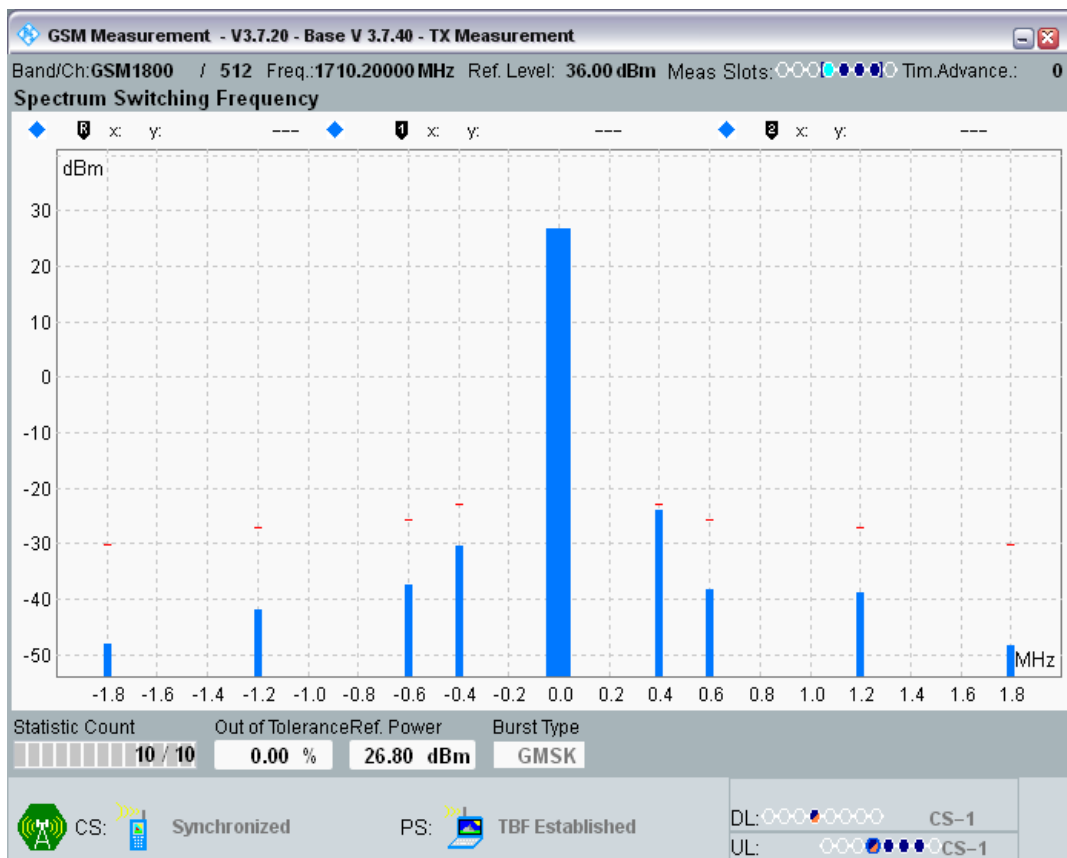

DCS1800 Channel=700 Gamma=3;3;3;3.png

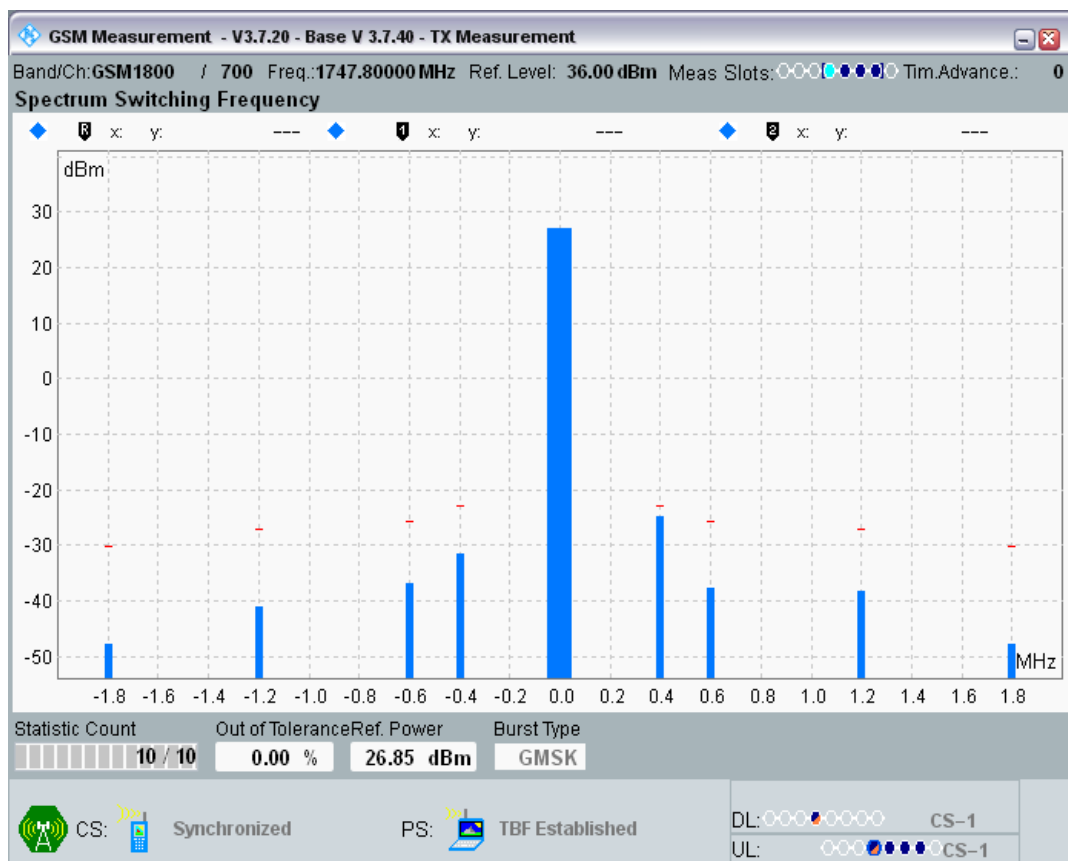


DCS1800 Channel=885 Gamma=3;3;3;3.png

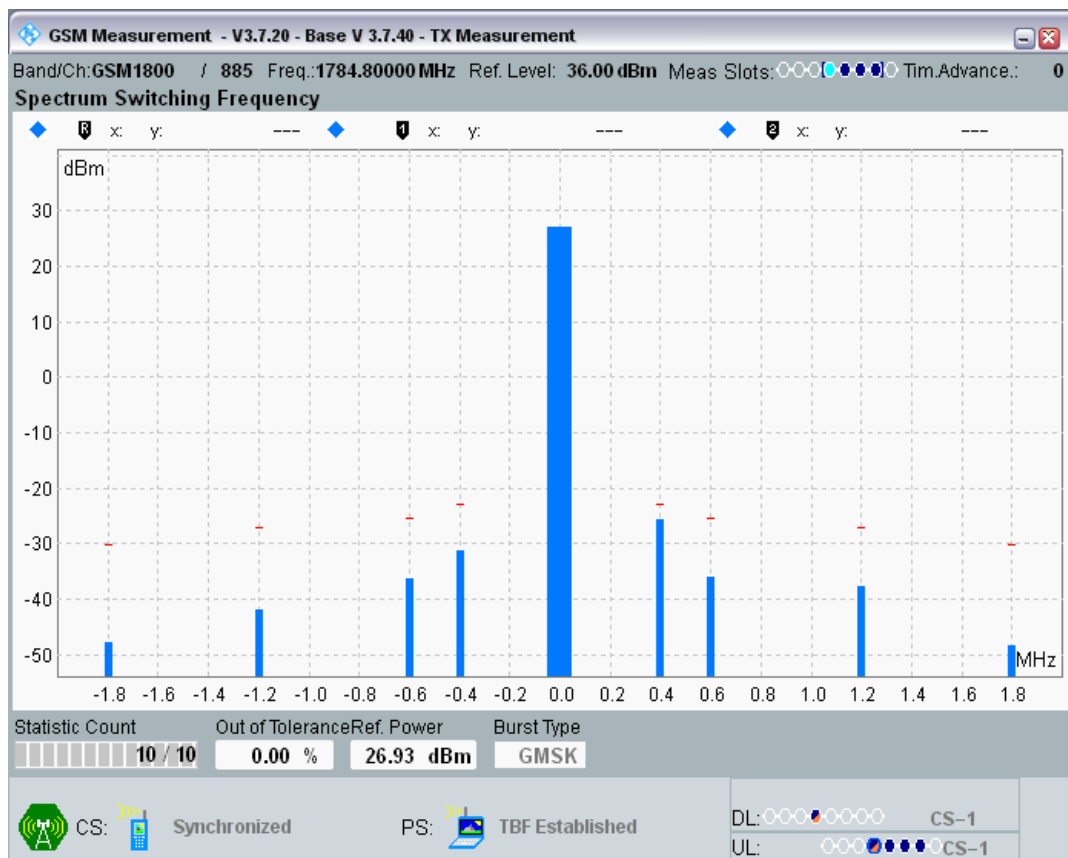


Clause 4.2.26 Frequency error and Modulation accuracy in EGPRS Configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
DCS1800	512	1710.2	5;5;5;5	Frequency Error (Hz)	5.81	-171.02	171.02	PASS
DCS1800	512	1710.2	5;5;5;5	RMS EVM (%)	1.00	0	9	PASS
DCS1800	512	1710.2	5;5;5;5	Peak EVM (%)	2.81	0	30	PASS
DCS1800	700	1747.8	5;5;5;5	Frequency Error (Hz)	3.52	-174.78	174.78	PASS
DCS1800	700	1747.8	5;5;5;5	RMS EVM (%)	1.58	0	9	PASS
DCS1800	700	1747.8	5;5;5;5	Peak EVM (%)	4.65	0	30	PASS
DCS1800	885	1784.8	5;5;5;5	Frequency Error (Hz)	6.81	-178.48	178.48	PASS
DCS1800	885	1784.8	5;5;5;5	RMS EVM (%)	1.62	0	9	PASS
DCS1800	885	1784.8	5;5;5;5	Peak EVM (%)	4.76	0	30	PASS
GSM900	975	880.2	6;6;6;6	Frequency Error (Hz)	12.59	-88.02	88.02	PASS
GSM900	975	880.2	6;6;6;6	RMS EVM (%)	1.03	0	9	PASS
GSM900	975	880.2	6;6;6;6	Peak EVM (%)	3.02	0	30	PASS
GSM900	60	902	6;6;6;6	Frequency Error (Hz)	8.62	-90.2	90.2	PASS
GSM900	60	902	6;6;6;6	RMS EVM (%)	0.98	0	9	PASS
GSM900	60	902	6;6;6;6	Peak EVM (%)	2.87	0	30	PASS
GSM900	124	914.8	6;6;6;6	Frequency Error (Hz)	7.26	-91.48	91.48	PASS
GSM900	124	914.8	6;6;6;6	RMS EVM (%)	0.98	0	9	PASS
GSM900	124	914.8	6;6;6;6	Peak EVM (%)	2.82	0	30	PASS


DCS1800 Channel=512 Gamma=5;5;5;5.png

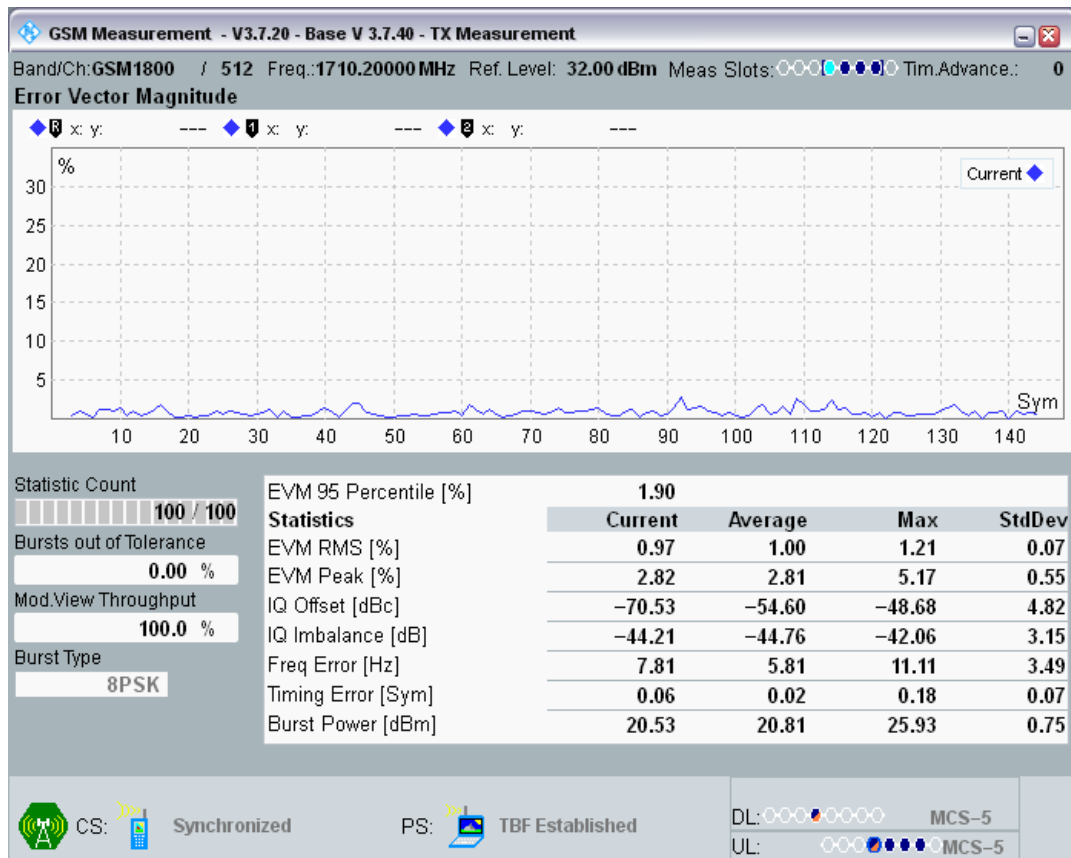


DCS1800 Channel=700 Gamma=5;5;5;5.png

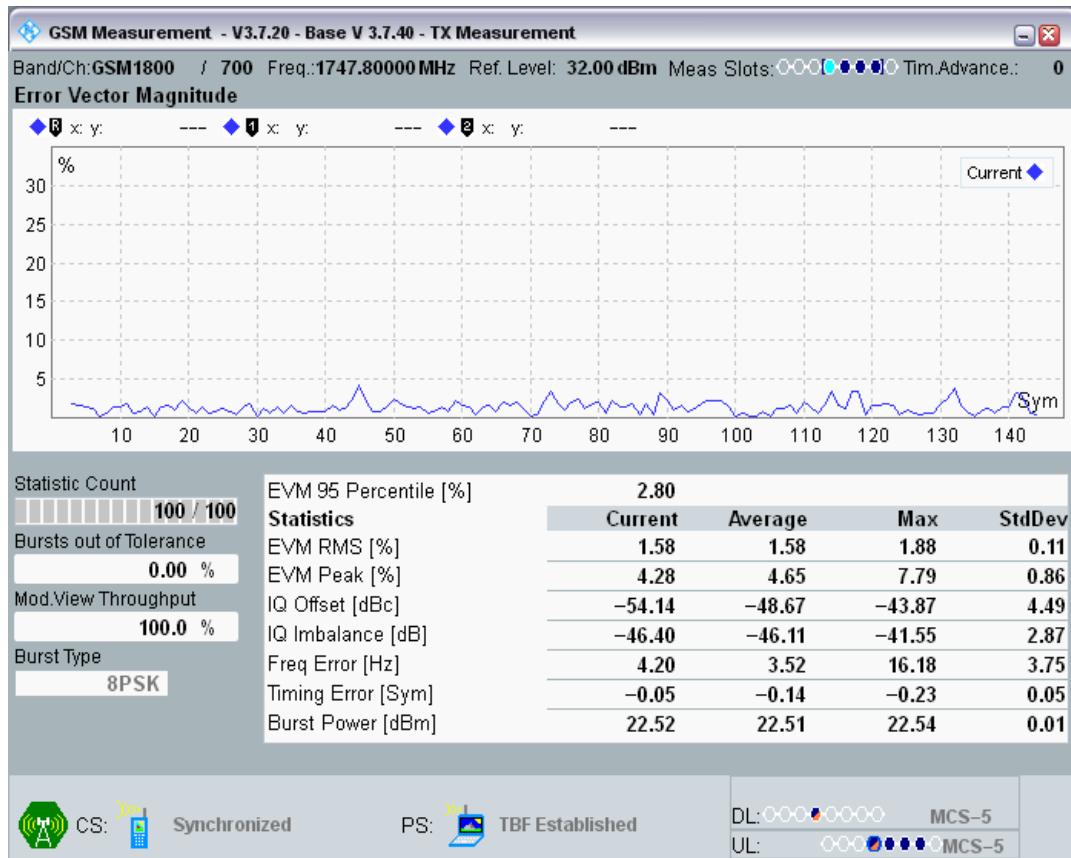


DCS1800 Channel=885 Gamma=5;5;5;5.png

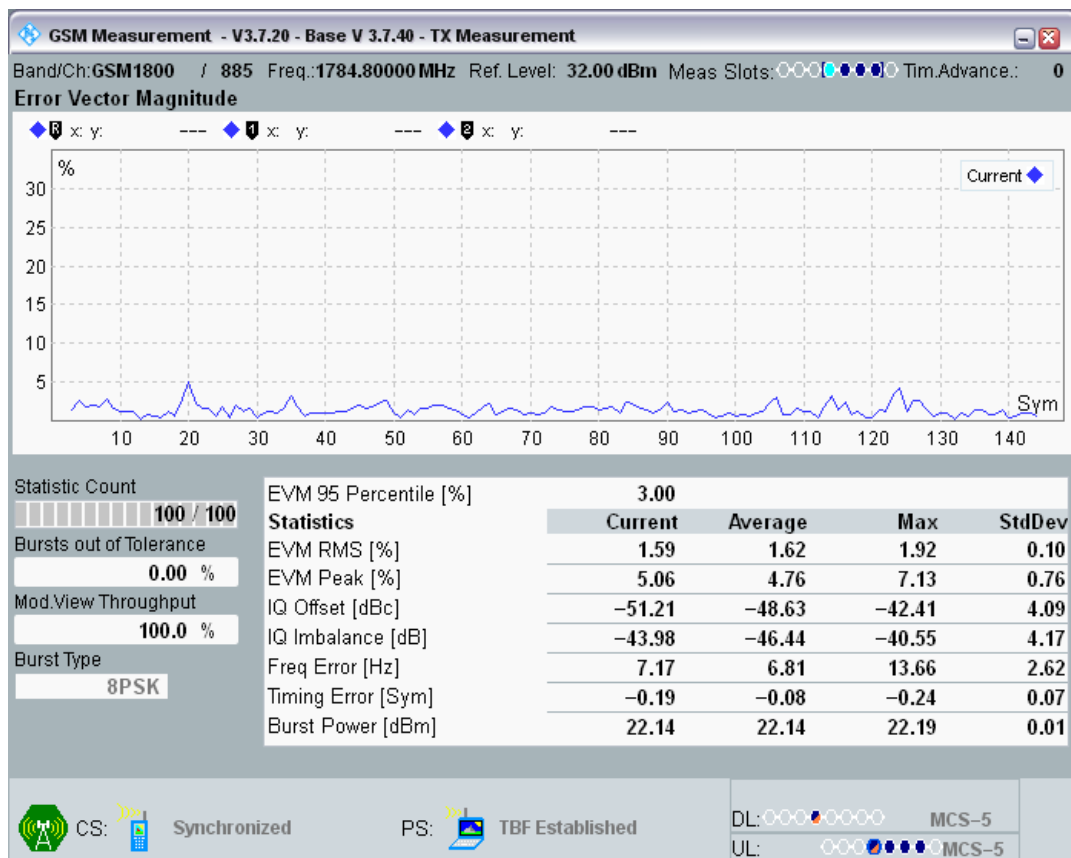


GSM900 Channel=124 Gamma=6;6;6;6.png

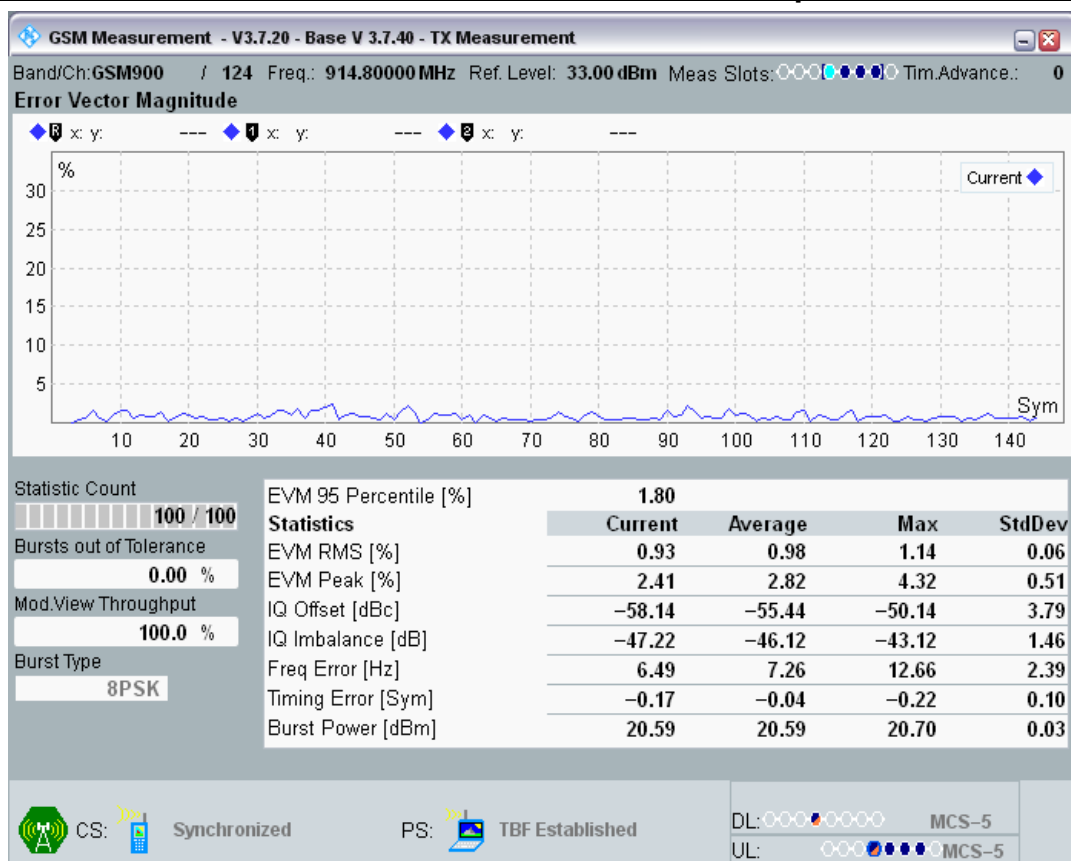

GSM900 Channel=60 Gamma=6;6;6;6.png

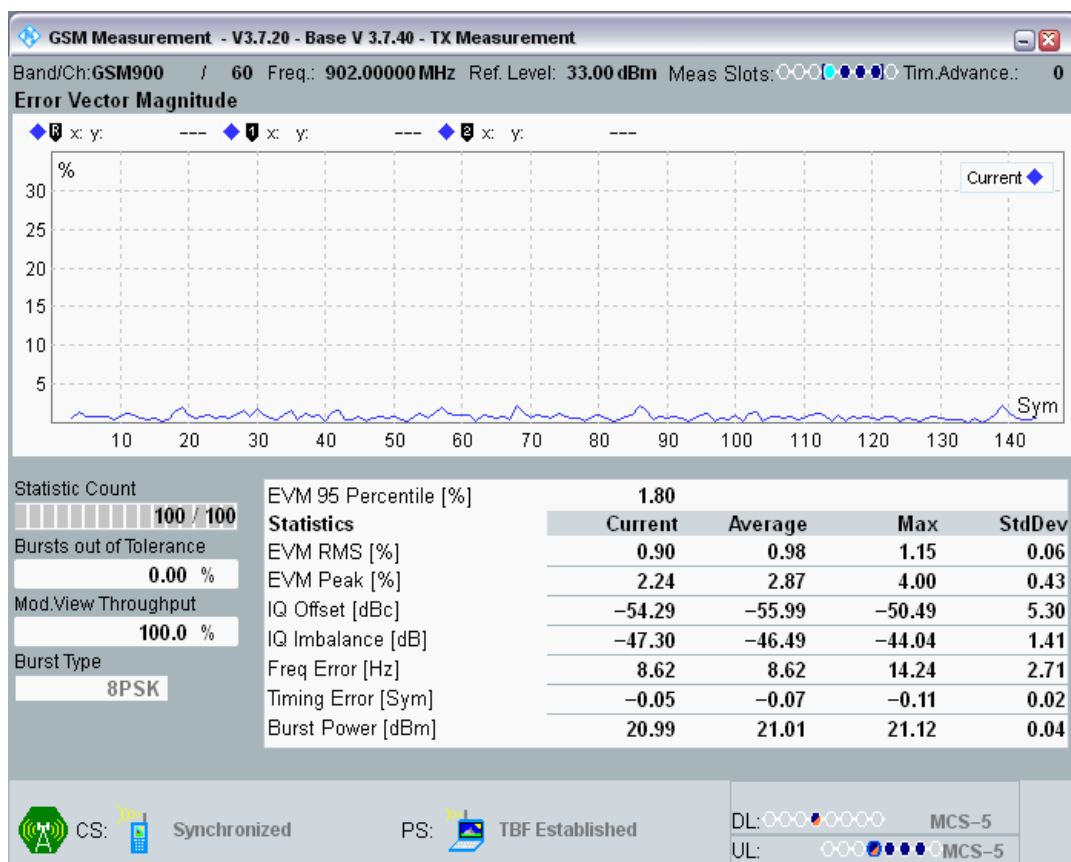

GSM900 Channel=975 Gamma=6;6;6;6.png

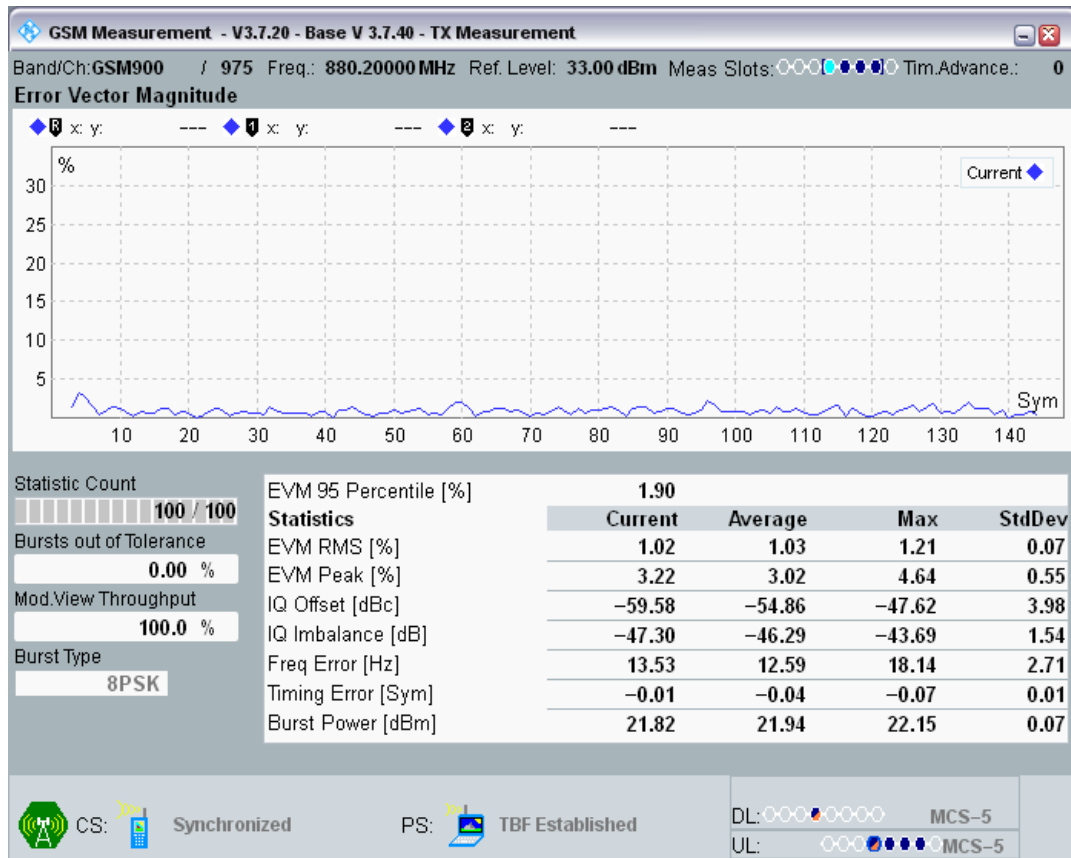


Clause 4.2.27 Frequency error under multipath and interference conditions in EGPRS Configuration


Band	Type	Channel	Frequency (MHz)	Gamma	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
DCS1800	RA130	512	1710.2	5;5;5;5	1.03	-400	400	PASS
DCS1800	RA130	700	1747.8	5;5;5;5	2.81	-400	400	PASS
DCS1800	RA130	885	1784.8	5;5;5;5	1.97	-400	400	PASS
DCS1800	HT100	512	1710.2	5;5;5;5	2.23	-350	350	PASS
DCS1800	HT100	700	1747.8	5;5;5;5	2.00	-350	350	PASS
DCS1800	HT100	885	1784.8	5;5;5;5	2.36	-350	350	PASS
DCS1800	TU50	512	1710.2	5;5;5;5	2.45	-260	260	PASS
DCS1800	TU50	700	1747.8	5;5;5;5	2.74	-260	260	PASS
DCS1800	TU50	885	1784.8	5;5;5;5	1.42	-260	260	PASS
DCS1800	TU1_5	512	1710.2	5;5;5;5	2.62	-320	320	PASS
DCS1800	TU1_5	700	1747.8	5;5;5;5	1.74	-320	320	PASS
DCS1800	TU1_5	885	1784.8	5;5;5;5	4.23	-320	320	PASS
GSM900	RA250	975	880.2	6;6;6;6	7.88	-300	300	PASS
GSM900	RA250	60	902	6;6;6;6	8.33	-300	300	PASS
GSM900	RA250	124	914.8	6;6;6;6	9.75	-300	300	PASS
GSM900	HT100	975	880.2	6;6;6;6	6.97	-180	180	PASS
GSM900	HT100	60	902	6;6;6;6	7.55	-180	180	PASS
GSM900	HT100	124	914.8	6;6;6;6	9.81	-180	180	PASS
GSM900	TU50	975	880.2	6;6;6;6	8.14	-160	160	PASS
GSM900	TU50	60	902	6;6;6;6	8.14	-160	160	PASS

GSM900	TU50	124	914.8	6;6;6;6	9.10	-160	160	PASS
GSM900	TU3	975	880.2	6;6;6;6	10.62	-230	230	PASS
GSM900	TU3	60	902	6;6;6;6	11.49	-230	230	PASS
GSM900	TU3	124	914.8	6;6;6;6	10.40	-230	230	PASS


DCS1800 Channel=512 Gamma=5;5;5;5 HT100.png

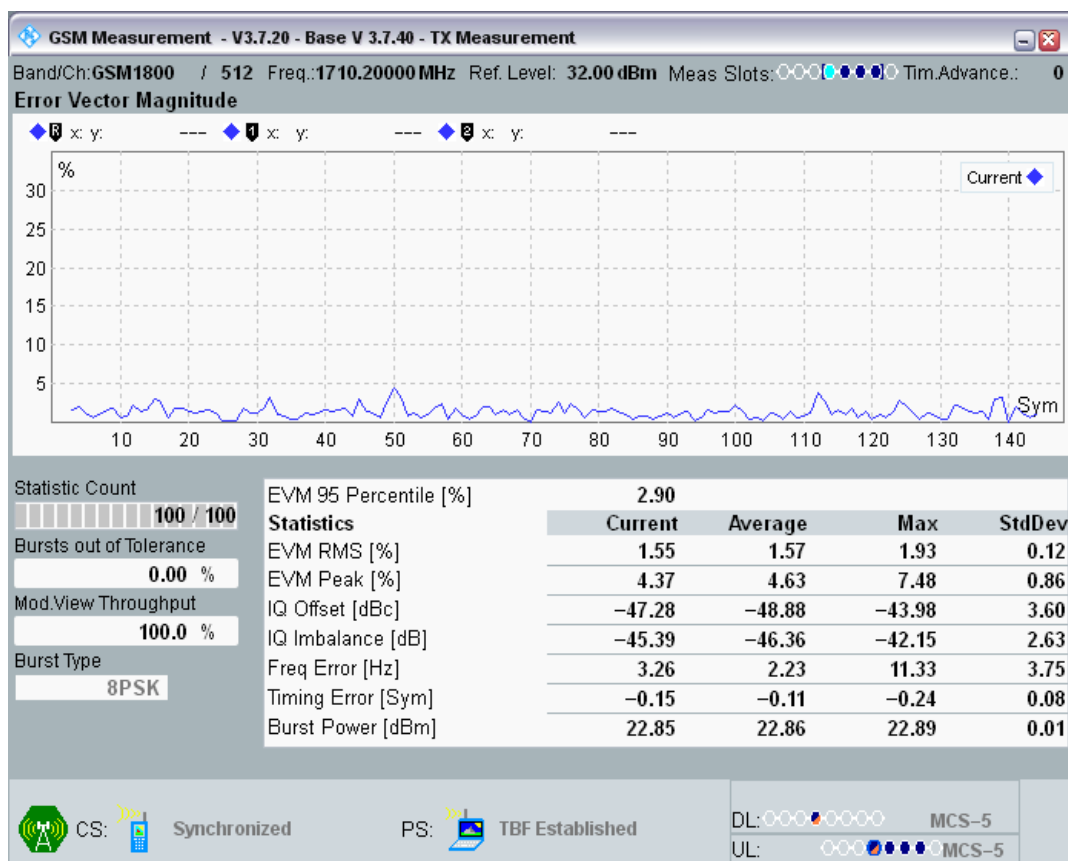


DCS1800 Channel=512 Gamma=5;5;5;5 RA130.png

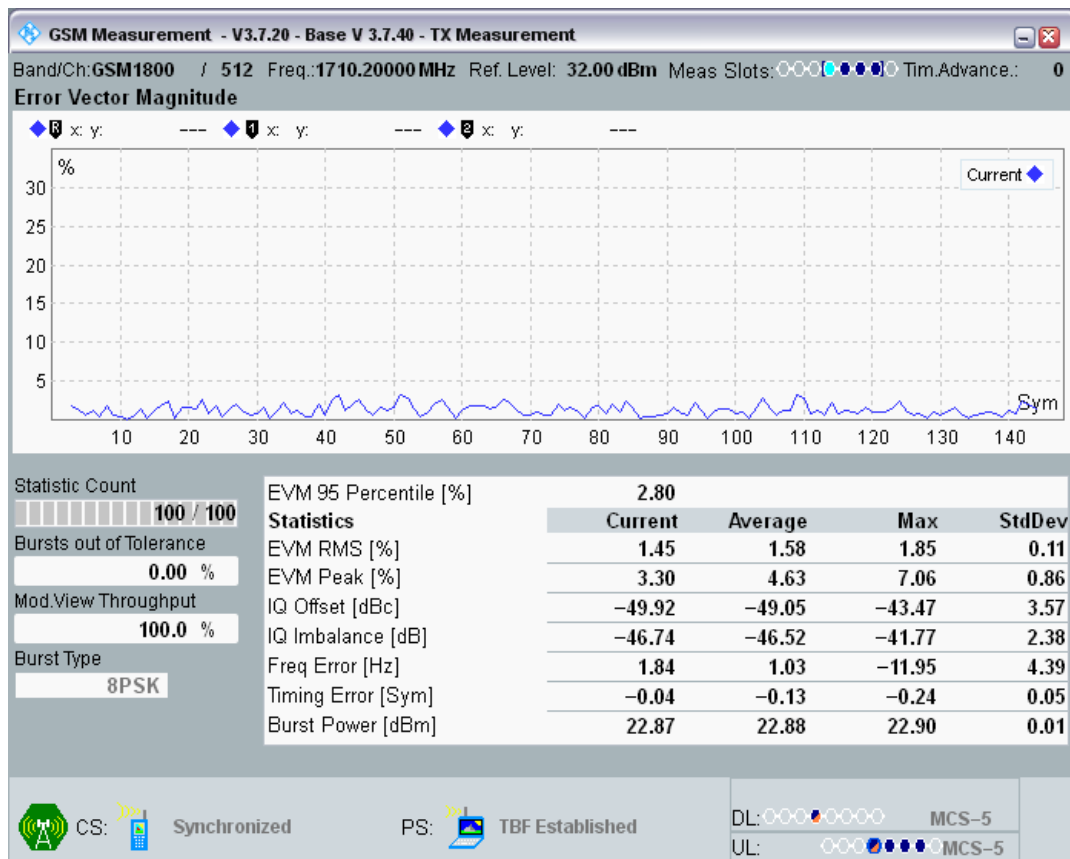


DCS1800 Channel=512 Gamma=5;5;5;5 TU1_5.png

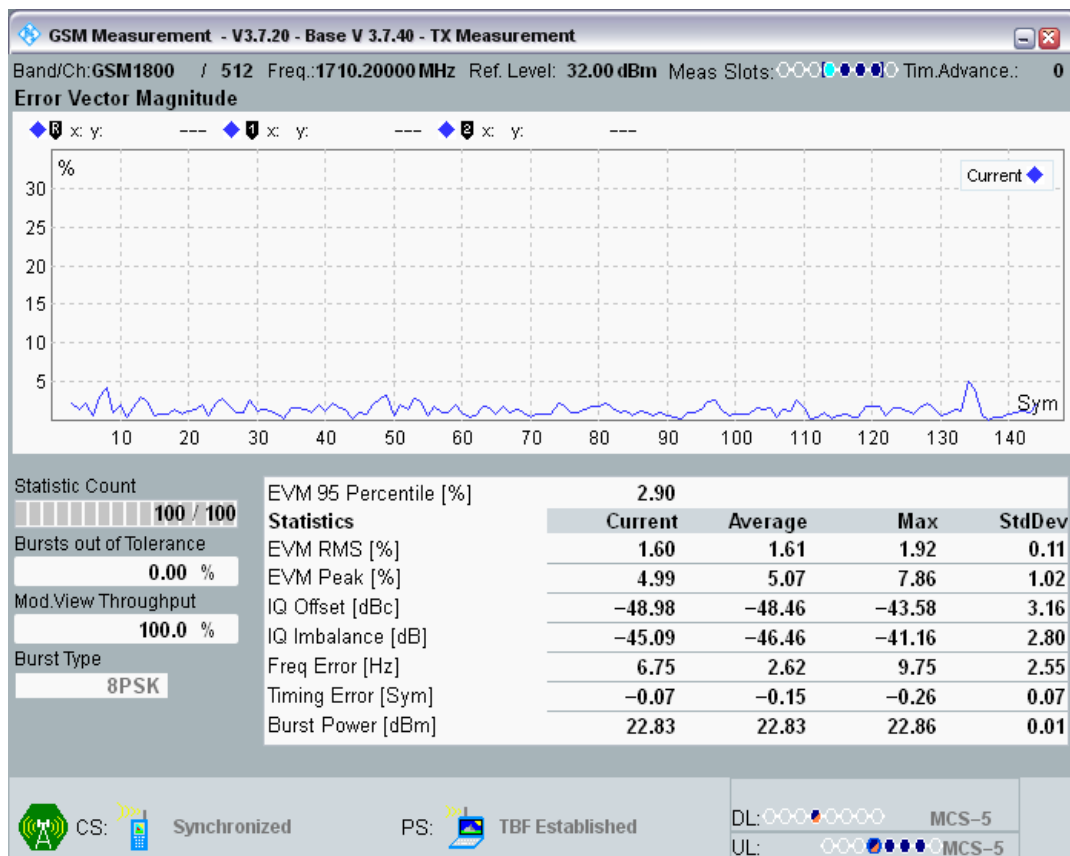


DCS1800 Channel=512 Gamma=5;5;5;5 TU50.png

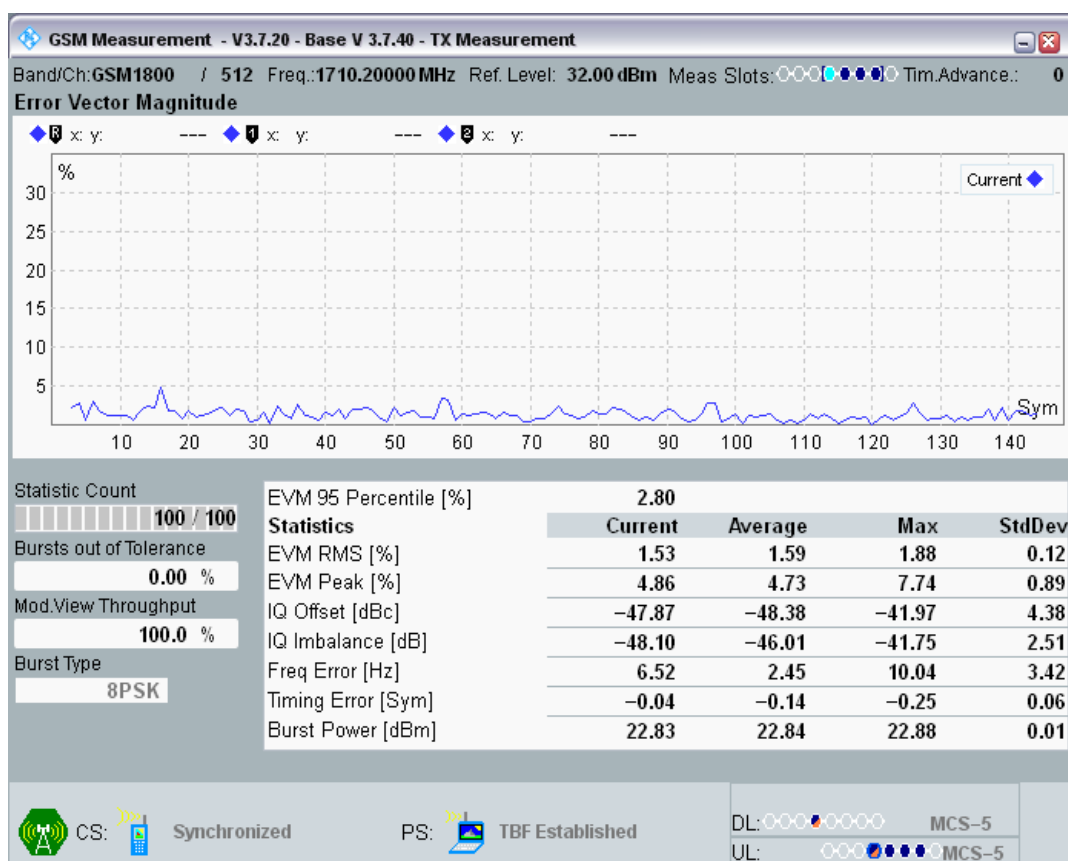


DCS1800 Channel=700 Gamma=5;5;5;5 HT100.png

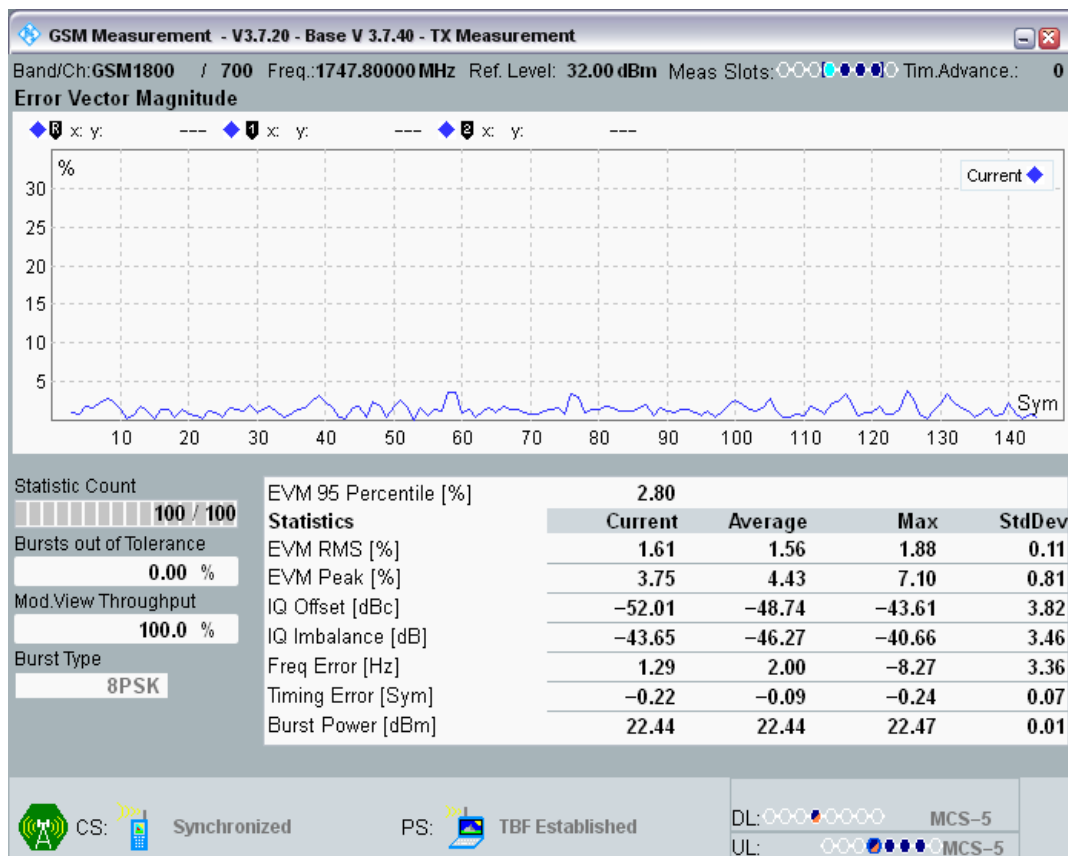


DCS1800 Channel=700 Gamma=5;5;5;5 RA130.png

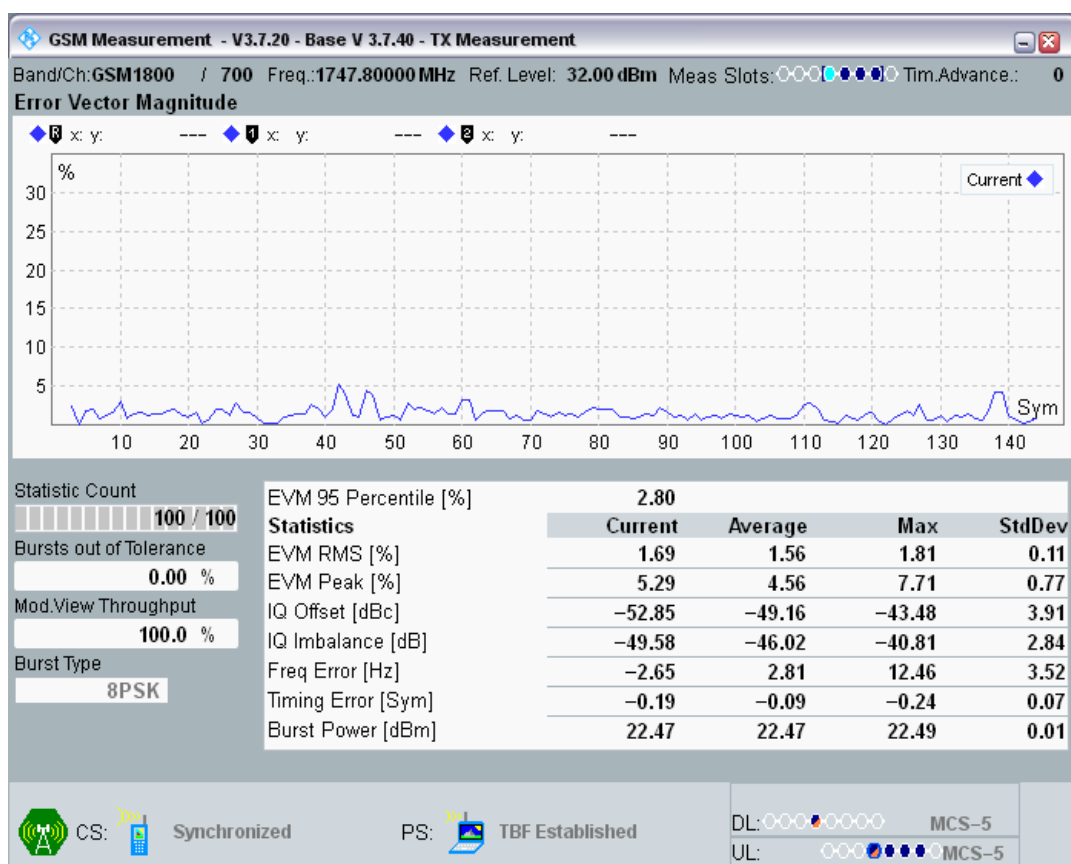


DCS1800 Channel=700 Gamma=5;5;5;5 TU1_5.png

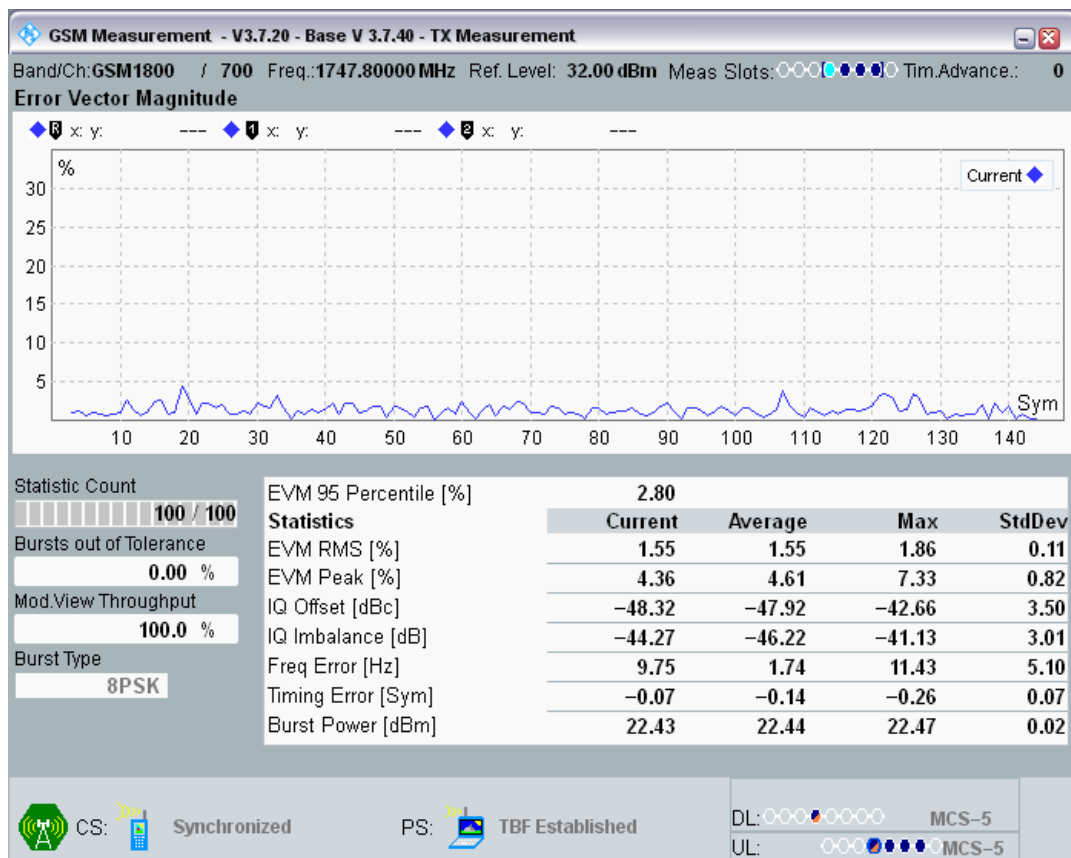


DCS1800 Channel=700 Gamma=5;5;5;5 TU50.png

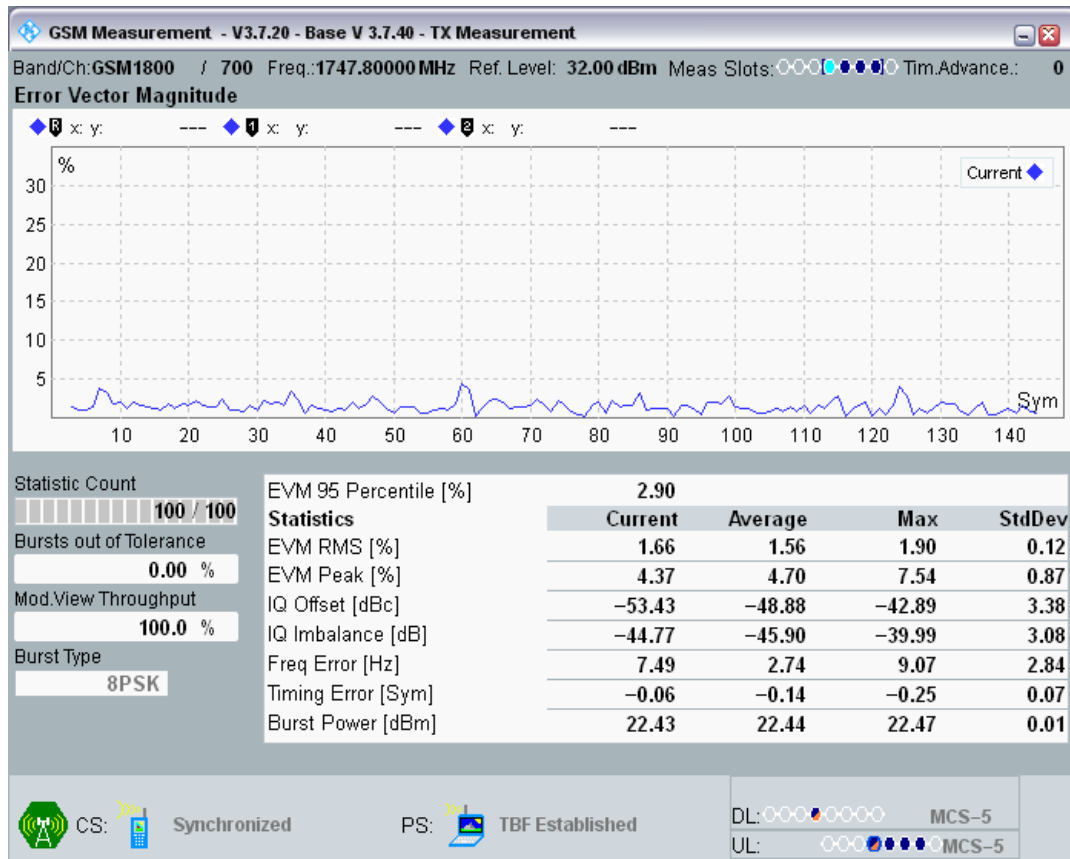


DCS1800 Channel=885 Gamma=5;5;5;5 HT100.png

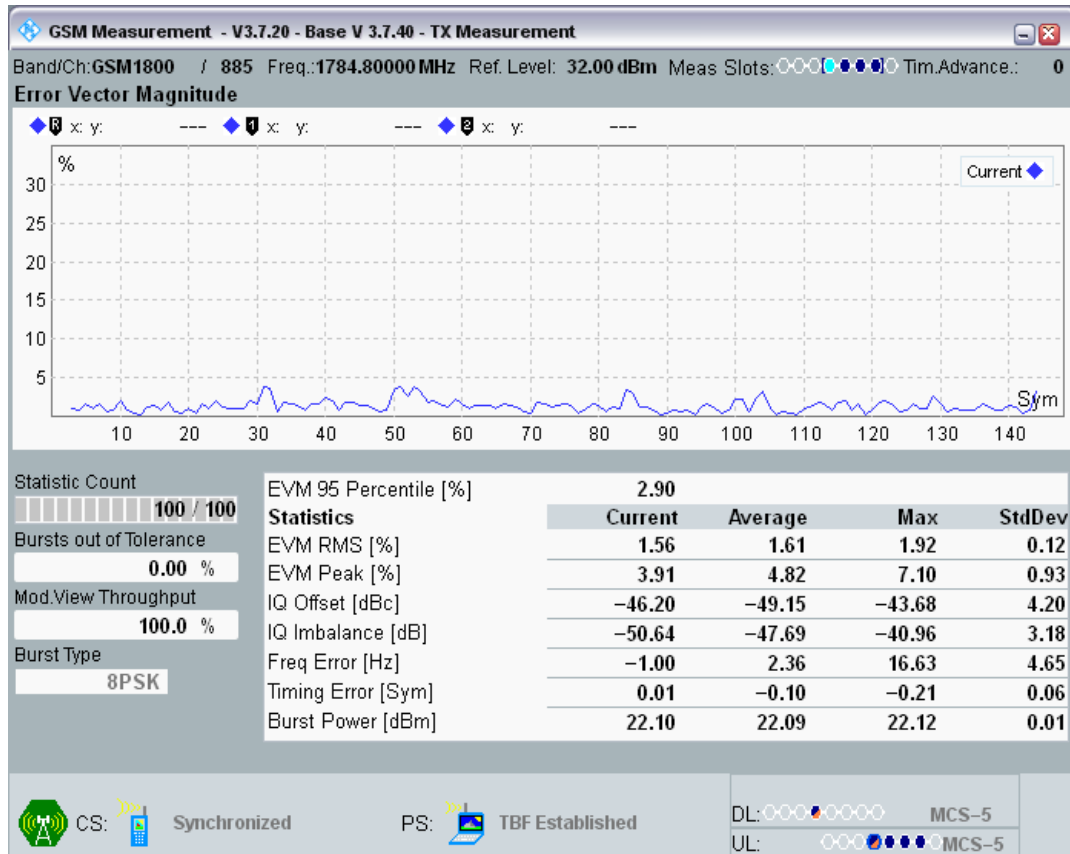


DCS1800 Channel=885 Gamma=5;5;5;5 RA130.png

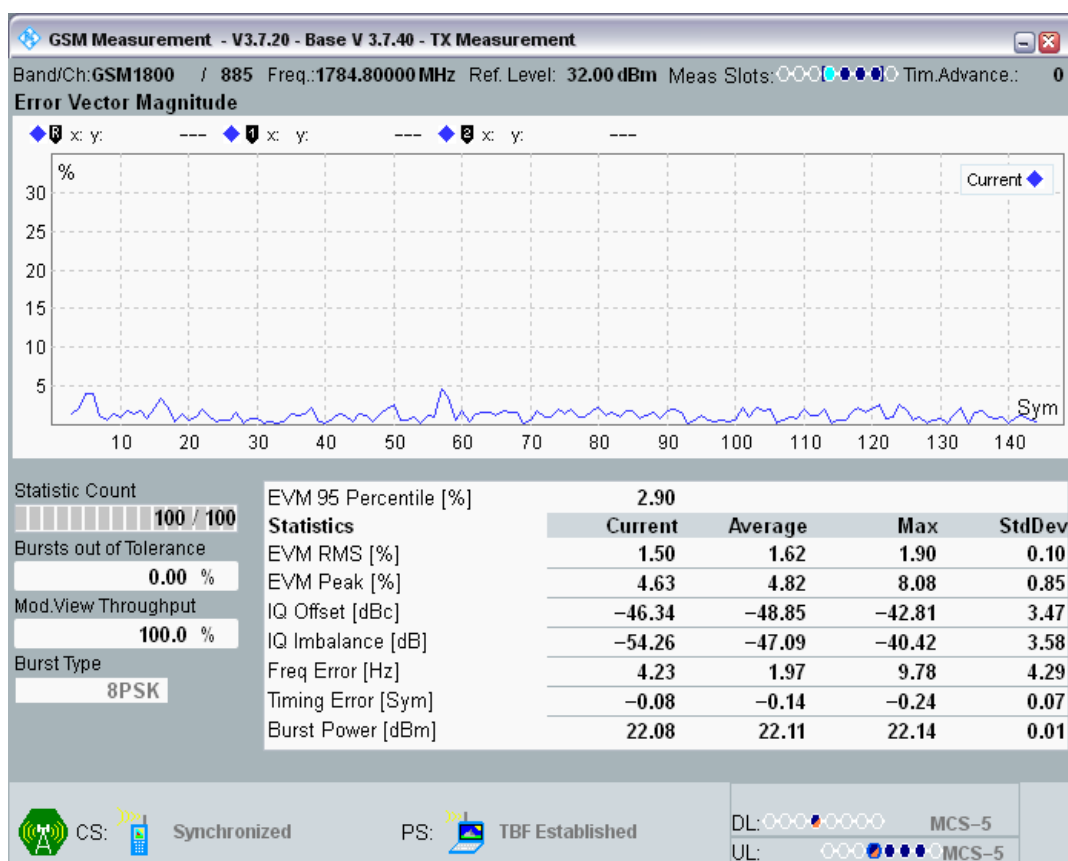


DCS1800 Channel=885 Gamma=5;5;5;5 TU1_5.png

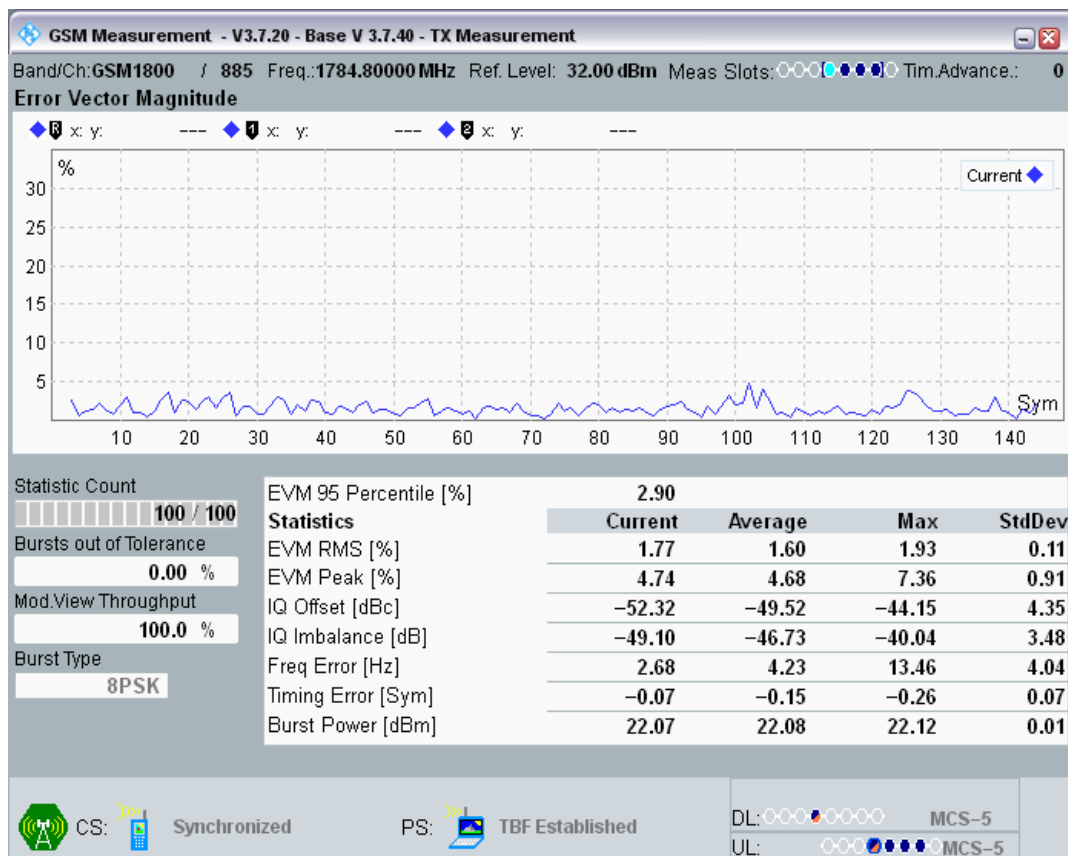


DCS1800 Channel=885 Gamma=5;5;5;5 TU50.png

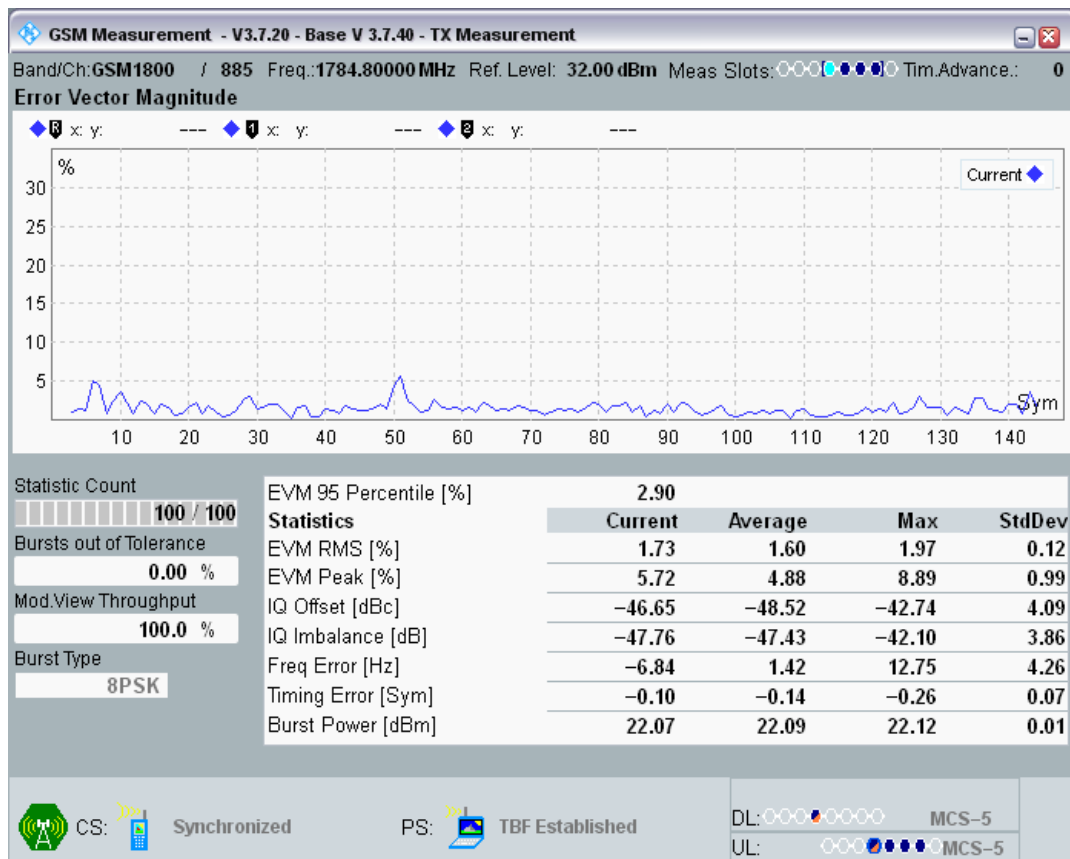


GSM900 Channel=124 Gamma=6;6;6;6 HT100.png

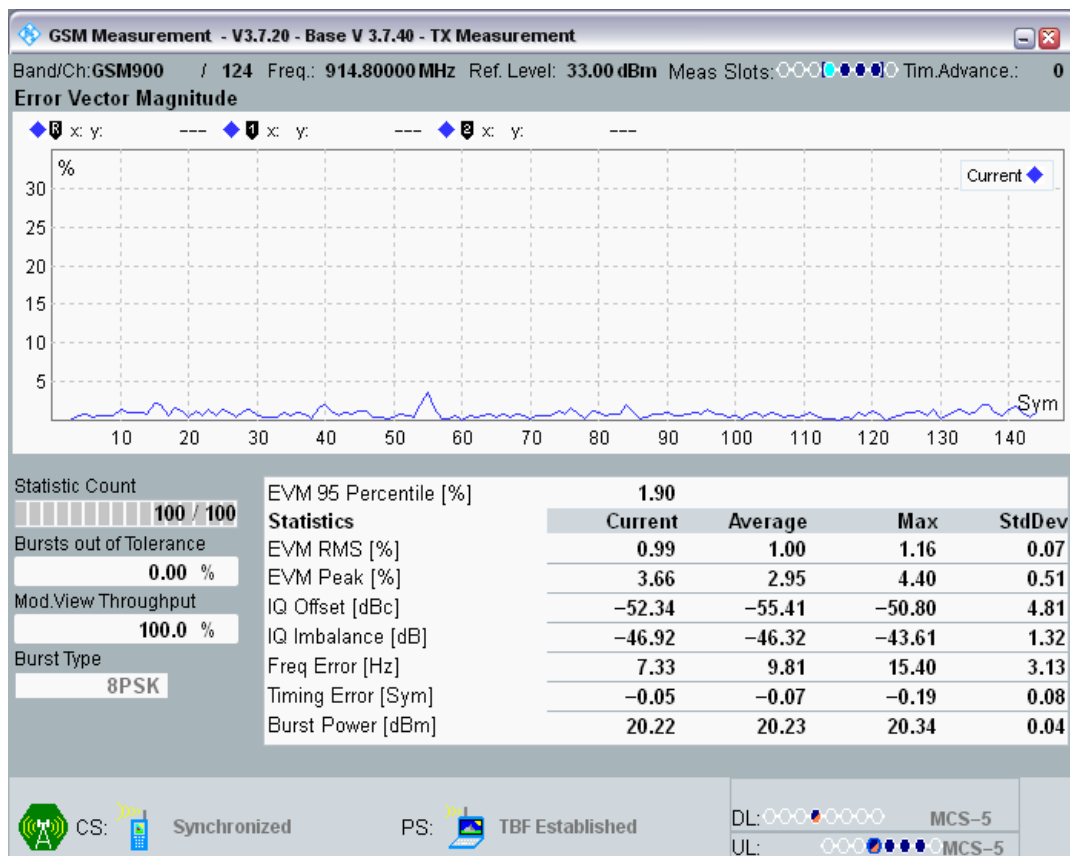


GSM900 Channel=124 Gamma=6;6;6;6 RA250.png

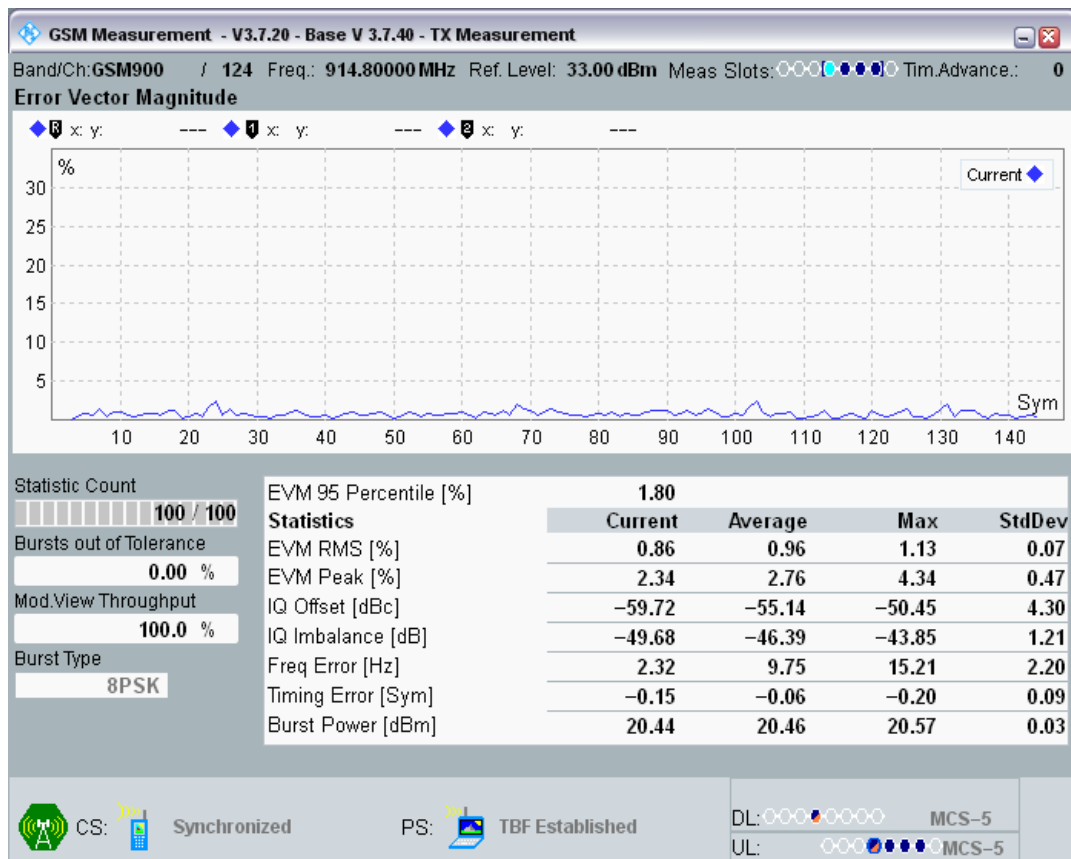


GSM900 Channel=124 Gamma=6;6;6;6 TU3.png

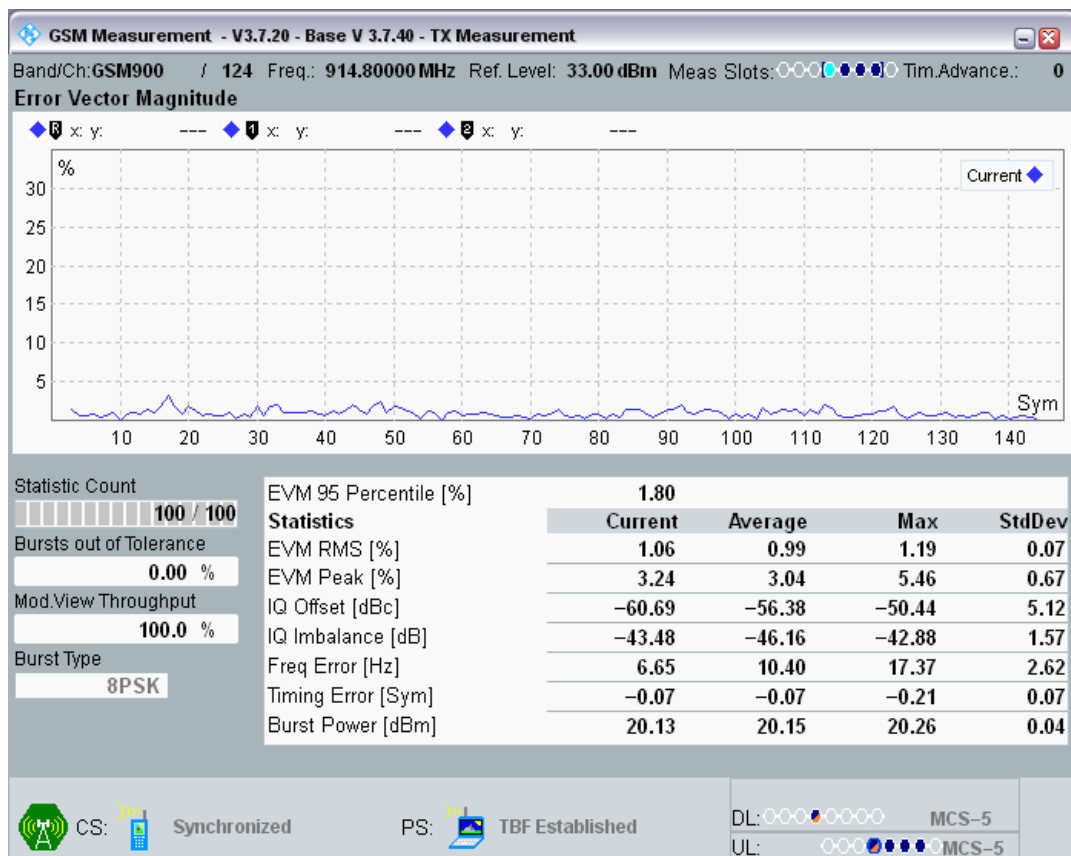


GSM900 Channel=124 Gamma=6;6;6;6 TU50.png

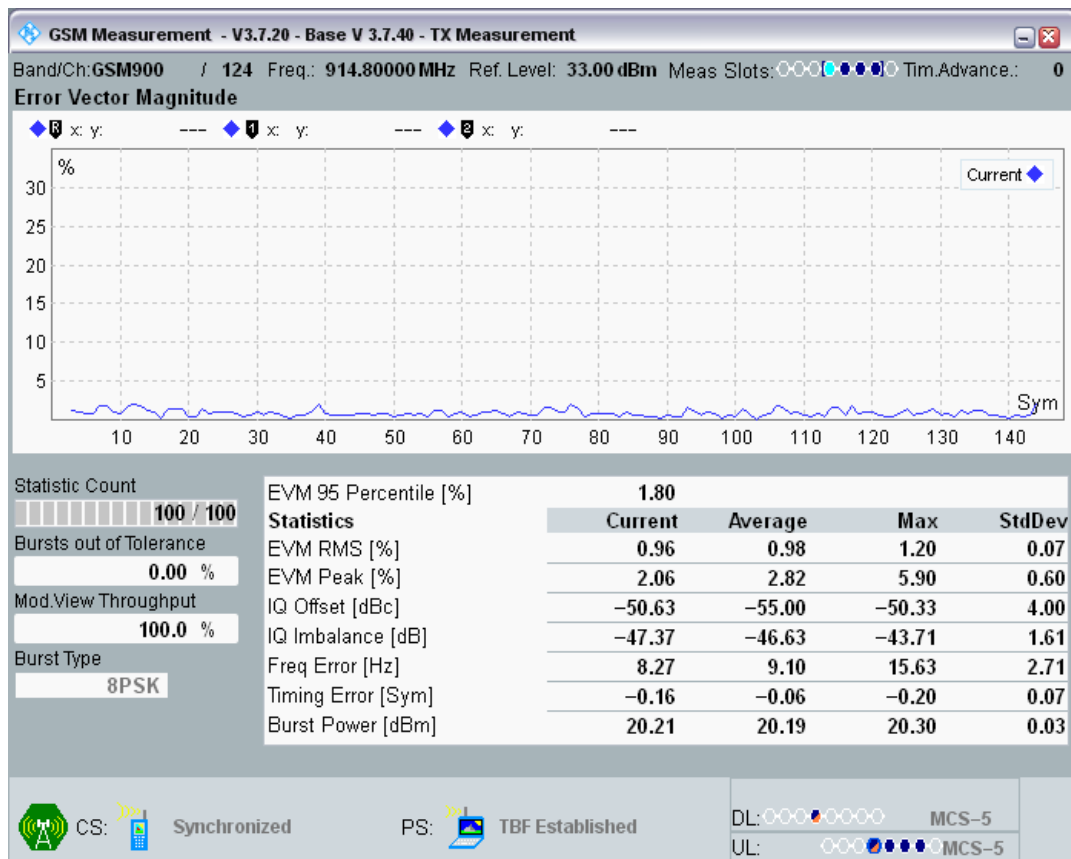


GSM900 Channel=60 Gamma=6;6;6;6 HT100.png

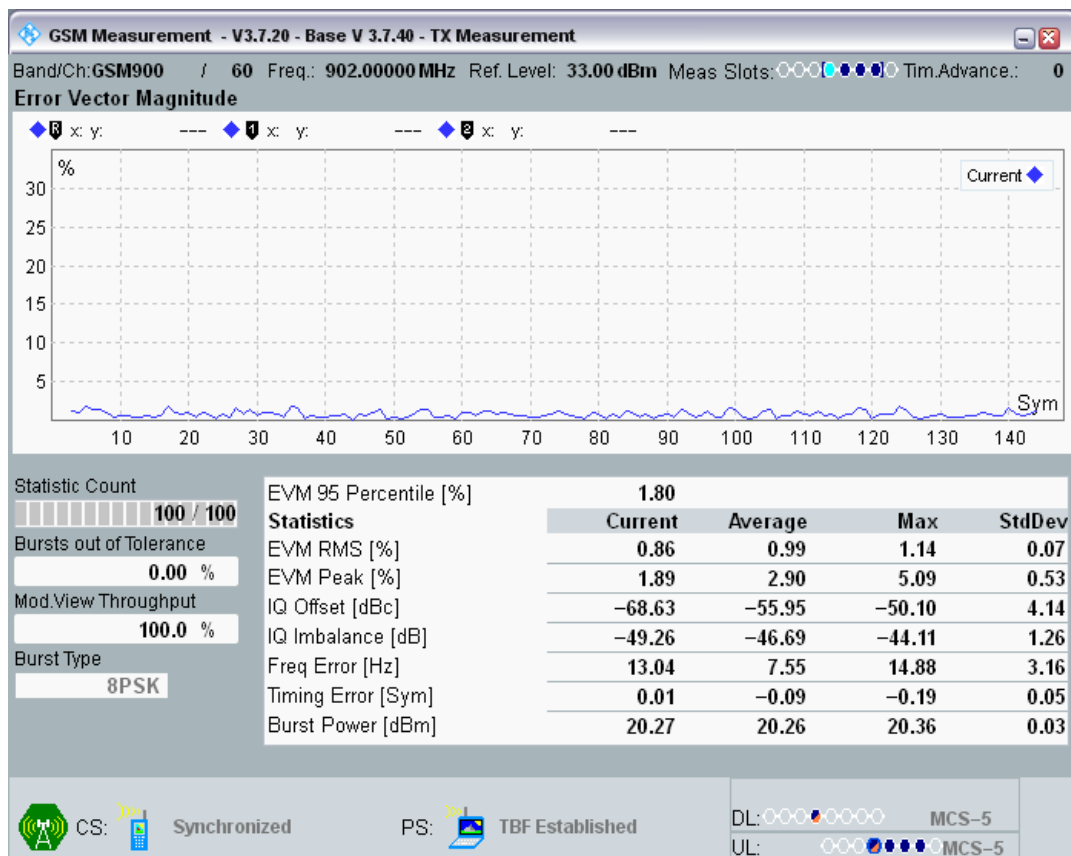


GSM900 Channel=60 Gamma=6;6;6 RA250.png

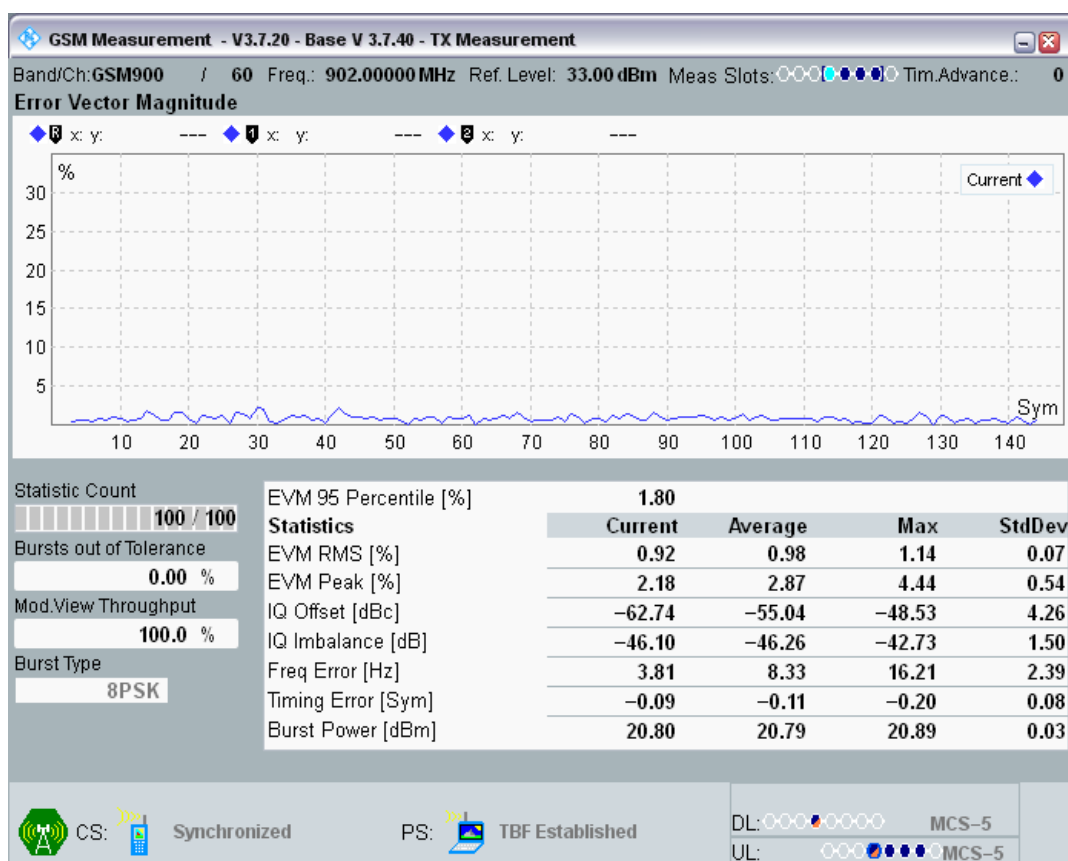


GSM900 Channel=60 Gamma=6;6;6 TU3.png

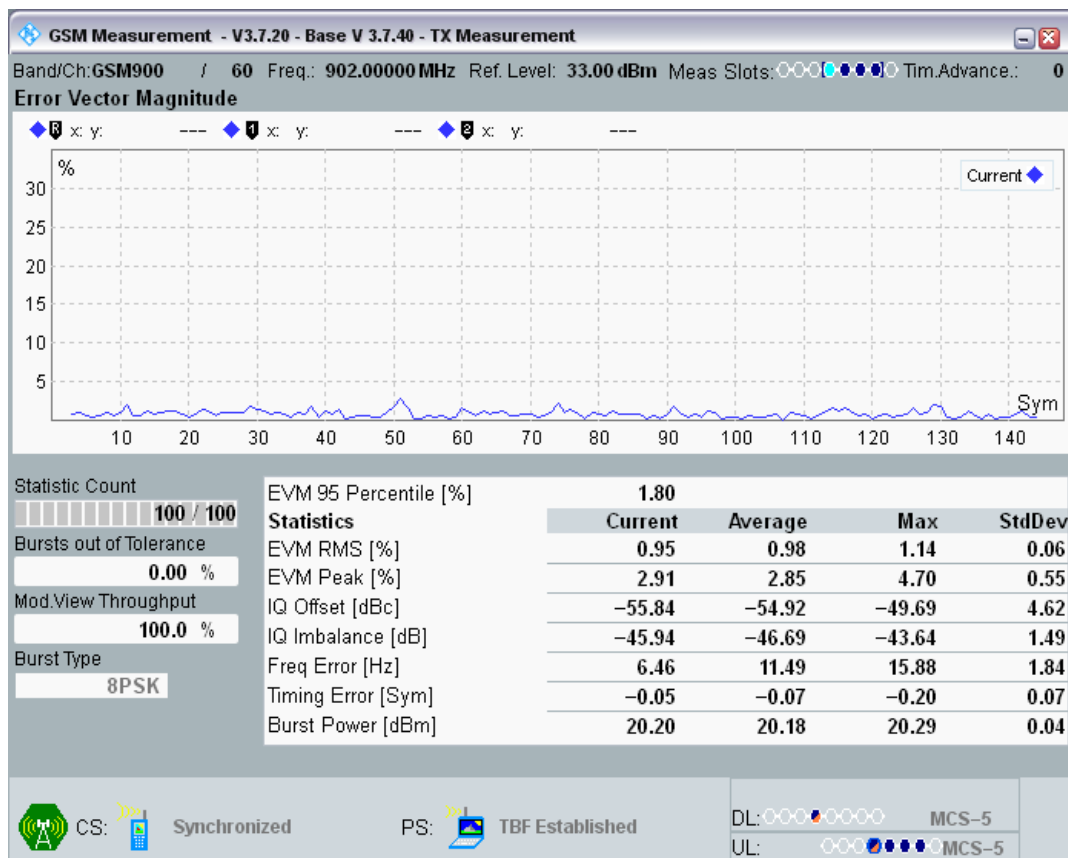


GSM900 Channel=60 Gamma=6;6;6 TU50.png

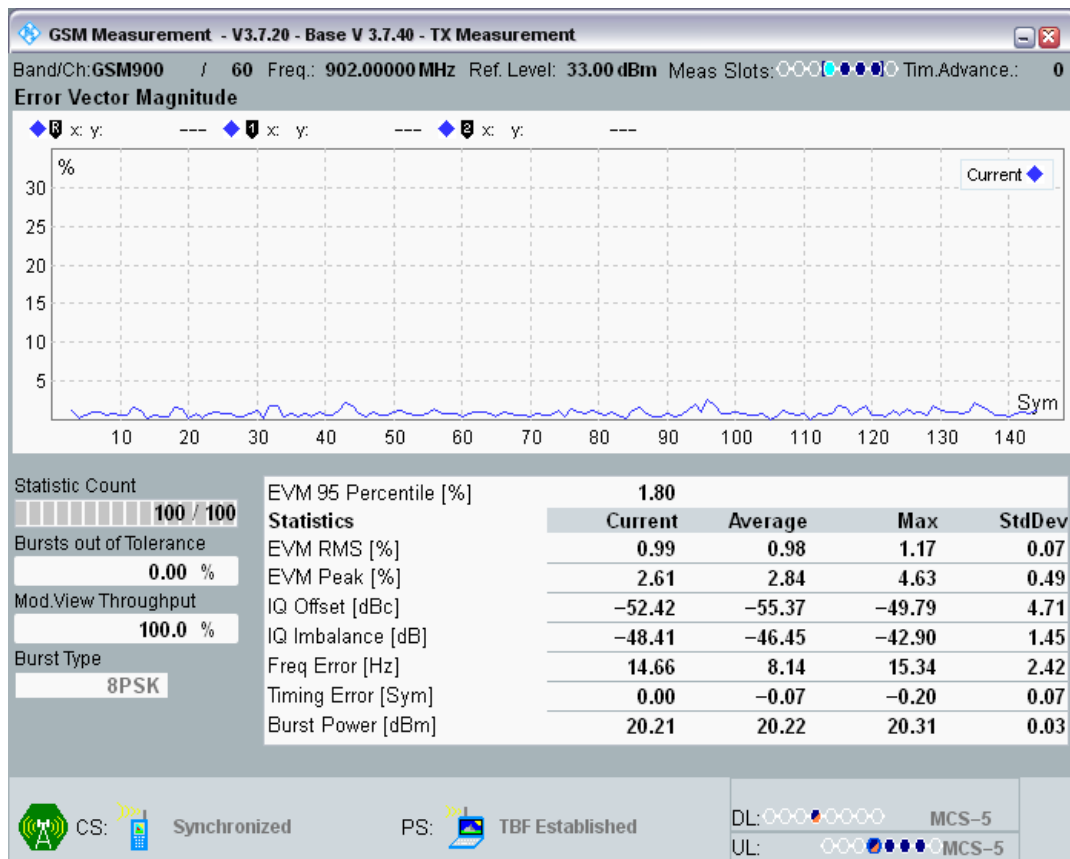


GSM900 Channel=975 Gamma=6;6;6 HT100.png

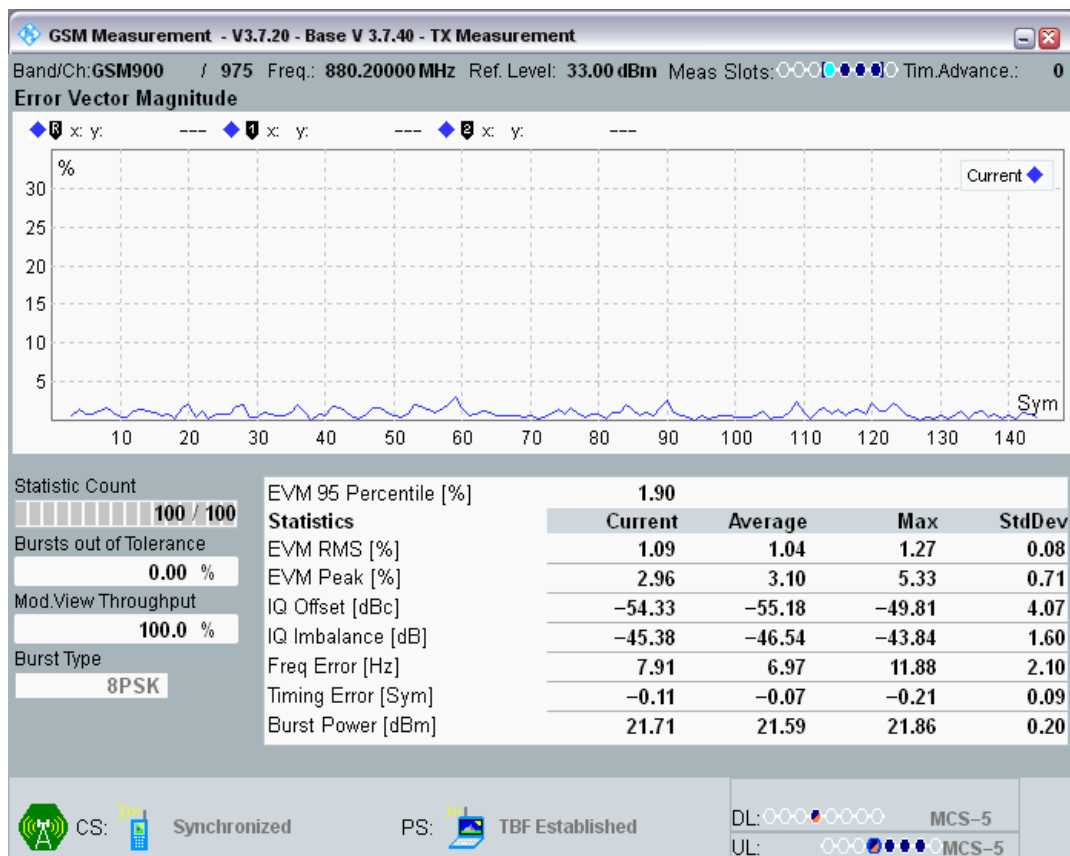


GSM900 Channel=975 Gamma=6;6;6;6 RA250.png

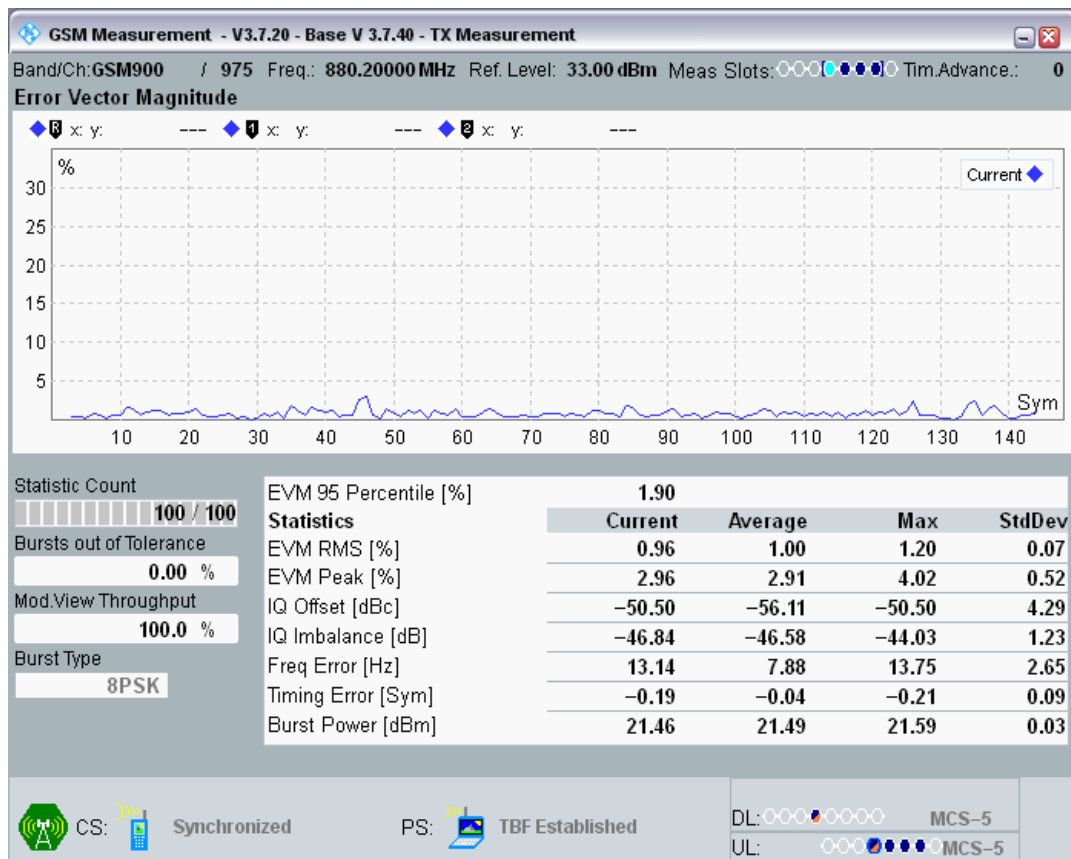

GSM900 Channel=975 Gamma=6;6;6;6 TU3.png

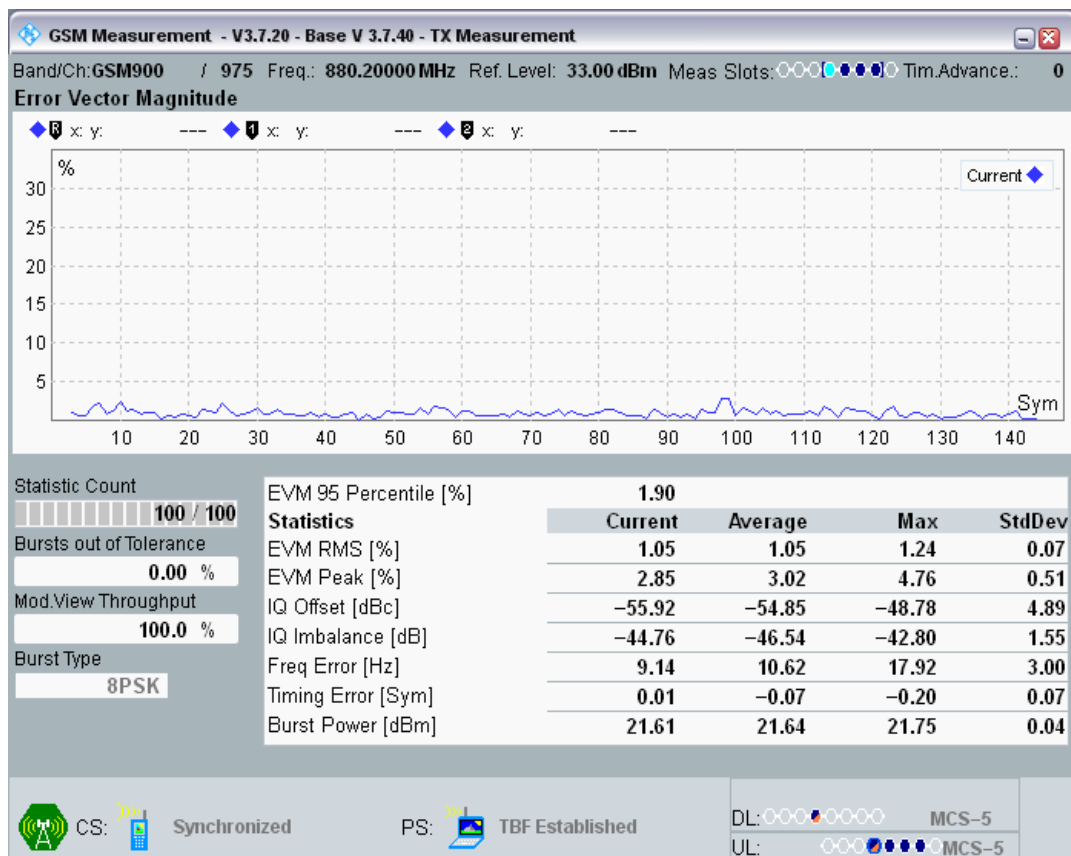

GSM900 Channel=975 Gamma=6;6;6;6 TU50.png

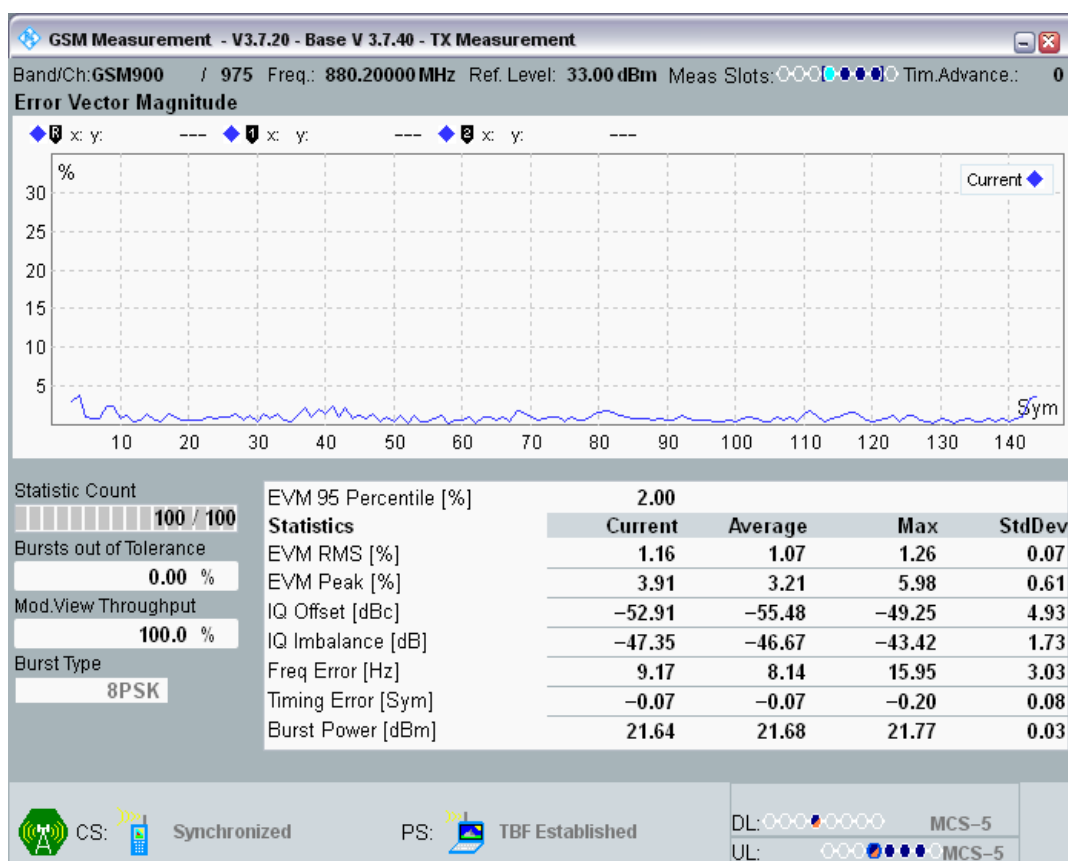

Clause 4.2.28 EGPRS Transmitter output power

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low (dBm)	Limit	high (dBm)	Limit	Verdict
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot1	22.43399	16		26		PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot2	22.64197	16		26		PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot3	23.02802	16		26		PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot4	22.42609	16		26		PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	22.74179	17		26		PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	23.08856	17		26		PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	23.39767	17		26		PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	23.18042	17		26		PASS

DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	22.54016	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	22.80649	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	22.72983	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot4	23.00354	17	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot1	20.65305	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot2	20.93536	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	20.52829	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	20.98083	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	19.20178	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	18.57111	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	18.78751	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	18.66083	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot1	16.97803	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot2	16.84137	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	17.1582	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	16.80685	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	14.85318	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	15.23489	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	14.57516	11	17	PASS

DCS1800	512	1710.2	11;11;11;11	Power slot4	@	14.77585	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT		-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot1	@	12.82104	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot2	@	12.90021	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot3	@	12.57132	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power slot4	@	13.24359	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT		-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot1	@	10.60181	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot2	@	10.3237	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot3	@	10.44983	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power slot4	@	10.38535	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT		-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot1	@	8.831116	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot2	@	8.309692	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot3	@	8.218079	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power slot4	@	8.478516	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT		-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot1	@	6.192444	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot2	@	5.903961	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot3	@	6.547394	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power slot4	@	6.331573	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT		-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot1	@	4.790405	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot2	@	4.042114	0	8	PASS

DCS1800	512	1710.2	16;16;16;16	Power slot3	@	4.342072	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power slot4	@	4.596069	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT		-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot1	@	1.910645	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot2	@	2.113953	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot3	@	2.245819	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power slot4	@	2.170441	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT		-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot1	@	0.5106506	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot2	@	0.1804504	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot3	@	0.1149902	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power slot4	@	-0.1398621	-5	5	PASS
DCS1800	700	1747.8	5;5;5;5	PvT		-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot1	@	22.13568	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot2	@	22.44934	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot3	@	22.71069	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power slot4	@	22.40311	16	26	PASS
DCS1800	700	1747.8	6;6;6;6	PvT		-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot1	@	22.65311	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot2	@	22.60803	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot3	@	23.03708	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot4	@	22.72293	17	26	PASS
DCS1800	700	1747.8	7;7;7;7	PvT		-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot1	@	22.35452	17	25	PASS

DCS1800	700	1747.8	7;7;7;7	Power slot2	@	22.66281	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot3	@	22.63159	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot4	@	22.46954	17	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot1	@	20.45676	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot2	@	20.65417	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot3	@	20.10437	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot4	@	20.79718	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot1	@	18.69623	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot2	@	18.35443	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot3	@	18.56595	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot4	@	18.61673	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot1	@	16.02267	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot2	@	16.70779	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot3	@	16.75995	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot4	@	16.66727	13	19	PASS
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power slot1	@	14.47202	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power slot2	@	14.35086	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power slot3	@	14.30582	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power slot4	@	14.36377	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	-	PASS

DCS1800	700	1747.8	12;12;12;12	Power slot1	@	12.34311	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power slot2	@	12.47723	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power slot3	@	12.16284	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power slot4	@	12.48651	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power slot1	@	10.59888	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power slot2	@	10.48807	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power slot3	@	10.16733	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power slot4	@	10.08124	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power slot1	@	8.431213	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power slot2	@	8.470367	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power slot3	@	8.407684	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power slot4	@	8.294434	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot1	@	6.865051	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot2	@	6.726868	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot3	@	6.282318	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power slot4	@	6.452209	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot1	@	4.201935	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot2	@	4.402588	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot3	@	4.476685	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power slot4	@	4.370636	0	8	PASS

				slot4				
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	2.49826	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	2.492065	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot3	2.102905	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	2.639374	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot1	0.3179321	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	0.6240845	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	-0.1257324	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	0.6089783	-5	5	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	21.84433	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	21.58221	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	22.18408	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	21.92862	16	26	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	22.35373	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	22.33252	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	22.28152	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	22.10513	17	26	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	22.10242	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	22.52048	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @	22.25159	17	25	PASS

				slot3				
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	22.27588	17	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	19.72168	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	20.15839	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	19.86008	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	20.23611	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	18.31845	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	18.17175	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	18.28946	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	18.15173	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	16.43732	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	15.83478	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	16.29062	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	16.19083	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	13.85962	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	14.36807	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	14.33224	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	14.00977	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	12.20639	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @	12.12769	8	16	PASS

				slot2				
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	12.56348	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	12.19876	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	10.15576	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	10.0033	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	10.37198	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	10.06686	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	8.507019	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	7.915527	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	7.751556	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot4	8.108368	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	6.210388	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot2	6.256561	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot3	5.92511	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot4	6.465546	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot1	4.660828	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot2	4.667236	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot3	4.141327	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot4	4.003601	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power @	2.691833	-3	7	PASS

				slot1				
DCS1800	885	1784.8	17;17;17;17	Power @	2.340179	-3	7	PASS
				slot2				
DCS1800	885	1784.8	17;17;17;17	Power @	1.977844	-3	7	PASS
				slot3				
DCS1800	885	1784.8	17;17;17;17	Power @	1.930786	-3	7	PASS
				slot4				
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power @	0.2287598	-5	5	PASS
				slot1				
DCS1800	885	1784.8	18;18;18;18	Power @	0.1162415	-5	5	PASS
				slot2				
DCS1800	885	1784.8	18;18;18;18	Power @	-0.1490784	-5	5	PASS
				slot3				
DCS1800	885	1784.8	18;18;18;18	Power @	-0.1342468	-5	5	PASS
				slot4				
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @	21.53314	18	27	PASS
				slot1				
GSM900	975	880.2	6;6;6;6	Power @	21.37784	18	27	PASS
				slot2				
GSM900	975	880.2	6;6;6;6	Power @	21.66806	18	27	PASS
				slot3				
GSM900	975	880.2	6;6;6;6	Power @	21.20053	18	27	PASS
				slot4				
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @	22.72348	18	27	PASS
				slot1				
GSM900	975	880.2	7;7;7;7	Power @	22.24374	18	27	PASS
				slot2				
GSM900	975	880.2	7;7;7;7	Power @	22.0791	18	27	PASS
				slot3				
GSM900	975	880.2	7;7;7;7	Power @	22.09293	18	27	PASS
				slot4				
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @	22.44705	18	26	PASS
				slot1				
GSM900	975	880.2	8;8;8;8	Power @	21.96194	18	26	PASS
				slot2				
GSM900	975	880.2	8;8;8;8	Power @	22.0271	18	26	PASS
				slot3				
GSM900	975	880.2	8;8;8;8	Power @	22.02948	18	26	PASS
				slot4				

GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	20.27341	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	20.8725	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	20.0029	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot4	20.43539	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	18.24744	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot2	18.67627	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot3	18.29596	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot4	18.50809	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot1	16.26834	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot2	16.60236	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot3	15.94064	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot4	16.08258	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot1	14.34424	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot2	14.33087	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot3	14.36969	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot4	14.62131	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot1	12.25943	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot2	12.29059	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot3	11.75623	10	16	PASS

GSM900	975	880.2	13;13;13;13	Power slot4	@	11.8584	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power slot1	@	11.70123	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot2	@	11.28387	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot3	@	11.06119	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power slot4	@	11.64789	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT	-	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power slot1	@	9.683075	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot2	@	9.562592	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot3	@	9.288055	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power slot4	@	9.196747	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power slot1	@	7.649536	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot2	@	7.342621	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot3	@	6.981506	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power slot4	@	7.234222	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT	-	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power slot1	@	5.105225	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot2	@	5.173553	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot3	@	5.486938	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power slot4	@	5.298279	0	10	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power slot1	@	19.96835	18	27	PASS
GSM900	60	902	6;6;6;6	Power slot2	@	19.73438	18	27	PASS

GSM900	60	902	6;6;6;6	Power slot3	@	19.54428	18	27	PASS
GSM900	60	902	6;6;6;6	Power slot4	@	19.74402	18	27	PASS
GSM900	60	902	7;7;7;7	PvT		-	-	-	PASS
GSM900	60	902	7;7;7;7	Power slot1	@	21.06625	18	27	PASS
GSM900	60	902	7;7;7;7	Power slot2	@	20.53543	18	27	PASS
GSM900	60	902	7;7;7;7	Power slot3	@	20.63504	18	27	PASS
GSM900	60	902	7;7;7;7	Power slot4	@	20.65906	18	27	PASS
GSM900	60	902	8;8;8;8	PvT		-	-	-	PASS
GSM900	60	902	8;8;8;8	Power slot1	@	20.76328	18	26	PASS
GSM900	60	902	8;8;8;8	Power slot2	@	21.12924	18	26	PASS
GSM900	60	902	8;8;8;8	Power slot3	@	21.03702	18	26	PASS
GSM900	60	902	8;8;8;8	Power slot4	@	20.83038	18	26	PASS
GSM900	60	902	9;9;9;9	PvT		-	-	-	PASS
GSM900	60	902	9;9;9;9	Power slot1	@	18.98669	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot2	@	18.49594	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot3	@	18.72003	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot4	@	18.64761	18	24	PASS
GSM900	60	902	10;10;10;10	PvT		-	-	-	PASS
GSM900	60	902	10;10;10;10	Power slot1	@	17.16519	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot2	@	16.6879	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot3	@	16.19739	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot4	@	16.90759	16	22	PASS
GSM900	60	902	11;11;11;11	PvT		-	-	-	PASS
GSM900	60	902	11;11;11;11	Power slot1	@	15.09048	14	20	PASS


GSM900	60	902	11;11;11;11	Power slot2	@	14.94263	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot3	@	14.15381	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot4	@	14.54932	14	20	PASS
GSM900	60	902	12;12;12;12	PvT		-	-	-	PASS
GSM900	60	902	12;12;12;12	Power slot1	@	13.14603	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot2	@	12.64706	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot3	@	13.02557	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot4	@	12.50333	12	18	PASS
GSM900	60	902	13;13;13;13	PvT		-	-	-	PASS
GSM900	60	902	13;13;13;13	Power slot1	@	11.13864	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot2	@	10.97644	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot3	@	10.57202	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot4	@	10.38101	10	16	PASS
GSM900	60	902	14;14;14;14	PvT		-	-	-	PASS
GSM900	60	902	14;14;14;14	Power slot1	@	9.626495	6	16	PASS
GSM900	60	902	14;14;14;14	Power slot2	@	10.11755	6	16	PASS
GSM900	60	902	14;14;14;14	Power slot3	@	9.601105	6	16	PASS
GSM900	60	902	14;14;14;14	Power slot4	@	9.687317	6	16	PASS
GSM900	60	902	15;15;15;15	PvT		-	-	-	PASS
GSM900	60	902	15;15;15;15	Power slot1	@	8.096649	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot2	@	7.699493	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot3	@	7.852173	4	14	PASS
GSM900	60	902	15;15;15;15	Power slot4	@	7.766998	4	14	PASS
GSM900	60	902	16;16;16;16	PvT		-	-	-	PASS

GSM900	60	902	16;16;16;16	Power slot1	@	6.003998	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot2	@	5.946655	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot3	@	6.025543	2	12	PASS
GSM900	60	902	16;16;16;16	Power slot4	@	5.758728	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power slot1	@	4.575287	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot2	@	4.170563	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot3	@	3.529144	0	10	PASS
GSM900	60	902	17;17;17;17	Power slot4	@	3.794556	0	10	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power slot1	@	19.89655	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power slot2	@	20.04218	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power slot3	@	19.93472	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power slot4	@	19.91284	18	27	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power slot1	@	21.16022	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power slot2	@	21.2941	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power slot3	@	20.75214	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power slot4	@	20.80917	18	27	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power slot1	@	21.03003	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot2	@	20.83191	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot3	@	20.72476	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot4	@	20.52441	18	26	PASS


				slot4				
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	18.78607	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	18.9537	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	18.71872	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	19.15982	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	17.16479	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	16.92899	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	16.58871	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	16.20865	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	15.08621	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	15.50284	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	15.0148	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	14.38687	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	13.04697	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	12.83835	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	13.14032	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	12.66382	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot1	11.05676	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot2	10.64084	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @	11.17685	10	16	PASS

				slot3				
GSM900	124	914.8	13;13;13;13	Power @ slot4	11.08197	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	10.07639	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	9.721588	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	9.976471	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	10.08456	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	8.001068	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	7.655792	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	7.420197	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot4	8.040588	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	6.683716	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	5.746765	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot3	5.820648	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot4	5.863739	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot1	4.334015	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot2	4.097382	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot3	4.077118	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot4	3.999939	0	10	PASS

DCS1800 Channel=512 Gamma=18;18;18;18.png

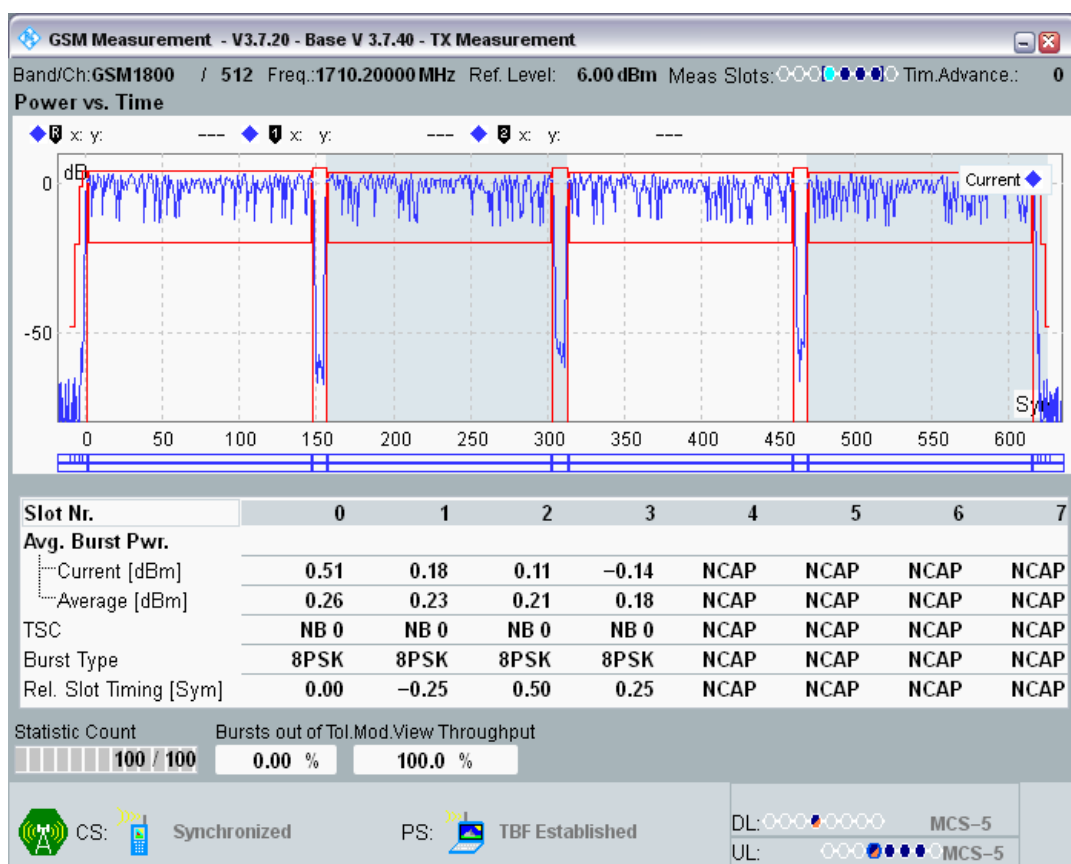


DCS1800 Channel=512 Gamma=5;5;5;5.png

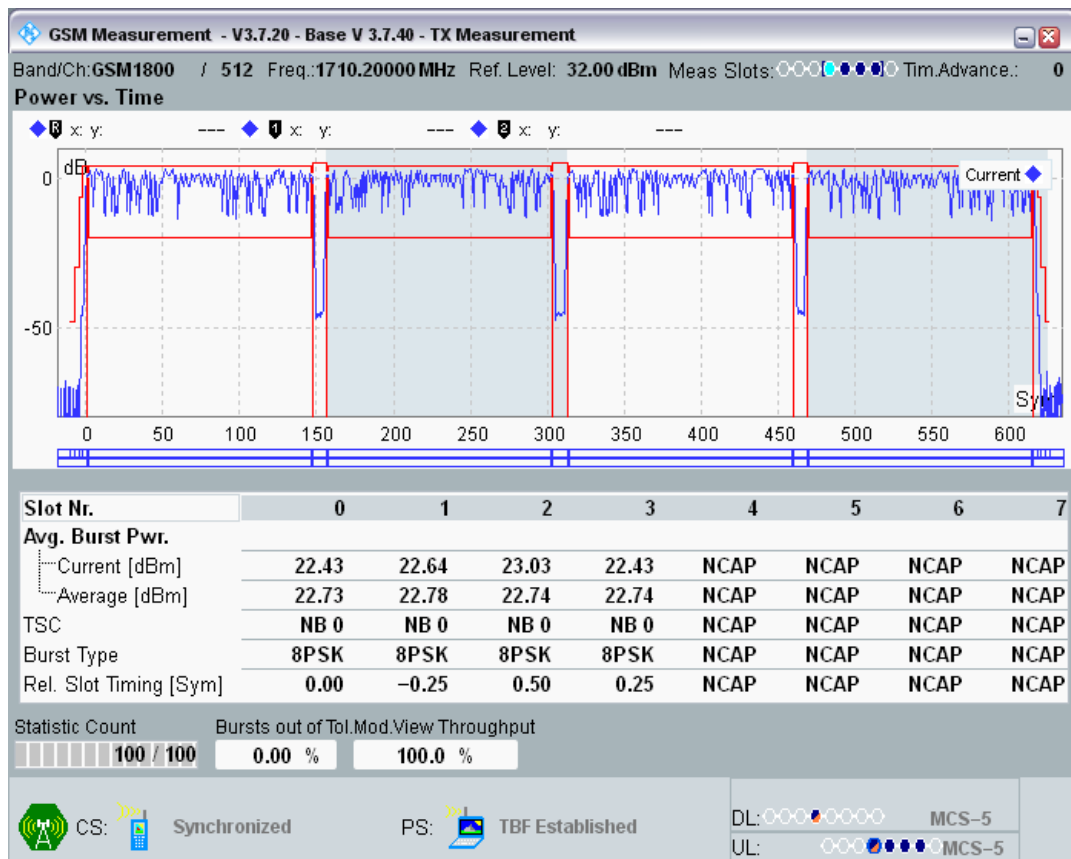

DCS1800 Channel=700 Gamma=18;18;18;18.png




DCS1800 Channel=700 Gamma=5;5;5;5.png

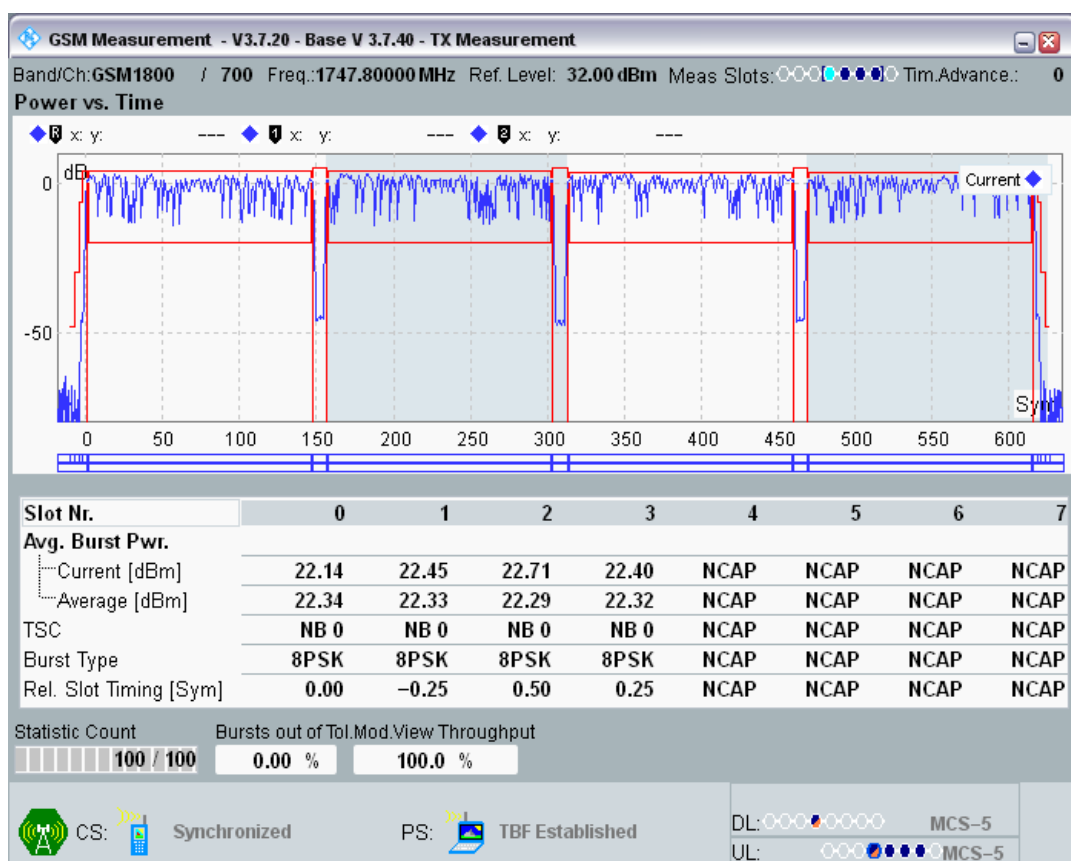


DCS1800 Channel=885 Gamma=18;18;18;18.png




DCS1800 Channel=885 Gamma=5;5;5;5.png

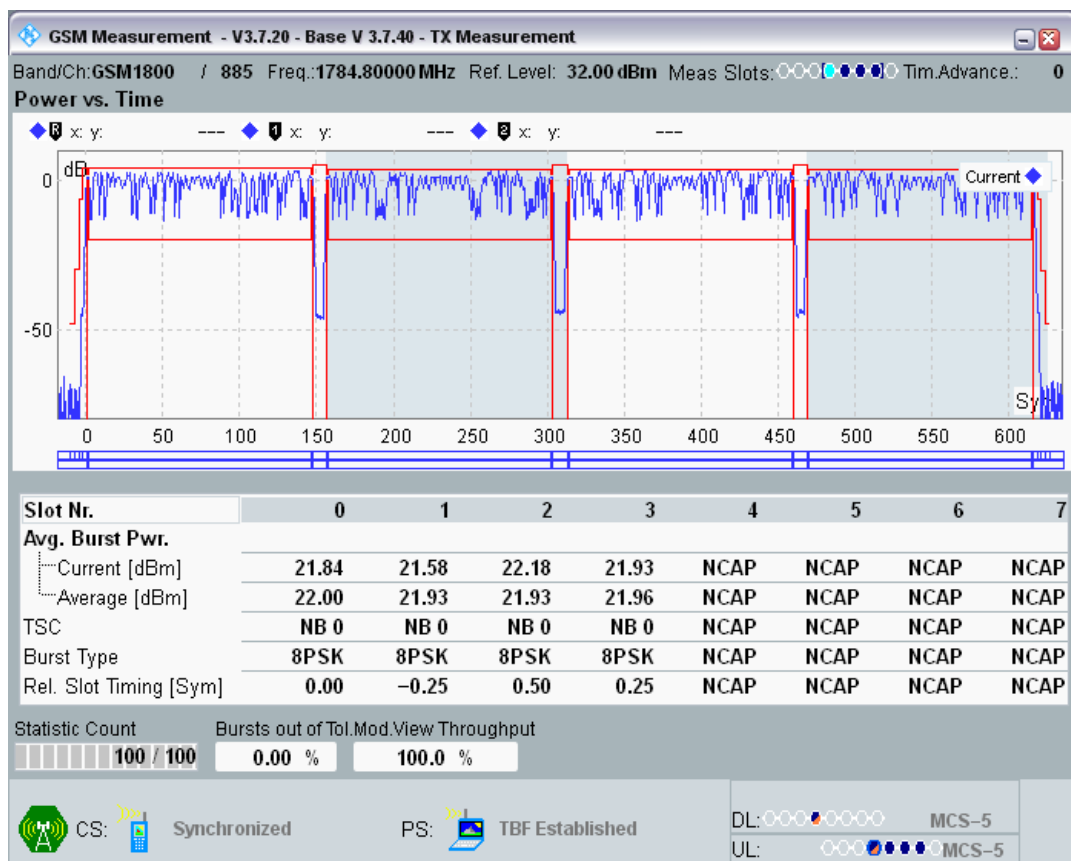

GSM900 Channel=124 Gamma=17;17;17;17.png

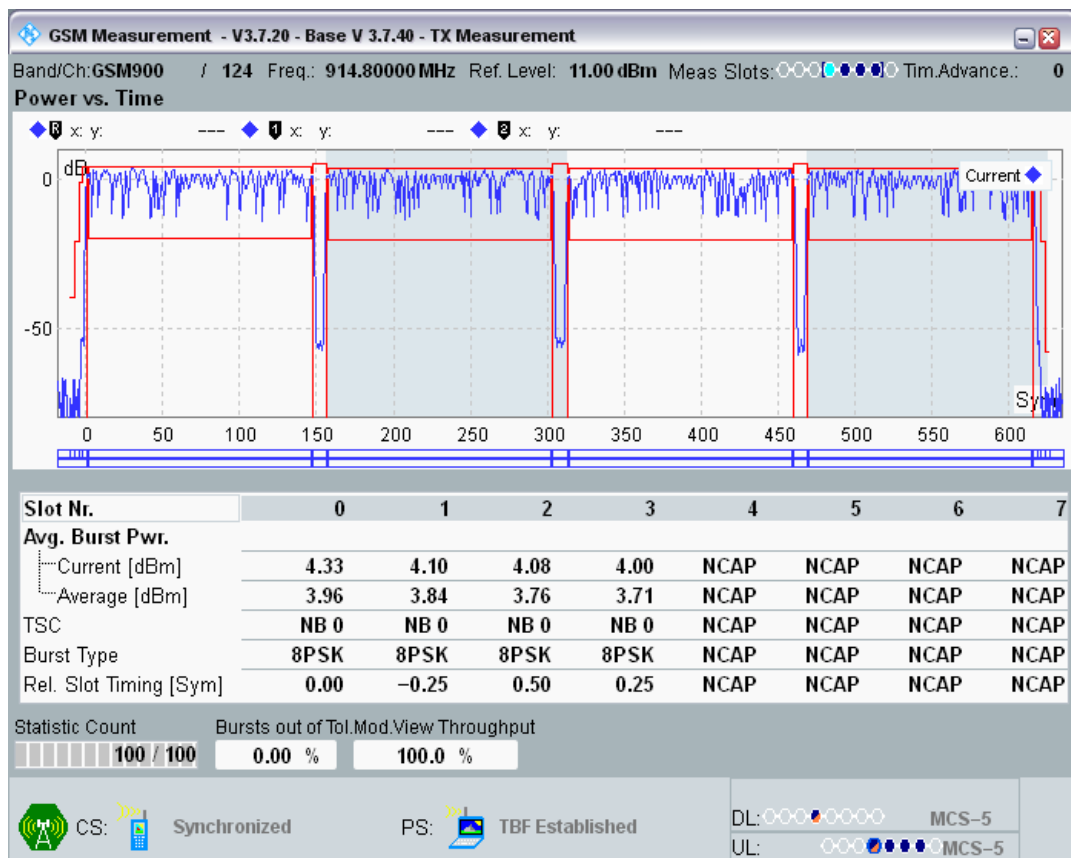


GSM900 Channel=124 Gamma=6;6;6;6.png

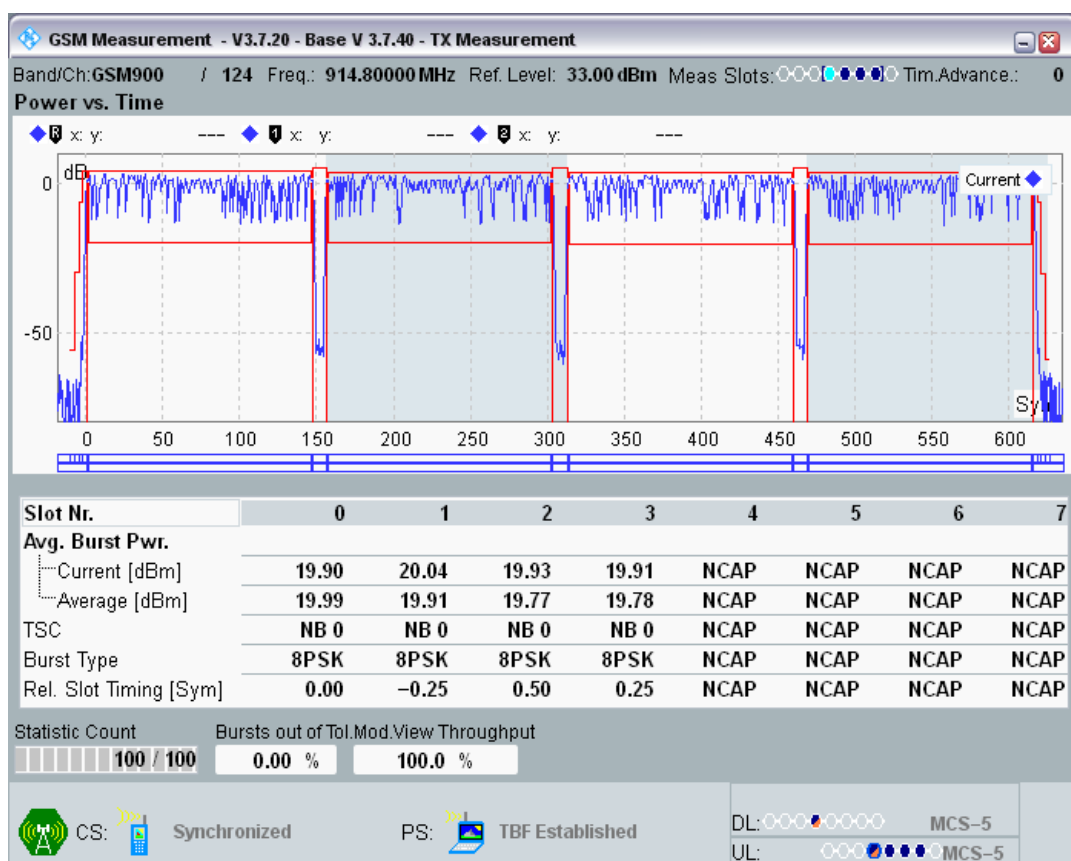


GSM900 Channel=60 Gamma=17;17;17;17.png




GSM900 Channel=60 Gamma=6;6;6.png

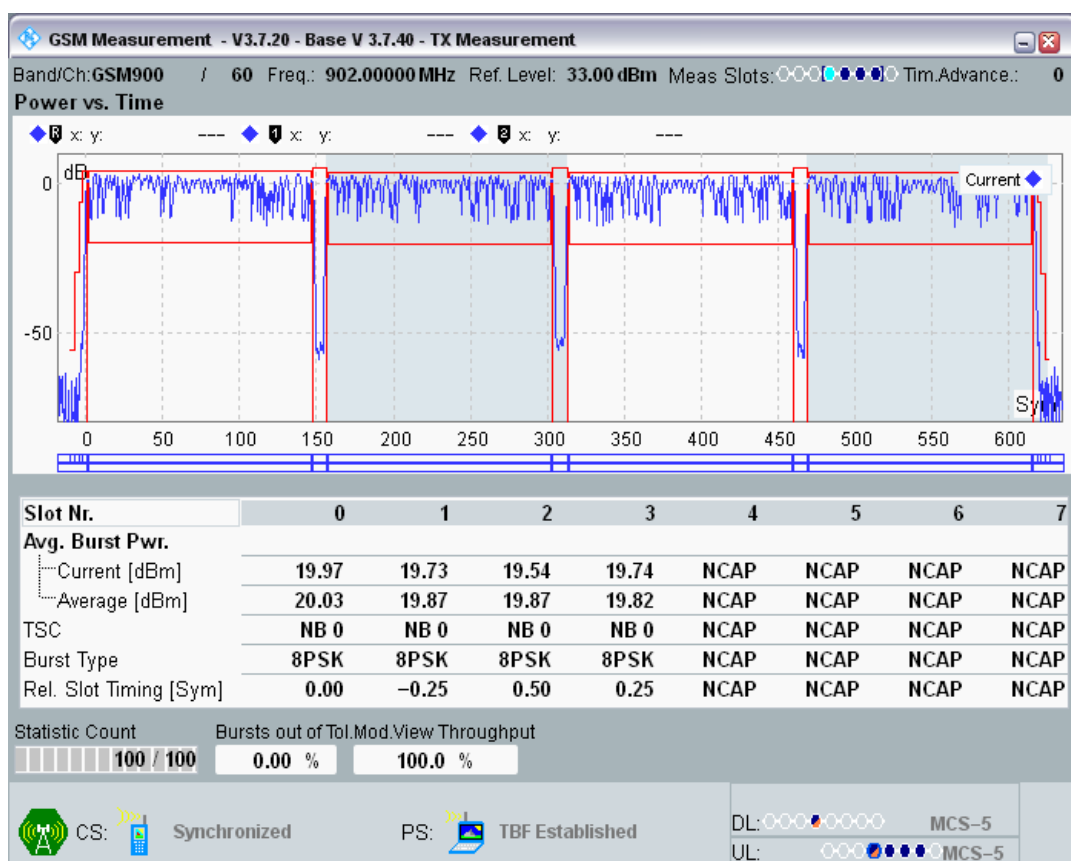

GSM900 Channel=975 Gamma=17;17;17;17.png

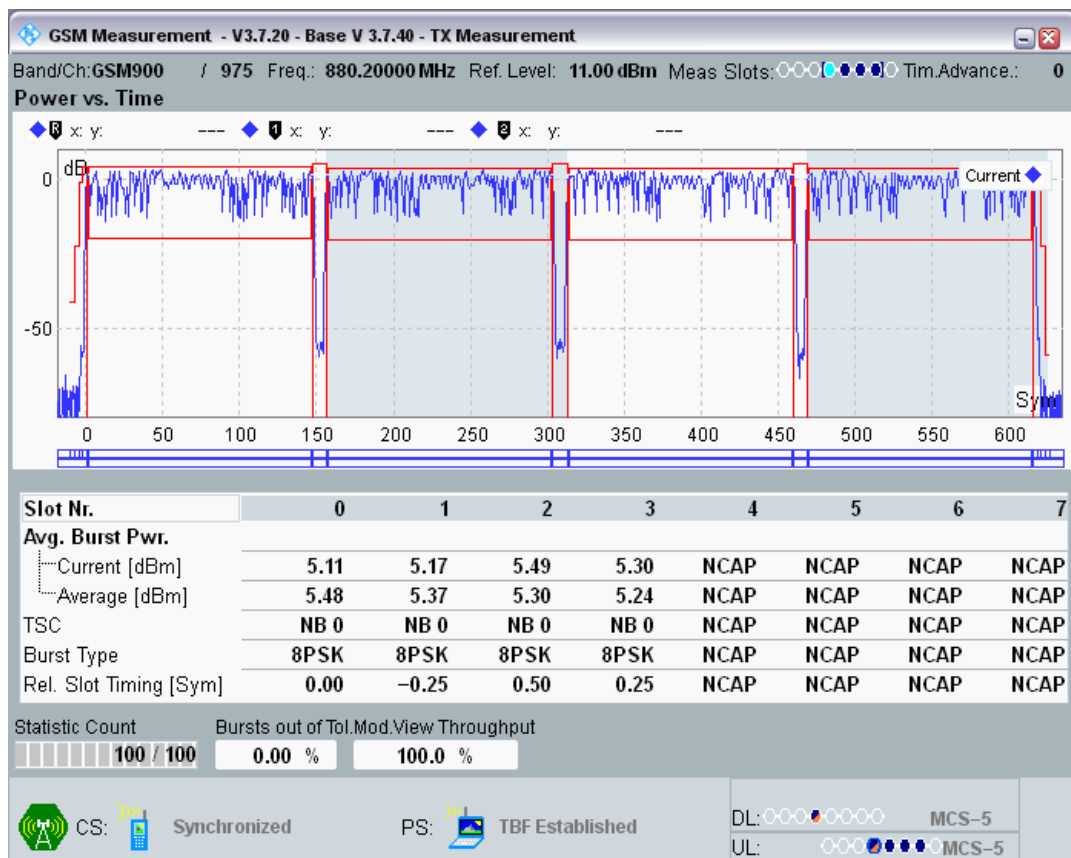

GSM900 Channel=975 Gamma=6;6;6;6.png

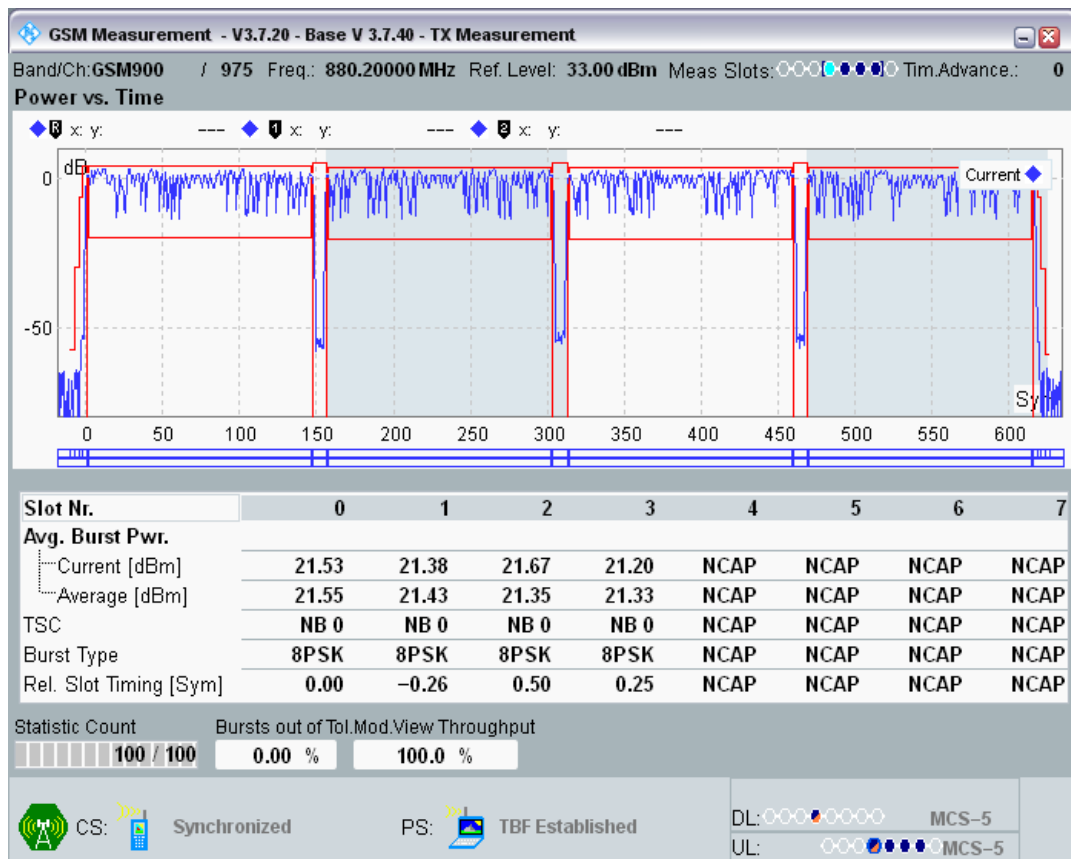

Clause 4.2.29 Modulation Spectrum in EGPRS configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-75.64	-60	-61.23	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1600 KHz	-74.66	-60	-60.26	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1400 KHz	-73.63	-60	-59.22	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-72.91	-60	-58.51	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1000 KHz	-71.81	-60	-57.41	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-800 KHz	-70.64	-60	-56.24	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-69.09	-60	-54.69	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-65.93	-60	-51.53	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-250 KHz	-43.41	-33	-29.00	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-200 KHz	-38.24	-30	-23.83	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-100 KHz	-7.70	0.5	6.70	-36	PASS
DCS1800	512	1710.2	5;5;5;5	100 KHz	-7.80	0.5	6.60	-36	PASS
DCS1800	512	1710.2	5;5;5;5	200 KHz	-38.48	-30	-24.08	-36	PASS
DCS1800	512	1710.2	5;5;5;5	250 KHz	-43.61	-33	-29.21	-36	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-66.20	-60	-51.80	-36	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-69.36	-60	-54.96	-56	PASS
DCS1800	512	1710.2	5;5;5;5	800 KHz	-70.97	-60	-56.57	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1000 KHz	-72.26	-60	-57.86	-56	PASS

DCS1800	512	1710.2	5;5;5;5	1200 KHz	-73.35	-60	-58.95	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1400 KHz	-74.27	-60	-59.87	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1600 KHz	-75.43	-60	-61.03	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-76.12	-60	-61.71	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-75.49	-60	-61.43	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1600 KHz	-74.56	-60	-60.49	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1400 KHz	-73.95	-60	-59.88	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-72.91	-60	-58.84	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1000 KHz	-71.80	-60	-57.73	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-800 KHz	-70.89	-60	-56.83	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-69.18	-60	-55.12	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-65.74	-60	-51.68	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-250 KHz	-43.78	-33	-29.72	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-200 KHz	-38.31	-30	-24.24	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-100 KHz	-7.99	0.5	6.07	-36	PASS
DCS1800	700	1747.8	5;5;5;5	100 KHz	-7.77	0.5	6.29	-36	PASS
DCS1800	700	1747.8	5;5;5;5	200 KHz	-38.66	-30	-24.60	-36	PASS
DCS1800	700	1747.8	5;5;5;5	250 KHz	-43.83	-33	-29.76	-36	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-66.12	-60	-52.05	-36	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-69.50	-60	-55.43	-56	PASS
DCS1800	700	1747.8	5;5;5;5	800 KHz	-70.79	-60	-56.72	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1000 KHz	-72.32	-60	-58.25	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-73.31	-60	-59.24	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1400 KHz	-74.40	-60	-60.34	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1600 KHz	-75.13	-60	-61.06	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-75.70	-60	-61.63	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-75.43	-60	-61.56	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1600 KHz	-74.84	-60	-60.97	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1400 KHz	-73.96	-60	-60.10	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-72.82	-60	-58.96	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1000 KHz	-71.76	-60	-57.90	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-800 KHz	-70.57	-60	-56.71	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-69.09	-60	-55.23	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-65.65	-60	-51.78	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-250 KHz	-44.14	-33	-30.28	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-200 KHz	-38.60	-30	-24.73	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-100 KHz	-7.93	0.5	5.94	-36	PASS
DCS1800	885	1784.8	5;5;5;5	100 KHz	-8.05	0.5	5.81	-36	PASS
DCS1800	885	1784.8	5;5;5;5	200 KHz	-38.75	-30	-24.89	-36	PASS
DCS1800	885	1784.8	5;5;5;5	250 KHz	-43.99	-33	-30.13	-36	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-66.02	-60	-52.16	-36	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-69.56	-60	-55.70	-56	PASS
DCS1800	885	1784.8	5;5;5;5	800 KHz	-70.76	-60	-56.89	-56	PASS


DCS1800	885	1784.8	5;5;5;5	1000 KHz	-72.44	-60	-58.58	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-73.38	-60	-59.51	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1400 KHz	-74.16	-60	-60.30	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1600 KHz	-75.21	-60	-61.35	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-75.86	-60	-62.00	-56	PASS
GSM900	975	880.2	6;6;6;6	-1800 KHz	-75.47	-60	-62.45	-51	PASS
GSM900	975	880.2	6;6;6;6	-1600 KHz	-74.60	-60	-61.58	-51	PASS
GSM900	975	880.2	6;6;6;6	-1400 KHz	-74.27	-60	-61.25	-51	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-73.36	-60	-60.34	-51	PASS
GSM900	975	880.2	6;6;6;6	-1000 KHz	-72.03	-60	-59.01	-51	PASS
GSM900	975	880.2	6;6;6;6	-800 KHz	-71.33	-60	-58.30	-51	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-69.90	-60	-56.88	-51	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-67.49	-60	-54.47	-36	PASS
GSM900	975	880.2	6;6;6;6	-250 KHz	-42.86	-33	-29.84	-36	PASS
GSM900	975	880.2	6;6;6;6	-200 KHz	-38.38	-30	-25.36	-36	PASS
GSM900	975	880.2	6;6;6;6	-100 KHz	-7.84	0.5	5.19	-36	PASS
GSM900	975	880.2	6;6;6;6	100 KHz	-7.74	0.5	5.28	-36	PASS
GSM900	975	880.2	6;6;6;6	200 KHz	-38.69	-30	-25.67	-36	PASS
GSM900	975	880.2	6;6;6;6	250 KHz	-43.03	-33	-30.01	-36	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-67.80	-60	-54.78	-36	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-69.87	-60	-56.84	-51	PASS
GSM900	975	880.2	6;6;6;6	800 KHz	-71.34	-60	-58.32	-51	PASS
GSM900	975	880.2	6;6;6;6	1000 KHz	-71.96	-60	-58.94	-51	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-73.45	-60	-60.43	-51	PASS
GSM900	975	880.2	6;6;6;6	1400 KHz	-74.24	-60	-61.21	-51	PASS
GSM900	975	880.2	6;6;6;6	1600 KHz	-74.77	-60	-61.75	-51	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-75.13	-60	-62.11	-51	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-74.60	-60	-62.83	-51	PASS
GSM900	60	902	6;6;6;6	-1600 KHz	-74.21	-60	-62.44	-51	PASS
GSM900	60	902	6;6;6;6	-1400 KHz	-73.47	-60	-61.70	-51	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-73.04	-60	-61.27	-51	PASS
GSM900	60	902	6;6;6;6	-1000 KHz	-71.59	-60	-59.82	-51	PASS
GSM900	60	902	6;6;6;6	-800 KHz	-70.85	-60	-59.09	-51	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-69.79	-60	-58.02	-51	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-67.43	-60	-55.66	-36	PASS
GSM900	60	902	6;6;6;6	-250 KHz	-42.98	-33	-31.21	-36	PASS
GSM900	60	902	6;6;6;6	-200 KHz	-38.85	-30	-27.08	-36	PASS
GSM900	60	902	6;6;6;6	-100 KHz	-7.94	0.5	3.83	-36	PASS
GSM900	60	902	6;6;6;6	100 KHz	-8.18	0.5	3.59	-36	PASS
GSM900	60	902	6;6;6;6	200 KHz	-38.99	-30	-27.23	-36	PASS
GSM900	60	902	6;6;6;6	250 KHz	-43.18	-33	-31.41	-36	PASS
GSM900	60	902	6;6;6;6	400 KHz	-67.70	-60	-55.94	-36	PASS
GSM900	60	902	6;6;6;6	600 KHz	-69.75	-60	-57.98	-51	PASS

GSM900	60	902	6;6;6;6	800 KHz	-71.04	-60	-59.27	-51	PASS
GSM900	60	902	6;6;6;6	1000 KHz	-71.71	-60	-59.95	-51	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-73.15	-60	-61.38	-51	PASS
GSM900	60	902	6;6;6;6	1400 KHz	-73.71	-60	-61.95	-51	PASS
GSM900	60	902	6;6;6;6	1600 KHz	-74.37	-60	-62.60	-51	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-74.60	-60	-62.83	-51	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-73.94	-60	-62.46	-51	PASS
GSM900	124	914.8	6;6;6;6	-1600 KHz	-73.94	-60	-62.45	-51	PASS
GSM900	124	914.8	6;6;6;6	-1400 KHz	-73.12	-60	-61.63	-51	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-72.72	-60	-61.23	-51	PASS
GSM900	124	914.8	6;6;6;6	-1000 KHz	-71.21	-60	-59.73	-51	PASS
GSM900	124	914.8	6;6;6;6	-800 KHz	-70.54	-60	-59.05	-51	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-69.60	-60	-58.11	-51	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-67.42	-60	-55.93	-36	PASS
GSM900	124	914.8	6;6;6;6	-250 KHz	-42.44	-33	-30.95	-36	PASS
GSM900	124	914.8	6;6;6;6	-200 KHz	-38.45	-30	-26.96	-36	PASS
GSM900	124	914.8	6;6;6;6	-100 KHz	-7.66	0.5	3.83	-36	PASS
GSM900	124	914.8	6;6;6;6	100 KHz	-7.63	0.5	3.85	-36	PASS
GSM900	124	914.8	6;6;6;6	200 KHz	-38.80	-30	-27.31	-36	PASS
GSM900	124	914.8	6;6;6;6	250 KHz	-43.28	-33	-31.79	-36	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-67.40	-60	-55.91	-36	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-69.55	-60	-58.06	-51	PASS
GSM900	124	914.8	6;6;6;6	800 KHz	-70.64	-60	-59.15	-51	PASS
GSM900	124	914.8	6;6;6;6	1000 KHz	-71.56	-60	-60.07	-51	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-72.94	-60	-61.45	-51	PASS
GSM900	124	914.8	6;6;6;6	1400 KHz	-73.22	-60	-61.74	-51	PASS
GSM900	124	914.8	6;6;6;6	1600 KHz	-73.82	-60	-62.33	-51	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-73.87	-60	-62.38	-51	PASS


DCS1800 Channel=512 Gamma=5;5;5;5.png

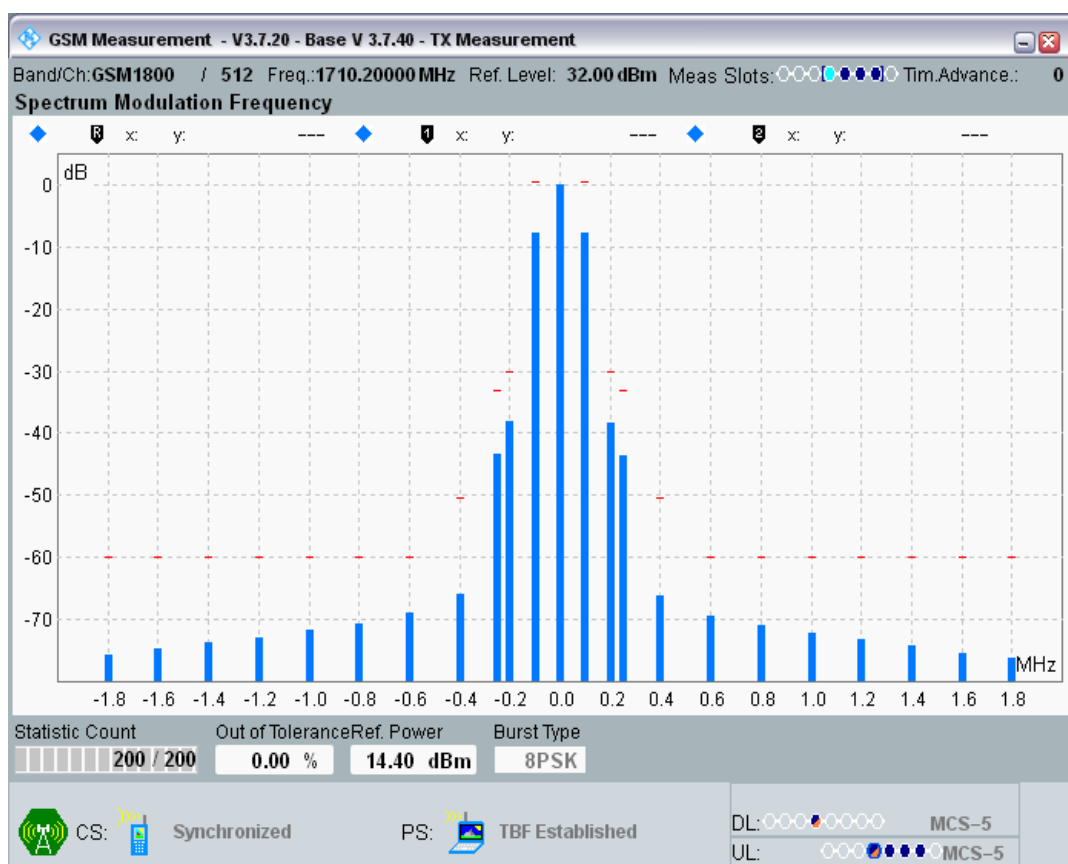


DCS1800 Channel=700 Gamma=5;5;5;5.png

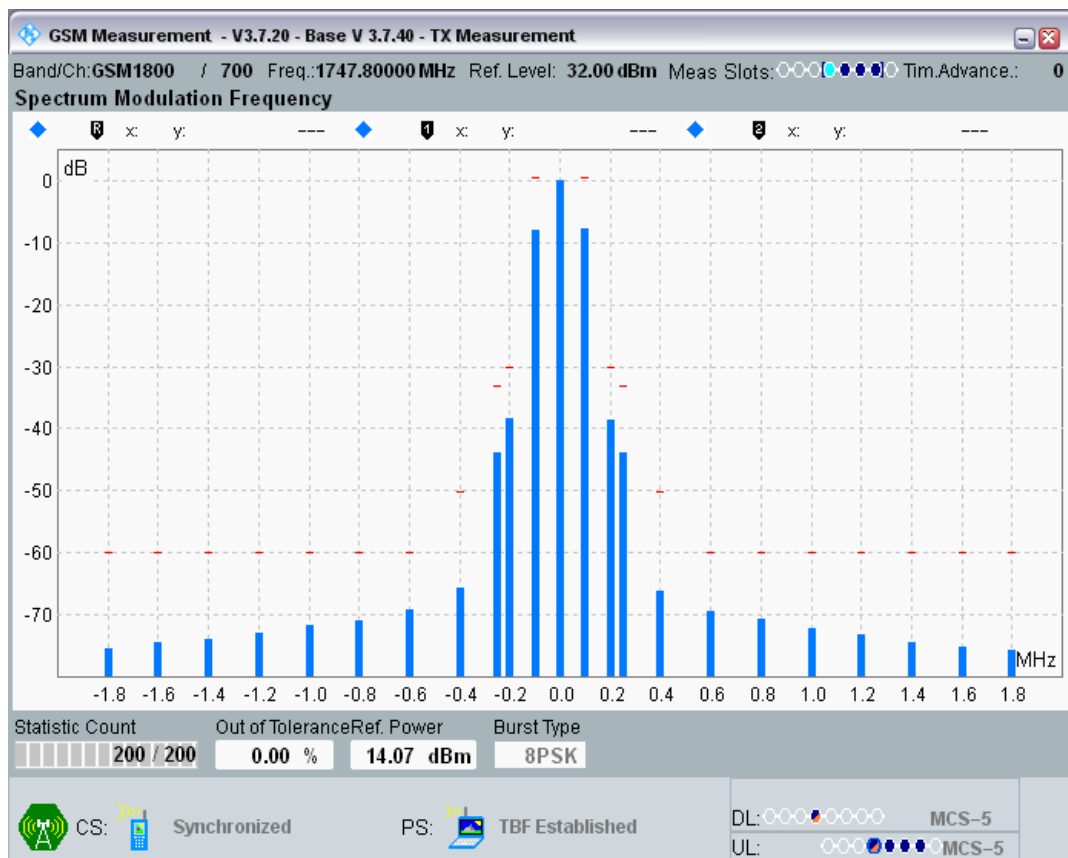


DCS1800 Channel=885 Gamma=5;5;5;5.png

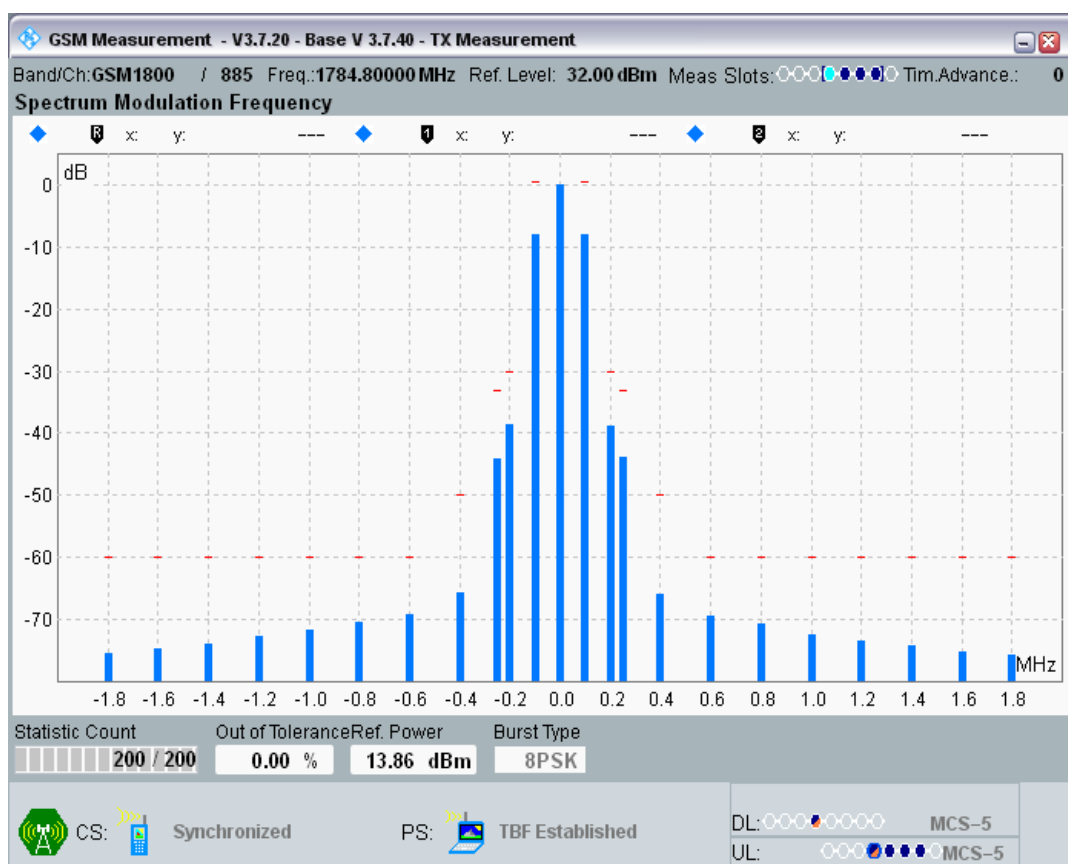


GSM900 Channel=124 Gamma=6;6;6;6.png

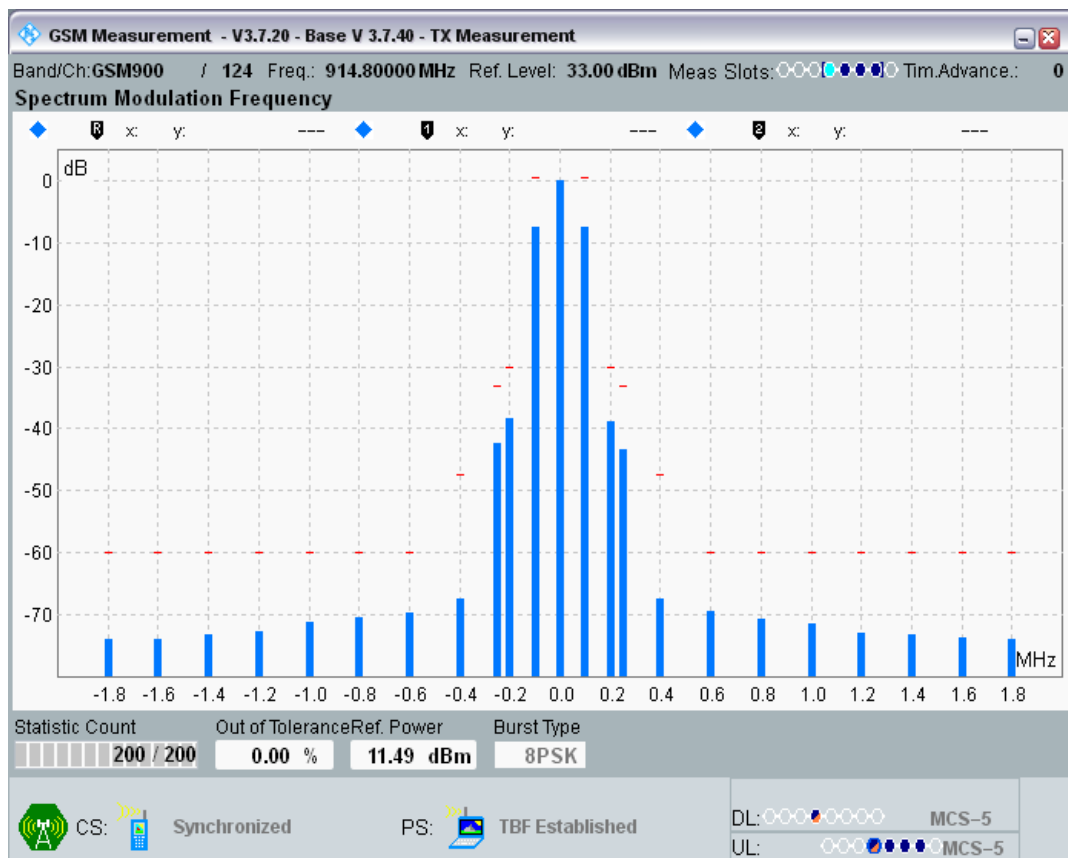

GSM900 Channel=60 Gamma=6;6;6.png

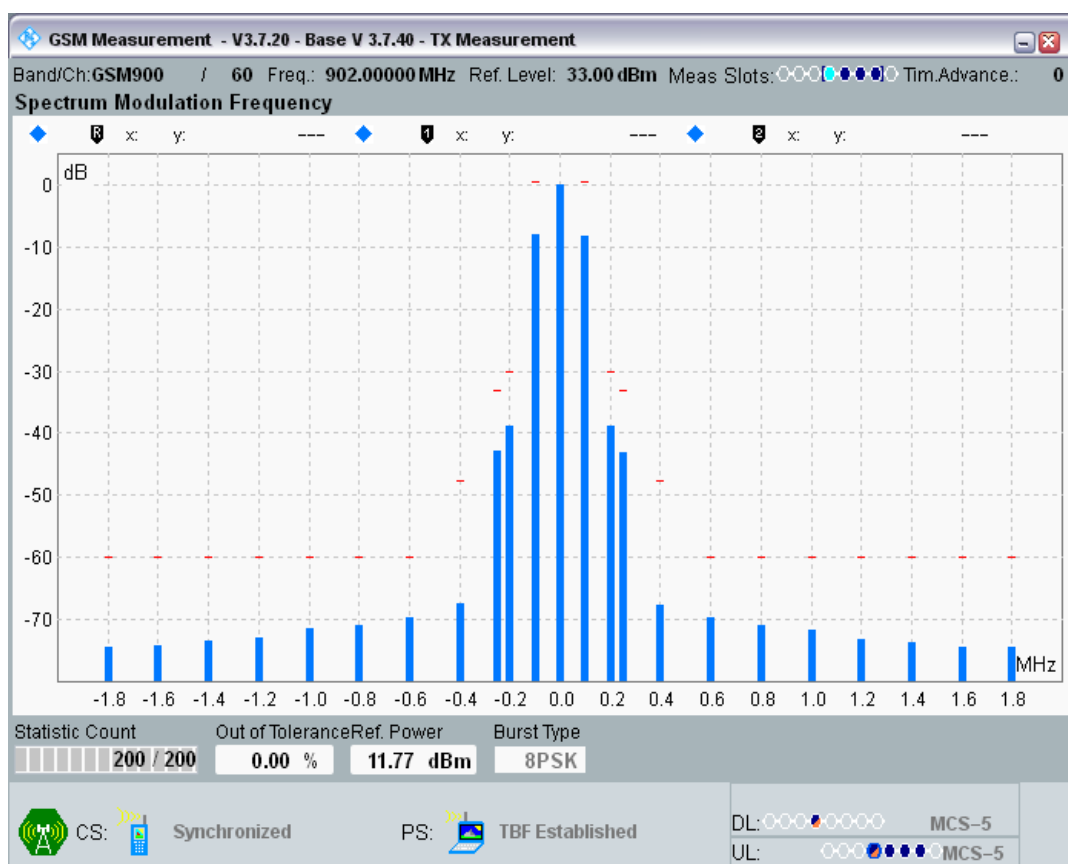

GSM900 Channel=975 Gamma=6;6;6.png

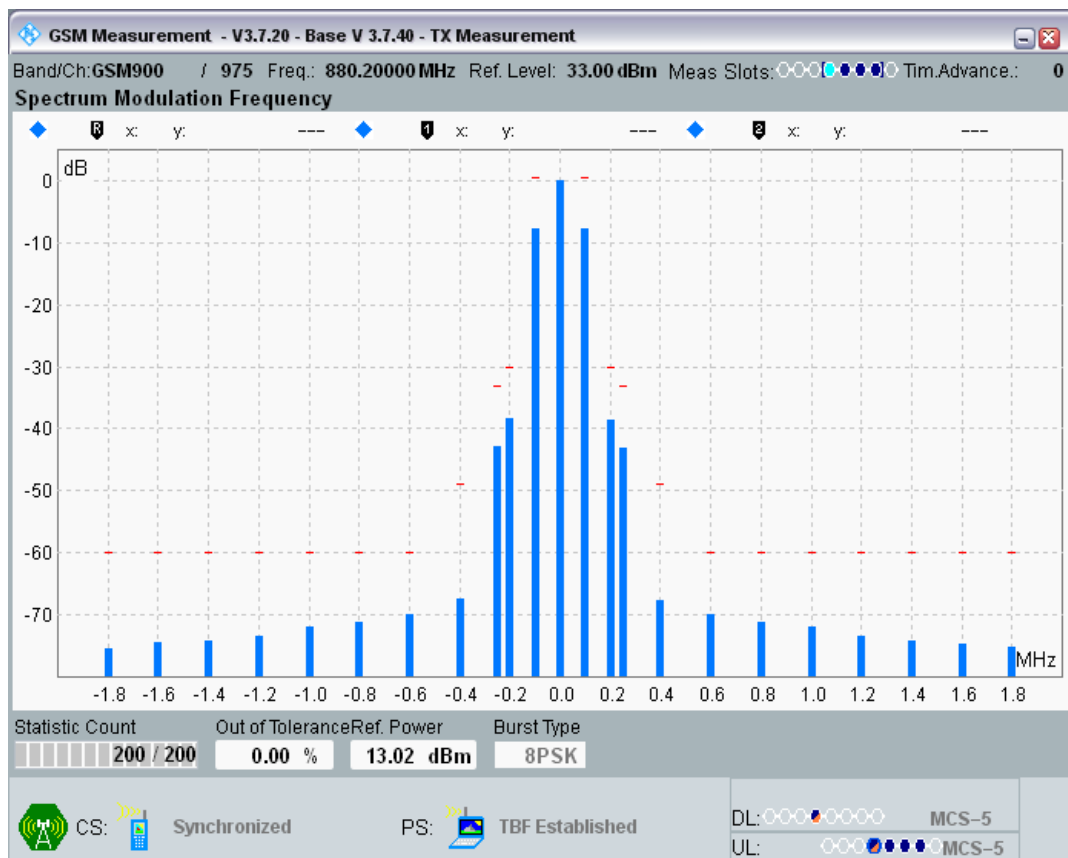


Clause 4.2.29 Switching Spectrum in EGPRS configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-48.90	-27	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-47.07	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-44.44	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-40.64	-22	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-39.14	-22	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-43.43	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-47.37	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-49.80	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-49.70	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-47.25	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-44.27	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-40.75	-22	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-39.66	-22	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-43.32	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-45.85	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-49.87	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-47.76	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-47.73	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-43.72	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-40.76	-22	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-40.37	-22	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-42.46	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-47.00	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-49.45	-27	PASS
GSM900	975	880.2	6;6;6;6	-1800 KHz	-49.94	-24	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-48.44	-21	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-46.27	-21	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-42.68	-19	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-42.79	-19	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-44.28	-21	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-49.60	-21	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-50.47	-24	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-51.61	-24	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-49.25	-21	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-45.46	-21	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-42.78	-19	PASS
GSM900	60	902	6;6;6;6	400 KHz	-43.85	-19	PASS
GSM900	60	902	6;6;6;6	600 KHz	-44.36	-21	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-48.28	-21	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-50.67	-24	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-51.09	-24	PASS

GSM900	124	914.8	6;6;6;6	-1200 KHz	-49.21	-21	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-45.50	-21	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-42.60	-19	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-44.61	-19	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-45.40	-21	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-50.43	-21	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-50.37	-24	PASS


DCS1800 Channel=512 Gamma=5;5;5;5.png

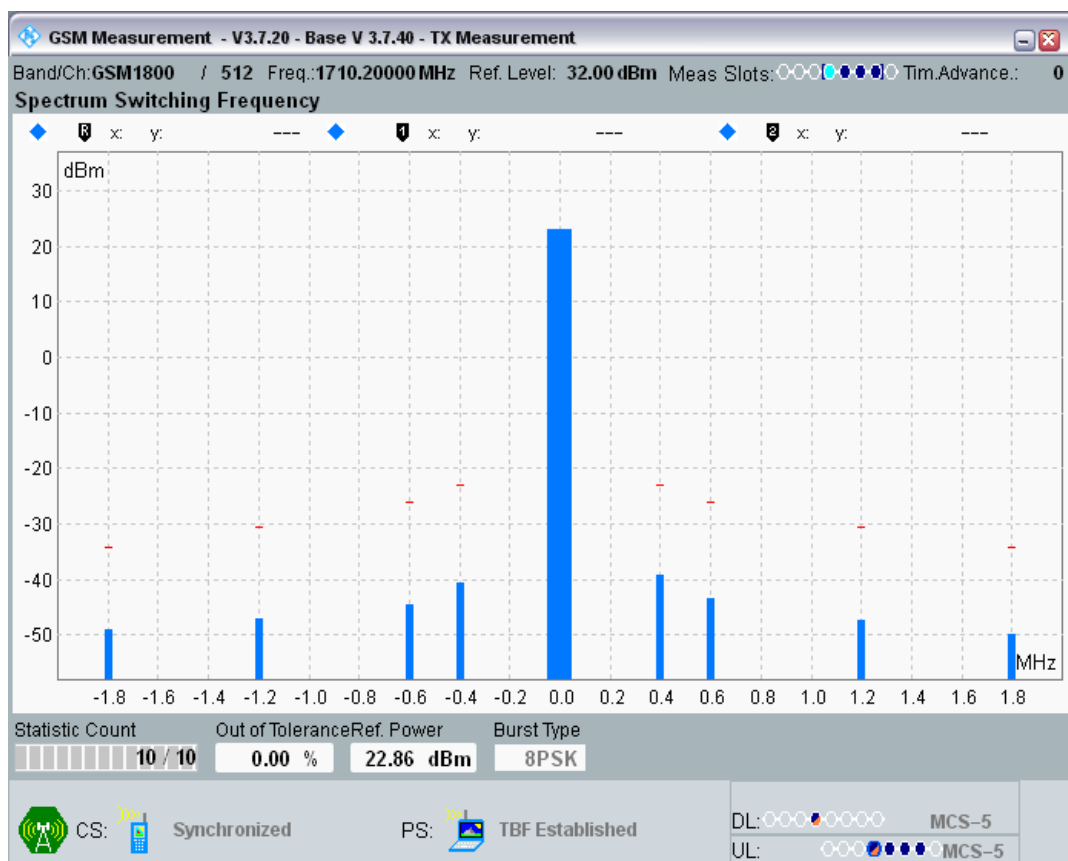


DCS1800 Channel=700 Gamma=5;5;5;5.png

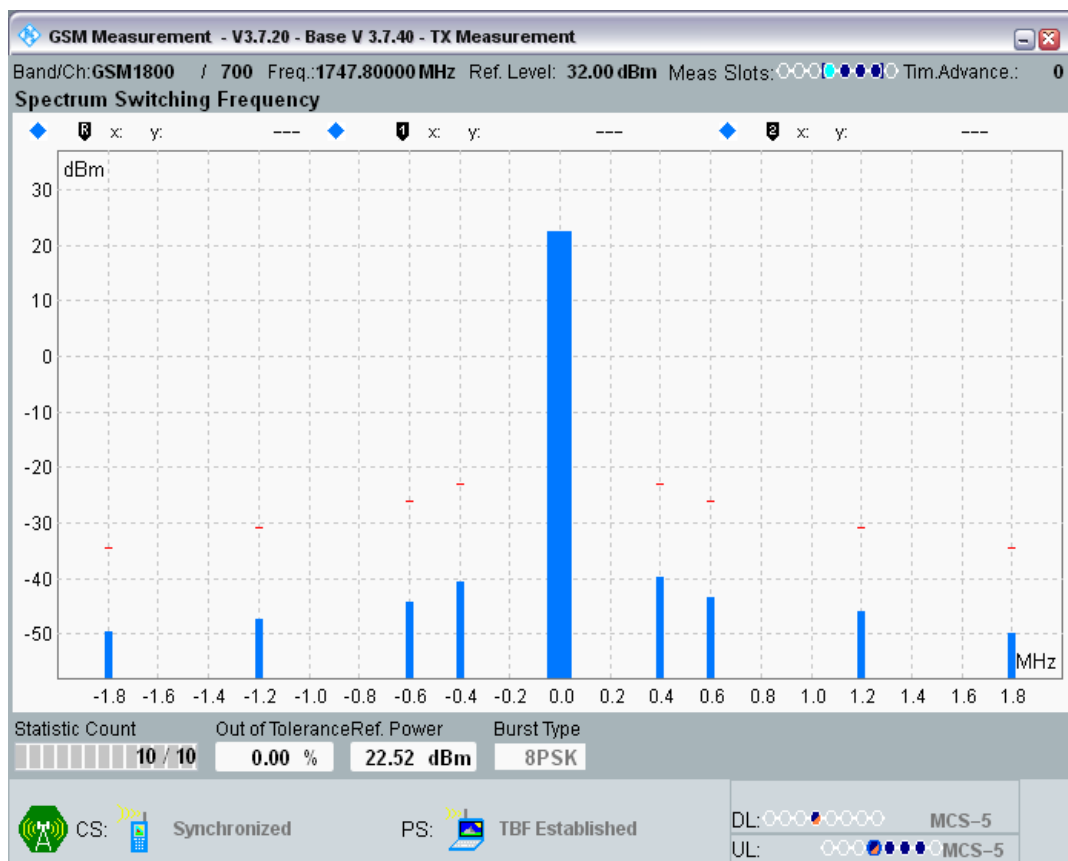


DCS1800 Channel=885 Gamma=5;5;5;5.png

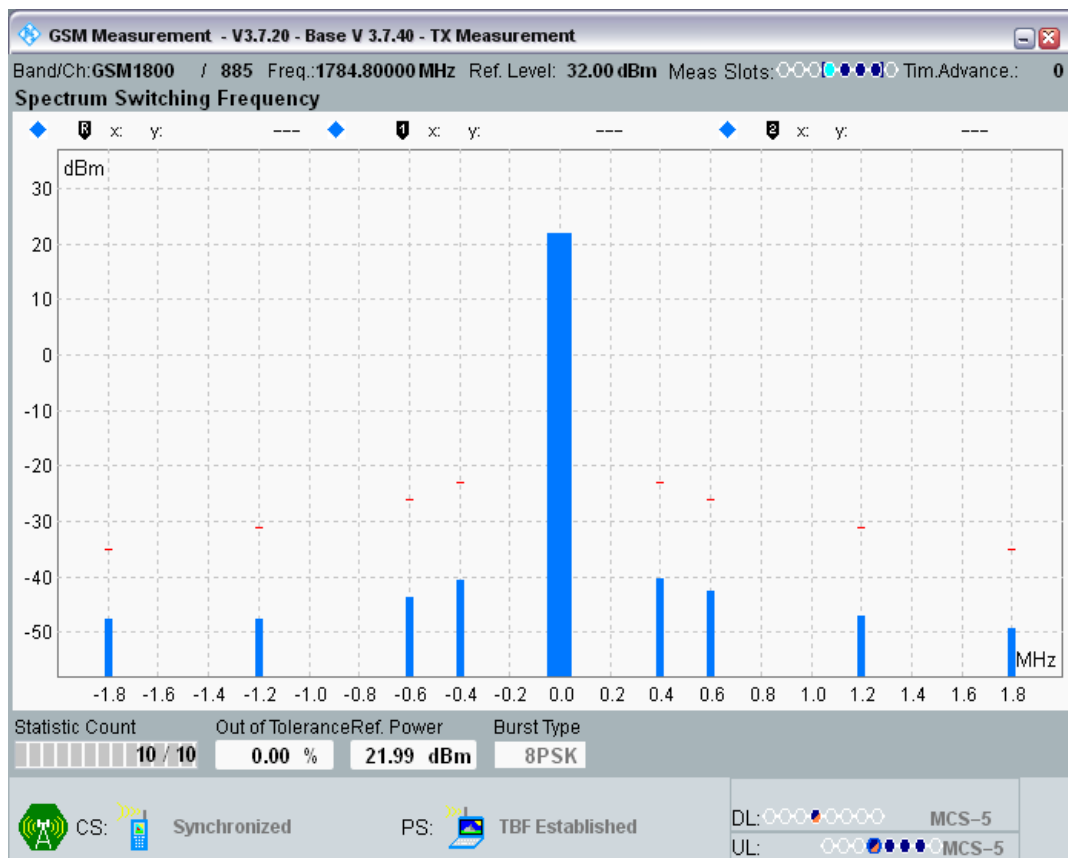

GSM900 Channel=124 Gamma=6;6;6;6.png

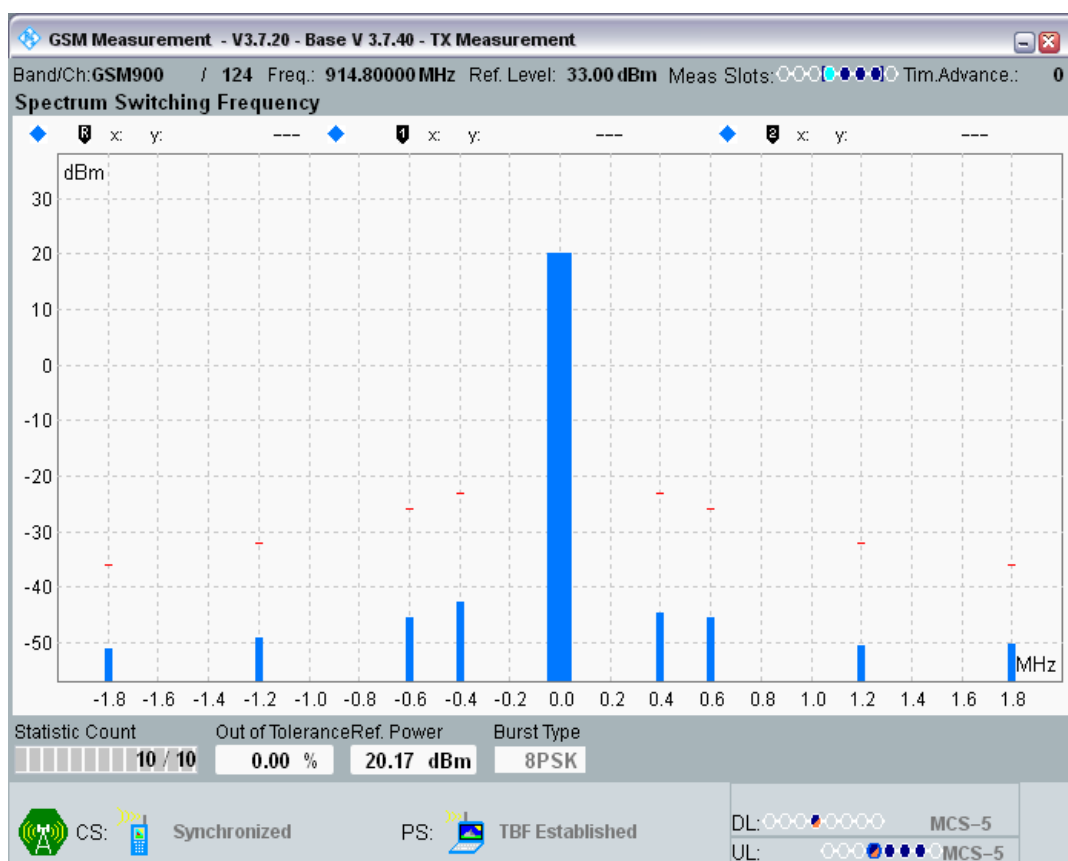

GSM900 Channel=60 Gamma=6;6;6;6.png

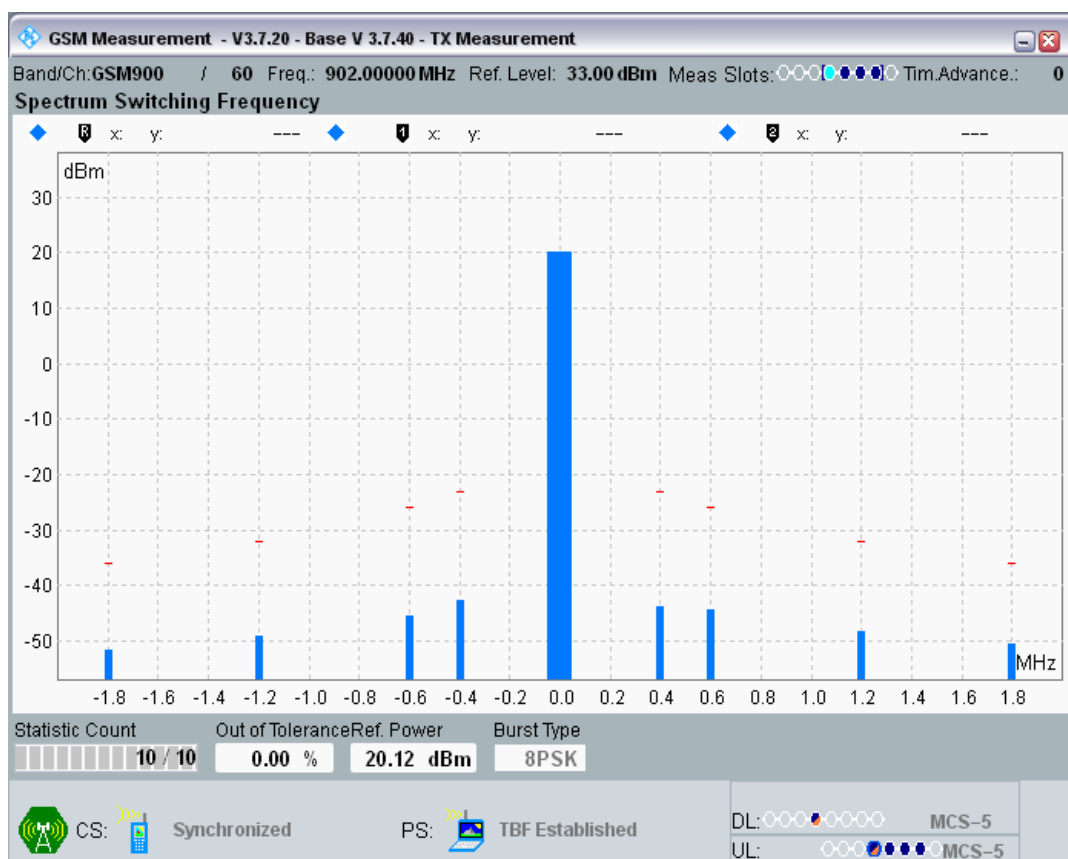

GSM900 Channel=975 Gamma=6;6;6;6.png

