



RADIO TEST REPORT

ETSI EN 300 440 V2.2.1 (2018-07)

Product : Tablet

Trade Mark : CUBOT

Model Name : TAB KINGKONG MINI

Family Model : N/A

Report No. : S25052400907005

Prepared for

Shenzhen Huafurui Technology Co., Ltd.

Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road,
Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District,
Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Huafurui Technology Co., Ltd.
Address..... : Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Manufacturer's Name : Shenzhen Huafurui Technology Co., Ltd.
Address..... : Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

Product description

Product name..... : Tablet
Trademark : CUBOT
Model and/or type reference : TAB KINGKONG MINI
Family Model : N/A

Standards : ETSI EN 300 440 V2.2.1 (2018-07)

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the of article 3.2 of the Directive 2014/53/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number : S250524009006

Date of Test

Date (s) of performance of tests : May 29, 2025 ~ Jul. 01, 2025

Date of Issue..... : Jul. 01, 2025

Test Result..... : **Pass**

Prepared By : Allen Liu
Allen Liu
(Project Engineer)

Reviewed By : Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By : Alex Li
Alex Li
(Manager)

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST CONDITIONS	10
2.3 DESCRIPTION OF TEST CONDITIONS	11
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . EQUIVALENT ISOTROPICALLY RADIATED POWER (E.I.R.P.)	15
3.1 APPLICABILITY	15
3.2 LIMITS	15
3.3 GENERAL REQUIREMENTS	15
3.4 TEST PROCEDURES	15
3.4.1 FOR NON SPREAD SPECTRUM TRANSMITTERS	15
3.4.2 FOR ALL OTHER TRANSMITTER BANDWIDTHS	16
3.5 TEST SETUP LAYOUT	16
3.6 EUT OPERATION DURING TEST	16
3.7 TEST RESULT FOR -6 DB BANDWIDTH	17
3.8 TEST RESULT FOR E.I.R.P	18
4 . PERMITTED RANGE OF OPERATING FREQUENCIES	19
4.1 APPLIED PROCEDURES / LIMIT	19
4.2 TEST PROCEDURES	19
4.3 TEST SETUP LAYOUT	19
4.4 EUT OPERATION DURING TEST	19
4.5 TEST RESULTS	20
5 . UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	23
5.1 APPLIED PROCEDURES / LIMIT	23
5.2 MEASURING INSTRUMENTS AND SETTING	23
5.3 TEST PROCEDURES	23
5.4 TEST SETUP LAYOUT	24

Table of Contents	Page
5.5 EUT OPERATION DURING TEST	24
5.6 RESULTS OF STANDBY MODE SPURIOUS EMISSIONS	24
5.7 TEST RESULTS	25
6 . DUTY CYCLE	27
6.1 APPLICABILITY AND DESCRIPTION	27
6.2 LIMITS	27
6.4 METHOD OF MEASUREMENT	27
6.5 TEST SETUP	28
6.6 TEST RESULTS	28
7 . SPURIOUS EMISSIONS – RX	29
7.1 APPLIED PROCEDURES / LIMIT	29
7.2 MEASURING INSTRUMENTS AND SETTING	29
7.3 TEST PROCEDURES	29
7.5 TEST SETUP LAYOUT	29
7.6 EUT OPERATION DURING TEST	29
7.7 TEST RESULTS	30
8 . ADJACENT CHANNEL SELECTIVITY	31
8.1 APPLICABILITY	31
8.2 LIMITS	31
8.3 METHODS OF MEASUREMENT	31
8.4 TEST SETUP LAYOUT	32
8.5 TEST RESULTS	32
9 . BLOCKING OR DESENSITIZATION	33
9.1 APPLICABILITY	33
9.2 LIMITS	33
9.3 TEST PROCEDURES	33
8.4 TEST SETUP LAYOUT	34
9.4 TEST RESULTS	35
10 . TEST RESULTS	42
10.1 DUTY CYCLE	42
10.2 -6DB EMISSION BANDWIDTH	50
10.3 FREQUENCY RANGE	58
10.4 OCCUPIED CHANNEL BANDWIDTH	65

Table of Contents	Page
10.5 RF OUTPUT POWER	73
11 . EUT TEST PHOTO	82
SPURIOUS EMISSIONS MEASUREMENT PHOTOS	82
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

ETSI EN 300 440 V2.2.1 (2018-07)

Clause	Description of Test Item	Remarks	Results
Transmitter Parameters			
4.2.2	-6 dB channel bandwidth	Conducted	Pass
4.2.2	Effective isotropic radiated power	Conducted	Pass
4.2.3	Permitted range of operation frequencies	Conducted	Pass
4.2.4	Unwanted emissions in the spurious domain	Radiated	Pass
4.2.5	Duty cycle	Conducted	Pass
4.2.6	Additional requirements for FHSS equipment	Conducted	N/A
Receiver Parameters			
4.3.3	Adjacent channel selectivity(For Receiver category 1)	Conducted	N/A
4.3.4	Blocking or desensitization(For Receiver category 1,2,3)	Conducted	Pass
4.3.5	Spurious emissions(For Receiver category 1,2,3)	Radiated	Pass

Note: The antenna gain provided by customer is used to calculate the EIRP result. NTEK is not responsible for the accuracy of antenna gain parameter

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

FCC Registered No.: 463705 IC Registered No.:9270A

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Radio frequency	$\pm 1 \times 10^{-7}$
2	RF power (conducted)	$\pm 2,5$ dB
3	Radiated emission of transmitter, valid to 26,5 GHz	± 6 dB
4	Radiated emission of transmitter, valid between 26,5 GHz and 66 GHz	± 8 dB
5	Radiated emission of receiver, valid to 26,5 GHz	± 6 dB
6	Radiated emission of receiver, valid between 26,5 GHz and 66 GHz	± 8 dB
7	Temperature	$\pm 1^{\circ}\text{C}$
8	Humidity	± 5 %
9	Voltage (DC)	± 1 %
10	Voltage (AC, < 10 kHz)	± 2 %

NOTE: For radiated emissions above 26,5 GHz it may not be possible to achieve measurement uncertainties complying with the levels specified in this table. In these cases alone it is acceptable to employ the alternative interpretation procedure specified in EN 300440 V2.2.1 clause 5.9.1.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet	
Trade Mark	CUBOT	
Model Name	TAB KINGKONG MINI	
Family Model	N/A	
Model Difference	N/A	
Product Description	Operation Frequency:	5745-5825 MHz for 802.11a/n20/ac20; 5755-5795 MHz for 802.11n40/ac40; 5775MHz for 802.11 ac80;
	Data Rate:	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS7; 802.11ac(VHT20/ VHT40/VHT80): NSS1, MCS0-MCS9,
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM
	Channel No.:	5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Antenna Designation:	FPC Antenna
	Antenna Gain(Peak)	2.1 dBi
Receiver category	<input type="checkbox"/> Category 1: Highly reliable SRD communication media; e.g. serving human life inherent systems (may result in a physical risk to a person). <input type="checkbox"/> Category 2: Medium reliable SRD communication media e.g. causing inconvenience to persons, which cannot simply be overcome by other means. <input checked="" type="checkbox"/> Category 3: Standard reliable SRD communication media e.g. Inconvenience to persons, which can simply be overcome by other means (e.g. manual).	
Channel List	Refer to below	
Adapter	Adapter 1: Model:HJ-PD33W-EU Input:100-240V~50-60Hz 0.8A Output: 5V---3A 15W OR 9V---3A 27W OR 12V---2.75A 33W Adapter 2: Model:TD-203G200170VF01 Input:100-240V~50-60Hz 0.6A Output: 5V---3AOR 9V---3A OR 12V---2.5A OR 15V---2A OR 20V---1.5A PPS: 3.3V-16V/2A OR 3.3V-11V/3A	
Battery	DC 3.87V, 10200mAh, 39.474Wh	
Rating	DC 3.87V from Battery or DC 5V/9V/12V from Adapter 1 or DC 5V/9V/12V/15V/20V from Adapter 2	
Hardware Version	T30D-UF-V1.2	
Software Version	CUBOT_TAB_KINGKONG_MINI_P131_V1.0	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Channel list:

Frequency and Channel list for 802.11a/n/ac(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band IV (5755-5795MHz):

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

Frequency and Channel list for 802.11ac(80MHz) band IV (5775MHz):

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

2.2 TEST CONDITIONS

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	-10°C ~ 40°C <small>Note1</small>
Relative Humidity	20% - 75%	N/A
Power Rating	DC 3.87V	N/A
Test voltage	DC 3.87V	DC 3.29V-DC 4.45V <small>Note2</small>

Note:

- (1) The temperature range as declared by the manufacturer; or one of the following specified temperature ranges:
 - Temperature category I (General): -20 °C to +55 °C;
 - Temperature category II (Portable): -10 °C to +55 °C;
 - Temperature category III (Equipment for normal indoor use): 5 °C to +35 °C.
- (2) The High Voltage 4.45V and Low Voltage 3.29V was declared by manufacturer.

2.3 DESCRIPTION OF TEST CONDITIONS

For Conducted Test	
Pretest Mode	Description
Mode 1	802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 155

For Radiated Test	
Final Test Mode	Description
Mode 1	802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 155

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

E-1
EUT

2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Tablet	TAB KINGKONG MINI	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” or “with ferrite core”; “NO” means “unshielded” or “without ferrite core”

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
EMI Test Receiver	R&S	ESPI7	101318	2025.04.17	2026.04.16	1 year
Bilog Antenna	TESEQ	CBL6111D	31216	2025.04.17	2026.04.16	1 year
Turn Table	EM	SC100_1	60531	N/A	N/A	N/A
Antnna Mast	EM	SC100	N/A	N/A	N/A	N/A
Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2024.05.12	2027.05.11	3 year
Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2023.06.17	2026.06.16	3 year
Test Cable (1-18GHz)	N/A	R-02	N/A	2023.06.17	2026.06.16	3 year
50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
Pre-Amplifier	EMC	EMC051835SE	980246	2025.04.17	2026.04.16	1 year
Spectrum Analyzer	Agilent	E4440A	MY41000130	2025.04.17	2026.04.16	1 year
Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
Attenuator	Weinschel	33-10-33	AR4010	2024.04.25	2027.04.24	3 year
Attenuator	Weinschel	24-20-34	BP4485	2024.04.25	2027.04.24	3 year
MXA Signal Analyzer	Agilent	N9020A	MY49100060	2025.04.17	2026.04.16	1 year
ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2025.04.17	2026.04.16	1 year
Power Splitter	Mini-Circuits/ USA	ZN2PD-63-S+	SF025101428	2024.04.26	2027.04.25	3 year
Coupler	Mini-Circuits	ZADC-10-63-S +	SF794101410	2024.04.26	2027.04.25	3 year
Directional Coupler	MCLI/USA	CB11-20	0D2L51502	2024.04.26	2027.04.25	3 year
Attenuator	Agilent	8495B	MY42147029	2024.04.26	2027.04.25	3 year
Power Meter	DARE	RPR3006W	15I00041SNO 84	2025.04.17	2026.04.16	1 year
MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2025.04.17	2026.04.16	1 year
Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2025.05.06	2026.05.05	1 year
temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	raditeq	RadiMation	2023.1.3	RadiatedTest
4	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

3. EQUIVALENT ISOTROPICALLY RADIATED POWER (E.I.R.P.)

3.1 APPLICABILITY

The equivalent isotropically radiated power requirement shall apply to all transmitters.

3.2 LIMITS

Table 2: Maximum radiated peak power (e.i.r.p.)

Frequency Bands	Power	Application	Notes
2 400 MHz to 2 483,5 MHz	10 mW e.i.r.p.	Non-specific short range devices	
2 400 MHz to 2 483,5 MHz	25 mW e.i.r.p.	Radio determination devices	
(a) 2 446 MHz to 2 454 MHz	500 mW e.i.r.p.	Radio Frequency Identification (RFID) devices	See also table 4 and annex D
(b) 2 446 MHz to 2 454 MHz	4 W e.i.r.p.	Radio Frequency Identification (RFID) devices	See also table 4 and annex D
5 725 MHz to 5 875 MHz	25 mW e.i.r.p.	Non-specific short range devices	
9 200 MHz to 9 500 MHz	25 mW e.i.r.p.	Radio determination devices	
9 500 MHz to 9 975 MHz	25 mW e.i.r.p.	Radio determination devices	
10,5 GHz to 10,6 GHz	500 mW e.i.r.p.	Radio determination devices	
13,4 GHz to 14,0 GHz	25 mW e.i.r.p.	Radio determination devices	
17,1 GHz to 17,3 GHz	400 mW e.i.r.p.	Radio determination devices	See annex F
24,00 GHz to 24,25 GHz	100 mW e.i.r.p.	Non-specific short range devices and Radio determination devices	

3.3 GENERAL REQUIREMENTS

- To measure e.i.r.p. it is first necessary to determine the appropriate method of measurement: see EN 300440 V2.2.1 clauses 4.2.2.3.1 and 4.2.2.3.2. The -6 dB transmitter bandwidth shall be determined using a 100 kHz measuring bandwidth in order to establish which measurement method is applicable:

Condition		Method of measurement
<input type="checkbox"/> Non spread spectrum transmitters with a -6 dB bandwidth of up to 20 MHz and spread spectrum transmitters with channel bandwidth of up to 1 MHz;	<input type="checkbox"/> Non spread spectrum equipment with a -6 dB bandwidth of 20 MHz or less and a duty cycle above 50 %;	Refer to section 3.4.1
	<input type="checkbox"/> Spread spectrum equipment with a -6 dB channel bandwidth of 1 MHz or less.	
<input checked="" type="checkbox"/> for all other transmitter bandwidths.	<input type="checkbox"/> equipment with a -6 dB bandwidth greater than 20 MHz, and equipment with a duty cycle below 50 %;	Refer to section 3.4.2
	<input checked="" type="checkbox"/> spread spectrum equipment with a channel bandwidth above 1 MHz..	

- Measurements shall be performed at normal test conditions.

3.4 TEST PROCEDURES

3.4.1 FOR NON SPREAD SPECTRUM TRANSMITTERS

The measurement shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range. These frequencies shall be recorded.

Equipment measured as constant envelope modulation equipment

For practical reasons, measurements shall be performed only at the highest power level at which the transmitter is intended to operate. The measurement arrangement in figure 2 shall be used. The measurement shall be performed preferably in the absence of modulation. When it is not possible to measure it in the absence of modulation, this fact shall be stated in test reports.

The transmitter shall be set in continuous transmission mode. If this is not possible, the measurements shall be carried out in a period shorter than the duration of the transmitted burst. It may be necessary to extend the duration of the burst.

The transmitter shall be connected to an artificial antenna (see clause 5.8.2) and the power delivered to this artificial antenna shall be measured.

The equivalent isotropically radiated power is then calculated from the measured value, the known antenna gain, relative to an isotropic antenna, and if applicable, any losses due to cables and connectors in the measurement system.

Equipment measured as non-constant envelope modulation equipment

The measurement shall be performed with test signals D-M2 or D-M3 as appropriate.

The transmitter shall be preferably set in continuous transmission mode. If this is not possible, the measurement can be performed in discontinuous mode.

The transmitter shall be connected to an artificial antenna (see clause 5.8.2) and the power delivered to this artificial antenna shall be measured. The measuring instrument shall have a measurement bandwidth not less than sixteen times the channel bandwidth.

The equivalent isotropically radiated power is then calculated from the measured value, the known antenna gain, relative to an isotropic antenna, and if applicable, any losses due to cables and connectors in the measurement system.

3.4.2 FOR ALL OTHER TRANSMITTER BANDWIDTHS


Step 1:

- using a suitable means, the output of the transmitter shall be coupled to a matched diode detector;
- the output of the diode detector shall be connected to the vertical channel of an oscilloscope;
- the combination of the diode detector and the oscilloscope shall be capable of faithfully reproducing the envelope peaks and the duty cycle of the transmitter output signal;
- the observed duty cycle of the transmitter (Tx on/(Tx on + Tx off)) shall be noted as x, ($0 < x < 1$) And recorded.

Step 2:

- the average output power of the transmitter shall be determined using a wideband, calibrated RF power meter with a matched thermocouple detector or an equivalent thereof and, where applicable, with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- the e.i.r.p. shall be calculated from the above measured power output A, the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:
 - $P = A + G + 10 \log(1/x)$;
 - P should be EIRP POWER.

3.5 TEST SETUP LAYOUT

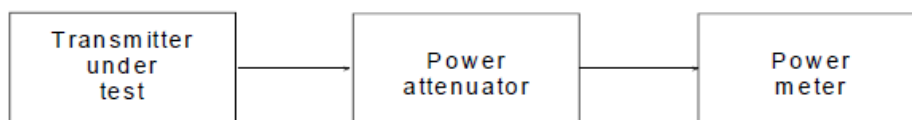

3.6 EUT OPERATION DURING TEST

Where possible, the equipment shall be able to operate in a continuous transmit mode for testing purposes.

3.7 TEST RESULT FOR -6 DB BANDWIDTH

EUT :	Tablet	Model Name :	TAB KINGKONG MINI
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 3.87V (NORMAL)
Test Mode :	Mode 1/2/3		

Test data reference attachment

3.8 TEST RESULT FOR E.I.R.P

EUT :	Tablet	Model Name :	TAB KINGKONG MINI
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 3.87V (NORMAL)
Test Mode :	Mode 1/2/3		

Test data reference attachment

4. PERMITTED RANGE OF OPERATING FREQUENCIES

4.1 APPLIED PROCEDURES / LIMIT

The Permitted range of operating frequencies shall apply to all transmitters.

Limits: The width of the power spectrum envelope is $f_H - f_L$ for a given operating frequency. In equipment that allows adjustment or selection of different operating frequencies, the power envelope takes up different positions in the allowed band. The frequency range is determined by the lowest value of f_L and the highest value of f_H resulting from the adjustment of the equipment to the lowest and highest operating frequencies.

The occupied bandwidth (i.e. the bandwidth in which 99 % of the wanted emission is contained) of the transmitter shall fall within the assigned frequency band.

For all equipment the frequency range shall lie within the frequency band given by section 3.2, table 2. For non-harmonized frequency bands the available frequency range may differ between national administrations.


4.2 TEST PROCEDURES

These measurements shall be performed under both normal and extreme operating conditions except for the occupied bandwidth assessment for which measurement at normal operating conditions is sufficient.

The measurement procedure shall be as follows:

- put the spectrum analyser in video averaging mode with a minimum of 50 sweeps selected;
- select the lowest operating frequency of the equipment under test and activate the transmitter with modulation applied. The RF emission of the equipment shall be displayed on the spectrum analyser;
- using the marker of the spectrum analyser, find the lowest frequency below the operating frequency at which the spectral power density drops below the level given in clause 4.2.3. This frequency shall be recorded in the test report;
- select the highest operating frequency of the equipment under test and find the highest frequency at which the spectral power density drops below the value given in clause 4.2.3. This frequency shall be recorded in the test report;
- the difference between the frequencies measured in steps c) and d) is the operating frequency range. It shall be recorded in the test report.

4.3 TEST SETUP LAYOUT

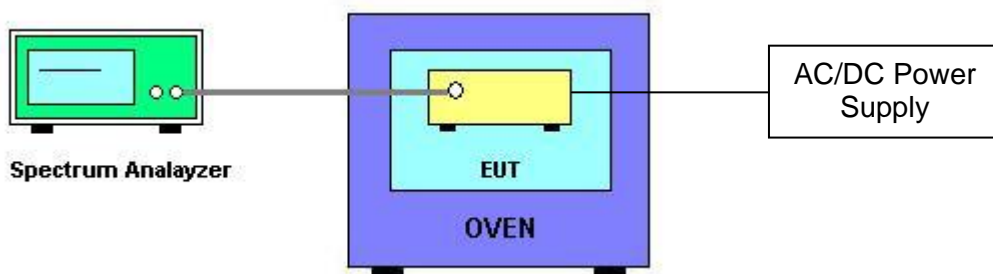

4.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

4.5 TEST RESULTS

EUT :	Tablet	Model Name :	TAB KINGKONG MINI
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 3.87V (NORMAL)
Test Mode :	TX		

802.11a

Extreme condition				Frequency range (MHz)	
				F _L CH149	F _H CH165
T nom (°C)	20	V nom (V)	3.87	5735.68	5834.32
T min (°C)	-10	V max (V)	4.45	5735.69	5834.33
		V nom (V)	3.87	5735.70	5834.34
		V min (V)	3.29	5735.71	5834.34
T max (°C)	40	V max (V)	4.45	5735.72	5834.35
		V nom (V)	3.87	5735.74	5834.36
		V min (V)	3.29	5735.75	5834.37
Min. f _L / Max. f _H Band Edges				5735.680	5834.368
Indoor Use Limits				F _L > 5725.0 MHz	F _H < 5875.0 MHz
Result				Complies	

802.11n20

Extreme condition				Frequency range (MHz)	
				F _L CH149	F _H CH165
T nom (°C)	20	V nom (V)	3.87	5735.28	5834.76
T min (°C)	-10	V max (V)	4.45	5735.29	5834.77
		V nom (V)	3.87	5735.30	5834.78
		V min (V)	3.29	5735.31	5834.78
T max (°C)	40	V max (V)	4.45	5735.32	5834.79
		V nom (V)	3.87	5735.34	5834.80
		V min (V)	3.29	5735.35	5834.81
Min. f _L / Max. f _H Band Edges				5735.280	5834.808
Indoor Use Limits				F _L > 5725.0 MHz	F _H < 5875.0 MHz
Result				Complies	

802.11n40

Extreme condition				Frequency range (MHz)	
				F _L CH151	F _H CH159
T nom (°C)	20	V nom (V)	3.87	5736.16	5813.84
T min (°C)	-10	V max (V)	4.45	5736.17	5813.85
		V nom (V)	3.87	5736.18	5813.86
		V min (V)	3.29	5736.19	5813.86
T max (°C)	40	V max (V)	4.45	5736.20	5813.87
		V nom (V)	3.87	5736.22	5813.88
		V min (V)	3.29	5736.23	5813.89
Min. f _L / Max. f _H Band Edges				5736.160	5813.888
Indoor Use Limits				F _L > 5725.0 MHz	F _H < 5875.0 MHz
Result				Complies	

802.11ac20

Extreme condition				Frequency range (MHz)	
				F _L CH149	F _H CH165
T nom (°C)	20	V nom (V)	3.87	5735.48	5834.48
T min (°C)	-10	V max (V)	4.45	5735.49	5834.49
		V nom (V)	3.87	5735.50	5834.50
		V min (V)	3.29	5735.51	5834.50
T max (°C)	40	V max (V)	4.45	5735.52	5834.51
		V nom (V)	3.87	5735.54	5834.52
		V min (V)	3.29	5735.55	5834.53
Min. f _L / Max. f _H Band Edges				5735.480	5834.528
Indoor Use Limits				F _L > 5725.0 MHz	F _H < 5875.0 MHz
Result				Complies	

802.11ac40

Extreme condition				Frequency range (MHz)	
				F _L CH151	F _H CH159
T nom (°C)	20	V nom (V)	3.87	5736.34	5813.66
T min (°C)	-10	V max (V)	4.45	5736.35	5813.67
		V nom (V)	3.87	5736.36	5813.68
		V min (V)	3.29	5736.37	5813.68
T max (°C)	40	V max (V)	4.45	5736.38	5813.69
		V nom (V)	3.87	5736.40	5813.70
		V min (V)	3.29	5736.41	5813.71
Min. f _L / Max. f _H Band Edges				5736.340	5813.708
Indoor Use Limits				F _L > 5725.0 MHz	F _H < 5875.0 MHz
Result				Complies	

802.11ac80

Extreme condition				Frequency range (MHz)	
				F _L CH155	F _h CH155
T nom (°C)	20	V nom (V)	3.87	5736.48	5812.35
T min (°C)	-10	V max (V)	4.45	5736.49	5812.36
		V nom (V)	3.87	5736.50	5812.37
		V min (V)	3.29	5736.51	5812.37
T max (°C)	40	V max (V)	4.45	5736.52	5812.38
		V nom (V)	3.87	5736.54	5812.39
		V min (V)	3.29	5736.55	5812.40
Min. f _L / Max. f _H Band Edges				5736.48	5812.40
Indoor Use Limits				F _L > 5725.0 MHz	F _H < 5875.0 MHz
Result				Complies	

5. UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

5.1 APPLIED PROCEDURES / LIMIT

The unwanted emissions in the spurious domain requirement shall apply to all transmitters.

State	47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies ≤ 1 000 MHz	Frequencies > 1 000 MHz
Operating	4 nW /-54dBm	250 nW/-36dBm	1 μW /-30dBm
Standby	2 nW /-57dBm	2 nW /-57dBm	20 nW /-47dBm

5.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of the Spectrum Analyzer.


Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	40GHz
Detector	Positive Peak
Sweep Time	Auto
RB	For frequency 30MHz~1G:100 kHz~120 kHz For frequency above 1G:1MHz

5.3 TEST PROCEDURES

- The EUT was placed on the top of the turntable in open test site area.
- The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- This measurement shall be repeated with the transmitter in standby mode where applicable.
- For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For above 1G, using Horn antenna .
- The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- Replace the EUT by standard antenna and feed the RF port by signal generator.
- Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- If the level calculated in (9) is higher than limit by more than 6dB, then lower the RBW of the spectrum analyzer to 30KHz. If the level of this emission does not change by more than 2dB, then it is taken as narrowband emission, otherwise, wideband emission.
- The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

5.4 TEST SETUP LAYOUT

Radiated Emission Test Set-Up

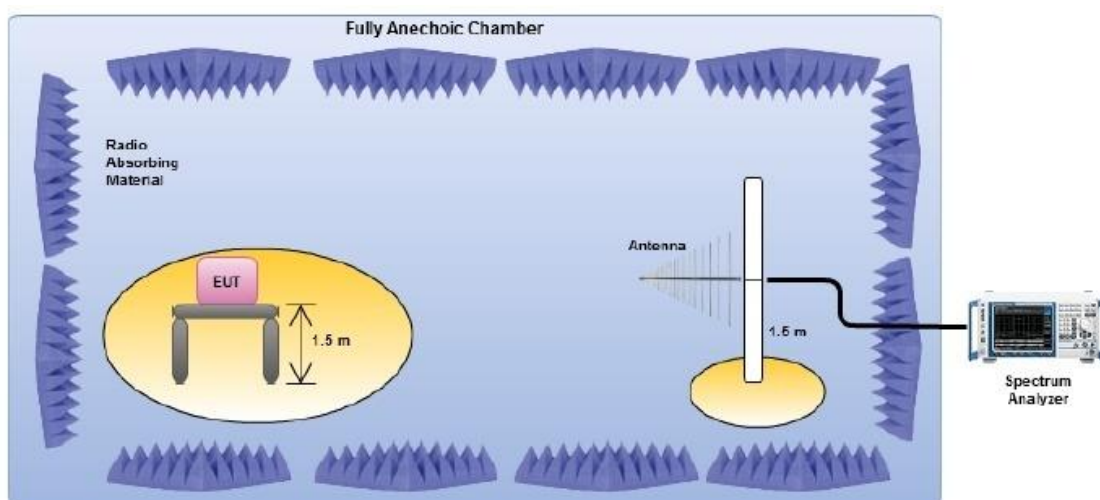

5.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

5.6 RESULTS OF STANDBY MODE SPURIOUS EMISSIONS

For the initial investigation on standby mode and receiving mode, no significant differences in spurious emissions were observed between these 2 modes. So test data for standby mode was omitted in this section.

5.7 TEST RESULTS

EUT :	Tablet	Model Name :	TAB KINGKONG MINI
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Power :	DC 3.87V (NORMAL)
Test Mode :	TX-802.11n20 mode		

Below 1G :

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	37.82	-70.59	14.47	-56.12	-36	-20.12	peak
V	107.116	-81.09	7.22	-73.87	-54	-19.87	peak
V	166.27	-77.29	12.25	-65.04	-36	-29.04	peak
V	212.749	-87.55	13.31	-74.24	-54	-20.24	peak
V	324.62	-68.46	15.91	-52.55	-36	-16.55	peak
V	647.014	-87.75	21.65	-66.10	-54	-12.10	peak
H	44.993	-74.27	18.31	-55.96	-36	-19.96	peak
H	92.801	-81.37	6.20	-75.17	-54	-21.17	peak
H	149.938	-68.58	10.27	-58.31	-36	-22.31	peak
H	195.64	-81.1	12.05	-69.05	-54	-15.05	peak
H	371.761	-70.64	12.93	-57.71	-36	-21.71	peak
H	828.289	-82.74	17.58	-65.16	-54	-11.16	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

Above 1G :

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Detector Type
operation frequency:5745 MHz							
V	2680.248	-49.47	2.61	-46.86	-30	-16.86	peak
V	5824.28	-49.02	3.32	-45.70	-30	-15.70	peak
V	2572.369	-52.17	8.34	-43.83	-30	-13.83	peak
V	5512.333	-51.6	8.72	-42.88	-30	-12.88	peak
H	2985.38	-50.02	3.12	-46.90	-30	-16.90	peak
H	5355.699	-51.29	8.53	-42.76	-30	-12.76	peak
H	2646.657	-51.4	9.58	-41.82	-30	-11.82	peak
H	5363.954	-61.94	14.73	-47.21	-30	-17.21	peak
operation frequency:5785 MHz							
V	2677.435	-51.51	2.61	-48.90	-30	-18.90	peak
V	5312.267	-52.88	3.32	-49.56	-30	-19.56	peak
V	2147.168	-51.92	8.34	-43.58	-30	-13.58	peak
V	3339.06	-50.1	8.72	-41.38	-30	-11.38	peak
V	2372.222	-49.32	3.12	-46.20	-30	-16.20	peak
H	5332.055	-51.75	8.53	-43.22	-30	-13.22	peak
H	2161.676	-50.07	9.58	-40.49	-30	-10.49	peak
H	4895.988	-59.99	14.73	-45.26	-30	-15.26	peak
H	5354.073	-62.29	14.73	-47.56	-30	-17.56	peak
operation frequency:5825 MHz							
V	2364.022	-52.21	2.61	-49.60	-30	-19.60	peak
V	5406.089	-50.05	3.32	-46.73	-30	-16.73	peak
V	2444.058	-49.99	8.34	-41.65	-30	-11.65	peak
V	4433.588	-49.18	8.72	-40.46	-30	-10.46	peak
V	2272.73	-48.61	3.12	-45.49	-30	-15.49	peak
H	4671.467	-52.81	8.53	-44.28	-30	-14.28	peak
H	2331.927	-50.43	9.58	-40.85	-30	-10.85	peak
H	3806.214	-60.53	14.73	-45.80	-30	-15.80	peak
H	3899.353	-60.24	14.73	-45.51	-30	-15.51	peak
Remark:							
Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit							

Note: Only the worst case 802.11n20 mode recorded in the report.

6. DUTY CYCLE

6.1 APPLICABILITY AND DESCRIPTION

Duty Cycle (DC) shall apply to all transmitting equipment except those which utilize Listen Before Talk (LBT) clause 4.4.2, or Detect And Avoid (DAA), clause 4.4.3. RFID transmitters operating in the 2 446 MHz to 2 454 MHz frequency band that transmit at a maximum radiated peak power level of less than 500 mW e.i.r.p. are also excluded.

Duty cycle is the ratio expressed as a percentage, of the cumulative duration of transmissions T_{on_cum} within an observation interval T_{obs} .

$$DC = \left(\frac{T_{on_cum}}{T_{obs}} \right) F_{obs} \text{ on an observation bandwidth } F_{obs}.$$

Unless otherwise specified, T_{obs} is 1 hour and the observation bandwidth F_{obs} is the operational frequency band

Each transmission consists of an RF emission, or sequence of RF emissions separated by intervals $< T_{Dis}$.

6.2 LIMITS

Table 4 defines the maximum duty cycle within a 1 hour period.

Table 4: Duty cycle limits


Frequency Band	Duty cycle	Application	Notes
2 400 MHz to 2 483,5 MHz	No Restriction	Generic use	
2 400 MHz to 2 483,5 MHz	No Restriction	Detection, movement and alert applications	
(a) 2 446 MHz to 2 454 MHz	No Restriction	RFID	Limits shown in annex D shall apply
(b) 2 446 MHz to 2 454 MHz	$\leq 15 \%$	RFID	Limits shown in annex D shall apply
5 725 MHz to 5 875 MHz	No Restriction	Generic use	
9 200 MHz to 9 500 MHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
9 500 MHz to 9 975 MHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
10,5 GHz to 10,6 GHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
13,4 GHz to 14,0 GHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
17,1 GHz to 17,3 GHz	DAA or equivalent techniques	Radiodetermination: GBSAR detecting and movement and alert applications	Limits shown in annex F shall apply
24,00 GHz to 24,25 GHz	No Restriction	Generic use and for Radiodetermination: radar, detection, movement and alert applications	

For devices with a 100 % duty cycle transmitting an unmodulated carrier most of the time, a time-out shut-off facility shall be implemented in order to improve the efficient use of spectrum. The method of implementation shall be declared by the manufacturer.

6.4 METHOD OF MEASUREMENT

Please refer to EN 300440 V2.2.1 Clause 4.2.5.3.

6.5 TEST SETUP



6.6 TEST RESULTS

EUT:	Tablet	Model Name:	TAB KINGKONG MINI
Temperature:	26°C	Relative Humidity:	53 %
Pressure:	1012 hPa	Test Voltage:	DC 3.87V (NORMAL)
Test Mode:	Mode 1/2/3		

Test data reference attachment

7. SPURIOUS EMISSIONS – RX

7.1 APPLIED PROCEDURES / LIMIT

Clause	Test Item	Frequency(MHz)	Limit
4.3.5.4	Spurious emissions	30-1000	-57dBm
	(radiated)	Above 1000	-47dBm

7.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	40GHz
Detector	Positive Peak
Sweep Time	Auto
RB	For frequency 30MHz~1G:100 kHz~120 kHz For frequency above 1G:1MHz

7.3 TEST PROCEDURES

- The EUT was placed on the top of the turntable in open test site area.
- The test shall be made in the receiving mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For above 1G, using Horn antenna .
- The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- Replace the EUT by standard antenna and feed the RF port by signal generator.
- Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- The level of the spurious emission is the power level of (7) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

7.5 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 5.4.

7.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously receiving mode.

7.7 TEST RESULTS

EUT :	Tablet	Model Name :	TAB KINGKONG MINI
Temperature :	26°C	Relative Humidity :	53 %
Pressure :	1012 hPa	Test Power :	DC 3.87V (NORMAL)
Test Mode :	RX-802.11n20 mode		

Below 1G :

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	31.385	-87.83	18.82	-69.01	-57	-12.01	peak
V	89.207	-79.91	11.11	-68.80	-57	-11.80	peak
V	192.023	-83.1	11.41	-71.69	-57	-14.69	peak
V	414.248	-77.74	12.72	-65.02	-57	-8.02	peak
V	668.5	-78.59	12.66	-65.93	-57	-8.93	peak
V	578.632	-82.73	12.62	-70.11	-57	-13.11	peak
H	38.135	-87.86	19.94	-67.92	-57	-10.92	peak
H	107.404	-82.9	10.96	-71.94	-57	-14.94	peak
H	205.743	-79.59	9.42	-70.17	-57	-13.17	peak
H	322.885	-83.36	12.65	-70.71	-57	-13.71	peak
H	554.02	-81.93	11.78	-70.15	-57	-13.15	peak
H	678.696	-85.98	15.38	-70.60	-57	-13.60	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

Above 1G :

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	2181.81	-84.46	11.33	-73.13	-47	-26.13	peak
V	3399.802	-79.72	10.97	-68.75	-47	-21.75	peak
V	2926.032	-84.47	10.14	-74.33	-47	-27.33	peak
V	4525.447	-80.61	16.83	-63.78	-47	-16.78	peak
V	2795.991	-80.48	10.52	-69.96	-47	-22.96	peak
H	5821.816	-83.05	11.70	-71.35	-47	-24.35	peak
H	2147.463	-81.12	6.62	-74.50	-47	-27.50	peak
H	3496.283	-84.92	14.99	-69.93	-47	-22.93	peak
H	3889.329	-69.67	8.25	-61.42	-47	-14.42	peak
H	5342.59	-82.5	14.99	-67.51	-47	-20.51	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

8. ADJACENT CHANNEL SELECTIVITY

8.1 APPLICABILITY

This requirement applies to channelized Category 1 receivers..

8.2 LIMITS

The adjacent channel selectivity of the equipment under specified conditions shall not be less than $-30 \text{ dBm} + k$.

The correction factor, k , is as follows:

$$k = -20\log f - 10\log BW$$

Where:

- f is the frequency in GHz;
- BW is the channel bandwidth in MHz.

The factor k is limited within the following:

- $-40 \text{ dB} < k < 0 \text{ dB}$.

8.3 METHODS OF MEASUREMENT

This measurement shall be conducted under normal conditions.

Two signal generators A and B shall be connected to the receiver via a combining network to the receiver, either:

- a) via a test fixture or a test antenna to the receiver integrated, dedicated or test antenna; or
- b) directly to the receiver permanent or temporary antenna connector.

The method of coupling to the receiver shall be stated in the test report.

Signal generator A shall be at the nominal frequency of the receiver, with normal modulation of the wanted signal.

Signal generator B shall be unmodulated and shall be adjusted to the adjacent channel centre frequency immediately above that of the wanted signal.

Initially signal generator B shall be switched off and using signal generator A the level that still gives sufficient

response shall be established. The output level of generator A shall then be increased by 3 dB.

Signal generator B is then switched on and adjusted until the wanted criteria are met. This level shall be recorded.

The measurements shall be repeated with signal generator B unmodulated and adjusted to the adjacent channel centre immediately below the wanted signal.


The adjacent channel selectivity shall be recorded for the upper and lower adjacent channels as the level in dBm of the unwanted signal.

For tagging systems (e.g. RF identification, anti-theft, access control, location and similar systems) signal generator A may be replaced by a physical tag positioned at 70 % of the measured system range in metres.

In this case, the adjacent selectivity shall be recorded as the level in dBm of lowest level of the unwanted signal

(generator B) resulting in a non-read of the tag.

8.4 TEST SETUP LAYOUT

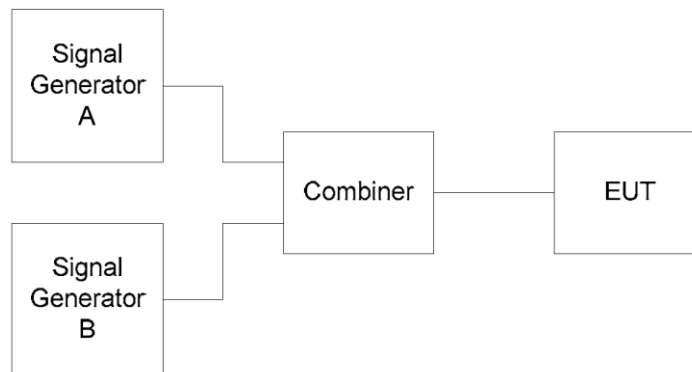

8.5 TEST RESULTS

EUT :	Tablet	Model Name :	TAB KINGKONG MINI
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	N/A
Test Mode :	N/A		

Not applicable.

9. BLOCKING OR DESENSITIZATION

9.1 APPLICABILITY

This requirement applies to all Category 1, 2, and 3 SRD communication media receivers.

9.2 LIMITS

The blocking level, for any frequency within the specified ranges, shall not be less than the values given in table 6, except at frequencies on which spurious responses are found.

Table 6: Limits for blocking or desensitization

Receiver category	Limit
1	-30 dBm + k
2	-45 dBm + k
3	-60 dBm + k

The correction factor, k, is as follows:

$$k = \square -20\log f -10\log BW$$

Where:

- f is the frequency in GHz;
- BW is the channel bandwidth in MHz.

The factor k is limited within the following:

- -40 dB < k < 0 dB.

9.3 TEST PROCEDURES

This measurement shall be conducted under normal conditions.

Two signal generators A and B shall be connected to the receiver via a combining network to the receiver, either:

- a) via a test fixture or a test antenna to the receiver integrated, dedicated or test antenna; or
- b) directly to the receiver permanent or temporary antenna connector.

The method of coupling to the receiver shall be stated in the test report.


Signal generator A shall be at the nominal frequency of the receiver, with normal modulation of the wanted signal. Signal generator B shall be unmodulated and shall be adjusted to a test frequency at approximately 10 times, 20 times and 50 times of the occupied bandwidth above upper band edge of occupied bandwidth. Initially signal generator B shall be switched off and using signal generator A the level which still gives sufficient response shall be established. The output level of generator A shall then be increased by 3 dB. Signal generator B is then switched on and adjusted until the wanted criteria are met. This level shall be recorded.

The measurement shall be repeated with the test frequency for signal generator B at 10 times, 20 times and 50 times of the occupied bandwidth below the lower band edge of the occupied bandwidth.

The blocking or desensitization shall be recorded as the level in dBm of lowest level of the unwanted signal(generator B).

For tagging systems (e.g. RF identification, anti-theft, access control, location and similar systems) signal generator A may be replaced by a physical tag positioned at 70 % of the measured system range in metres. In this case, the blocking or desensitization shall be recorded as the ratio in dB of lowest level of the unwanted signal (generator B) resulting in a non-read of the tag. to the declared sensitivity of the receiver +3 dB.

8.4 TEST SETUP LAYOUT

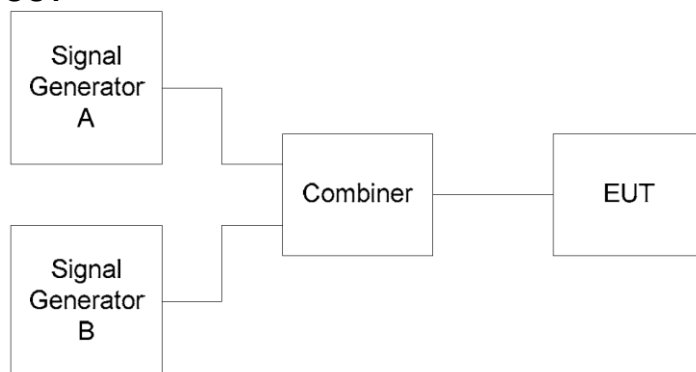

9.4 TEST RESULTS

EUT :	Tablet	Model Name :	TAB KINGKONG MINI
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.87V (NORMAL)
Test Mode :	RX		

802.11a

5745 MHz

Flow= 5736.71283MHz; Fhigh= 5753.24718MHz, occupied bandwidth=16.53435MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB)	Measurement Vause(dB)	≥Limit(dB)
			(Generator A)	(Generator B)	
3	5745 MHz	5745	-64.42	-	-
	10 times lower band edge of the occupied bandwidth	5571.36933	-	-28.57	-87.37(Note ¹)
	20 times lower band edge of the occupied bandwidth	5406.02583	-	-34.59	-87.37
	50 times lower band edge of the occupied bandwidth	4909.99533	-	-34.22	-87.37
	10 times upper band edge of the occupied bandwidth	5918.59068	-	-28.83	-87.37
	20 times upper band edge of the occupied bandwidth	6083.93418	-	-35.38	-87.37
	50 times upper band edge of the occupied bandwidth	6579.96468	-	-31.49	-87.37

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -27.37$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11a

5825 MHz

Flow= 5816.71683MHz; Fhigh= 5833.25917MHz, occupied bandwidth=16.54234MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB)	Measurement Vause(dB)	≥Limit(dB)
			(Generator A)	(Generator B)	
3	5825 MHz	5825	-66.28	-	-
	10 times lower band edge of the occupied bandwidth	5651.29343	-	-29.17	-87.49(Note ¹)
	20 times lower band edge of the occupied bandwidth	5485.87003	-	-35.46	-87.49
	50 times lower band edge of the occupied bandwidth	4989.59983	-	-35.16	-87.49
	10 times upper band edge of the occupied bandwidth	5998.68257	-	-30.24	-87.49
	20 times upper band edge of the occupied bandwidth	6164.10597	-	-35.63	-87.49
	50 times upper band edge of the occupied bandwidth	6660.37617	-	-30.12	-87.49

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -27.49$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11n20

5745 MHz

Flow= 5736.16888MHz; Fhigh=5753.81912MHz, occupied bandwidth=17.65024MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB)	Measurement Vause(dB)	≥Limit(dB)
			(Generator A)	(Generator B)	
3	5745 MHz	5745	-65.61	-	-
	10 times lower band edge of the occupied bandwidth	5559.66648	-	-28.31	-87.65(Note ¹)
	20 times lower band edge of the occupied bandwidth	5383.16408	-	-33.44	-87.65
	50 times lower band edge of the occupied bandwidth	4853.65688	-	-34.10	-87.65
	10 times upper band edge of the occupied bandwidth	5930.32152	-	-29.40	-87.65
	20 times upper band edge of the occupied bandwidth	6106.82392	-	-35.21	-87.65
	50 times upper band edge of the occupied bandwidth	6636.33112	-	-30.90	-87.65

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -27.65$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11n20

5825 MHz

Flow= 5816.15288MHz; Fhigh= 5833.81512MHz, occupied bandwidth=17.66224MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB)	Measurement Vause(dB)	≥Limit(dB)
			(Generator A)	(Generator B)	
3	5825 MHz	5825	-64.81	-	-
	10 times lower band edge of the occupied bandwidth	5639.53048	-	-28.13	-87.78(Note ¹)
	20 times lower band edge of the occupied bandwidth	5462.90808	-	-33.86	-87.78
	50 times lower band edge of the occupied bandwidth	4933.04088	-	-34.86	-87.78
	10 times upper band edge of the occupied bandwidth	6010.43752	-	-28.92	-87.78
	20 times upper band edge of the occupied bandwidth	6187.05992	-	-35.18	-87.78
	50 times upper band edge of the occupied bandwidth	6716.92712	-	-30.19	-87.78

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -27.78$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11n40

5755 MHz

Flow=5736.85781MHz; Fhigh= 5773.10219MHz, occupied bandwidth=36.24438MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB)	Measurement Vause(dB)	≥Limit(dB)
			(Generator A)	(Generator B)	
3	5755 MHz	5755	-66.22	-	-
	10 times lower band edge of the occupied bandwidth	5374.41401	-	-28.44	-90.79(Note ¹)
	20 times lower band edge of the occupied bandwidth	5011.97021	-	-33.52	-90.79
	50 times lower band edge of the occupied bandwidth	3924.63881	-	-35.02	-90.79
	10 times upper band edge of the occupied bandwidth	6135.54599	-	-30.05	-90.79
	20 times upper band edge of the occupied bandwidth	6497.98979	-	-34.52	-90.79
	50 times upper band edge of the occupied bandwidth	7585.32119	-	-29.73	-90.79

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -30.79$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11n40

5795 MHz

Flow= 5776.80812MHz; Fhigh=5813.12619MHz, occupied bandwidth=36.32427MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB)	Measurement Vause(dB)	≥Limit(dB)
			(Generator A)	(Generator B)	
3	5795 MHz	5795	-64.96	-	-
	10 times lower band edge of the occupied bandwidth	5413.55812	-	-29.00	-90.86(Note ¹)
	20 times lower band edge of the occupied bandwidth	5050.31442	-	-35.04	-90.86
	50 times lower band edge of the occupied bandwidth	3960.58332	-	-34.88	-90.86
	10 times upper band edge of the occupied bandwidth	6176.36989	-	-30.46	-90.86
	20 times upper band edge of the occupied bandwidth	6539.61359	-	-35.20	-90.86
	50 times upper band edge of the occupied bandwidth	7629.34469	-	-32.00	-90.86

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -30.86$$

Where:

- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.

802.11ac80

5775 MHz

Flow= 5737.0998MHz; Fhigh= 5812.7402MHz, occupied bandwidth=75.6404MHz

Receiver category	Frequency offset	Test Frequency (MHz)	Measurement Vause(dB)	Measurement Vause(dB)	Limit(dB)
			(Generator A)	(Generator B)	
3	5775 MHz	5775	-65.35	-	-
	10 times lower band edge of the occupied bandwidth	4980.696	-	-27.95	-94.02(Note ¹)
	20 times lower band edge of the occupied bandwidth	4224.292	-	-33.62	-94.02
	50 times lower band edge of the occupied bandwidth	1955.080	-	-34.04	-94.02
	10 times upper band edge of the occupied bandwidth	6569.144	-	-29.92	-94.02
	20 times upper band edge of the occupied bandwidth	7325.548	-	-35.35	-94.02
	50 times upper band edge of the occupied bandwidth	9594.760	-	-30.49	-94.02

Note1 :

The limit :

-60 dBm + k

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

$$k = -34.02$$

Where:



- f is the frequency in GHz;

- BW is the occupied bandwidth in MHz.


10. TEST RESULTS

10.1 DUTY CYCLE


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	88.81	0.52	0.72
NVNT	a	5785	Ant1	88.42	0.53	0.71
NVNT	a	5825	Ant1	97.82	0.1	0.72
NVNT	n20	5745	Ant1	87.25	0.59	0.85
NVNT	n20	5785	Ant1	86.69	0.62	0.85
NVNT	n20	5825	Ant1	87.61	0.57	0.85
NVNT	n40	5755	Ant1	74.12	1.3	∞
NVNT	n40	5795	Ant1	72.57	1.39	1.79
NVNT	ac20	5745	Ant1	87.49	0.58	0.85
NVNT	ac20	5785	Ant1	87.19	0.6	0.84
NVNT	ac20	5825	Ant1	87.45	0.58	0.84
NVNT	ac40	5755	Ant1	77.43	1.11	1.67
NVNT	ac40	5795	Ant1	77.06	1.13	1.69
NVNT	ac80	5775	Ant1	64.05	1.93	3.33

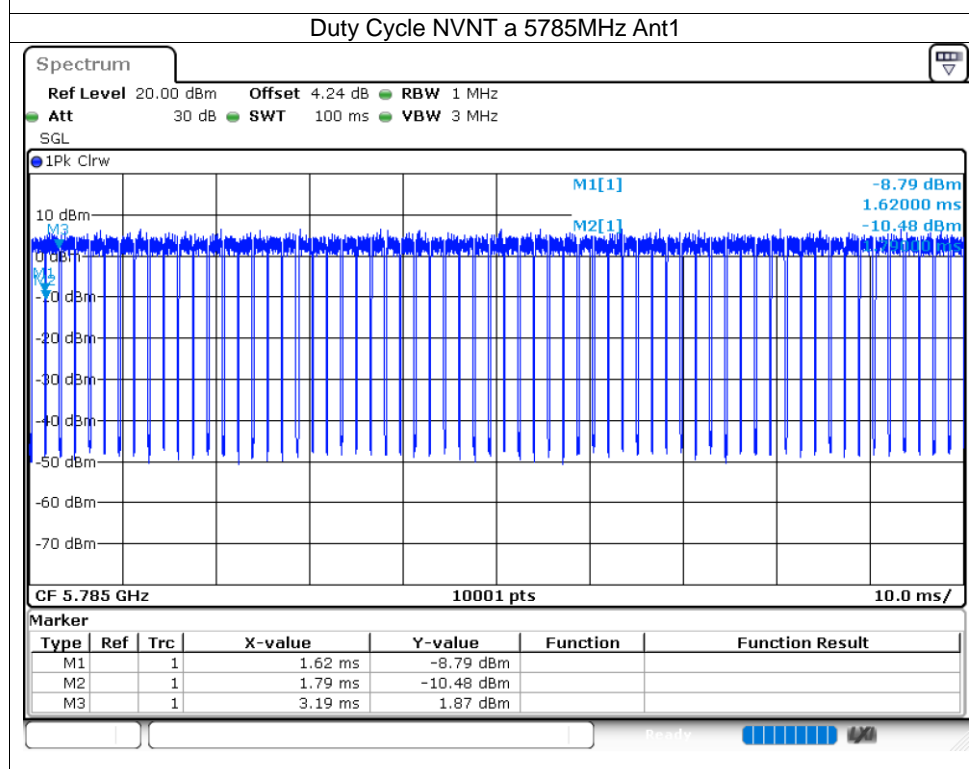
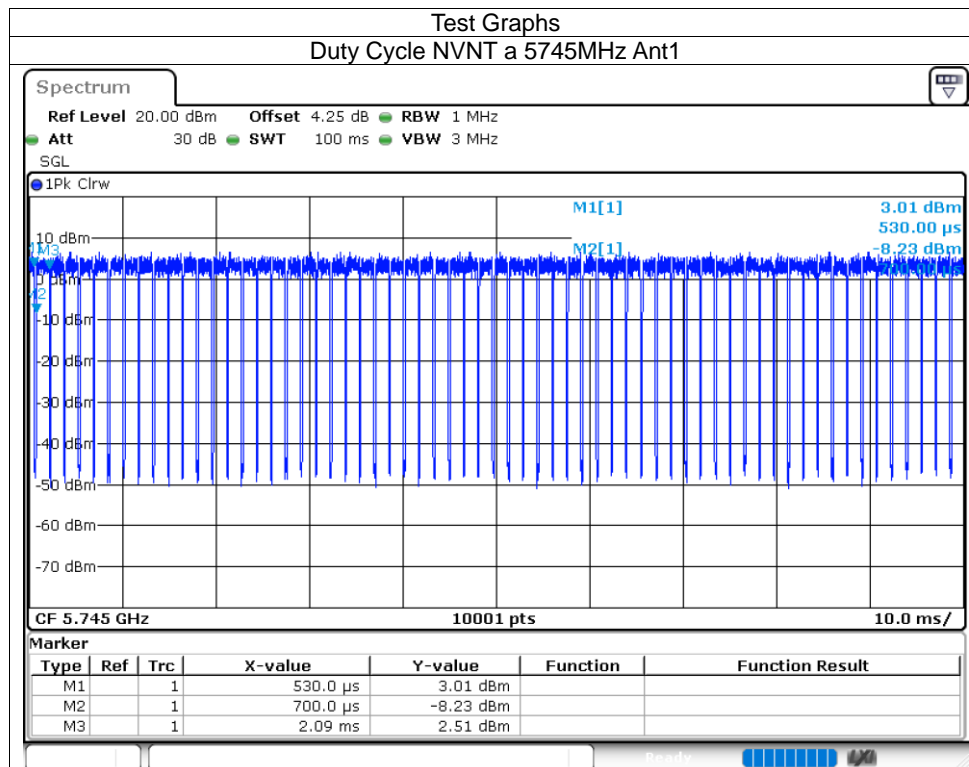




Duty Cycle NVNT a 5825MHz Ant1


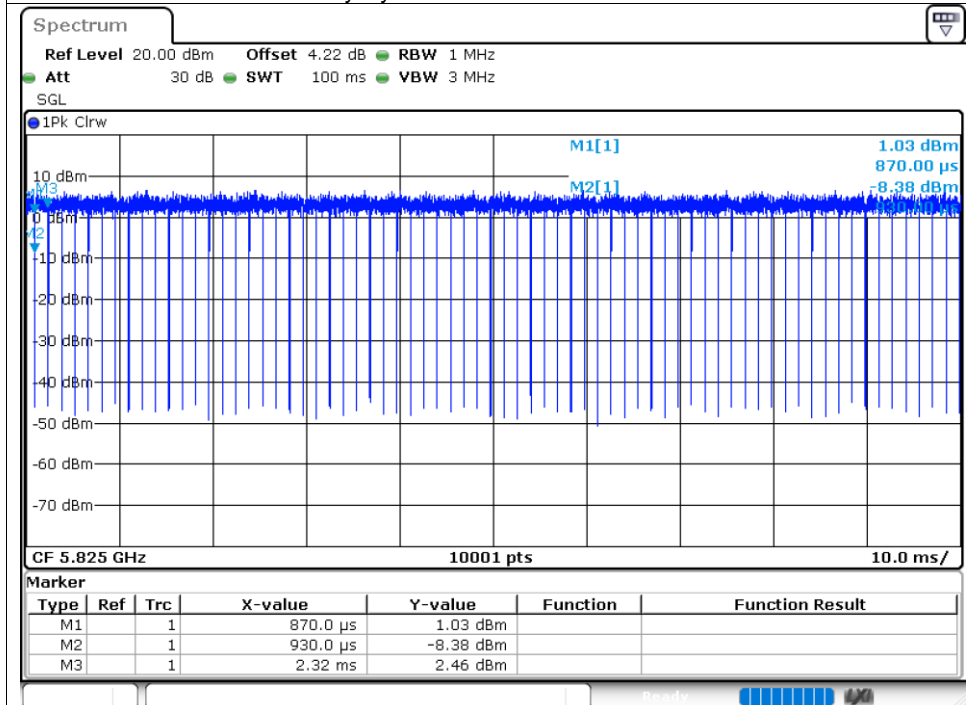




Duty Cycle NVNT n20 5745MHz Ant1


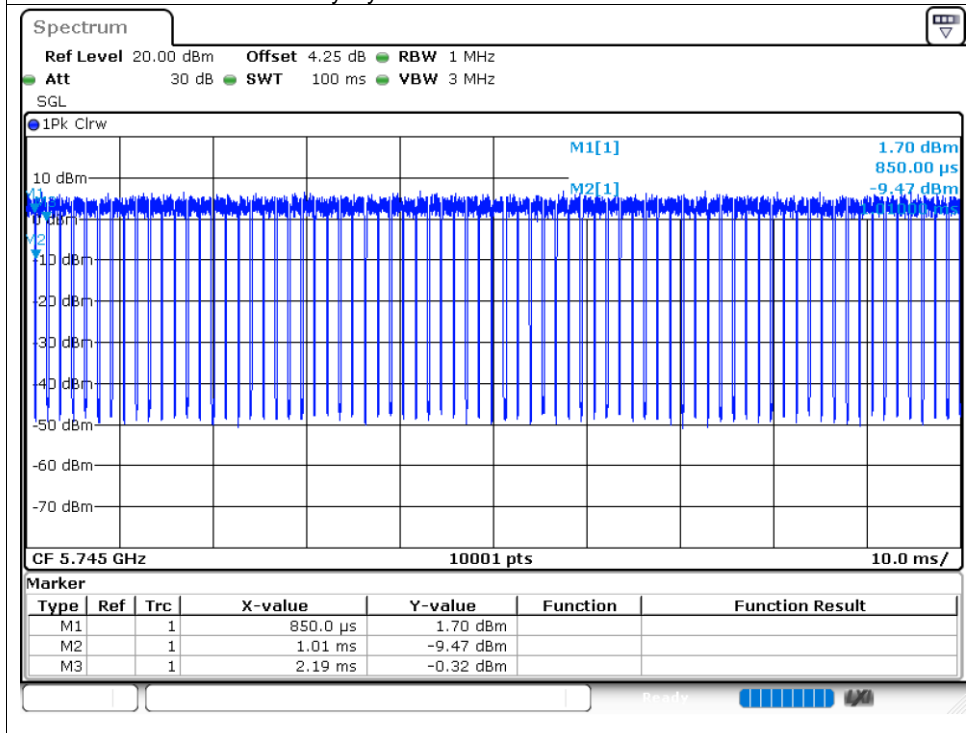


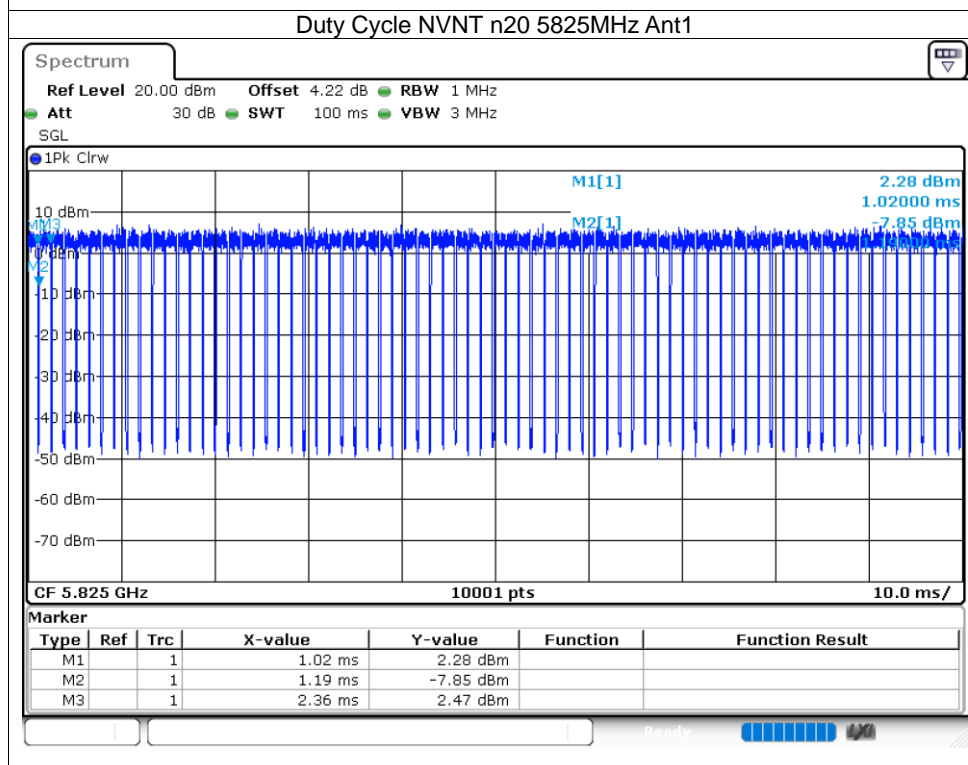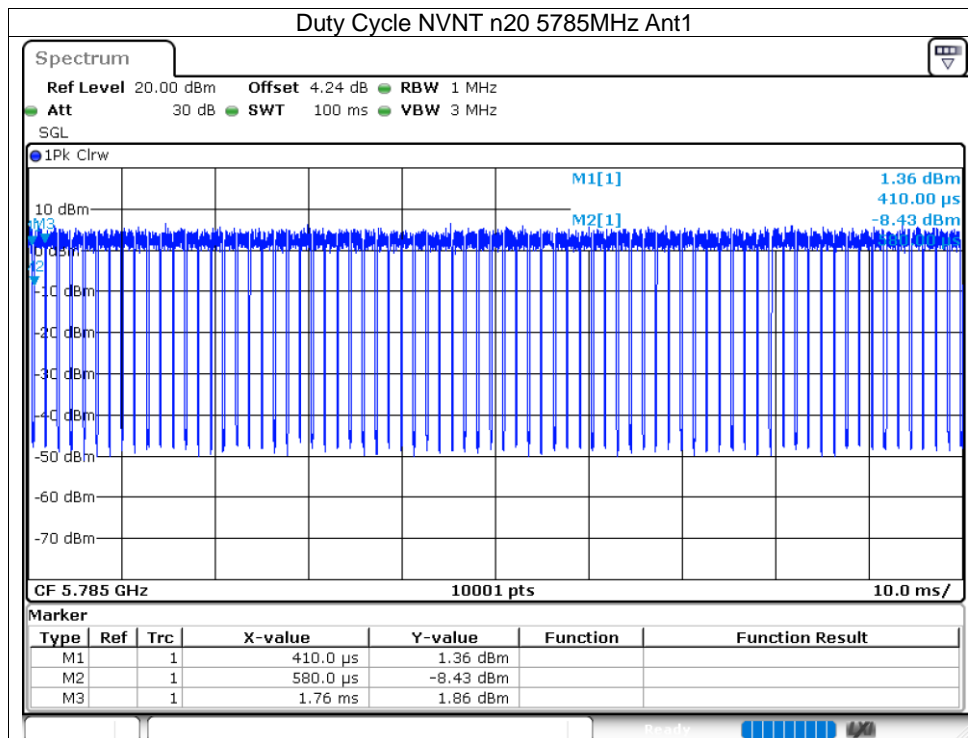

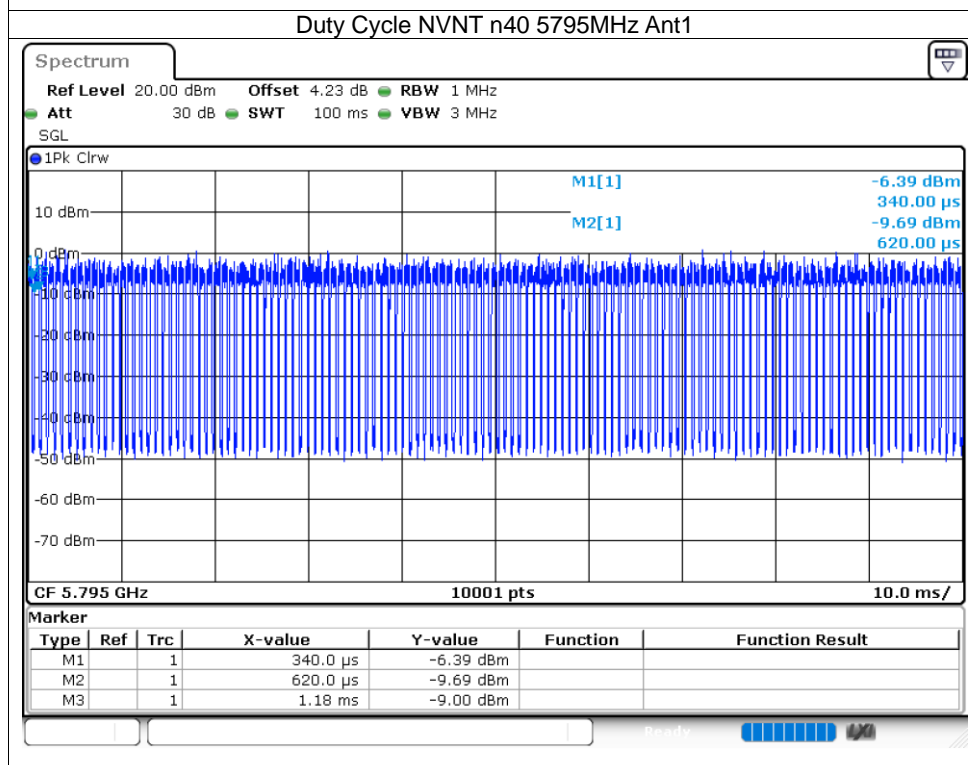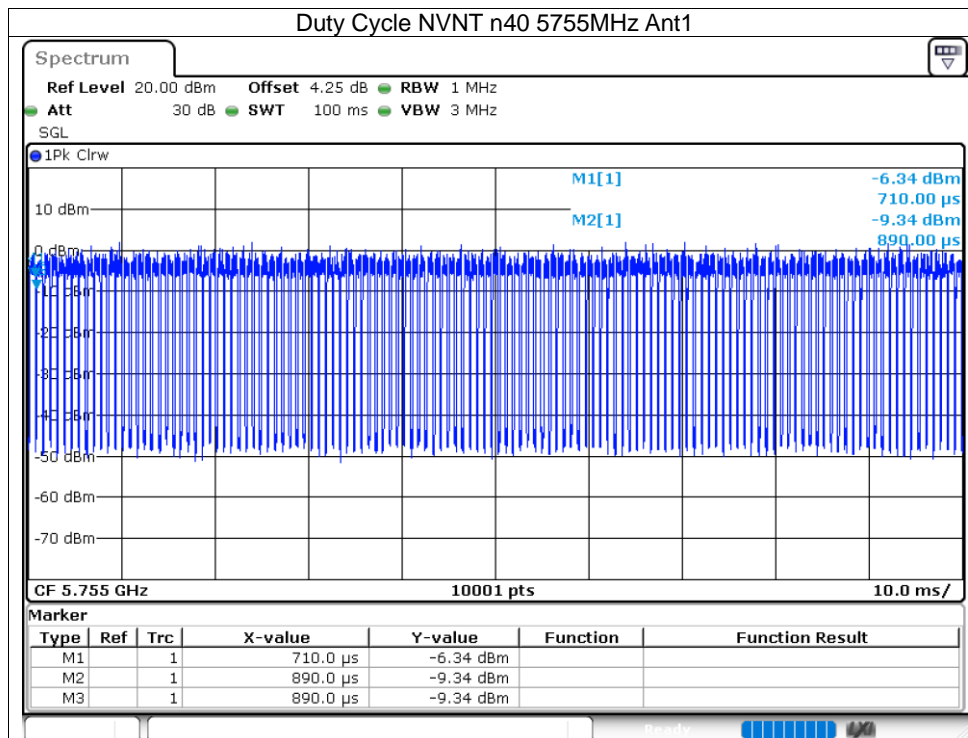

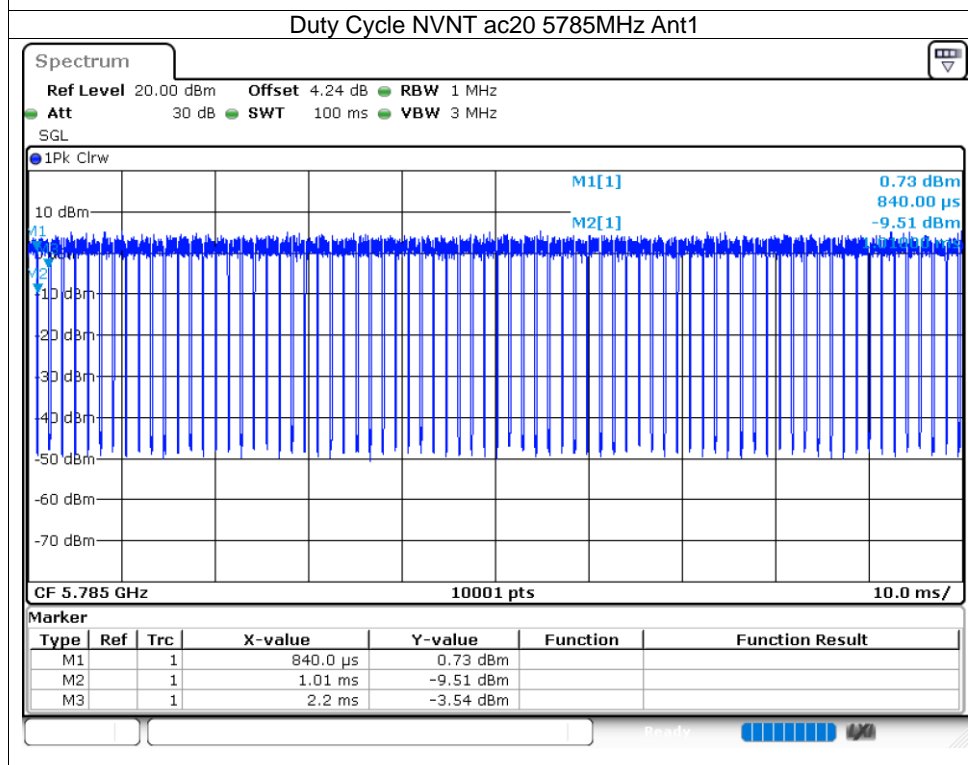
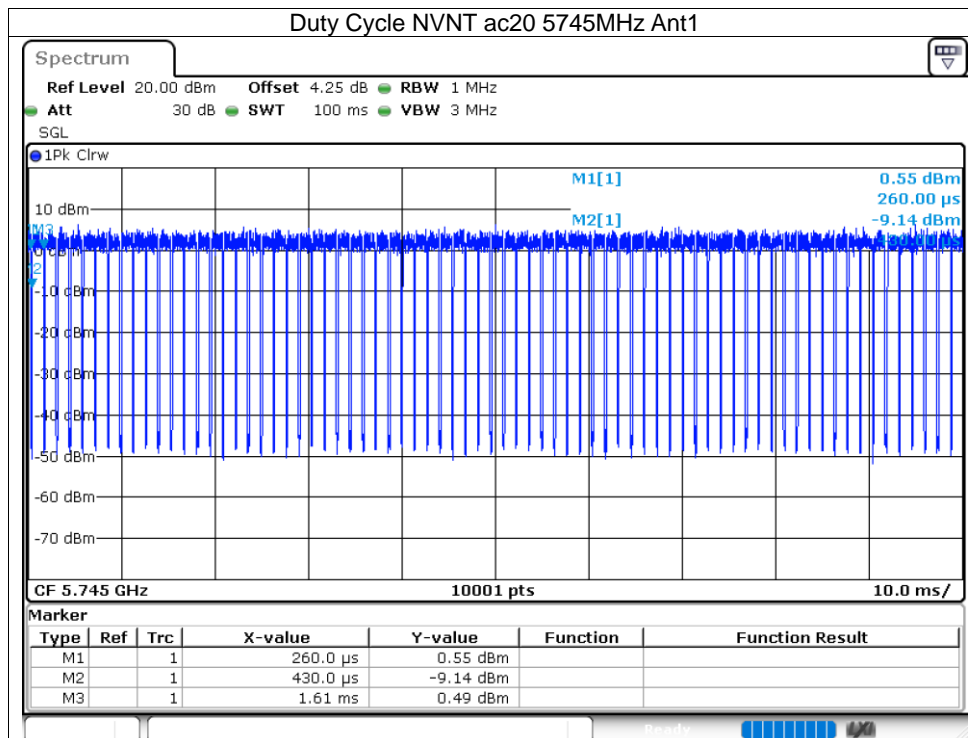


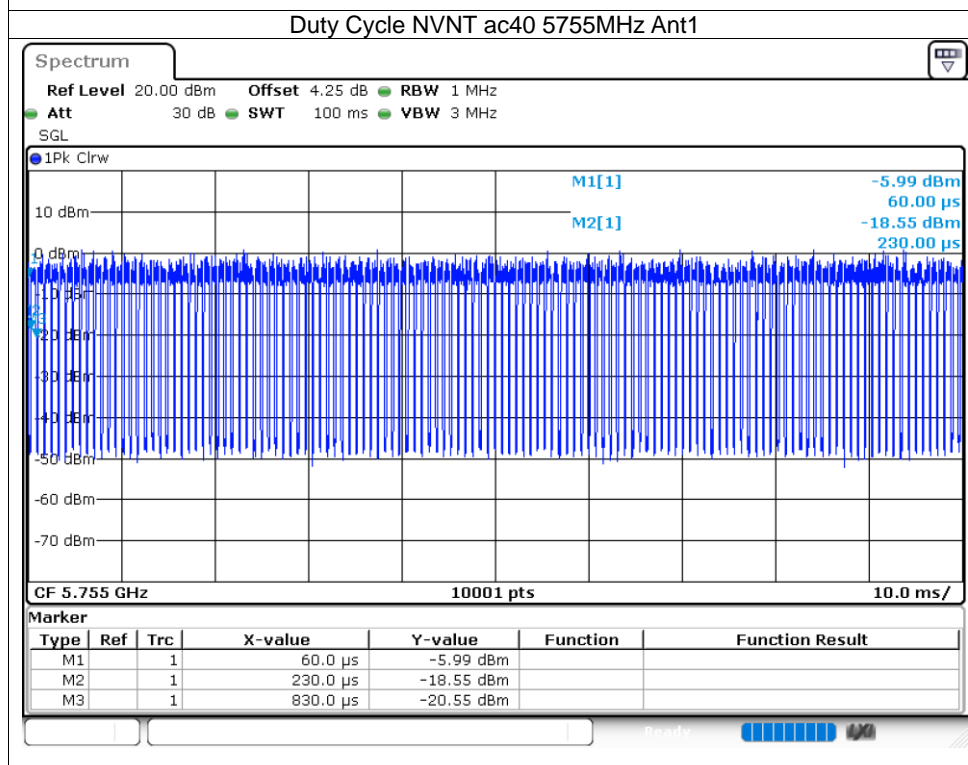
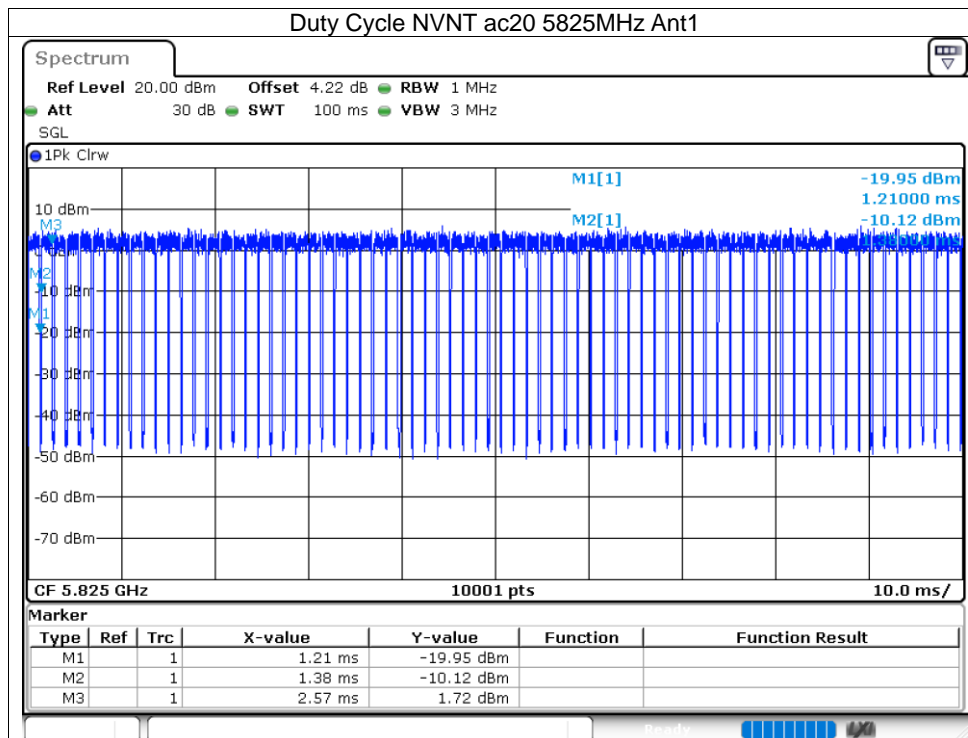


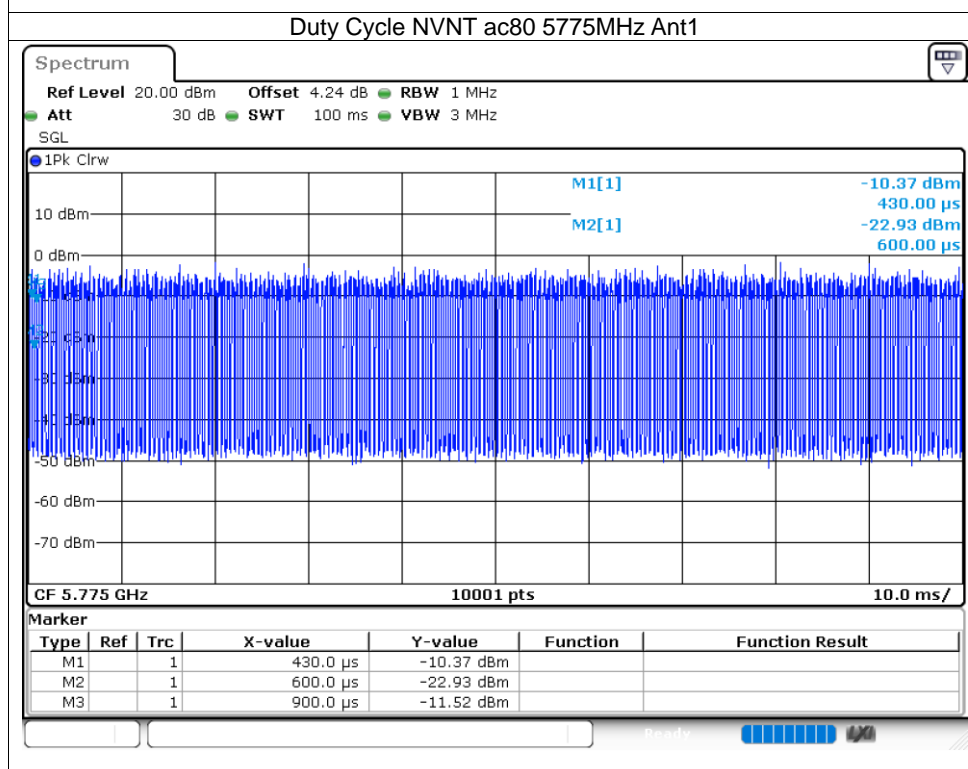
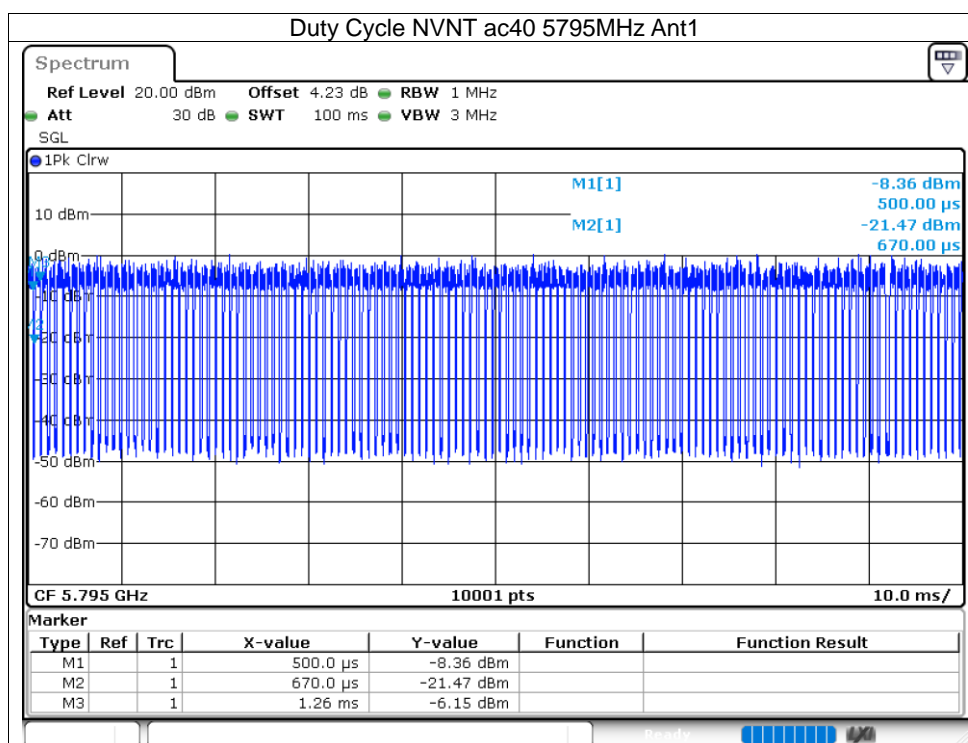




10.2 -6DB EMISSION BANDWIDTH



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.35	0.5	Pass
NVNT	a	5785	Ant1	16.35	0.5	Pass
NVNT	a	5825	Ant1	16.35	0.5	Pass
NVNT	n20	5745	Ant1	17.55	0.5	Pass
NVNT	n20	5785	Ant1	17.25	0.5	Pass
NVNT	n20	5825	Ant1	17.64	0.5	Pass
NVNT	n40	5755	Ant1	36.3	0.5	Pass
NVNT	n40	5795	Ant1	36.18	0.5	Pass
NVNT	ac20	5745	Ant1	17.58	0.5	Pass
NVNT	ac20	5785	Ant1	17.58	0.5	Pass
NVNT	ac20	5825	Ant1	17.52	0.5	Pass
NVNT	ac40	5755	Ant1	36.06	0.5	Pass
NVNT	ac40	5795	Ant1	36.54	0.5	Pass
NVNT	ac80	5775	Ant1	75.6	0.5	Pass

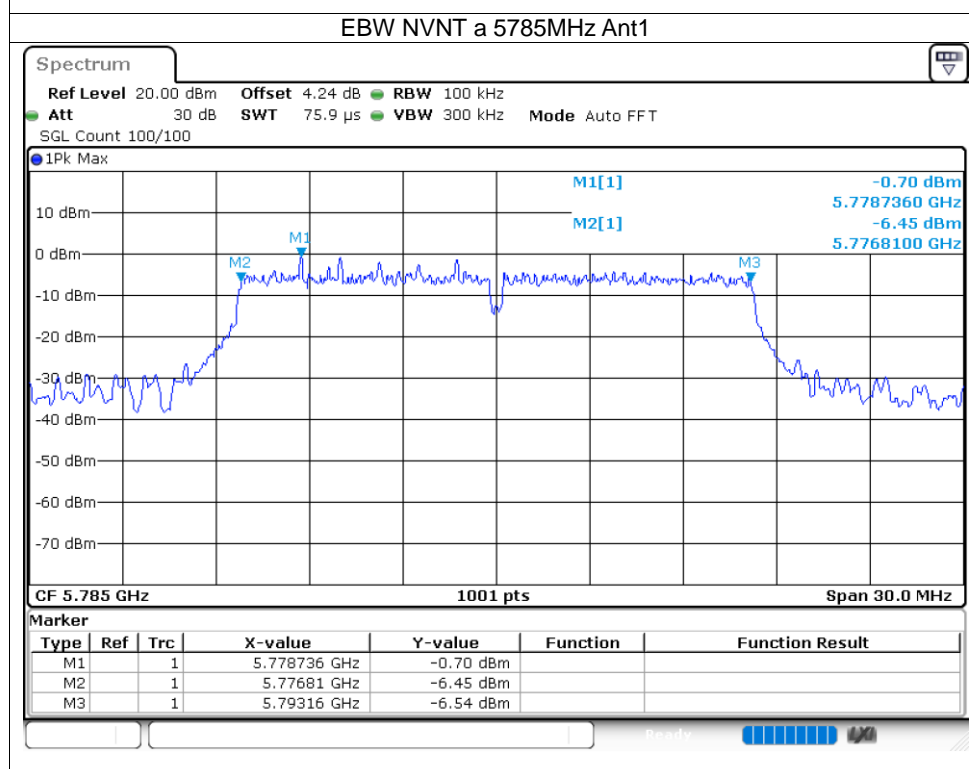
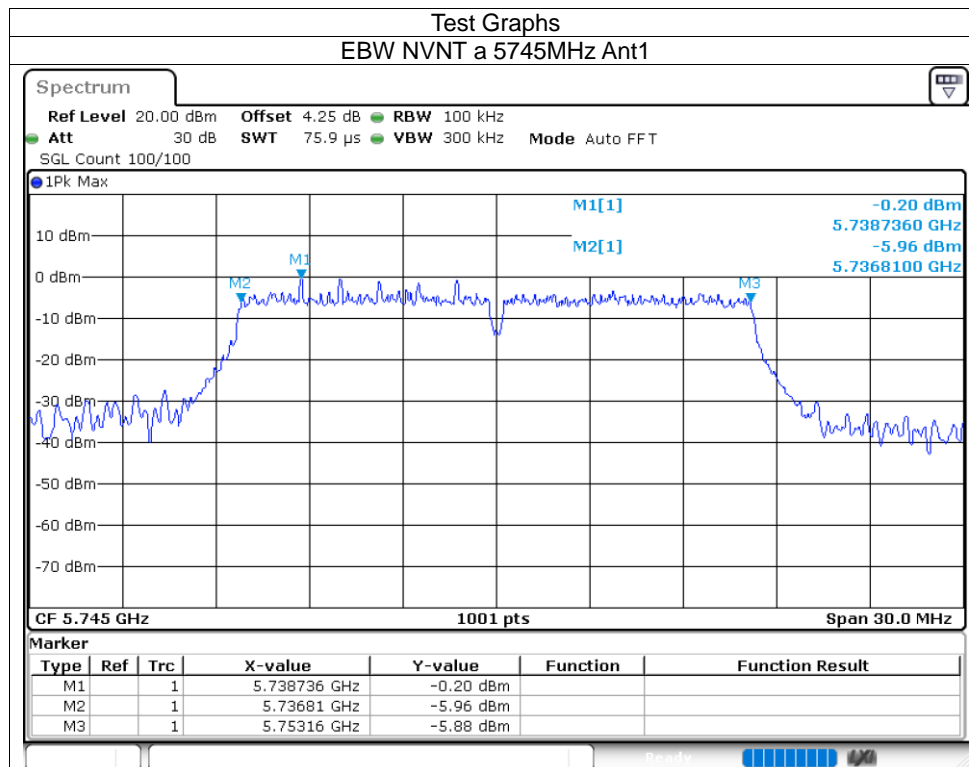


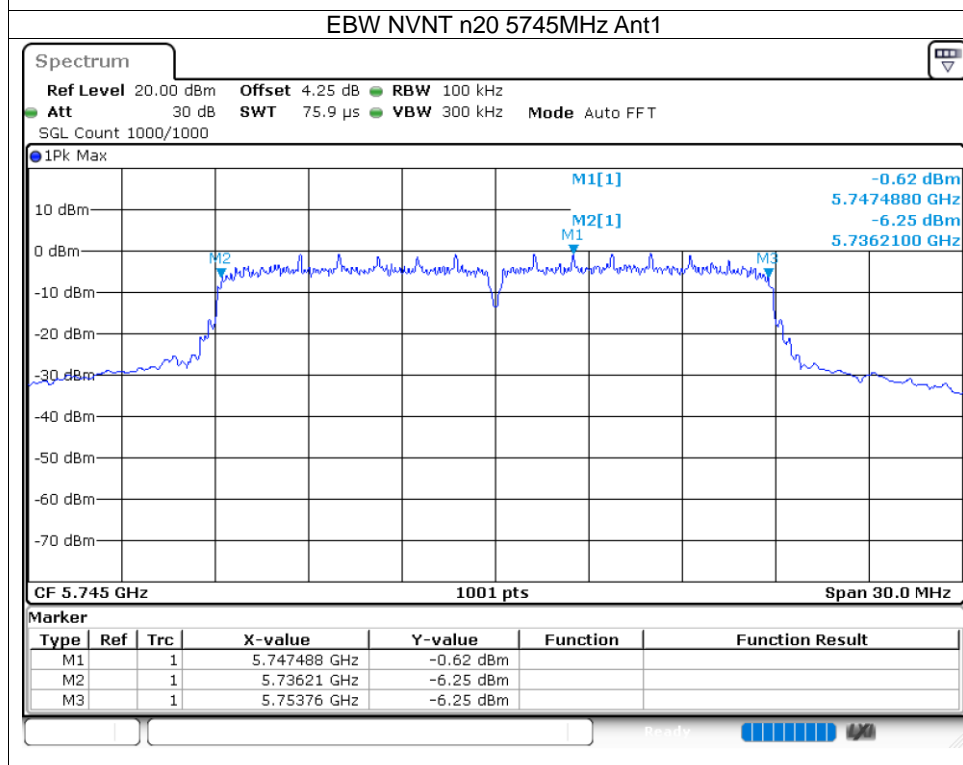
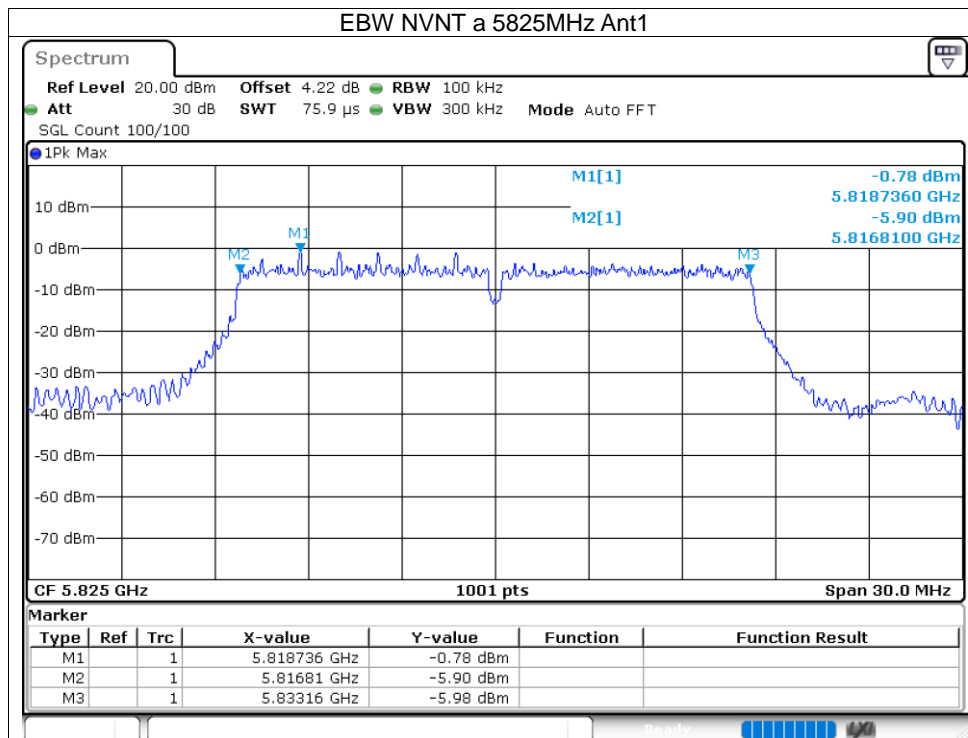


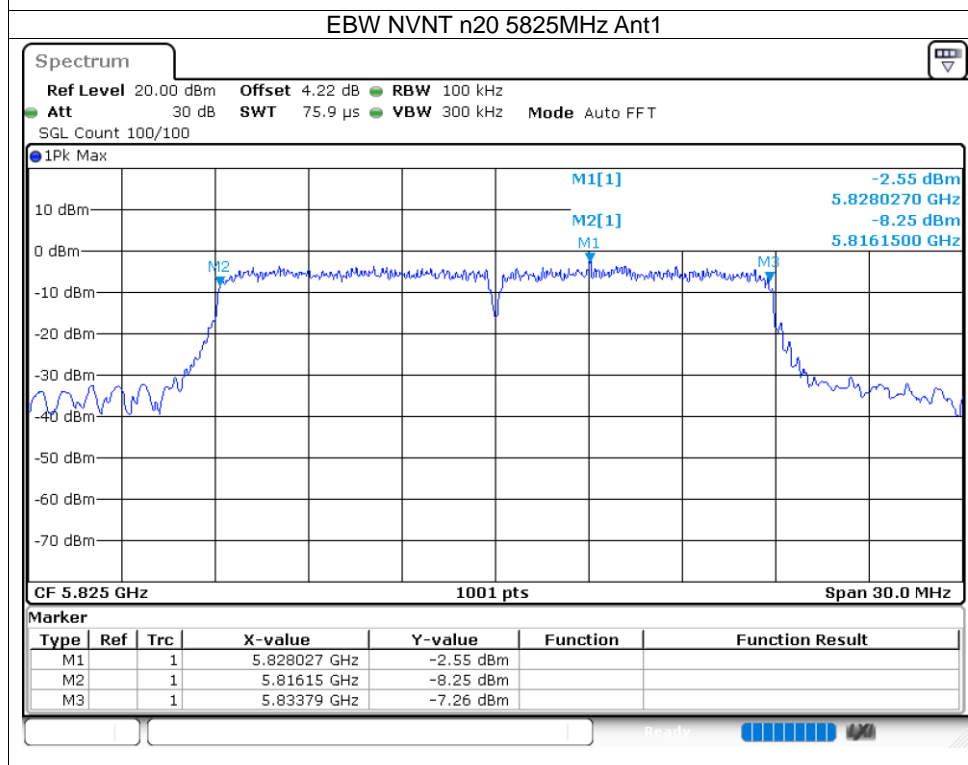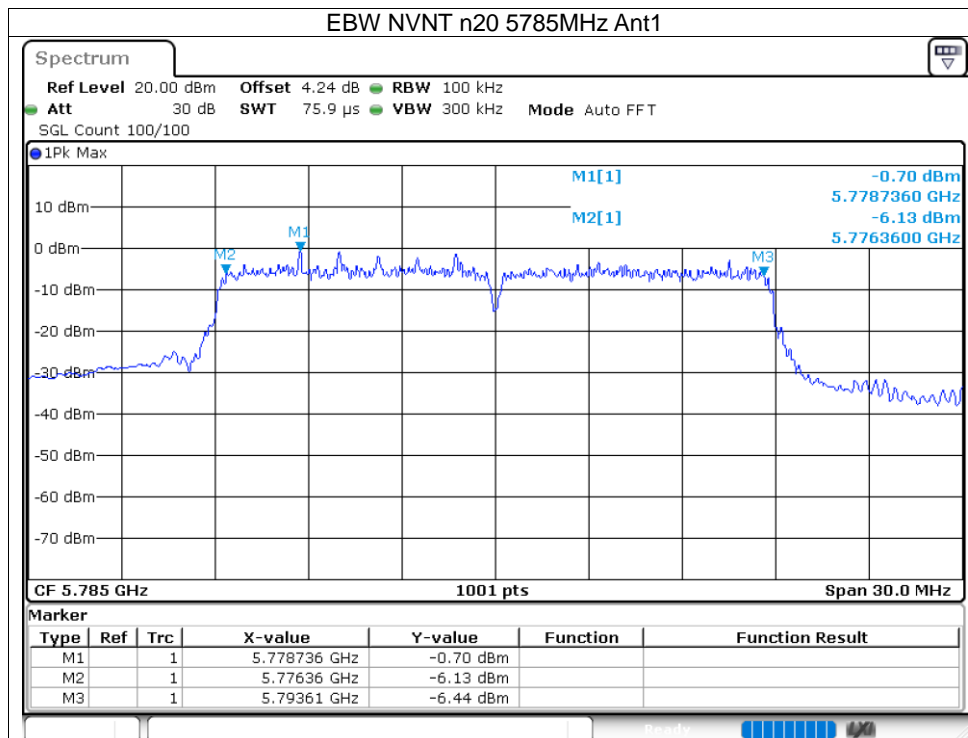

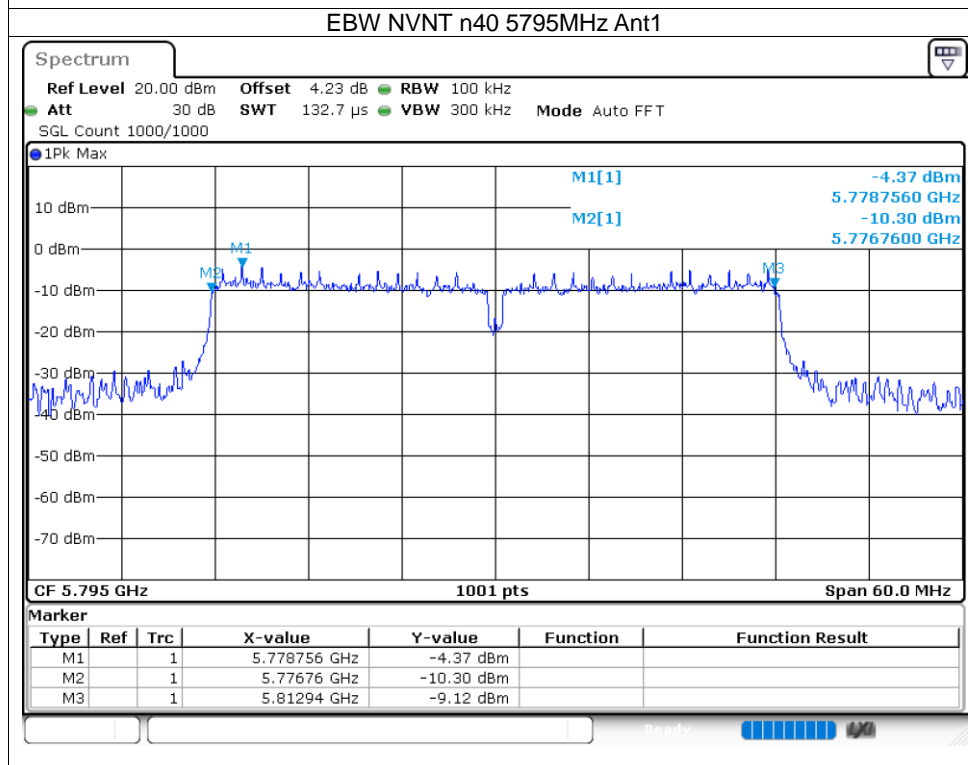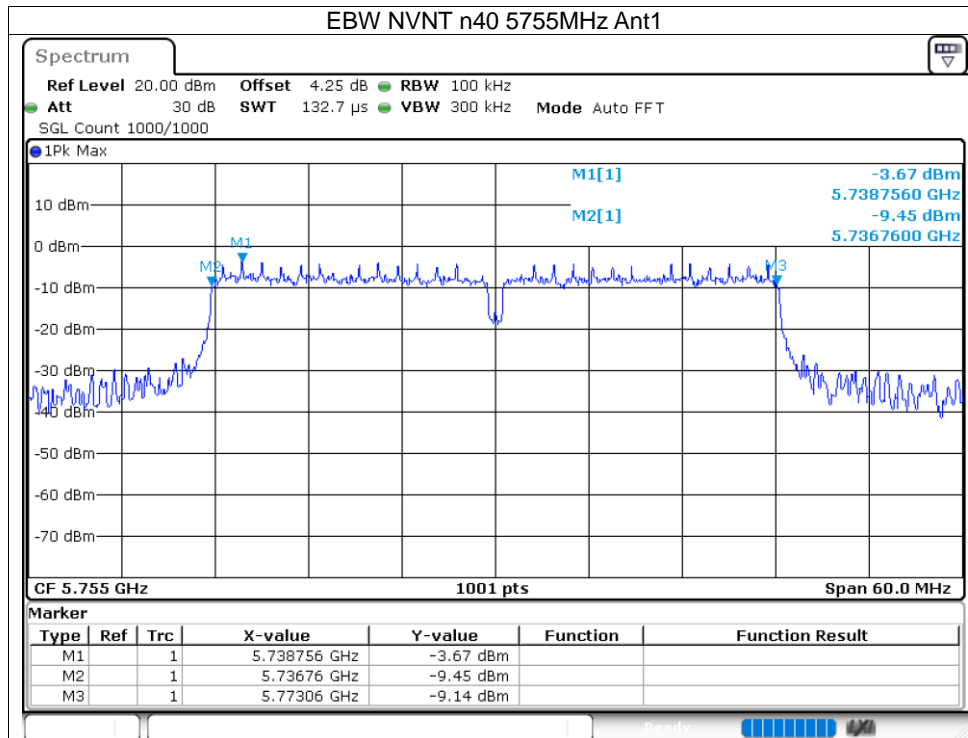

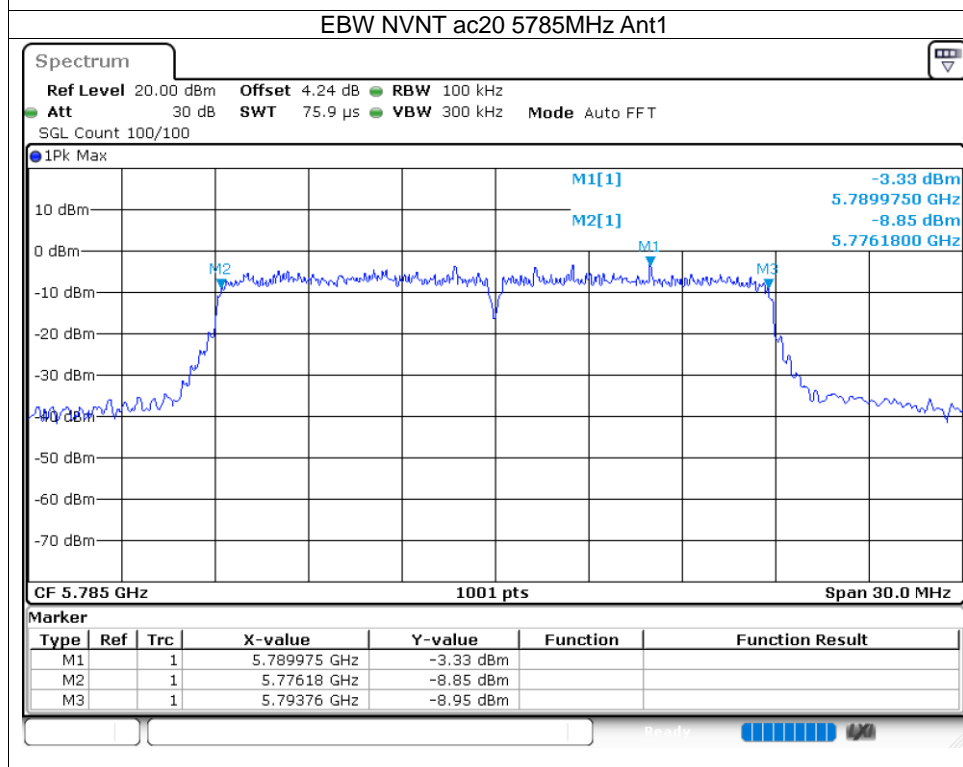
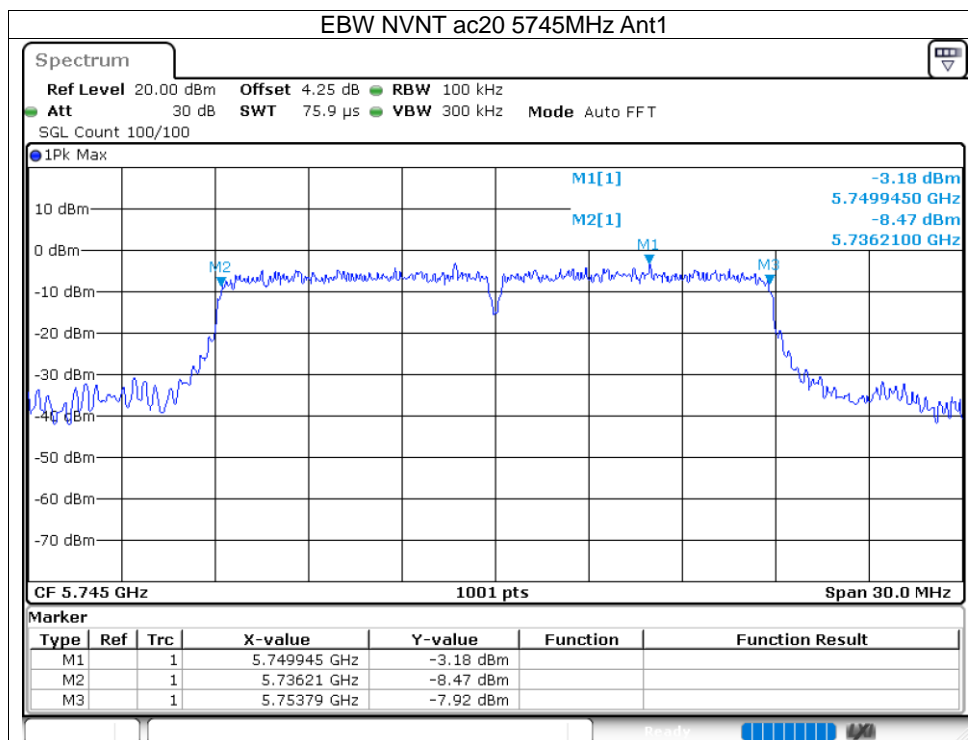


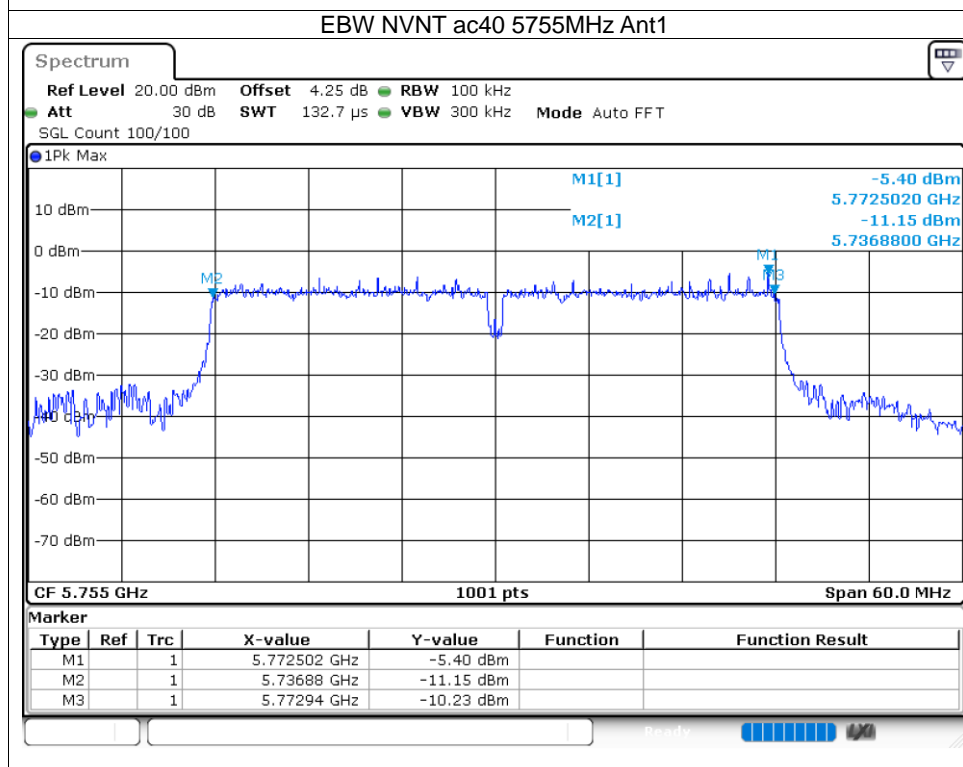
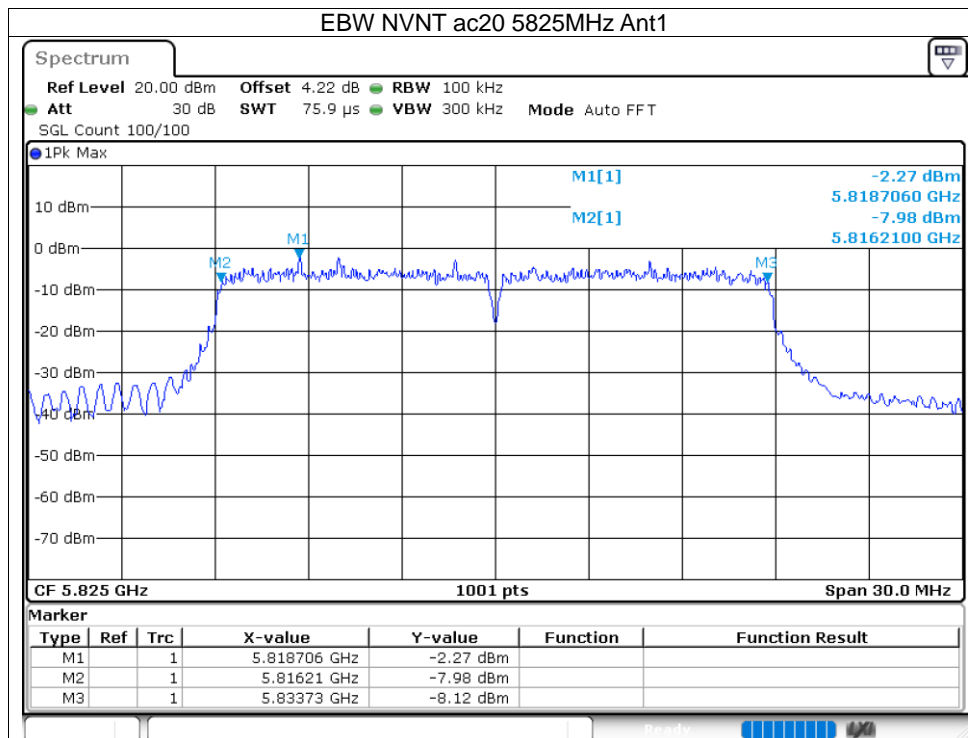


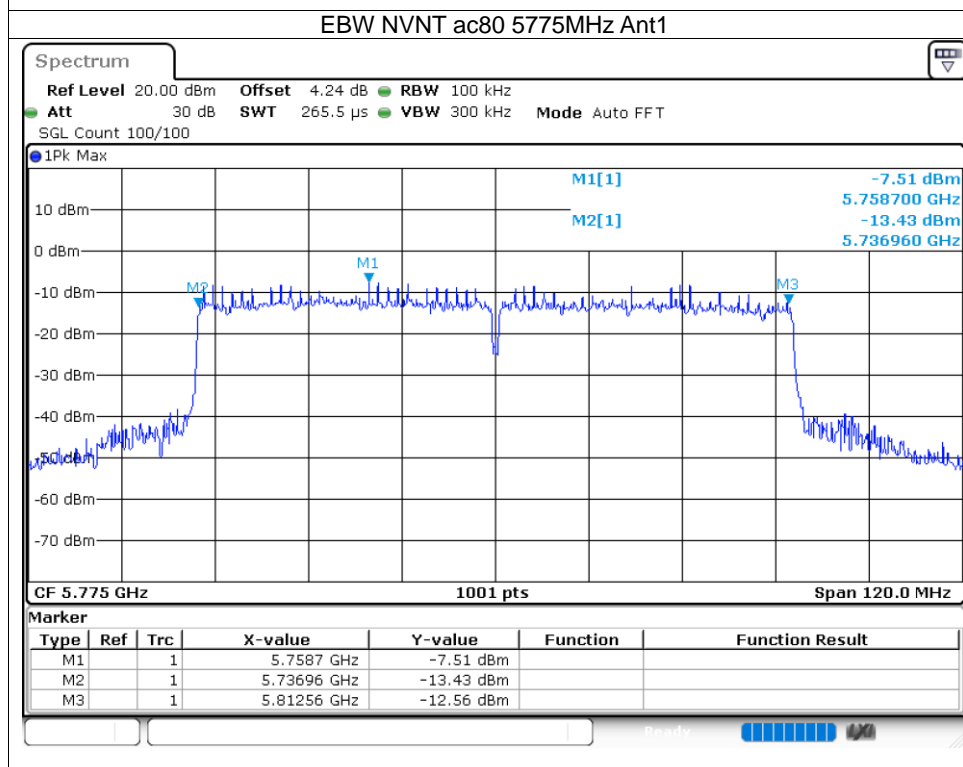
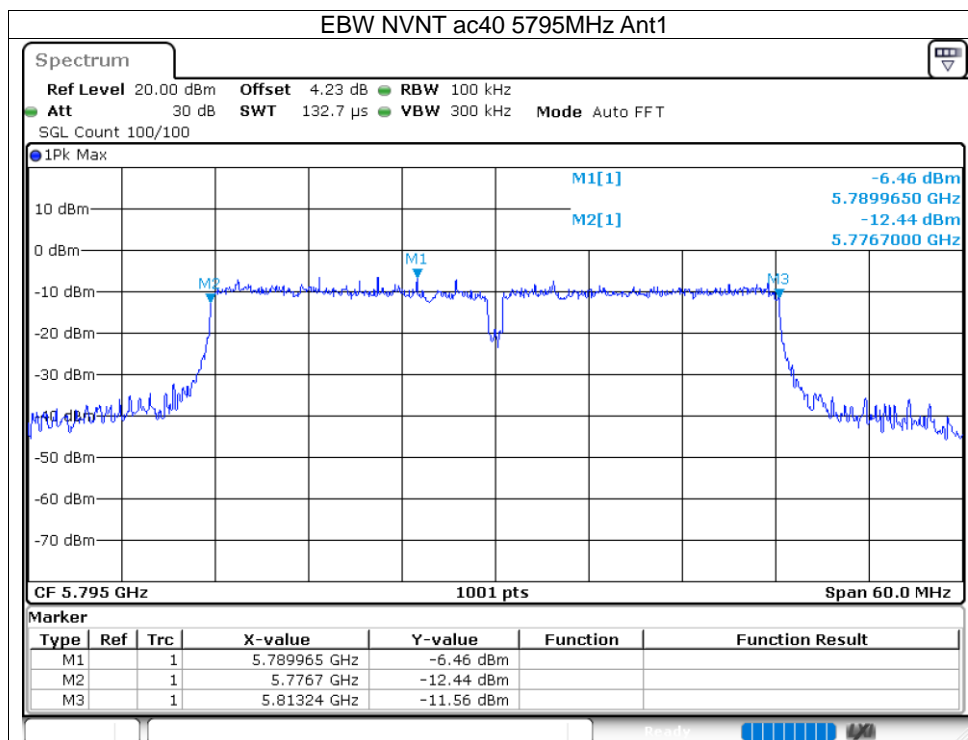




10.3 FREQUENCY RANGE



Condition	Mode	Frequency (MHz)	Antenna	Frequency Range (MHz)	Limit (MHz)	Verdict
NVNT	a	5745	Ant1	5735.68	>=5725	Pass
NVNT	a	5825	Ant1	5834.32	<=5875	Pass
NVNT	n20	5745	Ant1	5735.28	>=5725	Pass
NVNT	n20	5825	Ant1	5834.76	<=5875	Pass
NVNT	n40	5755	Ant1	5736.16	>=5725	Pass
NVNT	n40	5795	Ant1	5813.84	<=5875	Pass
NVNT	ac20	5745	Ant1	5735.48	>=5725	Pass
NVNT	ac20	5825	Ant1	5834.48	<=5875	Pass
NVNT	ac40	5755	Ant1	5736.34	>=5725	Pass
NVNT	ac40	5795	Ant1	5813.66	<=5875	Pass
NVNT	ac80	5775	Ant1	5736.48	>=5725	Pass

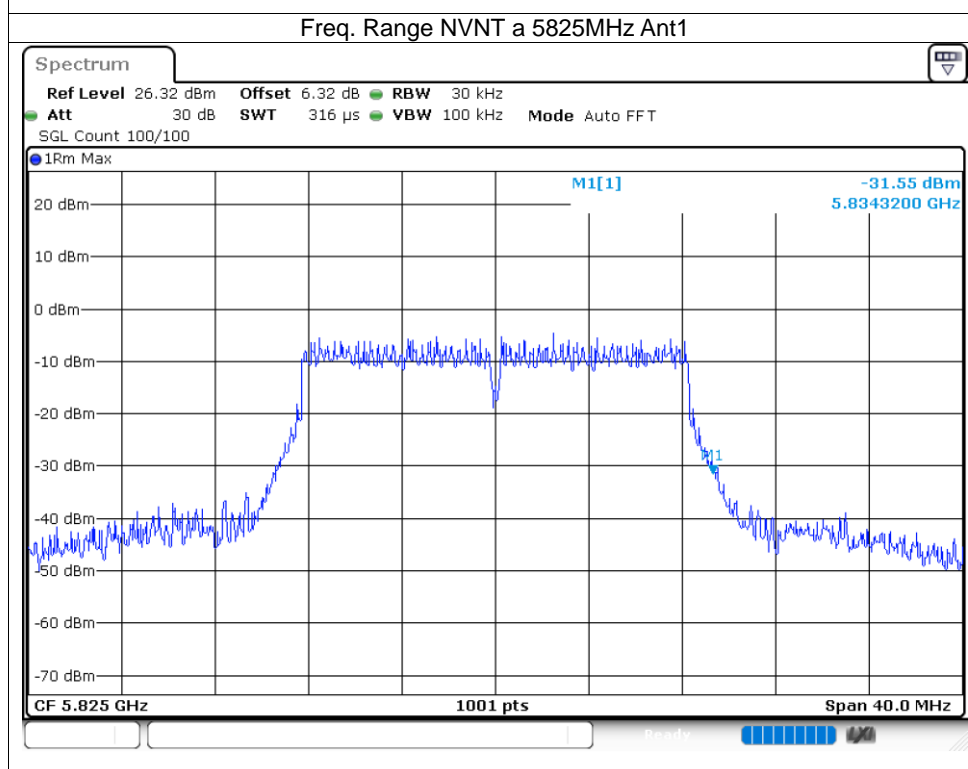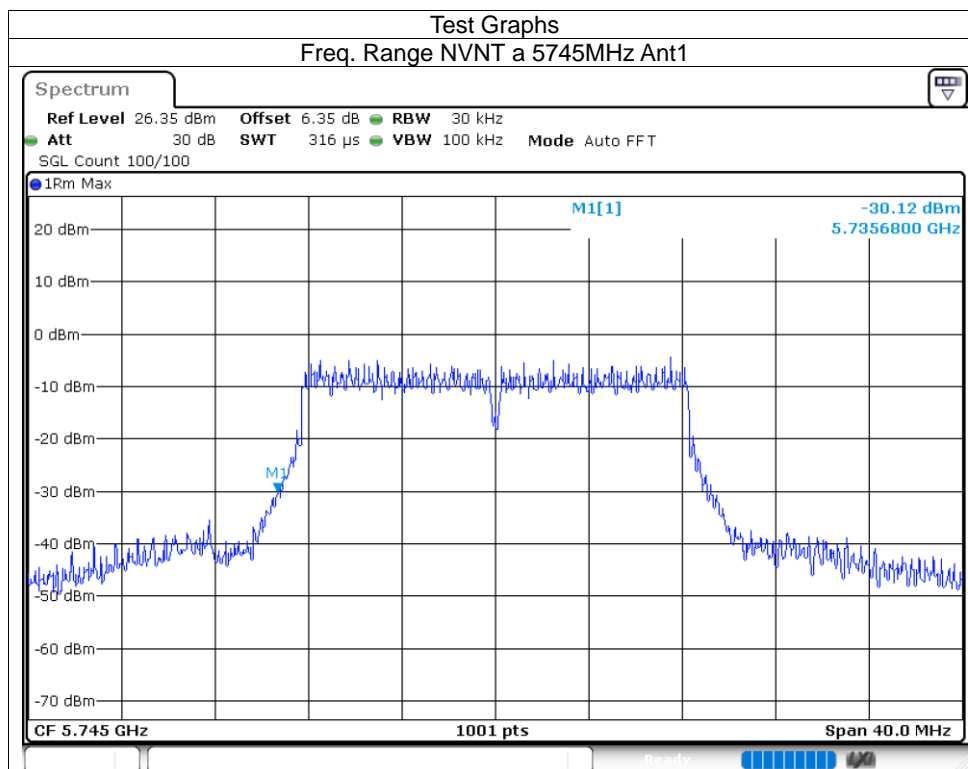


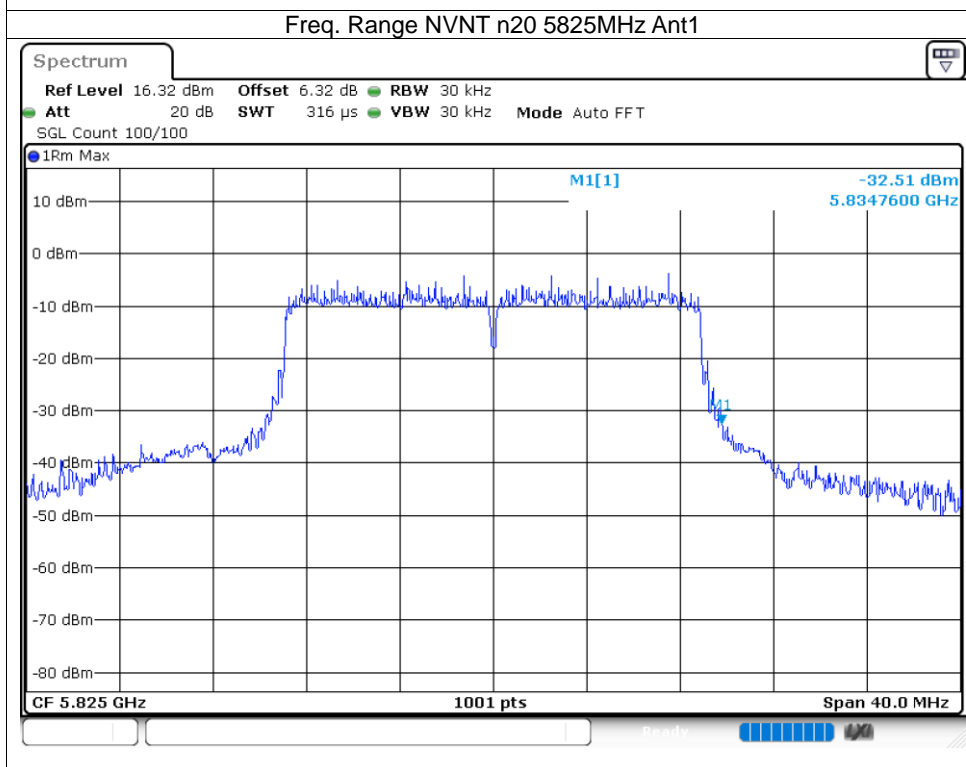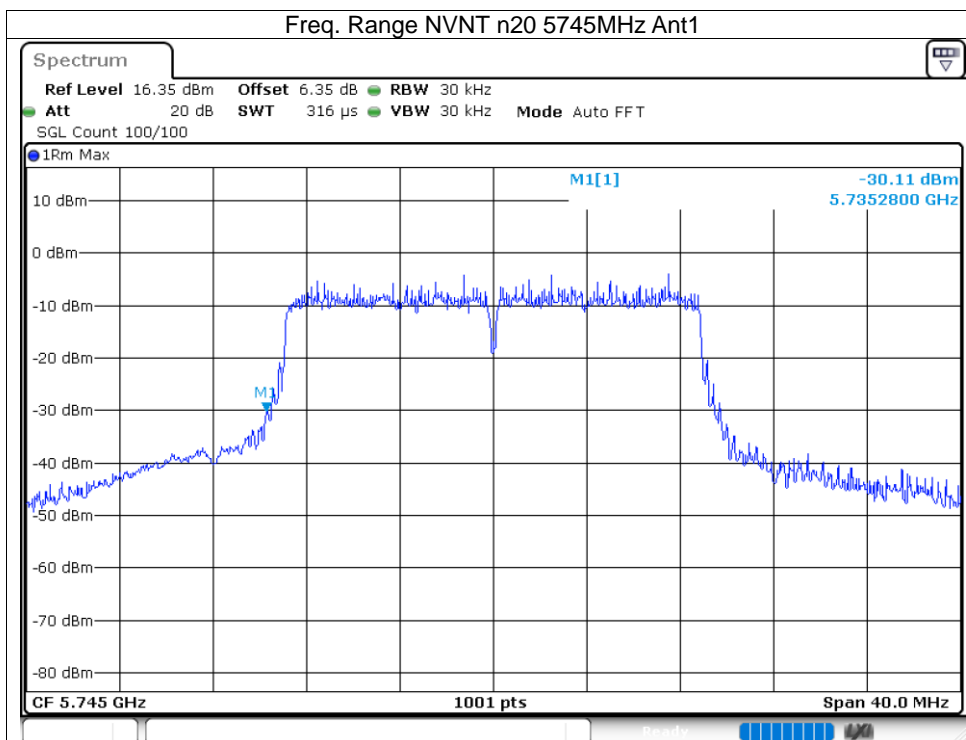

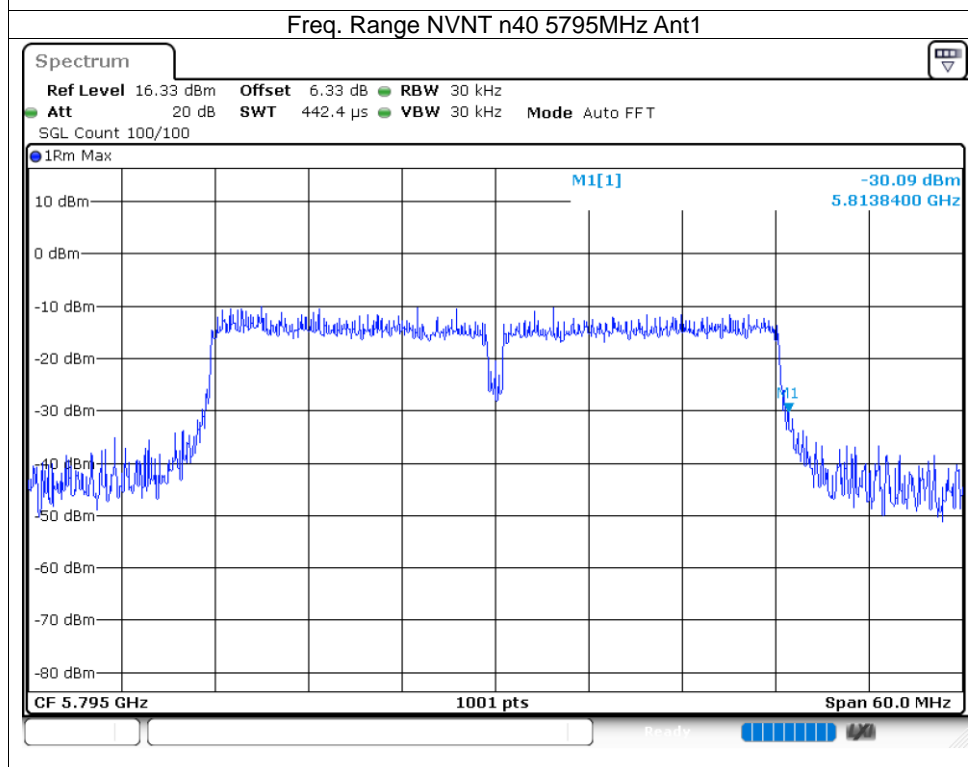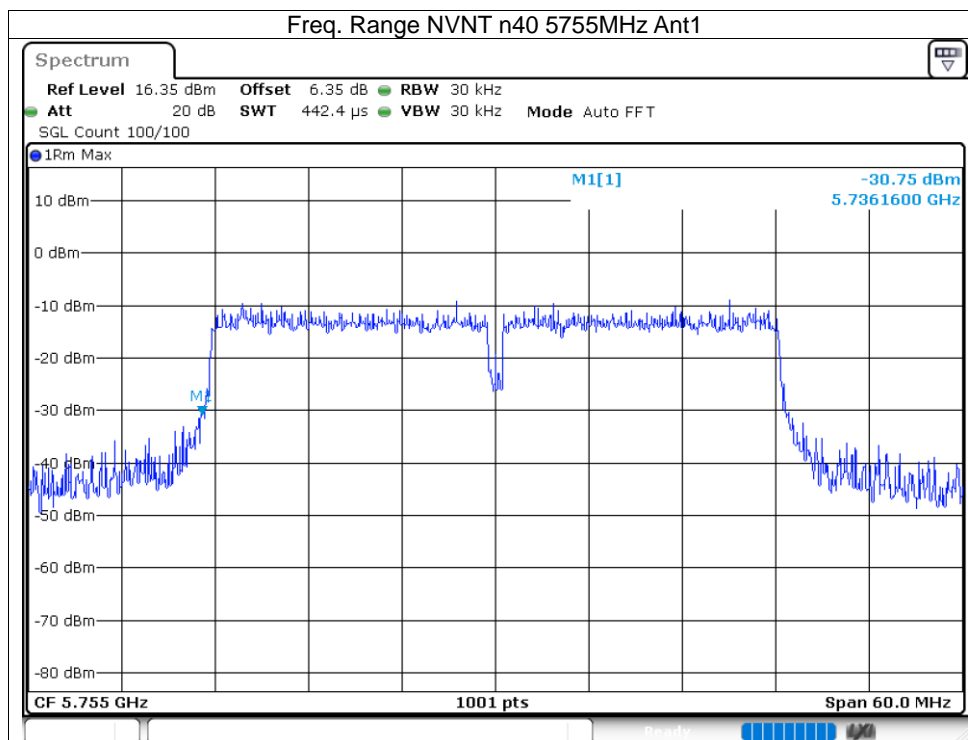

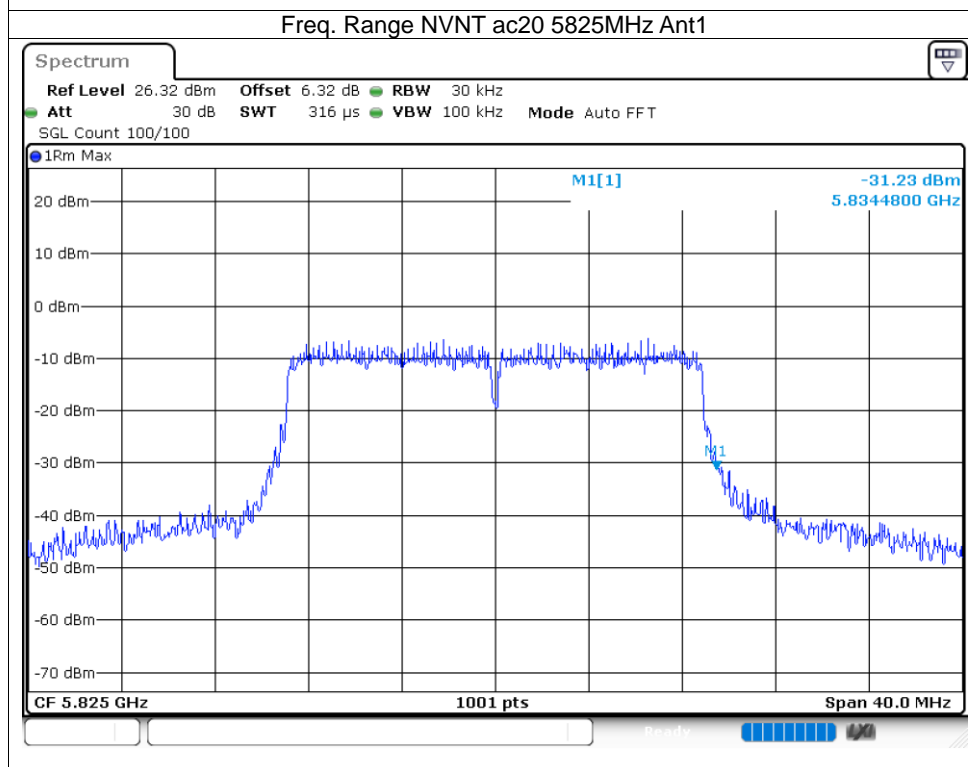
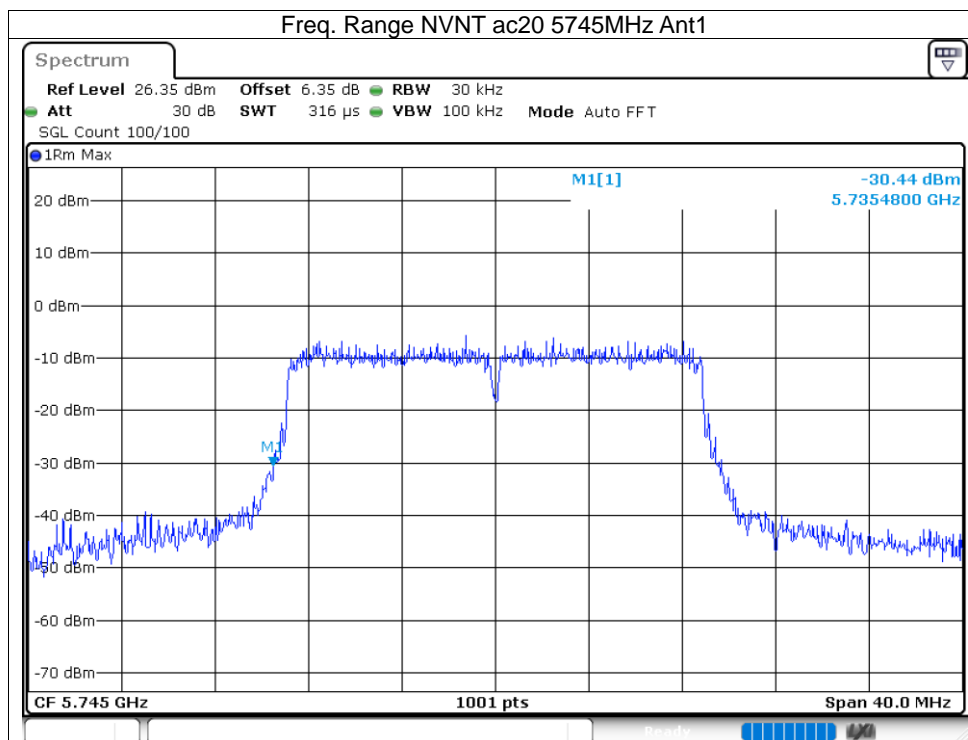


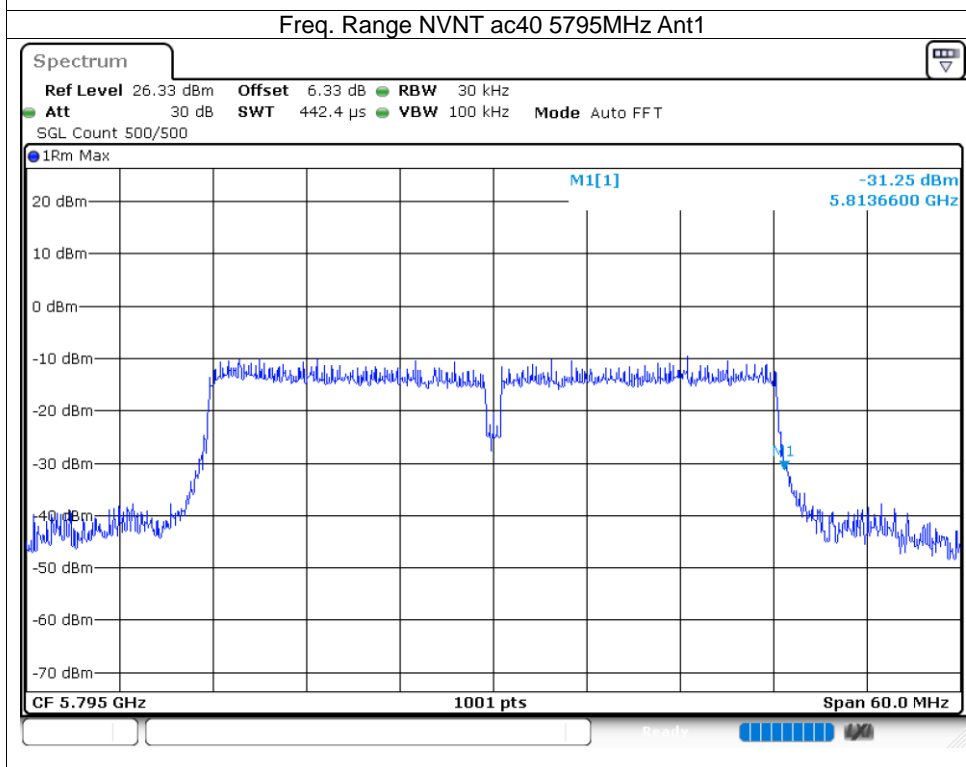
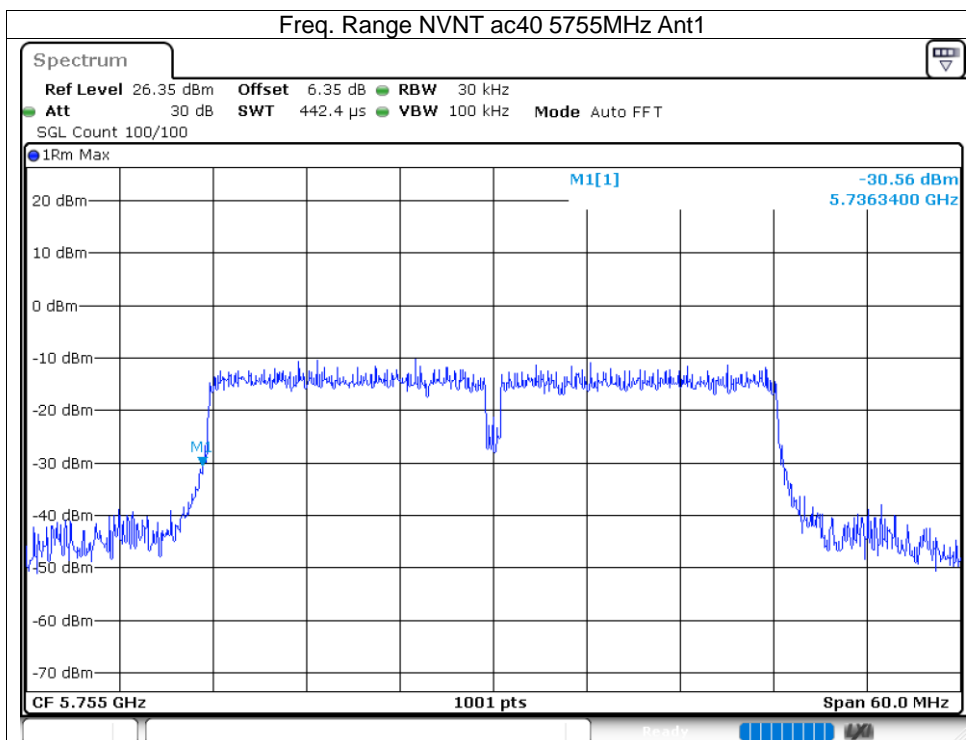



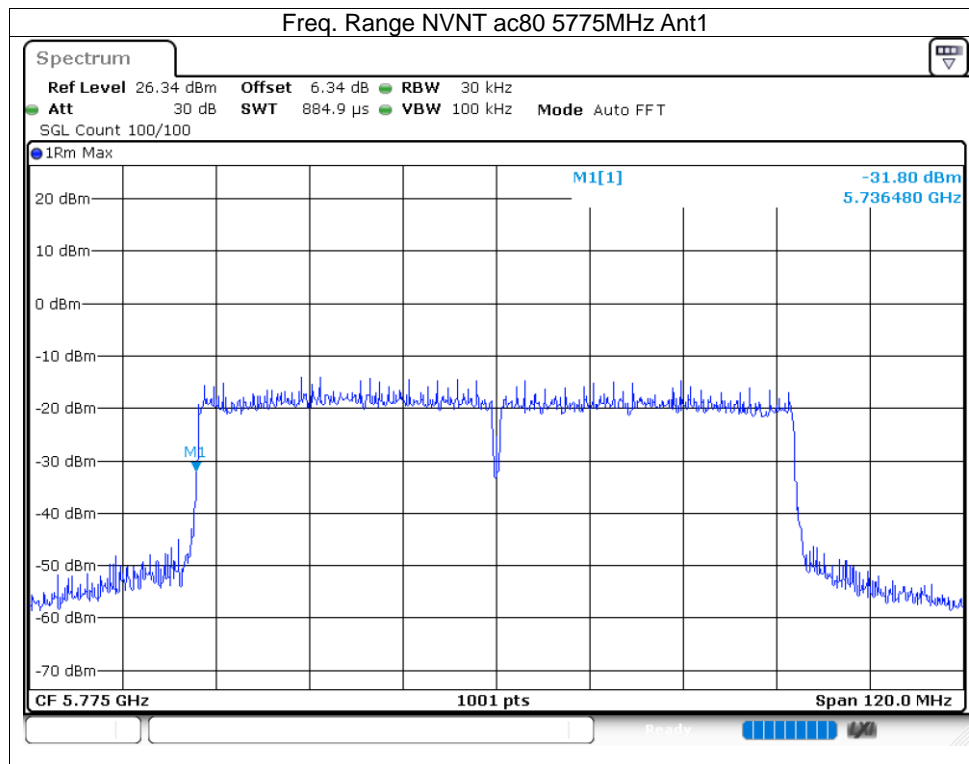




10.4 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	Center Frequency (MHz)	OBW (MHz)	Verdict
NVNT	a	5745	Ant1	5744.98	16.534	Pass
NVNT	a	5785	Ant1	5784.978	16.538	Pass
NVNT	a	5825	Ant1	5824.988	16.542	Pass
NVNT	n20	5745	Ant1	5744.994	17.65	Pass
NVNT	n20	5785	Ant1	5784.976	17.662	Pass
NVNT	n20	5825	Ant1	5824.984	17.662	Pass
NVNT	n40	5755	Ant1	5754.98	36.244	Pass
NVNT	n40	5795	Ant1	5794.964	36.324	Pass
NVNT	ac20	5745	Ant1	5744.994	17.65	Pass
NVNT	ac20	5785	Ant1	5784.97	17.65	Pass
NVNT	ac20	5825	Ant1	5824.98	17.662	Pass
NVNT	ac40	5755	Ant1	5754.98	36.244	Pass
NVNT	ac40	5795	Ant1	5794.964	36.308	Pass
NVNT	ac80	5775	Ant1	5774.92	75.64	Pass

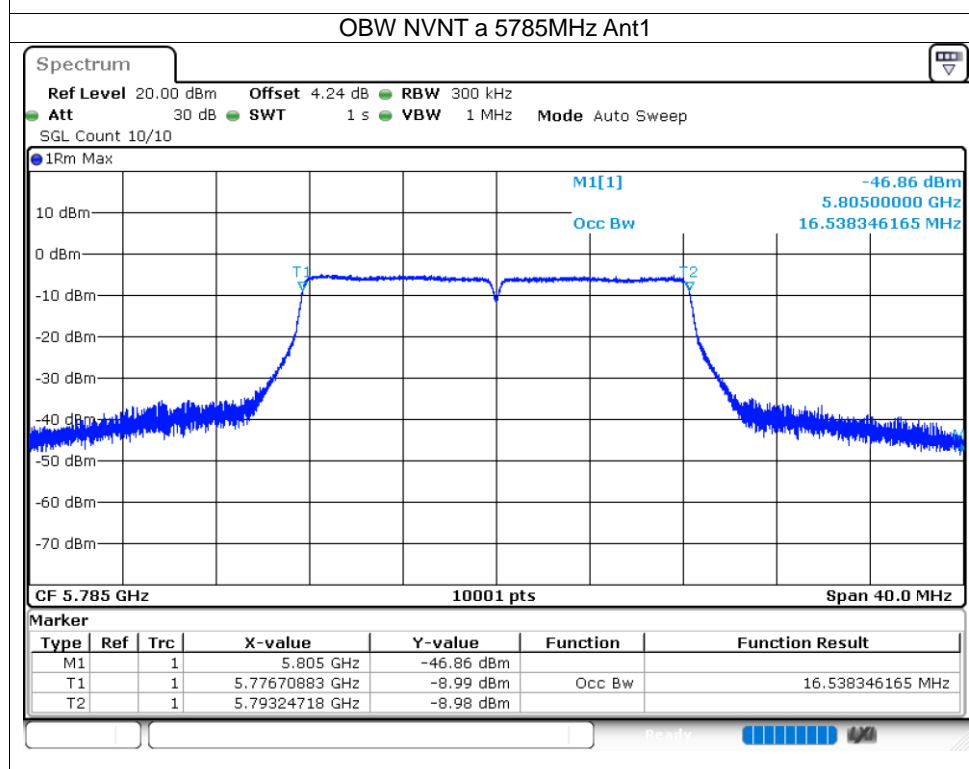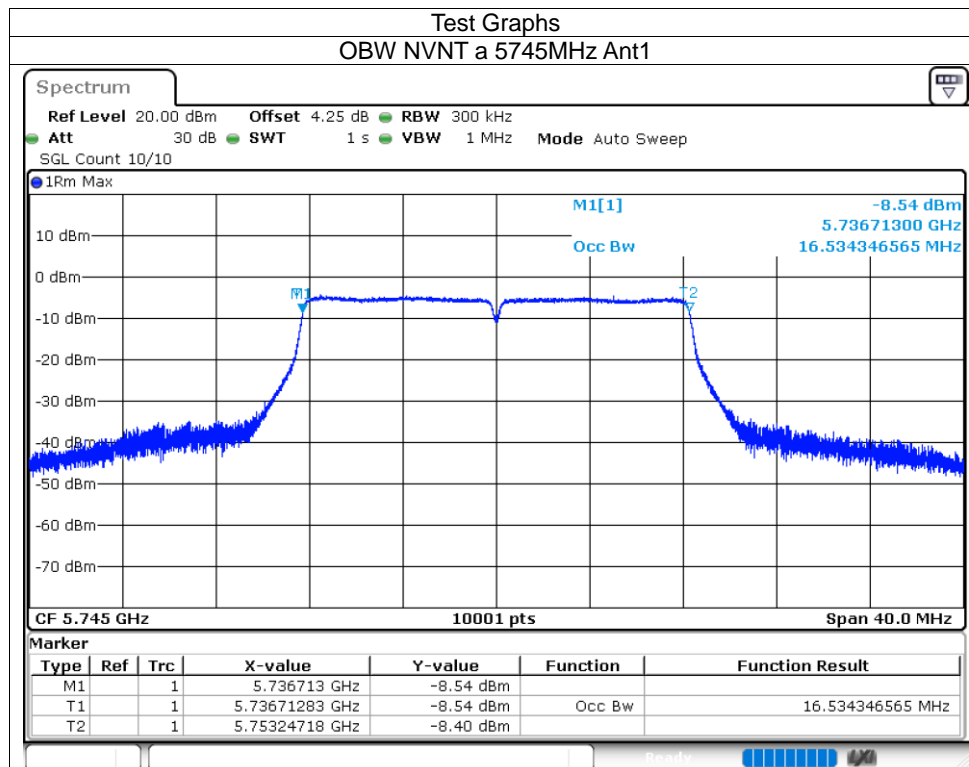


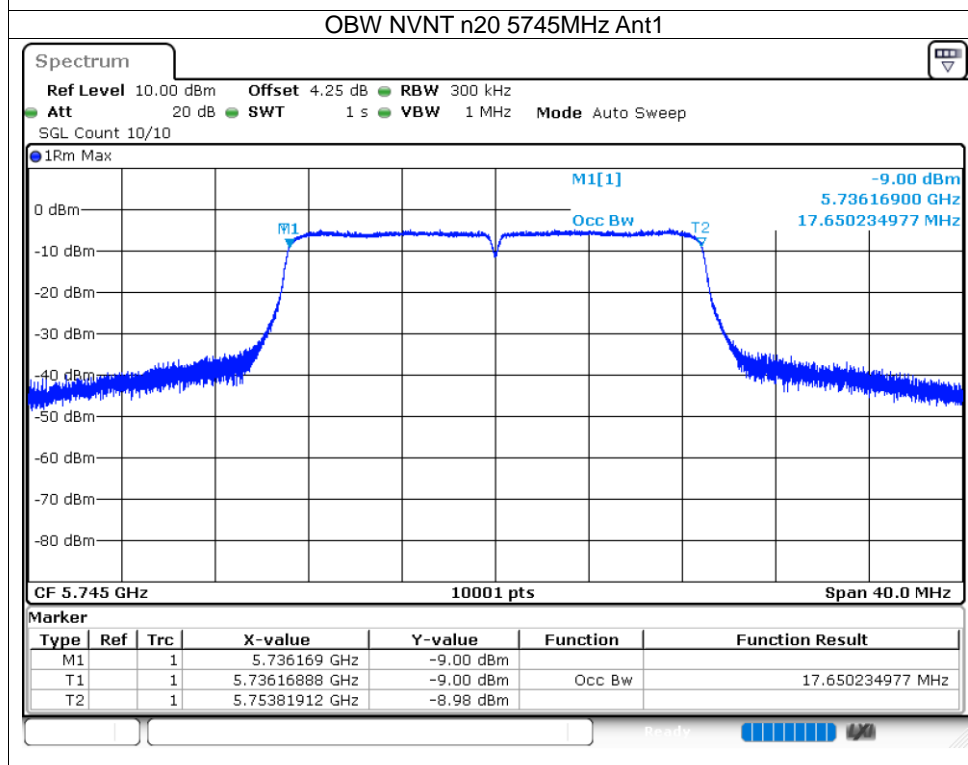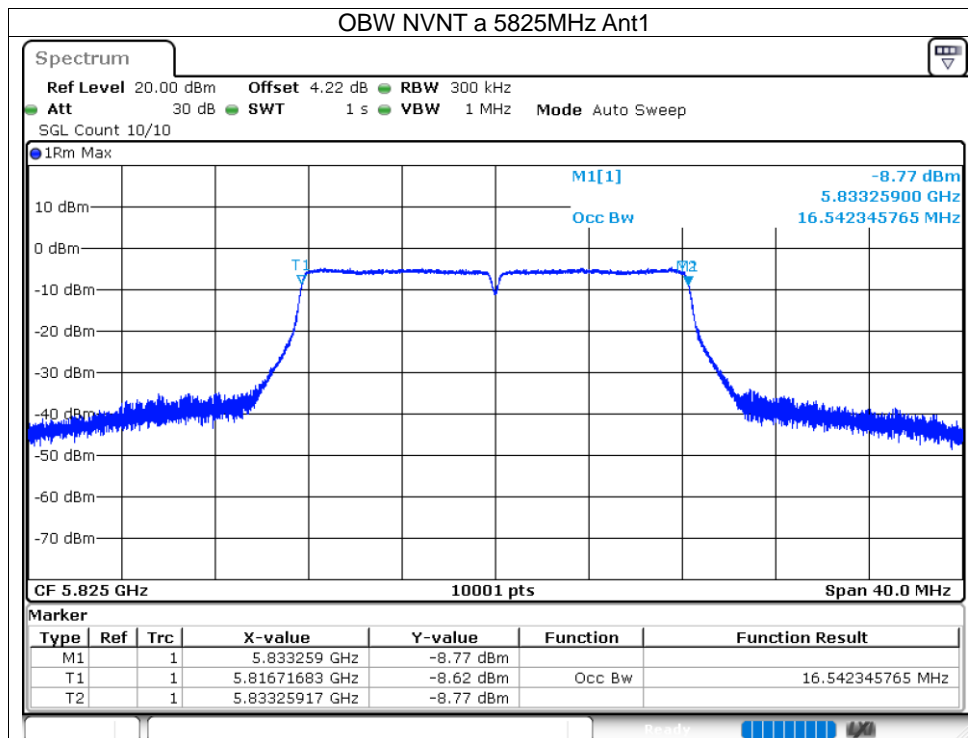

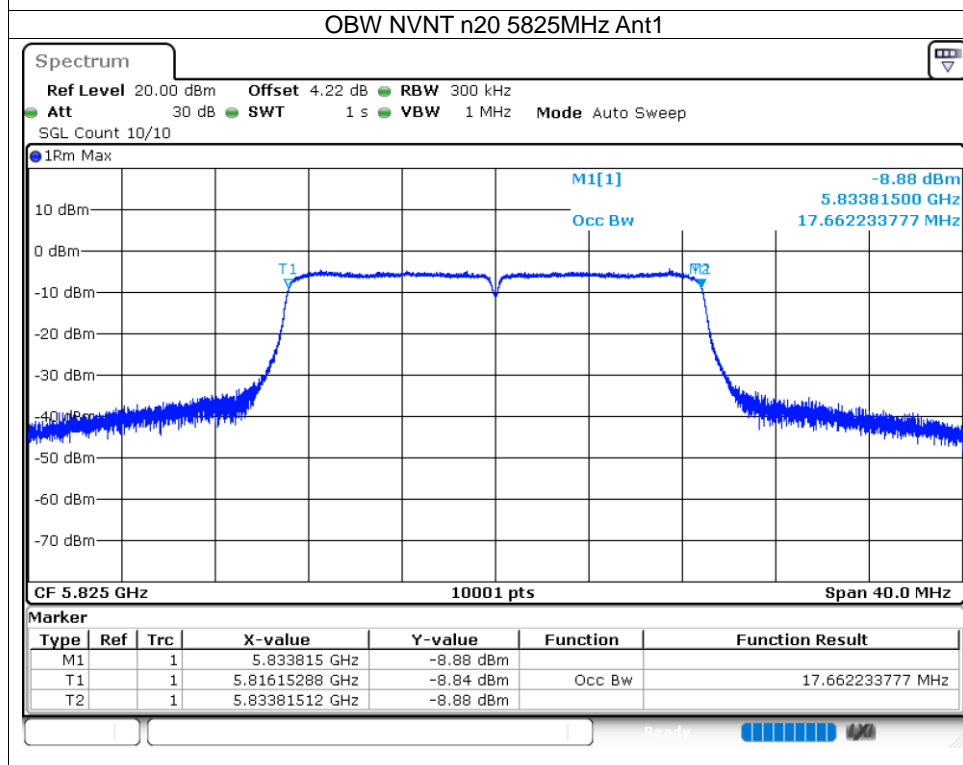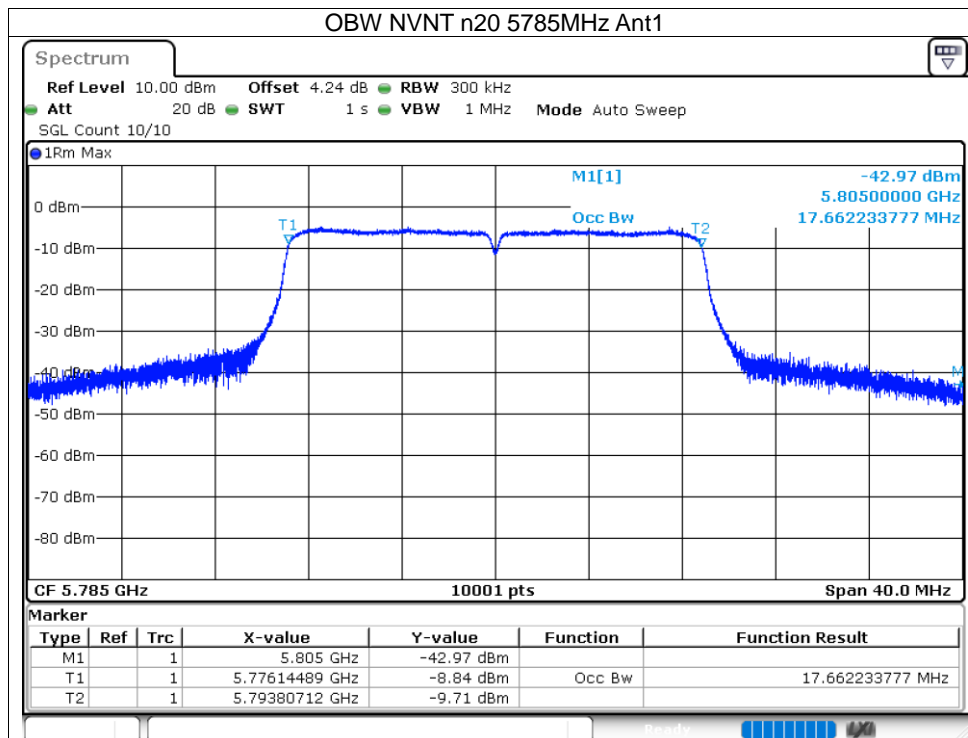


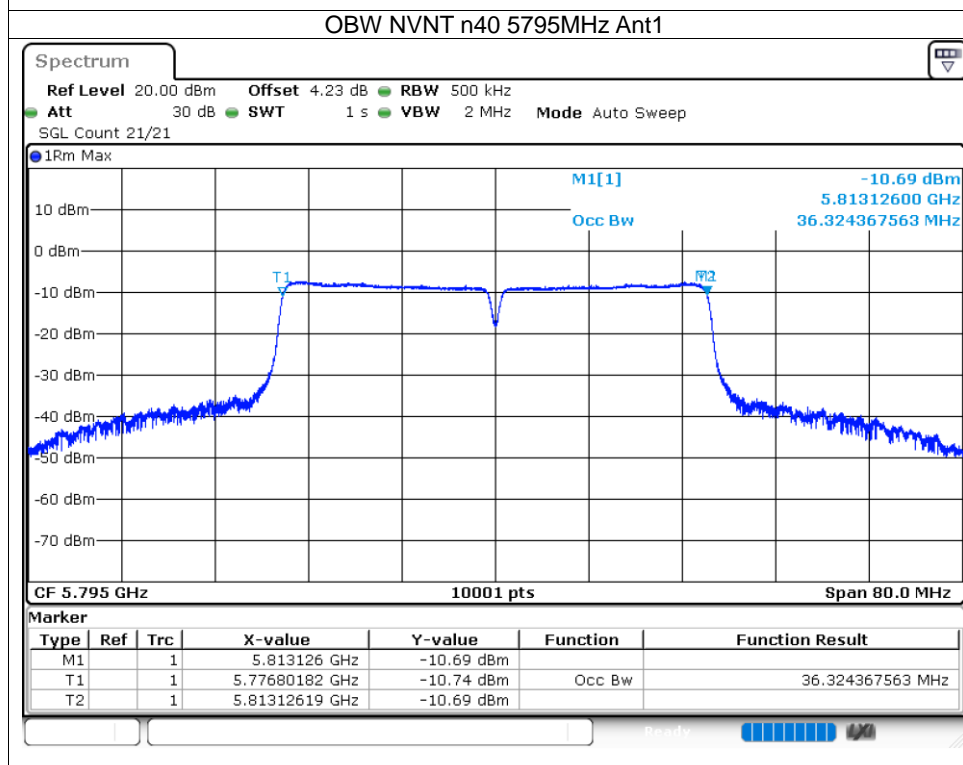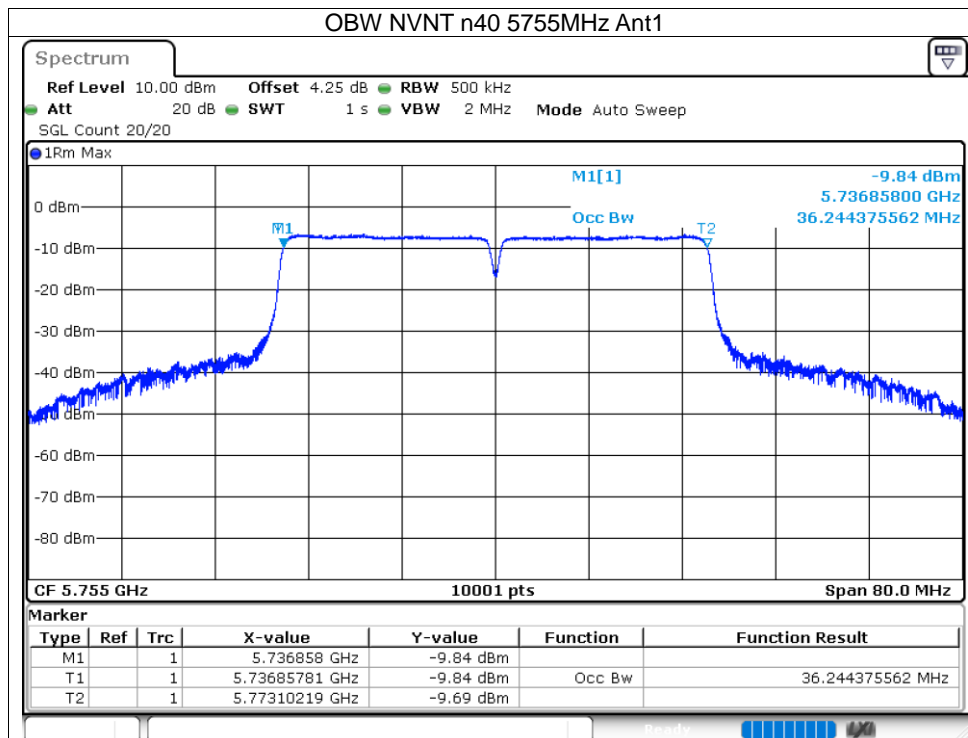


OBW NVNT ac20 5745MHz Ant1

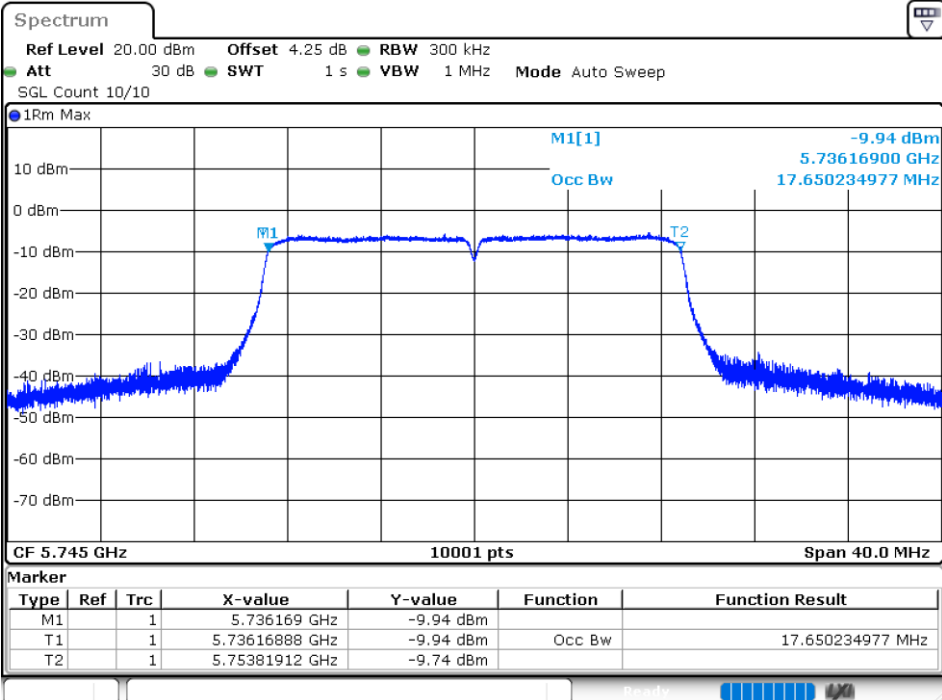


OBW NVNT ac20 5785MHz Ant1

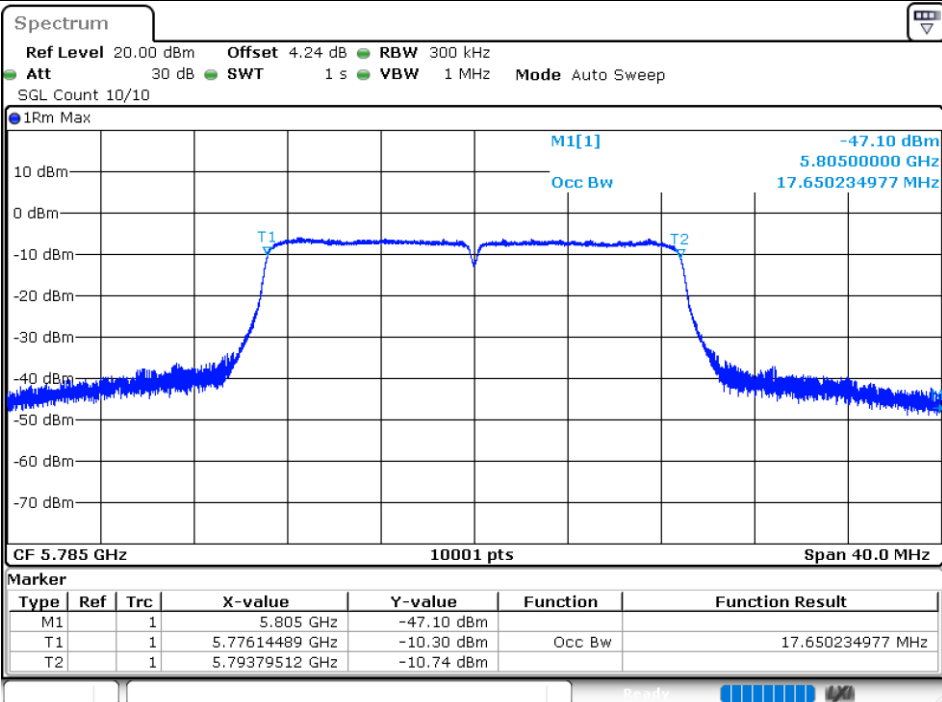


OBW NVNT ac20 5825MHz Ant1

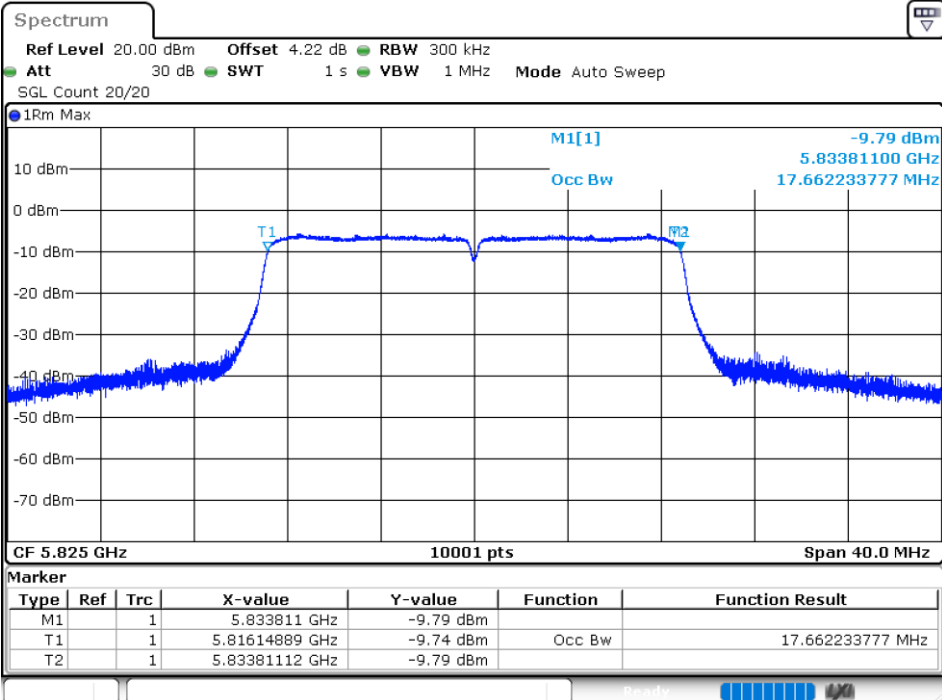


OBW NVNT ac40 5755MHz Ant1

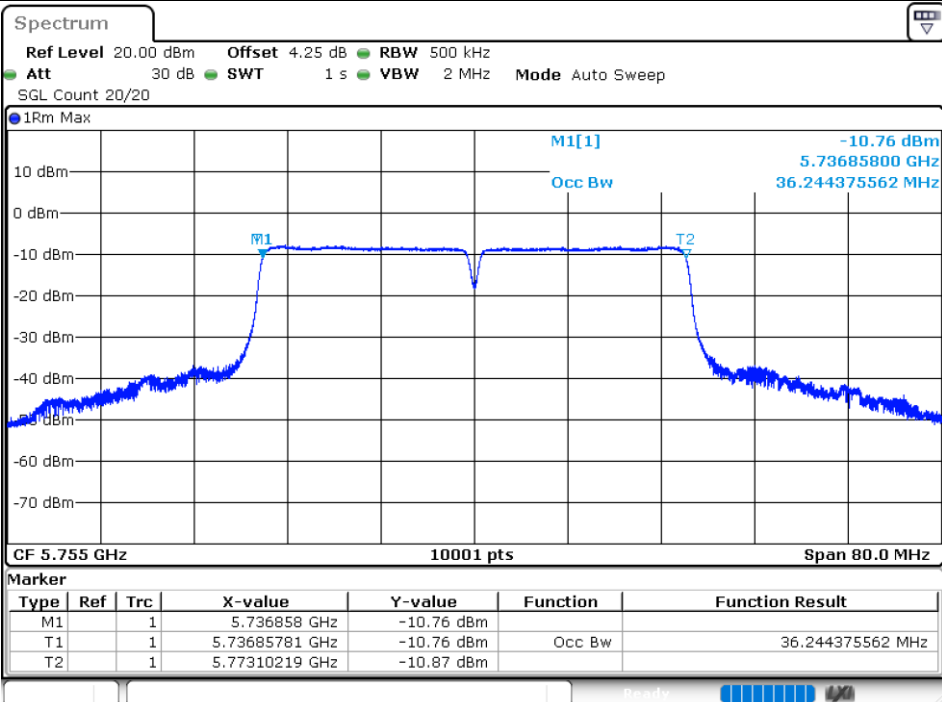

OBW NVNT ac40 5795MHz Ant1

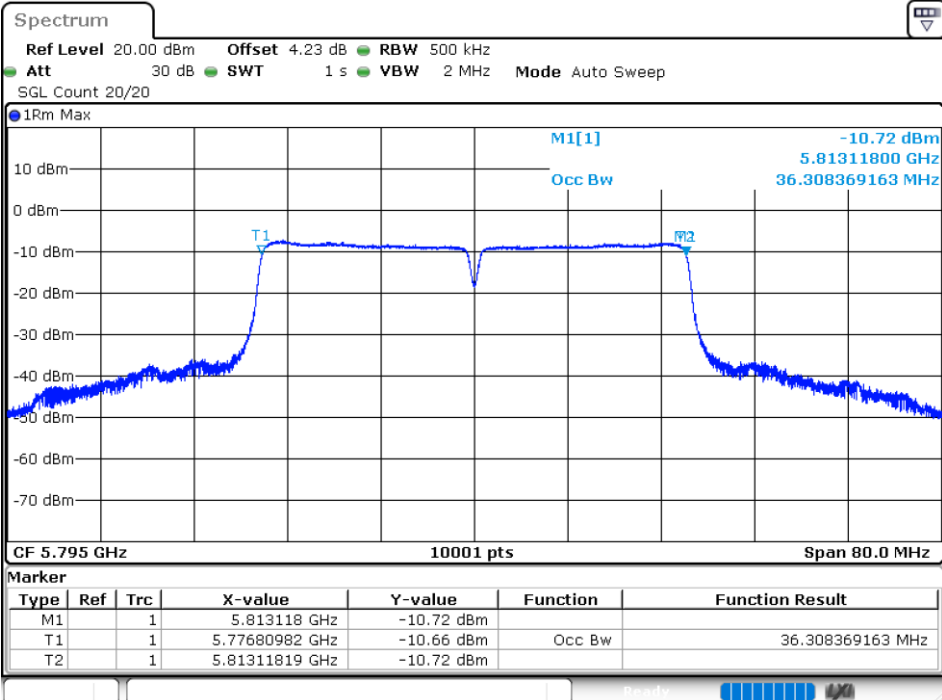

OBW NVNT ac80 5775MHz Ant1

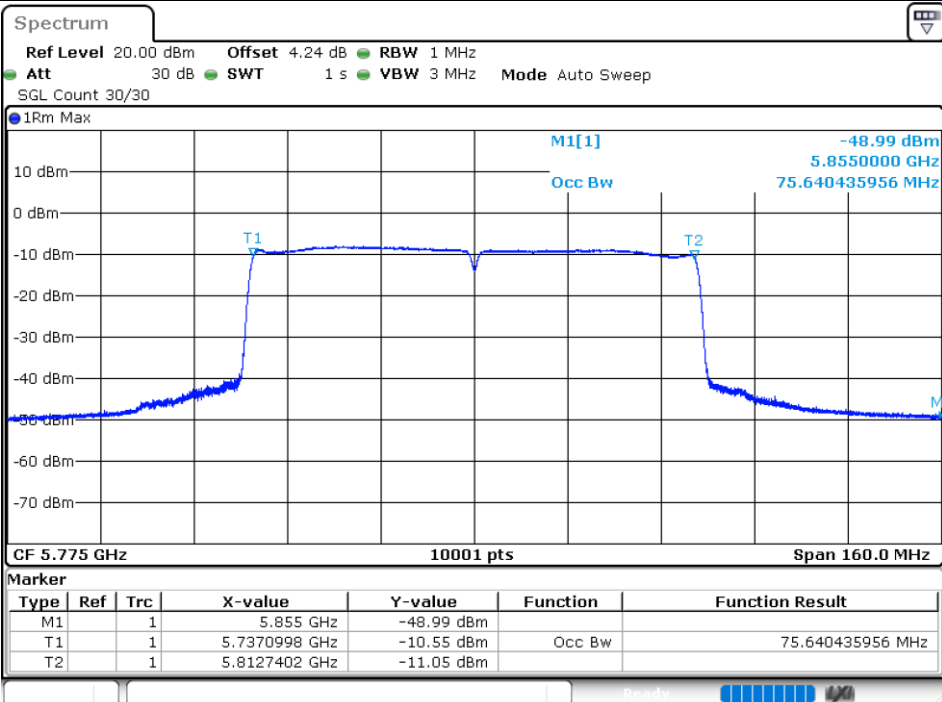


10.5 RF OUTPUT POWER


Condition	Mode	Frequency (MHz)	Antenna	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	11.09	65	13.19	13.98	Pass
NVNT	a	5785	Ant1	11.48	64	13.58	13.98	Pass
NVNT	a	5825	Ant1	11.55	70	13.65	13.98	Pass
NVNT	n20	5745	Ant1	10.95	74	13.05	13.98	Pass
NVNT	n20	5785	Ant1	11.49	74	13.59	13.98	Pass
NVNT	n20	5825	Ant1	11.5	74	13.6	13.98	Pass
NVNT	n40	5755	Ant1	10.52	129	12.62	13.98	Pass
NVNT	n40	5795	Ant1	10.6	129	12.7	13.98	Pass
NVNT	ac20	5745	Ant1	10.82	74	12.92	13.98	Pass
NVNT	ac20	5785	Ant1	11.21	74	13.31	13.98	Pass
NVNT	ac20	5825	Ant1	11.29	74	13.39	13.98	Pass
NVNT	ac40	5755	Ant1	10.31	129	12.41	13.98	Pass
NVNT	ac40	5795	Ant1	10.85	129	12.95	13.98	Pass
NVNT	ac80	5775	Ant1	10.54	210	12.64	13.98	Pass
HVLT	a	5745	Ant1	10.98	65	13.08	13.98	Pass
HVLT	a	5785	Ant1	11.51	64	13.61	13.98	Pass
HVLT	a	5825	Ant1	11.52	70	13.62	13.98	Pass
HVLT	n20	5745	Ant1	10.90	74	13	13.98	Pass
HVLT	n20	5785	Ant1	11.44	74	13.54	13.98	Pass
HVLT	n20	5825	Ant1	11.53	74	13.63	13.98	Pass
HVLT	n40	5755	Ant1	10.49	129	12.59	13.98	Pass
HVLT	n40	5795	Ant1	10.55	129	12.65	13.98	Pass
HVLT	ac20	5745	Ant1	10.79	74	12.89	13.98	Pass
HVLT	ac20	5785	Ant1	11.16	74	13.26	13.98	Pass
HVLT	ac20	5825	Ant1	11.26	74	13.36	13.98	Pass
HVLT	ac40	5755	Ant1	10.26	129	12.36	13.98	Pass
HVLT	ac40	5795	Ant1	10.82	129	12.92	13.98	Pass
HVLT	ac80	5775	Ant1	10.51	210	12.61	13.98	Pass
LVHT	a	5745	Ant1	10.87	65	12.97	13.98	Pass
LVHT	a	5785	Ant1	11.54	64	13.64	13.98	Pass
LVHT	a	5825	Ant1	11.49	70	13.59	13.98	Pass
LVHT	n20	5745	Ant1	10.85	74	12.95	13.98	Pass
LVHT	n20	5785	Ant1	11.42	74	13.52	13.98	Pass
LVHT	n20	5825	Ant1	11.56	74	13.66	13.98	Pass
LVHT	n40	5755	Ant1	10.46	129	12.56	13.98	Pass
LVHT	n40	5795	Ant1	10.50	129	12.6	13.98	Pass
LVHT	ac20	5745	Ant1	10.76	74	12.86	13.98	Pass
LVHT	ac20	5785	Ant1	11.11	74	13.21	13.98	Pass
LVHT	ac20	5825	Ant1	11.23	74	13.33	13.98	Pass
LVHT	ac40	5755	Ant1	10.21	129	12.31	13.98	Pass
LVHT	ac40	5795	Ant1	10.79	129	12.89	13.98	Pass
LVHT	ac80	5775	Ant1	10.48	210	12.58	13.98	Pass
HVHT	a	5745	Ant1	10.76	65	12.86	13.98	Pass
HVHT	a	5785	Ant1	11.57	64	13.67	13.98	Pass
HVHT	a	5825	Ant1	11.46	70	13.56	13.98	Pass
HVHT	n20	5745	Ant1	10.80	74	12.9	13.98	Pass
HVHT	n20	5785	Ant1	11.40	74	13.5	13.98	Pass
HVHT	n20	5825	Ant1	11.59	74	13.69	13.98	Pass
HVHT	n40	5755	Ant1	10.43	129	12.53	13.98	Pass
HVHT	n40	5795	Ant1	10.45	129	12.55	13.98	Pass
HVHT	ac20	5745	Ant1	10.73	74	12.83	13.98	Pass
HVHT	ac20	5785	Ant1	11.06	74	13.16	13.98	Pass
HVHT	ac20	5825	Ant1	11.20	74	13.3	13.98	Pass
HVHT	ac40	5755	Ant1	10.16	129	12.26	13.98	Pass

HVHT	ac40	5795	Ant1	10.76	129	12.86	13.98	Pass
HVHT	ac80	5775	Ant1	10.45	210	12.55	13.98	Pass
LVLt	a	5745	Ant1	10.65	65	12.75	13.98	Pass
LVHT	a	5785	Ant1	11.60	64	13.7	13.98	Pass
LVHT	a	5825	Ant1	11.43	70	13.53	13.98	Pass
LVHT	n20	5745	Ant1	10.75	74	12.85	13.98	Pass
LVHT	n20	5785	Ant1	11.39	74	13.49	13.98	Pass
LVHT	n20	5825	Ant1	11.62	74	13.72	13.98	Pass
LVHT	n40	5755	Ant1	10.40	129	12.5	13.98	Pass
LVHT	n40	5795	Ant1	10.40	129	12.5	13.98	Pass
LVHT	ac20	5745	Ant1	10.70	74	12.8	13.98	Pass
LVHT	ac20	5785	Ant1	11.01	74	13.11	13.98	Pass
LVHT	ac20	5825	Ant1	11.17	74	13.27	13.98	Pass
LVHT	ac40	5755	Ant1	10.11	129	12.21	13.98	Pass
LVHT	ac40	5795	Ant1	10.73	129	12.83	13.98	Pass
LVHT	ac80	5775	Ant1	10.44	210	12.54	13.98	Pass


Test Graphs
Power NVNT a 5745MHz Ant1

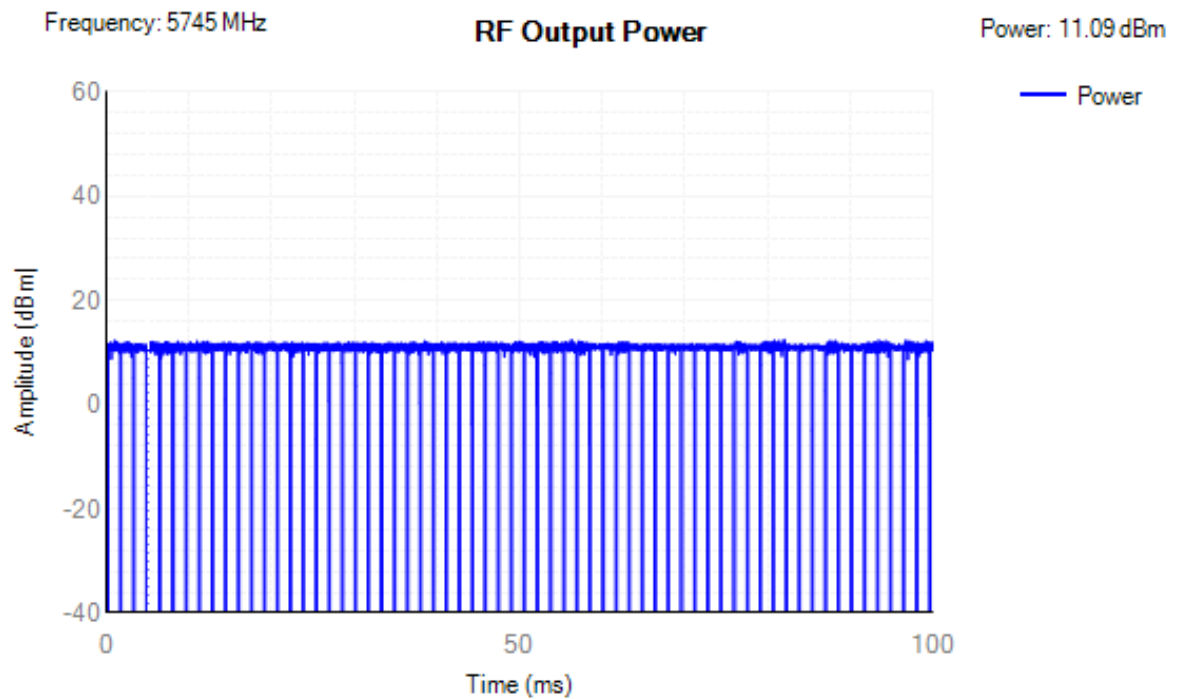


Power NVNT a 5785MHz Ant1

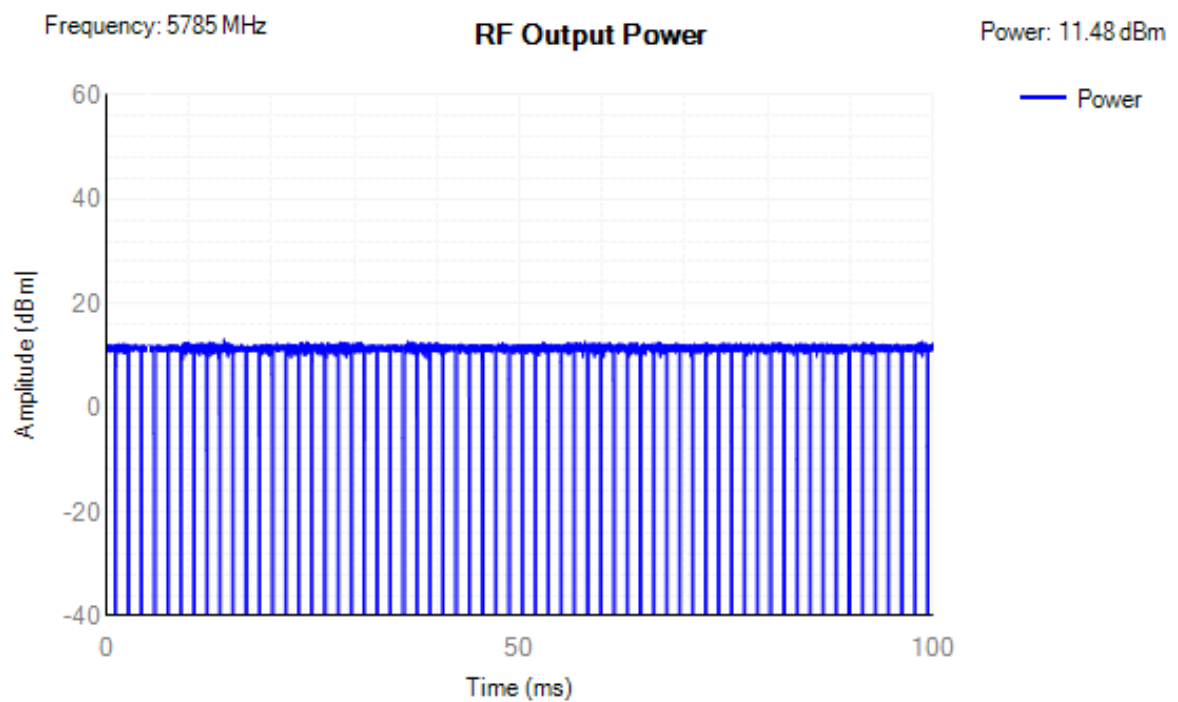


Power NVNT a 5825MHz Ant1

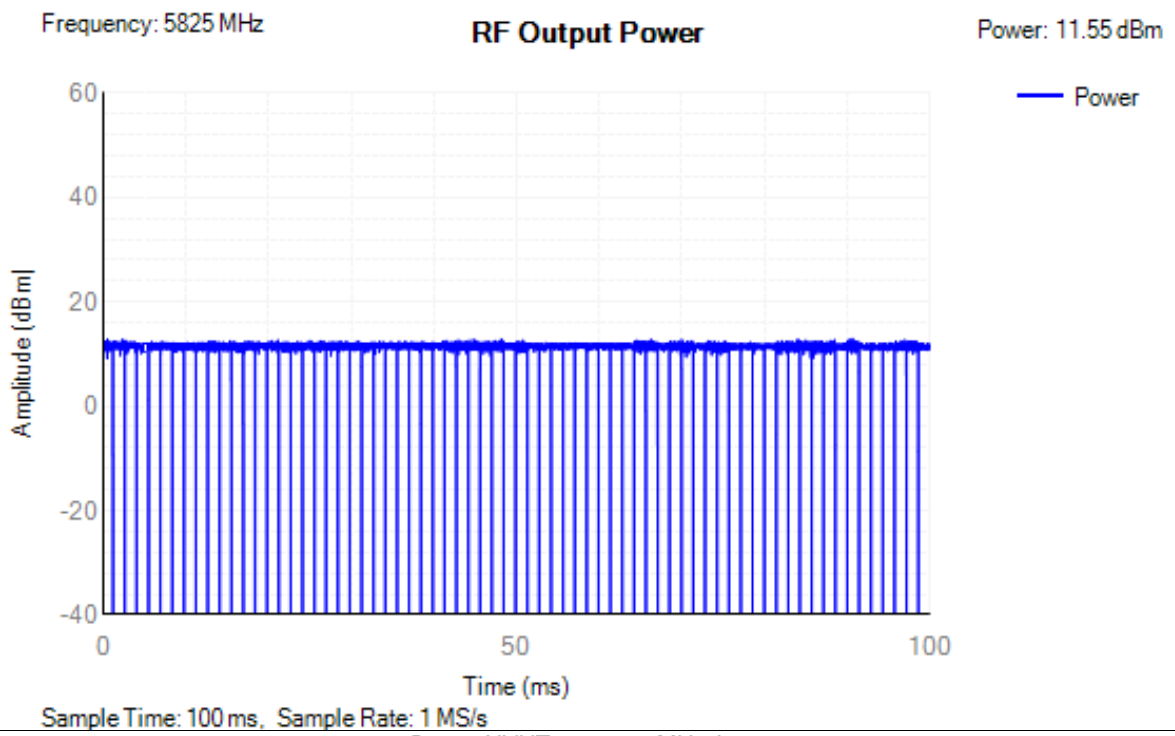


Power NVNT n20 5745MHz Ant1

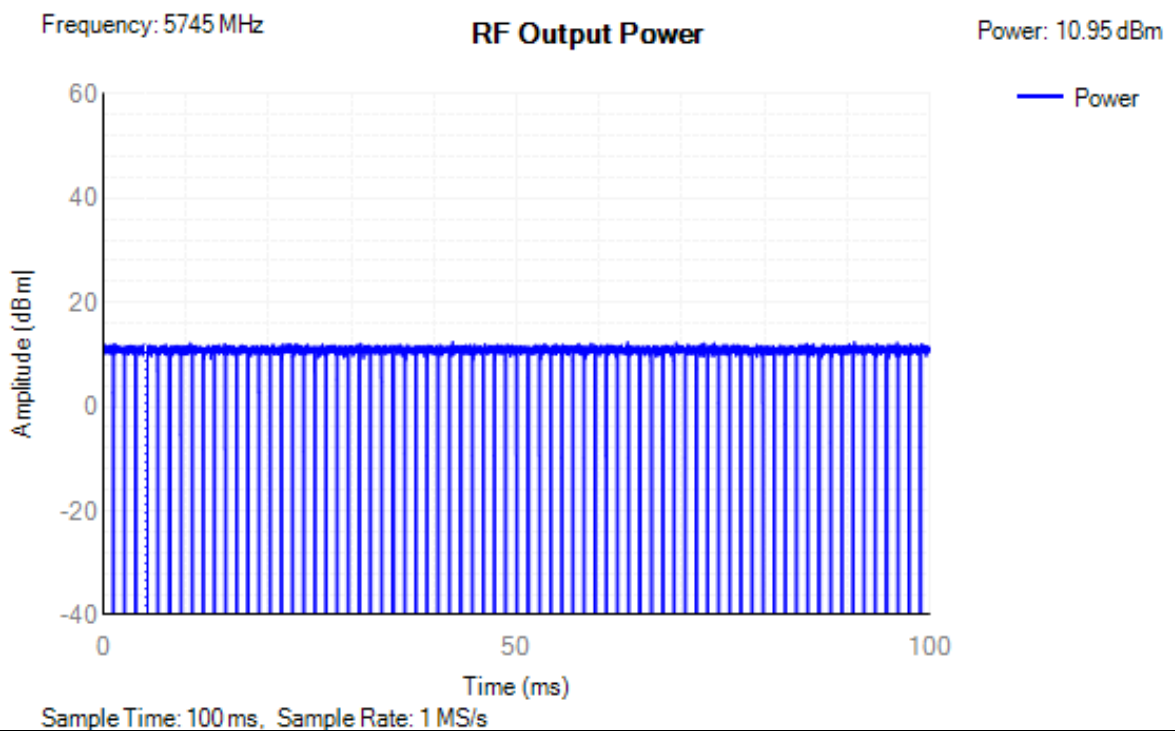


Power NVNT n20 5785MHz Ant1

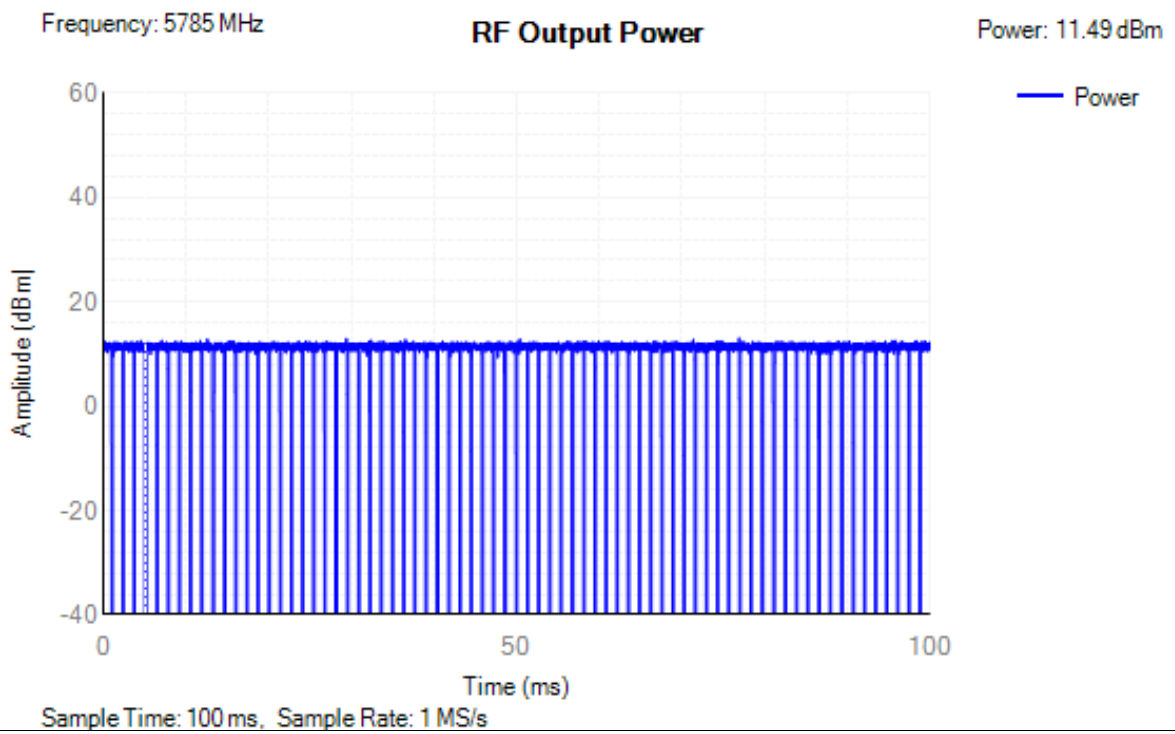


Power NVNT n20 5825MHz Ant1

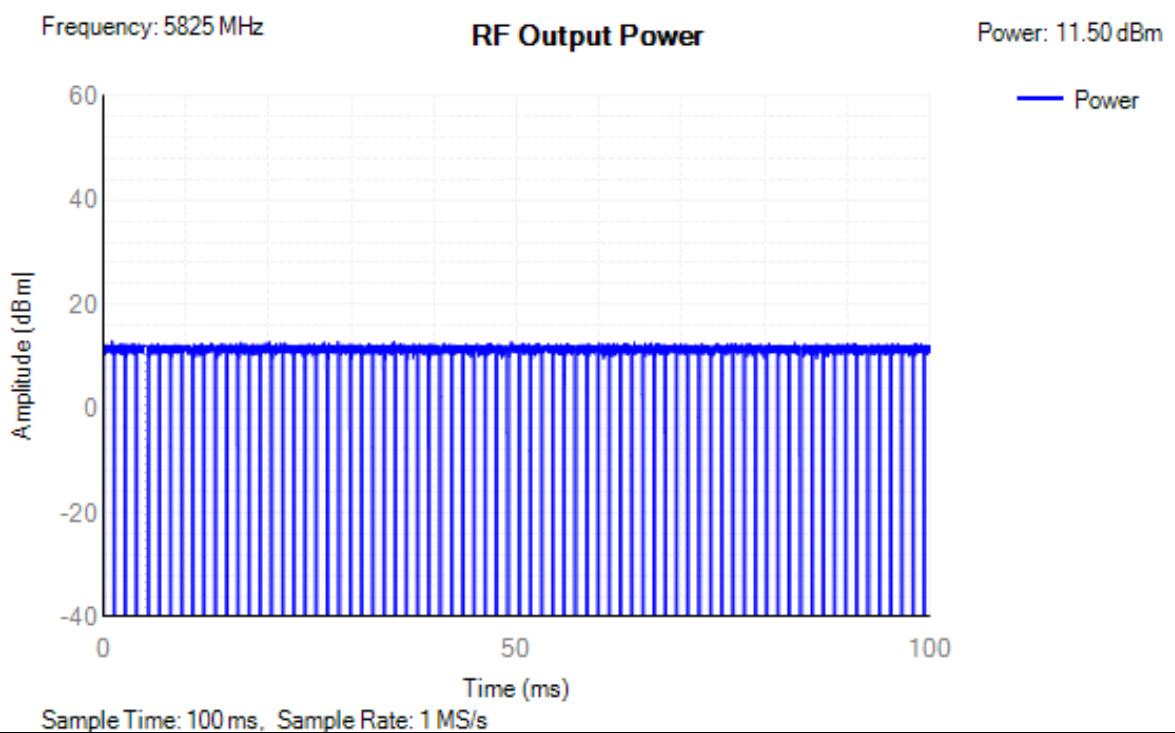


Power NVNT n40 5755MHz Ant1

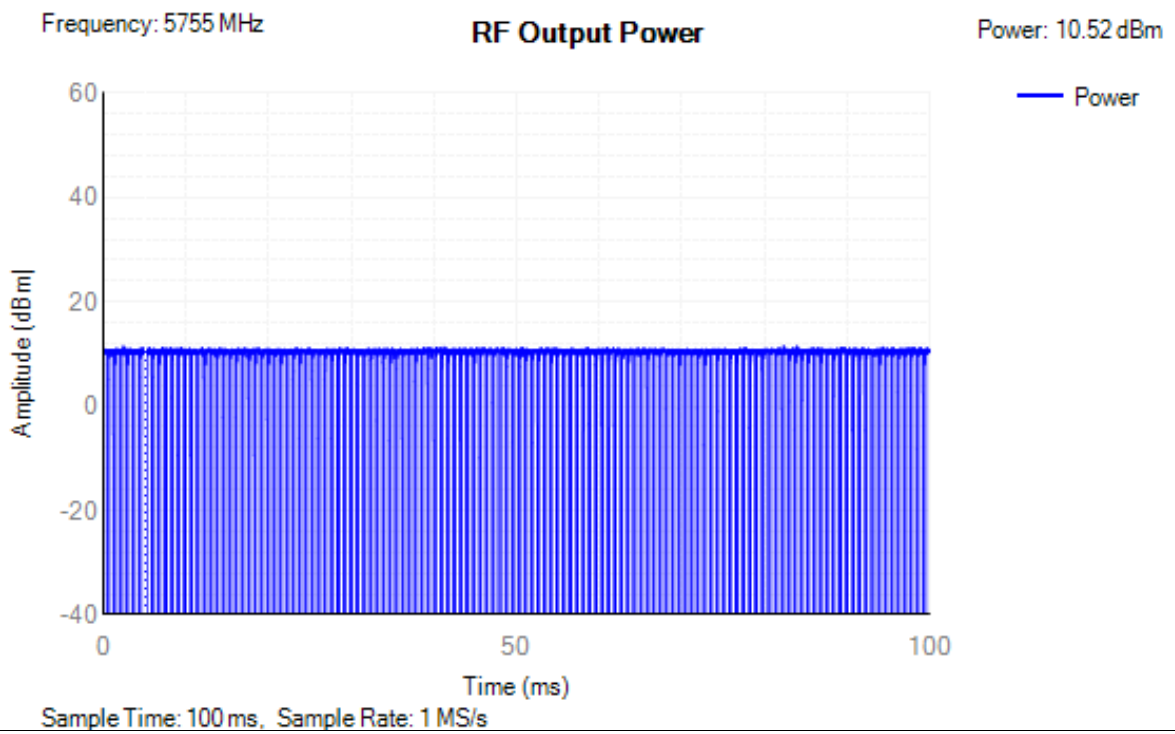


Power NVNT n40 5795MHz Ant1

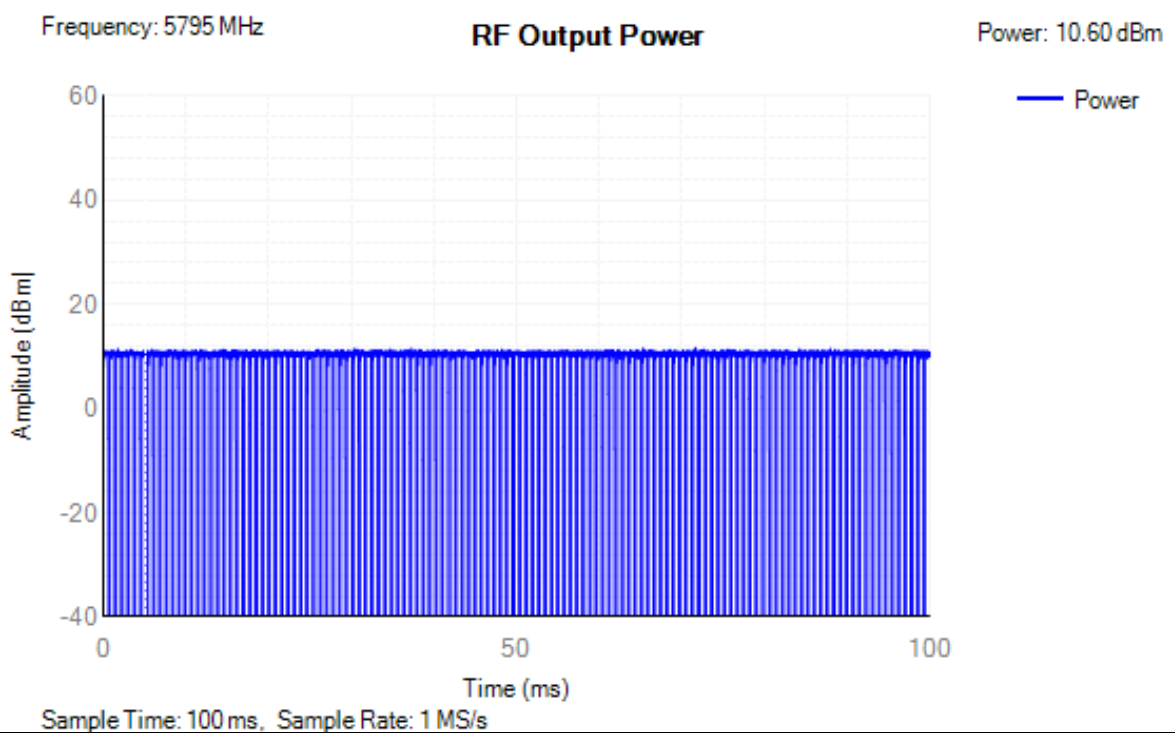


Power NVNT ac20 5745MHz Ant1

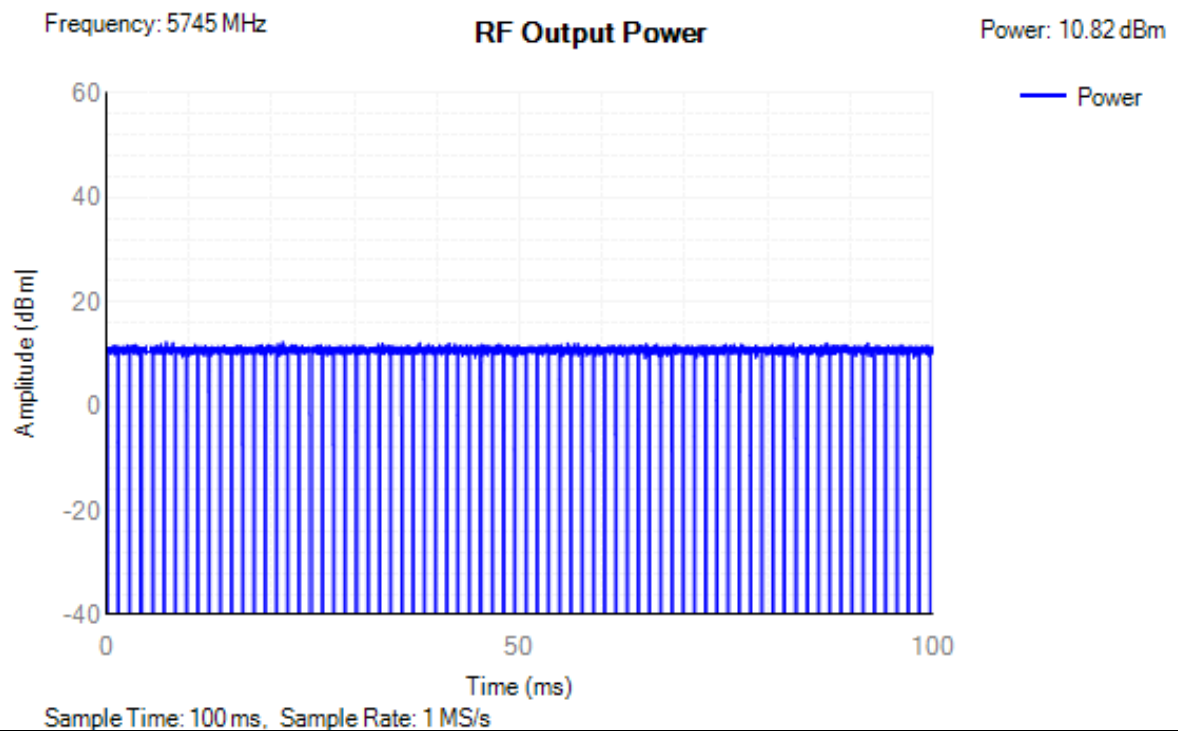


Power NVNT ac20 5785MHz Ant1

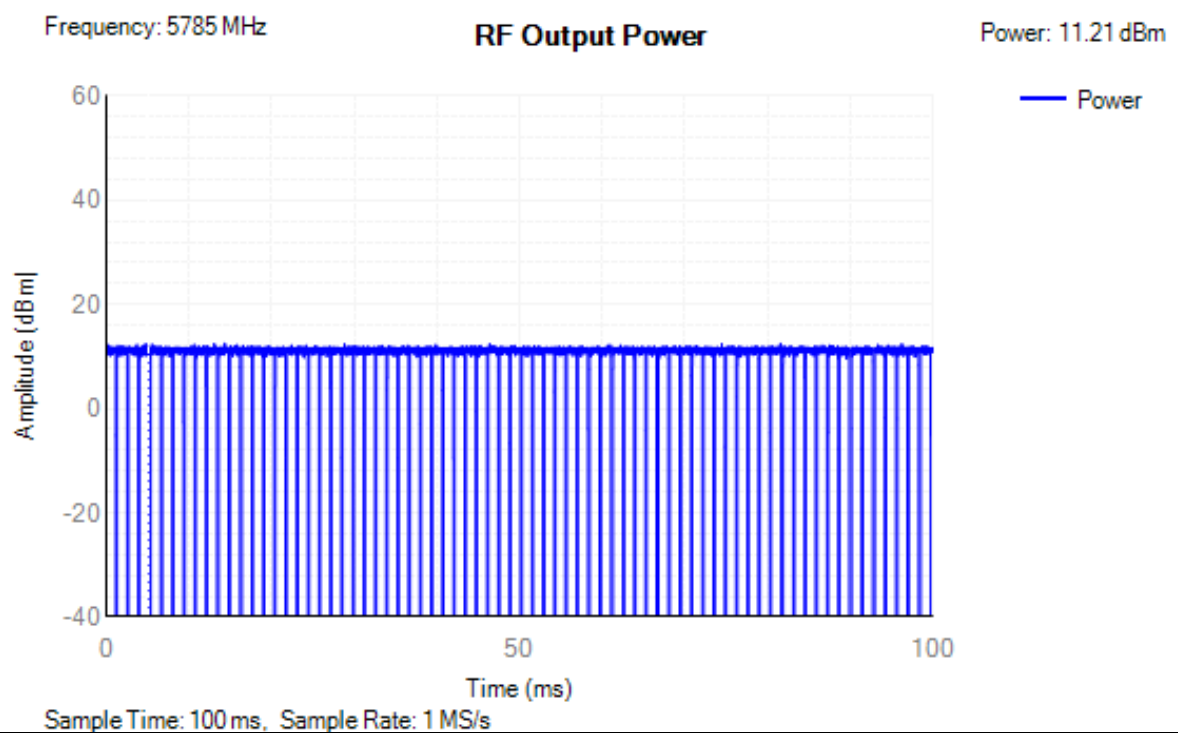


Power NVNT ac20 5825MHz Ant1

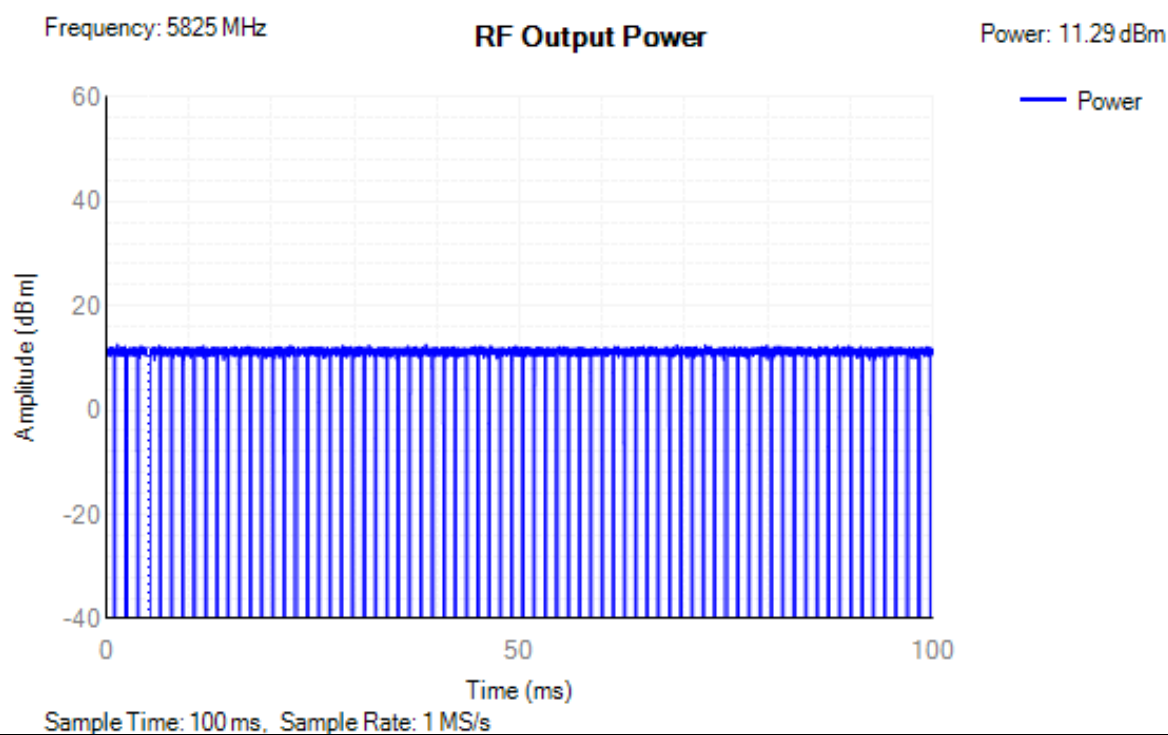


Power NVNT ac40 5755MHz Ant1

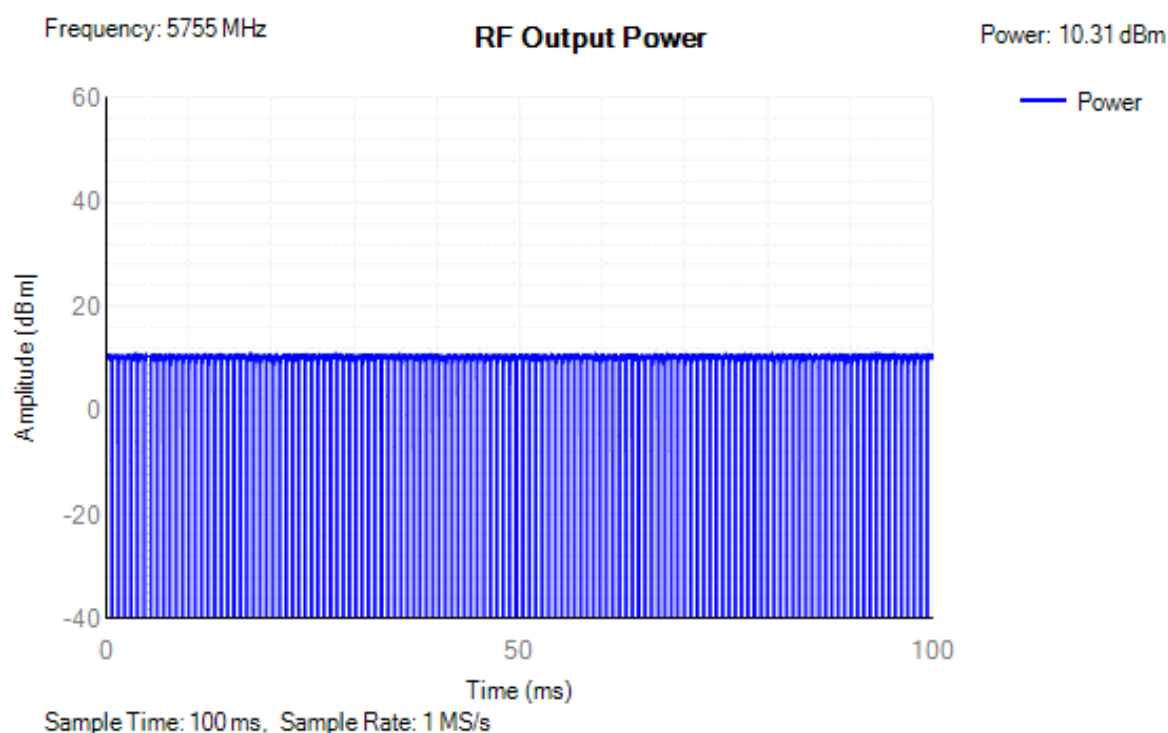

Power NVNT ac40 5795MHz Ant1

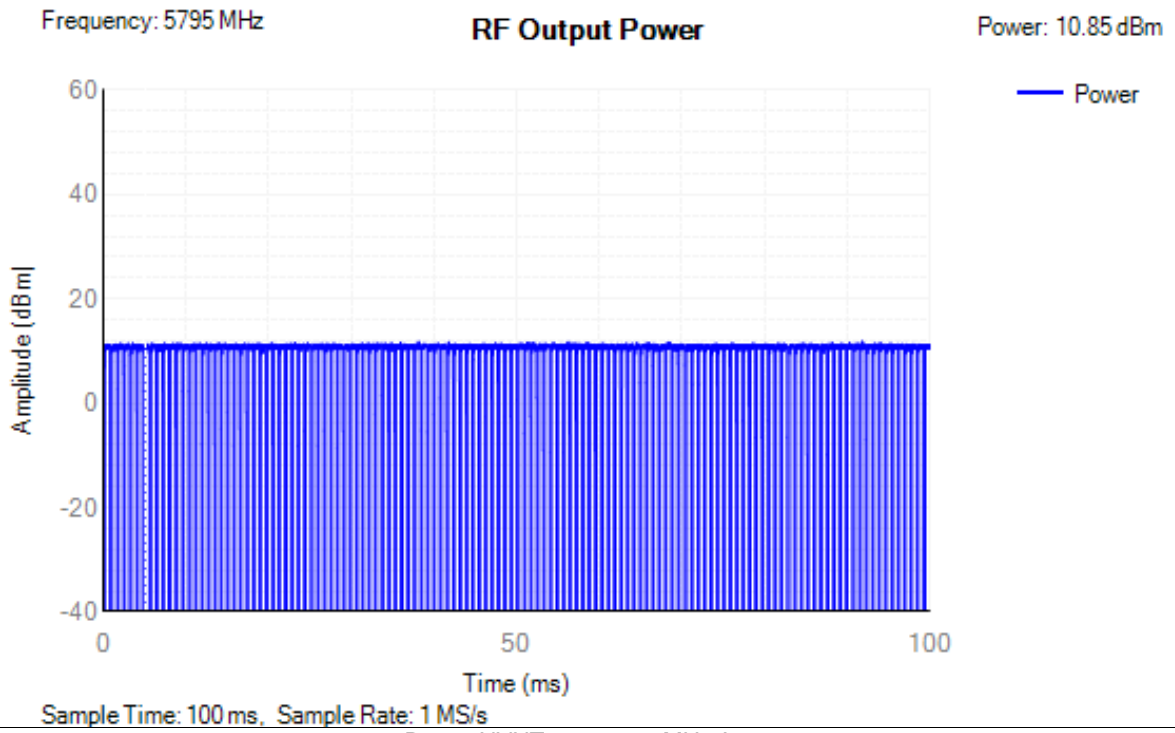


Power NVNT ac80 5775MHz Ant1

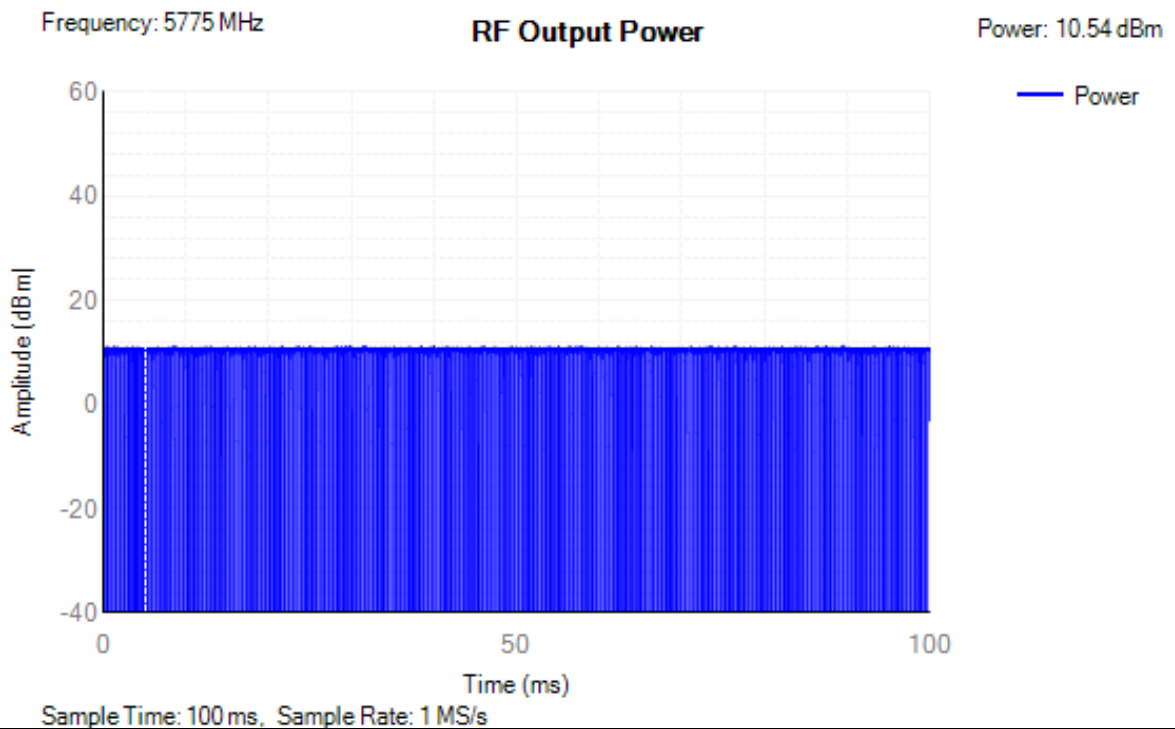

11. EUT TEST PHOTO

SPURIOUS EMISSIONS MEASUREMENT PHOTOS

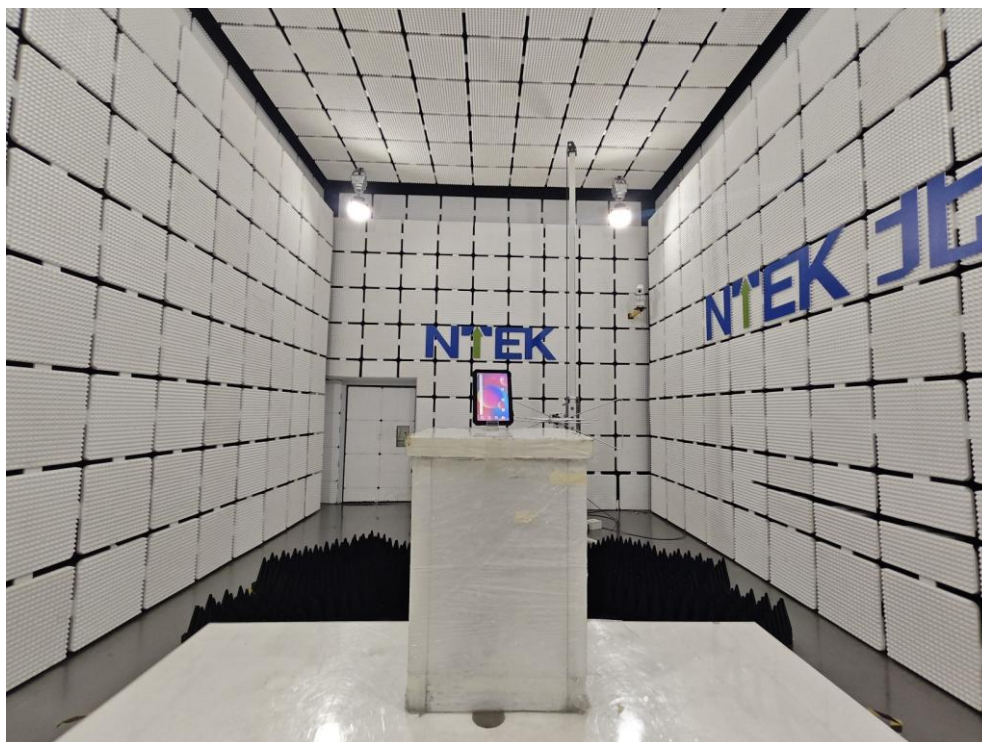

END OF REPORT