



# **RADIO TEST REPORT**

## **ETSI EN 301 511 V12.5.1 (2017-03)**

**Product :** Tablet

**Trade Mark :** CUBOT

**Model Name :** TAB KINGKONG MINI

**Family Model :** N/A

**Report No. :** S25052400907006

### **Prepared for**

Shenzhen Huafurui Technology Co., Ltd.

Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road,  
Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District,  
Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

**TEST RESULT CERTIFICATION**

**Applicant's name** .....: Shenzhen Huafurui Technology Co., Ltd.  
Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building,  
**Address** .....: No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street,  
Longgang District, Shenzhen, P.R. China  
**Manufacturer's Name** .....: Shenzhen Huafurui Technology Co., Ltd.  
Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building,  
**Address** .....: No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street,  
Longgang District, Shenzhen, P.R. China

**Product description**

**Product name** .....: Tablet  
**Trademark** .....: CUBOT  
**Model Name** .....: TAB KINGKONG MINI  
**Family Model** .....: N/A

**Standards** .....: ETSI EN 301 511 V12.5.1 (2017-03)

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the of article 3.2 of the Directive 2014/53/EU requirements.

And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personnel only, and shall be noted in the revision of the document.

**Test Sample Number** ..... S250524009006

**Date of Test** .....

**Date (s) of performance of tests** ..... May 29, 2025 ~ Jul. 01, 2025

**Date of Issue** ..... Jul. 01, 2025

**Test Result** ..... **Pass**

Prepared By : Allen Liu  
Allen Liu  
(Project Engineer)

Reviewed By : Aaron Cheng  
Aaron Cheng  
(Supervisor)

Approved By : Alex Li  
Alex Li  
(Manager)

Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>4</b>
1.1 TEST FACILITY	4
1.2 MEASUREMENT UNCERTAINTY	4
<b>2. GENERAL INFORMATION</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 LIST OF TEST EQUIPMENTS	7
2.3 TYPE OF MOBILE STATION AND ADDITIONAL INFORMATION	8
2.4 TEST ENVIRONMENT/CONDITIONS	8
<b>3. SUMMARY OF TEST REPORT</b>	<b>10</b>
3.1 TERMS IN THE COLUMN "VERDICT" FOR THE TEST RESULTS LIST OF THIS SECTION:	10
3.2 TABLE 1 EN REQUIREMENT TABLE	10
<b>4. RADIATED SPURIOUS EMISSIONS</b>	<b>14</b>
4.1 RADIATED SPURIOUS EMISSIONS – MS ALLOCATED A CHANNEL	14
4.2 RADIATED SPURIOUS EMISSIONS – MS IN IDLE MODE	16
<b>5. PHOTOGRAPHS OF THE TEST SETUP</b>	<b>18</b>

## 1. SUMMARY OF TEST RESULTS

### Leading Reference Documents For Testing:

No.	Identity	Document Title
1	ETSI EN 301 511 V12.5.1 (2017-03)	Global System for Mobile communications (GSM); Mobile Stations (MS) equipment; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

### Specific Reference Documents For Testing:

No.	Identity	Document Title
2	ETSI TS 151 010-1 V12.8.0 (2016-05)	Digital cellular telecommunications system (Phase 2+); Mobile Station (MS) conformance specification; Part 1: Conformance specification (3GPP TS 51.010-1 version 12.8.0 Release 12)

### 1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

FCC Registered No.:463705 IC Registered No.:9270A

CNAS Registration No.:L5516

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.6\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated (<1G)	$\pm 4.8\text{dB}$
5	All emissions, radiated (>1G)	$\pm 5.0\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

Revision History

Report No.	Version	Description	Issued Date
S25052400907006	Rev.01	Initial issue of report	Jul. 01, 2025

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EU T

Equipment :	Tablet
Trade Mark:	CUBOT
Model Name:	TAB KINGKONG MINI
Family Model	N/A
Model Difference	N/A
Support Band:	<input checked="" type="checkbox"/> GSM 900 (EU-Band) <input checked="" type="checkbox"/> DCS 1800 (EU-Band) <input type="checkbox"/> GSM 850 (U.S.-Band) <input type="checkbox"/> PCS 1900(U.S.-Band)
Release Version:	R99
GPRS Class:	12
Frequency Bands:	Uplink: GSM/GPRS 900: 880~915MHz GSM/GPRS 1800: 1710~1785 MHz
	Downlink: GSM/GPRS 900: 925~960MHz GSM/GPRS 1800: 1805~1880MHz
Modulation Mode:	GMSK/8-DPSK
SIM Card:	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Power Class:	GPRS900: 4, GPRS 1800: 1,
Antenna Description:	FPC Antenna (GSM900:-2.8dBi)/(DCS1800:-1.0dBi)
Adapter	Adapter 1: Model: HJ-PD33W-EU Input: 100-240V~50-60Hz 0.8A Output: 5V---3A 15W OR 9V---3A 27W OR 12V---2.75A 33W Adapter 2: Model: TD-203G200170VF01 Input: 100-240V~50-60Hz 0.6A Output: 5V---3A OR 9V---3A OR 12V---2.5A OR 15V---2A OR 20V---1.5A PPS: 3.3V-16V/2A OR 3.3V-11V/3A
Battery	DC 3.87V, 10200mAh, 39.474Wh
Rating	DC 3.87V from Battery or DC 5V/9V/12V from Adapter 1 or DC 5V/9V/12V/15V/20V from Adapter 2
Hard Ware Version	T30D-UF-V1.2
Soft Ware Version	CUBOT_TAB_KINGKONG_MINI_P131_V1.0

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.2 LIST OF TEST EQUIPMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2025.04.24	2026.04.23	1 year
2	Test Receiver	R&S	ESPI7	101318	2025.04.17	2026.04.16	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2025.04.17	2026.04.16	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
5	Spectrum Analyzer	Agilent	N9020A	MY46471732	2025.04.17	2026.04.16	1 year
6	Horn Antenna	EM	EM-AH-20180	2011071402	2024.05.12	2027.05.11	3 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2024.05.12	2027.05.11	3 year
8	Amplifier	EMC	EMC051835SE	980246	2025.04.17	2026.04.16	1 year
9	Loop Antenna	ARA	PLA-2030/B	1029	2025.04.17	2026.04.16	1 year
10	Temperature & Humidity Chamber	GIANT FORCE	GTH-056P	GF-94454-1	2025.04.17	2026.04.16	1 year
11	LTE Wireless Communications Test Set	R&S	CMW500	1100.008.02	2025.05.06	2026.05.05	1 year
12	Power Splitter	Mini-Circuits	ZN2PD-63-S+	SF025101428	2024.04.26	2027.04.25	3 year
13	Wireless Communication Test	Anritsu	MT8821C	6262192315	2025.04.16	2026.04.15	1 year
14	Power Meter	DARE	RPR3006W	15I00041SNO84	2025.04.17	2026.04.16	1 year
15	ESG VETCTOR SIGNAL GENERATOR	Agilent	N5182A	MY47070317	2025.04.17	2026.04.16	1 year
16	Spectrum Analyzer	R&S	FSV40	101417	2025.04.17	2026.04.16	1 year

## Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTtest	MTS 8200	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	Radiated Test
3	raditeq	RadiMation	2023.1.3	Radiated Test

## 2.3 TYPEOFMOBILESTATIONANDADDITIONALINFORMATION

Table A.2: Type of Mobile Station (Re. ETSI EN 301 511 Annex A)

Item	Type of Mobile Station	Support	Mnemonic
1	HSCSD Multislot MS	NO	Type_HSCSD_Multislot
2	R-GSM MS	YES	Type_R-GSM
3	Support of GPRS Multislot class on the uplink	YES	Type_GPRS_Multislot_uplink
4	EGPRS	NO	Type_EGPRS
5	EGPRS capable of 8PSK in Uplink, of all Multislot classes	NO	Type_EGPRS_8PSK_uplink

Type A.3: Additional information (Re. ETSI EN 301 511 Annex A)


Item	Additional Information	Support	Mnemonic
1	Telephony.	YES	TSPC_Serv_TS11
2	Permanent Antenna Connector	YES	TSPC_AddInfo_PermAntenna

## 2.4 TESTENVIRONMENT/CONDITIONS

Normal Temperature (NT):	20 ... 25 °C		
Relative Humidity:	30 ... 75 %		
Air Pressure:	980 ... 1020 hPa		
Extreme Temperature:	Low Temperature (LT)	=	-10°C
	High Temperature (HT)	=	40°C
Extreme Voltage of the EUT(Declared by manufacturer):	Normal Voltage (NV)	=	DC 3.87V
	Low Voltage (LV)	=	DC 3.29V
	High Voltage (HV)	=	DC 4.45V


Note: The High Voltage DC 4.45V and Low Voltage DC3.29V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage. The High temperature and Low temperature was declared by manufacturer

## 2.5 Test Setup

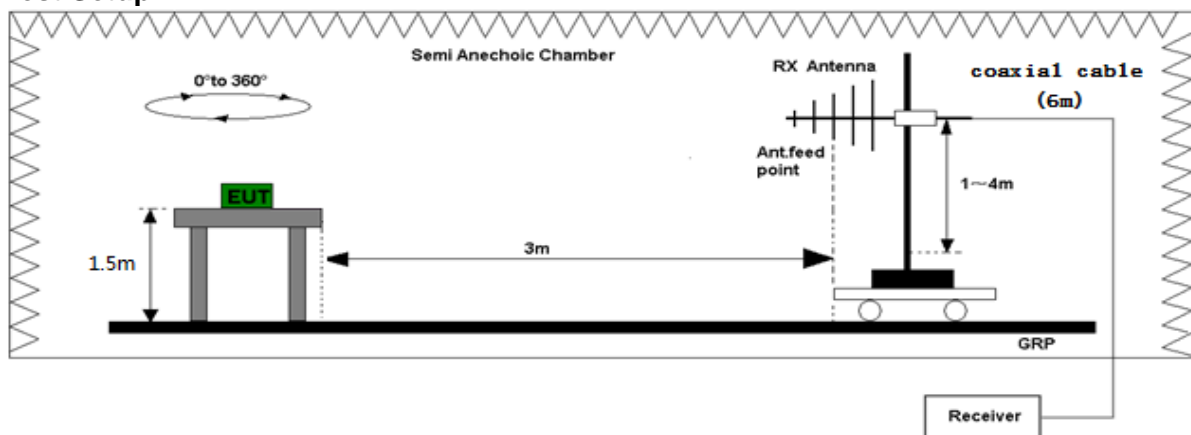


Radiated spurious emissions(30MHz-1GHz)




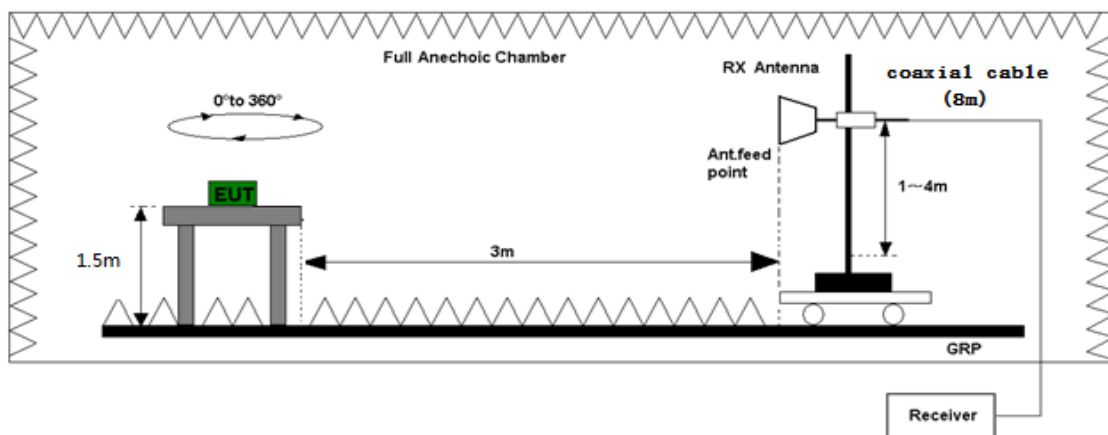

Radiated spurious emissions(Above 1G)

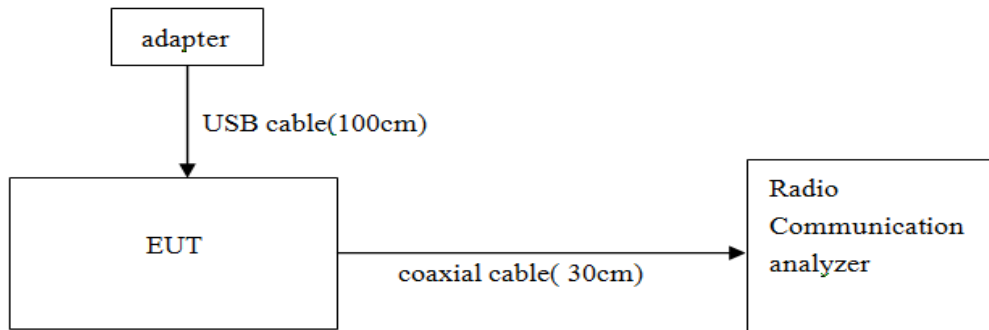

Conducted Test

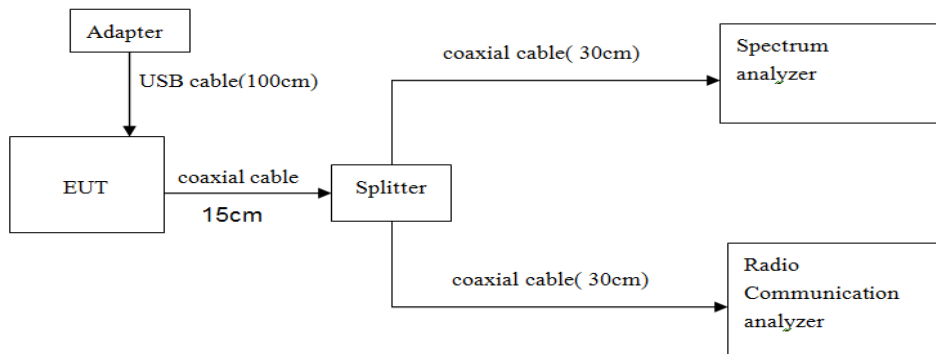

Conducted spurious emissions

### 3. SUMMARY OF TEST REPORT

#### 3.1 TERMS IN THE COLUMN "VERDICT" FOR THE TEST RESULTS LIST OF THIS SECTION:

Verdict	Description
PASS	EUT passed this test case
FAIL	EUT failed this test case
Decl.	"Declaration": NTEK has received documents from the applicant and/or manufacturer which show conformity to the applied standards for this test case.
N/A	Test case not applicable for the EUT, please see the column "Note" for detailed

#### 3.2 TABLE 1 EN REQUIREMENT TABLE

Testcase in ETSI EN 301511 V12.5.1	Testcase in 3GPP TS 51.010-1	Description	Condition	GSM/GPRS 900		GSM/GPRS 1800		Test Data
				Sample	Result	Sample	Result	
Section 4.2.1	13.1.5	Transmitter - Frequency error and phase error	NT / NV	A01	PASS	A01	PASS	Appendix A - GSM - Normal
			LT / LV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			LT / HV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			HT / LV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			HT / HV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			Vibration(X)	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			Vibration(Y)	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			Vibration(Z)	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
Section 4.2.2	13.2.5	Transmitter - Frequency error under multipath and interference conditions	NT / NV	A01	PASS	A01	PASS	Appendix A - GSM - Normal
			LT / LV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			LT / HV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			HT / LV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			HT / HV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
Section 4.2.4	13.16.1.5	Frequency error and phase error in GPRS multislot configuration	NT / NV	A01	PASS	A01	PASS	Appendix A - GSM - Normal
			LT / LV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			LT / HV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			HT / LV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			HT / HV	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			Vibration(X)	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			Vibration(Y)	A01	PASS	A01	PASS	Appendix B - GSM -Extreme
			Vibration(Z)	A01	PASS	A01	PASS	Appendix B - GSM -Extreme

Testcase in ETSI EN 301511 V12.5.1	Testcase in 3GPP TS 51.010-1	Description	Condition	GSM/GPRS 900		GSM/GPRS 1800		Test Data
				Sample	Result	Sample	Result	
Section 4.2.5	13.3.5	Transmitter output power and burst timing	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
			LT / LV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			LT / HV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			HT / LV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			HT / HV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
Section 4.2.6	13.4.5	Transmitter - Output RF spectrum	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
			LT / LV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			LT / HV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			HT / LV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			HT / HV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
Section 4.2.10	13.16.2.5	Transmitter output power in GPRS multislot configuration	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
			LT / LV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			LT / HV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			HT / LV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			HT / HV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
Section 4.2.11	13.16.3.5	Output RF spectrum in GPRS multislot configuration	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
			LT / LV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			LT / HV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			HT / LV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
			HT / HV	A01	PASS	A01	PASS	Appendix B -GSM-Extreme
Section 4.2.12	12.1.1.5	Conducted spurious emissions - MS allocated a channel	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal (Only record the worst test data)
			NT / LV	A01	PASS	A01	PASS	
			NT / HV	A01	PASS	A01	PASS	
Section 4.2.13	12.1.2.5	Conducted spurious emissions - MS in idle mode	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal (Only record the worst test data)
			NT / LV	A01	PASS	A01	PASS	
			NT / HV	A01	PASS	A01	PASS	
Section 4.2.16	12.2.1.5	Radiated spurious emissions - MS allocated a channel	NT / NV	A01	PASS	A01	PASS	Refer to the report
			NT / LV	A01	PASS	A01	PASS	
			NT / HV	A01	PASS	A01	PASS	
Section 4.2.17	12.2.2.5	Radiated spurious emissions - MS in idle mode	NT / NV	A01	PASS	A01	PASS	Refer to the report
			NT / LV	A01	PASS	A01	PASS	
			NT / HV	A01	PASS	A01	PASS	
Section 4.2.20	14.7.1.5	Receiver Blocking and spurious response - speech channels	NT / NV	A01	PASS	A01	PASS	Appendix C -GSM-Blocking

Testcase in ETSI EN 301511 V12.5.1	Testcase in 3GPP TS 51.010-1	Description	Condition	GSM/GPRS 900		GSM/GPRS 1800		Test Data
				Sample	Result	Sample	Result	
Section 4.2.26	13.17.1.5	Frequency error and Modulation accuracy in EGPRS Configuration	NT / NV	A01	N/A	A01	N/A	N/A
			LT / LV	A01	N/A	A01	N/A	N/A
			LT / HV	A01	N/A	A01	N/A	N/A
			HT / LV	A01	N/A	A01	N/A	N/A
			HT / HV	A01	N/A	A01	N/A	N/A
			Vibration(X)	A01	N/A	A01	N/A	N/A
			Vibration(Y)	A01	N/A	A01	N/A	N/A
			Vibration(Z)	A01	N/A	A01	N/A	N/A
Section 4.2.27	13.17.2.5	Frequency error under multipath and interference conditions in EGPRS Configuration	NT / NV	A01	N/A	A01	N/A	N/A
			LT / LV	A01	N/A	A01	N/A	N/A
			LT / HV	A01	N/A	A01	N/A	N/A
			HT / LV	A01	N/A	A01	N/A	N/A
			HT / HV	A01	N/A	A01	N/A	N/A
Section 4.2.28	13.17.3.5	EGPRS Transmitter output power	NT / NV	A01	N/A	A01	N/A	N/A
			LT / LV	A01	N/A	A01	N/A	N/A
			LT / HV	A01	N/A	A01	N/A	N/A
			HT / LV	A01	N/A	A01	N/A	N/A
			HT / HV	A01	N/A	A01	N/A	N/A
Section 4.2.29	13.17.4.5	Output RF spectrum in EGPRS configuration	NT / NV	A01	N/A	A01	N/A	N/A
			LT / LV	A01	N/A	A01	N/A	N/A
			LT / HV	A01	N/A	A01	N/A	N/A
			HT / LV	A01	N/A	A01	N/A	N/A
			HT / HV	A01	N/A	A01	N/A	N/A
Section 4.2.30	14.18.5.5	Blocking and spurious response in EGPRS configuration	NT / NV	A01	N/A	A01	N/A	N/A
Section 4.2.31	14.18.5b.5	Blocking and spurious response in DLMP configuration	NT / NV	A01	N/A	A01	N/A	N/A
Section 4.2.32	14.6.1.5	Intermodulation rejection - speech channels	NT / NV	A01	PASS	A01	PASS	Appendix A - GSM-Normal
Section 4.2.33	14.6.2.5	Intermodulation rejection - control channels	NT / NV	A01	PASS	A01	PASS	Appendix A - GSM-Normal
Section 4.2.34	14.18.4.5	Intermodulation rejection - EGPRS	NT / NV	A01	N/A	A01	N/A	N/A

Testcase in ETSI EN 301511 V12.5.1	Testcase in 3GPP TS 51.010-1	Description	Condition	GSM/GPRS 900		GSM/GPRS 1800		Test Data
				Sample	Result	Sample	Result	
Section 4.2.35	14.8.1.5	AM suppression - speech channels	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
Section 4.2.36	14.8.2.5	AM suppression - control channels	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
Section 4.2.37	14.8.3.5	AM suppression - packet channels	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
Section 4.2.38	14.5.1.1.5	Adjacent channel rejection - speech channels (TCH/FS)	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
Section 4.2.39	14.5.2.5	Adjacent channel rejection - control channels	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
Section 4.2.40	14.18.3.5	Adjacent channel rejection - EGPRS	NT / NV	A01	N/A	A01	N/A	N/A
Section 4.2.41	14.18.3d.5	Adjacent channel rejection in DLCC configuration	NT / NV	A01	N/A	A01	N/A	N/A
Section 4.2.42	14.2.1.5	Reference sensitivity - TCH/FS	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
Section 4.2.43	14.2.3.5	Reference sensitivity - FACCH/F	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
Section 4.2.44	14.16.1.5	Minimum Input level for Reference Performance - GPRS	NT / NV	A01	PASS	A01	PASS	Appendix A -GSM-Normal
Section 4.2.45	14.18.1.5	Minimum Input level for Reference Performance - EGPRS	NT / NV	A01	N/A	A01	N/A	N/A

#### 4. RADIATED SPURIOUS EMISSIONS

##### 4.1 RADIATED SPURIOUS EMISSIONS – MS ALLOCATED A CHANNEL

###### Environmental Conditions

Temperature	25°C
Relative Humidity	56%
ATM Pressure	100.2kPa

###### Test Requirements:

Frequency range		Power level in dBm		
		GSM 400, GSM 700, T-GSM 810, GSM 850, GSM 900	DCS 1 800	PCS 1 900
30 MHz to	1 GHz	-36	-36	-36
1 GHz to	4 GHz	-30		-30
1 GHz to	1 710 MHz		-30	
1 710 MHz to	1 785 MHz		-36	
1 785 MHz to	4 GHz		-30	

###### TEST RESULT

###### GSM 900

Normal Voltage, Middle Channel

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Factor	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
operation frequency: Middle channel						
47.677	V	-59.72	11.22	-48.50	-36.00	-12.50
78.362	V	-60.68	12.45	-48.23	-36.00	-12.23
160.869	V	-68.17	12.88	-55.29	-36.00	-19.29
1596.21	V	-65.44	16.38	-49.06	-30.00	-19.06
2069.594	V	-68.73	14.83	-53.90	-30.00	-23.90
3996.542	V	-67.82	15.64	-52.18	-30.00	-22.18
45.486	H	-63.68	12.29	-51.39	-36.00	-15.39
76.485	H	-61.35	9.79	-51.56	-36.00	-15.56
366.702	H	-59.05	16.72	-42.33	-36.00	-6.33
1827.143	H	-69.25	15.95	-53.30	-30.00	-23.30
2972.307	H	-64.1	12.86	-51.24	-30.00	-21.24
5500.738	H	-62.94	14.69	-48.25	-30.00	-18.25

**GSM 1800**

Normal Voltage, Middle Channel

Frequency (MHz)	Polar (H/V)	ReadingLevel (dBm)	Factor	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
<b>operation frequency: Middle channel</b>						
31.72	V	-60.41	10.68	-46.84	-36.00	-10.84
75.842	V	-67.07	13.13	-51.05	-36.00	-15.05
323.4	V	-68.04	12.44	-52.71	-36.00	-16.71
1854.011	V	-63.36	14.96	-45.51	-30.00	-15.51
2634.766	V	-66.2	13.91	-49.40	-30.00	-19.40
4897.527	V	-63.08	10.51	-49.68	-30.00	-19.68
33.794	H	-59.15	15.02	-41.24	-36.00	-5.24
76.662	H	-59.16	16.36	-39.91	-36.00	-3.91
302.098	H	-65.1	12.22	-49.99	-36.00	-13.99
1979.622	H	-69.11	14.14	-52.08	-30.00	-22.08
2025.641	H	-60.98	11.31	-46.78	-30.00	-16.78
5881.872	H	-63.09	12.74	-47.46	-30.00	-17.46

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit

The laboratory has completed all tests for normal and extreme voltage conditions. This report shows only the worst test data.

## 4.2 RADIATED SPURIOUS EMISSIONS – MS IN IDLE MODE

### Environmental Conditions

Temperature	25°C
Relative Humidity	56%
ATM Pressure	100.2kPa

### Test Requirements:

Frequency range		Power level in dBm	
		GSM 400, T-GSM810, GSM900, DCS 1 800	GSM 700, GSM 850, PCS 1 900
30 MHz to	880 MHz	-57	-57
880 MHz to	915 MHz	-59	-57
915 MHz to	1 000 MHz	-57	-57
1 GHz to	1 710 MHz	-47	
1 710 MHz to	1 785 MHz	-53	
1 785 MHz to	4GHz	-47	
1 GHz to	1 850 MHz		-47
1 850 MHz to	1 910 MHz		-53
1 910 MHz to	4GHz		-47



## TEST RESULT

## GSM 900

Frequency (MHz)	Polar (H/V)	ReadingLevel (dBm)	Factor	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
operation frequency:Middle channel						
87.825	V	-86.68	14.9	-71.78	-57.00	-14.78
177.767	V	-87.48	15.17	-72.31	-57.00	-15.31
710.951	V	-84.18	14.05	-70.13	-57.00	-13.13
1278.49	V	-84.1	15.58	-68.52	-47.00	-21.52
2489.569	V	-86.04	14.06	-71.98	-47.00	-24.98
3701.227	V	-88.75	13.93	-74.82	-47.00	-27.82
100.523	H	-88.14	11.78	-76.36	-57.00	-19.36
216.761	H	-86.34	10.46	-75.88	-57.00	-18.88
636.596	H	-84.72	11.73	-72.99	-57.00	-15.99
1341.367	H	-89.5	12.83	-76.67	-47.00	-29.67
2429.2	H	-87.99	12.64	-75.35	-47.00	-28.35
3075.222	H	-87.97	9.82	-78.15	-47.00	-31.15

## GSM 1800



Frequency (MHz)	Polar (H/V)	ReadingLevel (dBm)	Factor	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
operation frequency:Middle channel						
98.517	V	-88.81	14.39	-74.42	-57.00	-17.42
102.245	V	-84.58	13.74	-70.84	-57.00	-13.84
527.339	V	-85.62	10.2	-75.42	-57.00	-18.42
1791.967	V	-80.91	13.33	-67.58	-47.00	-20.58
2370.852	V	-87.46	11.86	-75.60	-47.00	-28.60
5509.445	V	-89.88	14.51	-75.37	-47.00	-28.37
51.987	H	-83.1	9.89	-73.21	-57.00	-16.21
176.177	H	-80.78	12.81	-67.97	-57.00	-10.97
395.396	H	-80.57	16.85	-63.72	-57.00	-6.72
1025.623	H	-88.13	14.98	-73.15	-47.00	-26.15
2862.583	H	-84.38	9.28	-75.10	-47.00	-28.10
3544.268	H	-83.2	11.36	-71.84	-47.00	-24.84

Note: Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

The laboratory has completed all tests for normal and extreme voltage conditions. This report shows only the worst test data.

## 5. PHOTOGRAPHS OF THE TEST SETUP

### Radiated Spurious Emission Test

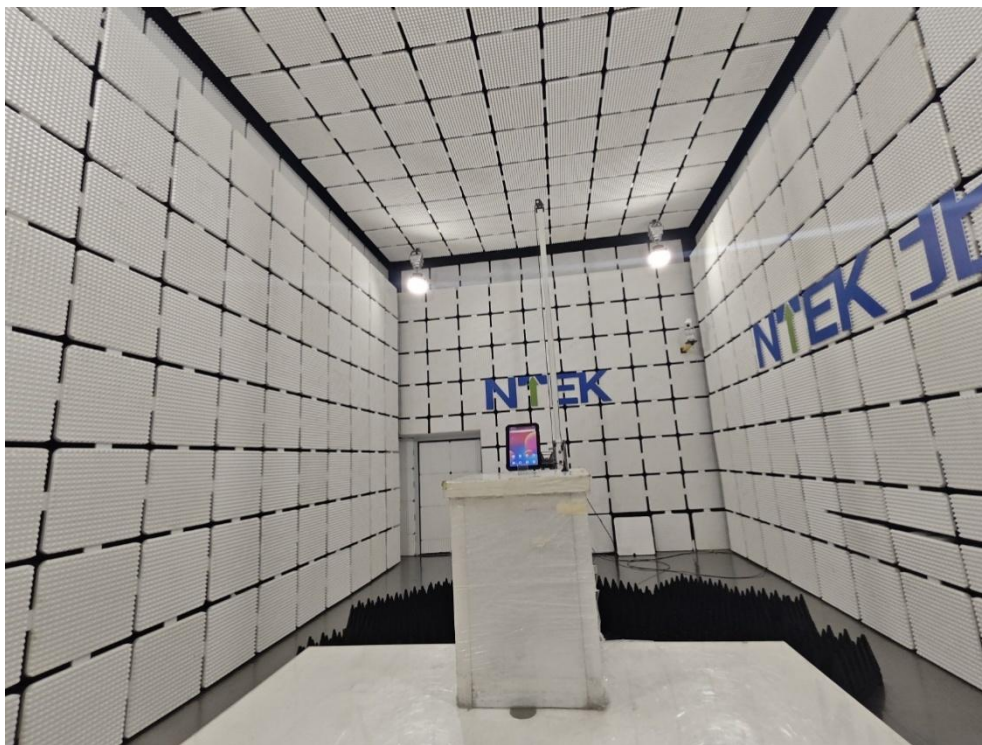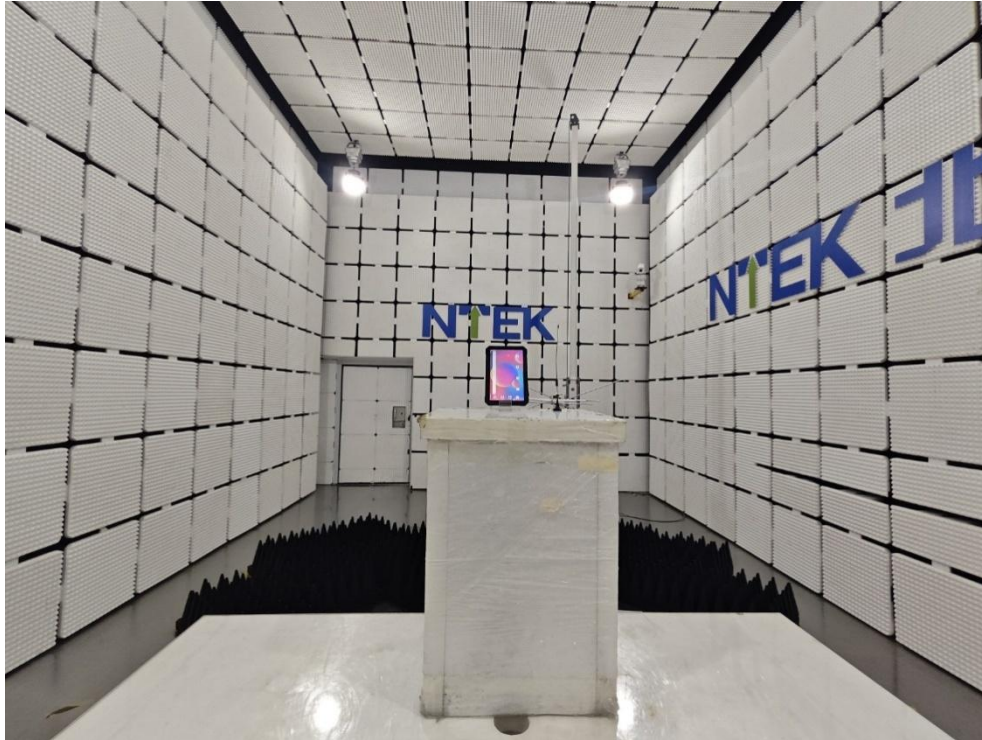

END OF REPORT