



## EMC TEST REPORT

For

Shenzhen Huafurui Technology Co., Ltd.

Tablet

Test Model: TAB KINGKONG S

Prepared for : Shenzhen Huafurui Technology Co., Ltd.  
Address : Unit 601-03, 6/F, Block A, Building 1, Ganfeng  
Technology Building, No. 993 Jiaxian Road,  
Xiangjiaotang Community, Bantian Street, Longgang  
District, Shenzhen, P.R. China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : Room 101, 201, Building A and Room 301, Building C,  
Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 04, 2025  
Number of tested samples : 2  
Sample No. : A250603038-1, A250603038-2  
Serial number : Prototype  
Date of Test : June 04, 2025 ~ July 07, 2025  
Date of Report : July 11, 2025



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China

Tel: + (86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



<b>EMC TEST REPORT</b>	
<b>ETSI EN 301 489-1 V2.2.3 (2019-11) &amp; ETSI EN 301 489-3 V2.3.2 (2023-01) &amp; ETSI EN 301 489-17 V3.3.1 (2024-09) &amp; ETSI EN 301 489-19 V2.2.1 (2022-09) &amp; ETSI EN 301 489-52 V1.3.1 (2024-11)</b>	
Report Reference No. ....	<b>LCSA06035052EA</b>
Date Of Issue.....	July 11, 2025
Testing Laboratory Name.....	<b>Shenzhen LCS Compliance Testing Laboratory Ltd.</b>
Address.....	Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Testing Location/ Procedure.....	Full application of Harmonised standards■ Partial application of Harmonised standards□ Other standard testing method□
Applicant's Name.....	<b>Shenzhen Huafurui Technology Co., Ltd.</b>
Address.....	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
<b>Test Specification</b>	
Standard.....	ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-3 V2.3.2 (2023-01) ETSI EN 301 489-17 V3.3.1 (2024-09) ETSI EN 301 489-19 V2.2.1 (2022-09) ETSI EN 301 489-52 V1.3.1 (2024-11)
Test Report Form No. ....	TRF-4-E-132 A/0
TRF Originator.....	Shenzhen LCS Compliance Testing Laboratory Ltd.
Master TRF.....	Dated 2017-06
<b>Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.</b> This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
<b>Test Item Description..... : Tablet</b>	
Trade Mark.....	CUBOT
Test Model.....	TAB KINGKONG S
Ratings.....	Please Refer to Page 6
Result .....	<b>Pass</b>

Compiled by:

Diamond Lu/ Administrator

Supervised by:

Jack Liu/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## EMC -- TEST REPORT

Test Report No. : <b>LCSA06035052EA</b>	<u>July 11, 2025</u> Date of issue
---	---------------------------------------

Test Model.....	: TAB KINGKONG S
EUT.....	: Tablet
<b>Applicant.....</b>	<b>: Shenzhen Huafurui Technology Co., Ltd.</b>
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: Shenzhen Huafurui Technology Co., Ltd.</b>
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: Shenzhen Huafurui Technology Co., Ltd.</b>
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Pass</b>
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	July 11, 2025	Initial Issue	---



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>6</b>
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2. OBJECTIVE	9
1.3. RELATED SUBMITTAL(S)/GRANT(S)	9
1.4. TEST METHODOLOGY	9
1.5. DESCRIPTION OF TEST FACILITY	10
1.6. SUPPORT EQUIPMENT LIST	10
1.7. EXTERNAL I/O	10
1.8. MEASUREMENT UNCERTAINTY	10
1.9. DESCRIPTION OF TEST MODES	11
<b>2. SUMMARY OF TEST RESULTS</b>	<b>14</b>
<b>3. TEST RESULTS</b>	<b>15</b>
3.1. LINE CONDUCTED EMISSION	15
3.2. CONDUCTED EMISSION (WIRED NETWORK PORT)	17
3.3. RADIATED DISTURBANCE	18
3.4. HARMONIC CURRENT EMISSIONS	21
3.5. VOLTAGE FLUCTUATION AND FLICKER	22
3.6. RF ELECTROMAGNETIC FIELD (80 MHz - 6000 MHz)	23
3.7. ELECTROSTATIC DISCHARGE	25
3.8. ELECTRICAL FAST TRANSIENT IMMUNITY	27
3.9. RF COMMON MODE	28
3.10. SURGES, LINE TO LINE AND LINE TO GROUND	30
3.11. VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST	31
<b>4. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST</b>	<b>32</b>
4.1. PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO TRANSMITTER (CT)	32
4.2. PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO TRANSMITTER (TT)	32
4.3. PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO RECEIVER (CR)	32
4.4. PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO RECEIVER (TR)	32
<b>5. LIST OF MEASURING EQUIPMENT</b>	<b>35</b>
<b>6. PHOTOGRAPHS OF TEST SETUP</b>	<b>37</b>
<b>7. PHOTOGRAPHS OF THE EUT</b>	<b>37</b>





## 1. GENERAL INFORMATION

### 1.1. Product Description for Equipment Under Test (EUT)

EUT	: Tablet
Test Model	: TAB KINGKONG S
Ratings	: Adapter1 Model: HJ-PD33W-EU For AC Adapter Input: 100-240V~, 50/60Hz, 0.8A Adapter Output: 5.0V=3.0A 15.0W OR 9.0V=3.0A 27.0W OR 12.0V=2.75A 33.0W MAX Adapter2 Model: TPD-203G200170VF01 For AC Adapter Input: 100-240V~, 50/60Hz, 0.6A Adapter Output: 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.5A PPS: 3.3V-16V/2A 3.3V-11V/3A Total output power: 33W Max DC 3.87V by Rechargeable Li-ion Battery, 15300mAh
Hardware Version	: T30D-UF-V1.1
Software Version	: CUBOT_TAB_KINGKONG_S_P121C_V01
Bluetooth	:
Frequency Range	: 2402MHz~2480MHz
Channel Number	: 79 channels for Bluetooth V5.0 (BDR/EDR) 40 channels for Bluetooth V5.0 (BT LE/ BT 2LE)
Channel Spacing	: 1MHz for Bluetooth V5.0 (BDR/EDR) 2MHz for Bluetooth V5.0 (BT LE/ BT 2LE)
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V5.0 (BDR/EDR) GFSK for Bluetooth V5.0 (BT LE/ BT 2LE)
Bluetooth Version	: V5.0
Antenna Description	: PIFA Antenna, -1.3dBi(Max.)
WIFI(2.4G Band)	:
Frequency Range	: 2412MHz~2472MHz
Channel Number	: 13 Channel for 20MHz bandwidth(2412~2472MHz) 9 channels for 40MHz bandwidth(2422~2462MHz)
Channel Spacing	: 5MHz
Modulation Type	: 802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: PIFA Antenna, -1.3dBi(Max.)
WIFI(5.2G Band)	:
Frequency Range	: 5180MHz~5240MHz
Channel Number	: 4 channels for 20MHz bandwidth(5180~5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	: 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK) 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: PIFA Antenna, 1.5dBi(Max.)
WIFI(5.8G Band)	:
Frequency Range	: 5745MHz~5825MHz
Channel Number	: 5 channels for 20MHz bandwidth(5745~5825MHz)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





	2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	: 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK) 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: PIFA Antenna, 1.5dBi(Max.)
2G	:
Support Band	: <input checked="" type="checkbox"/> GSM 900 (EU-Band) <input checked="" type="checkbox"/> DCS 1800 (EU-Band) <input checked="" type="checkbox"/> GSM 850 (U.S.-Band) <input checked="" type="checkbox"/> PCS 1900 (U.S.-Band)
Release Version	: R99
GPRS Class	: Class 12
EGPRS Class	: Class 12
Uplink	: GSM 900: 880MHz~915MHz DCS 1800: 1710MHz~1785MHz
Downlink	: GSM 900: 925MHz~960MHz DCS 1800: 1805MHz~1880MHz
Type Of Modulation	: GMSK for GSM/GPRS; 8PSK for EGPRS
Antenna Description	: PIFA Antenna -1.5dBi (max.) For GSM 900 -0.7dBi (max.) For DCS 1800
Power Class	: GSM 900: Level 5, DCS 1800: Level 0 EGPRS 900: Level 8, EGPRS 1800: Level 2
3G	:
Support Band	: <input checked="" type="checkbox"/> WCDMA Band I (EU-Band) <input checked="" type="checkbox"/> WCDMA Band VIII (EU-Band)
Release Version	: R8
Uplink	: WCDMA Band I: 1920MHz~1980MHz WCDMA Band VIII: 880MHz~915MHz
Downlink	: WCDMA Band I: 2110MHz~2170MHz WCDMA Band VIII: 925MHz~960MHz
Type Of Modulation	: QPSK/16QAM
Antenna Description	: PIFA Antenna 1.6dBi (max.) For WCDMA Band I -1.5dBi (max.) For WCDMA Band VIII
Power Class	: Level 3
LTE	:
Support Band	: <input checked="" type="checkbox"/> E-UTRA Band 1(EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 3(EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 7(EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 8(EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 20(EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 28(EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 38(EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 40(EU-Band)
LTE Release Version	: R8
FDD Band	: Uplink: E-UTRA Band 1: 1920MHz~1980MHz E-UTRA Band 3: 1710MHz~1785MHz E-UTRA Band 7: 2500MHz~2570MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





E-UTRA Band 8: 880MHz~915MHz  
E-UTRA Band 20: 832MHz~862MHz  
E-UTRA Band 28: 703MHz~748MHz  
Downlink: E-UTRA Band 1: 2110MHz~2170MHz  
E-UTRA Band 3: 1805MHz~1880MHz  
E-UTRA Band 7: 2620MHz~2690MHz  
E-UTRA Band 8: 925MHz~960MHz  
E-UTRA Band 20: 791MHz~821MHz  
E-UTRA Band 28: 758MHz~803MHz  
TDD Band : E-UTRA Band 38: 2570MHz~2620MHz  
E-UTRA Band 40: 2300MHz~2400MHz  
Type Of Modulation : QPSK/16QAM  
Antenna Description : PIFA Antenna  
1.6dBi (max.) For E-UTRA Band 1  
-0.7dBi (max.) For E-UTRA Band 3  
0.1dBi (max.) For E-UTRA Band 7  
-1.5dBi (max.) For E-UTRA Band 8  
-1.9dBi (max.) For E-UTRA Band 20  
-3.6dBi (max.) For E-UTRA Band 28  
-0.6dBi (max.) For E-UTRA Band 38  
0.7dBi (max.) For E-UTRA Band 40  
Power Class : Class 3

**GPS Receiver**

Receive Frequency : 1575.42MHz

Channel Number : 1

Antenna Description : PIFA Antenna, 0.6dBi(Max.)

**GLONASS Receiver**

Receive Frequency : 1602.5625MHz

Channel Number : 1

Antenna Description : PIFA Antenna, 0.6dBi(Max.)

**Galileo Receiver**

Receive Frequency : 1589.74MHz

Channel Number : 1

Antenna Description : PIFA Antenna, 0.6dBi(Max.)

**BDS Receiver**

Receive Frequency : 1561.098MHz

Channel Number : 1

Antenna Description : PIFA Antenna, 0.6dBi(Max.)

**SBAS Receiver**

Receive Frequency : 1575.42MHz

Channel Number : 1

Antenna Description : PIFA Antenna, 0.6dBi(Max.)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## 1.2. Objective

ETSI EN 301 489-1	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-3	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-17	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband and Wideband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-19	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 19: Specific conditions for Receive Only Mobile Earth Stations (ROMES) operating in the 1,5 GHz band providing data communications and GNSS receivers operating in the RNSS band providing positioning, navigation, and timing data; Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-52	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 52: Specific conditions for Cellular Communication User Equipment (UE) radio and ancillary equipment; Harmonised Standard for ElectroMagnetic Compatibility

The objective is to determine compliance with ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-3 V2.3.2 (2023-01), ETSI EN 301 489-17 V3.3.1 (2024-09), ETSI EN 301 489-19 V2.2.1 (2022-09), ETSI EN 301 489-52 V1.3.1 (2024-11).

## 1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

## 1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-3 V2.3.2 (2023-01), ETSI EN 301 489-17 V3.3.1 (2024-09), ETSI EN 301 489-19 V2.2.1 (2022-09), ETSI EN 301 489-52 V1.3.1 (2024-11).





## 1.5. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

## 1.6. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Shenzhen Huafului Technology Co., Ltd	Fast Charger	HJ-PD33W-EU	--	CE
SHENZHEN TIANYIN ELECTRONICS CO.,LTD.	AC Adapter	TPD-203G200 170VF01	--	CE

## 1.7. External I/O

I/O Port Description	Quantity	Cable
Type-C USB Port	1	USB Cable: 1.0m, unshielded Earphone Cable: 1.2m, unshielded

## 1.8. Measurement Uncertainty

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	0.01ppm	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2℃	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	





## 1.9. Description of Test Modes

There was 109 test Modes. TM1 to TM109 were shown below:		
TM1	:	Operate in GSM 900 mode;
TM2	:	Operate in GPRS 900 mode;
TM3	:	Operate in EGPRS 900 mode;
TM4	:	Operate in DCS 1800 mode;
TM5	:	Operate in GPRS 1800 mode;
TM6	:	Operate in EGPRS 1800 mode;
TM7	:	Operate in WCDMA For band I mode;
TM8	:	Operate in HSUPA For band I mode;
TM9	:	Operate in HSDPA For band I mode;
TM10	:	Operate in WCDMA For band VIII mode;
TM11	:	Operate in HSUPA For band VIII mode;
TM12	:	Operate in HSDPA For band VIII mode;
TM13	:	Operate in For E-UTRA Band 1 mode;
TM14	:	Operate in For E-UTRA Band 3 mode;
TM15	:	Operate in For E-UTRA Band 7 mode;
TM16	:	Operate in For E-UTRA Band 8 mode;
TM17	:	Operate in For E-UTRA Band 20 mode;
TM18	:	Operate in For E-UTRA Band 28 mode;
TM19	:	Operate in For E-UTRA Band 38 mode;
TM20	:	Operate in For E-UTRA Band 40 mode;
TM21	:	Operate in Bluetooth + GSM 900 mode;
TM22	:	Operate in Bluetooth + GPRS 900 mode;
TM23	:	Operate in Bluetooth + EGPRS 900 mode;
TM24	:	Operate in Bluetooth + DCS 1800 mode;
TM25	:	Operate in Bluetooth + GPRS 1800 mode;
TM26	:	Operate in Bluetooth + EGPRS 1800 mode;
TM27	:	Operate in Bluetooth + WCDMA For band I mode;
TM28	:	Operate in Bluetooth + HSUPA For band I mode;
TM29	:	Operate in Bluetooth + HSDPA For band I mode;
TM30	:	Operate in Bluetooth + WCDMA For band VIII mode;
TM31	:	Operate in Bluetooth + HSUPA For band VIII mode;
TM32	:	Operate in Bluetooth + HSDPA For band VIII mode;
TM33	:	Operate in Bluetooth + For E-UTRA Band 1 mode;
TM34	:	Operate in Bluetooth + For E-UTRA Band 3 mode;
TM35	:	Operate in Bluetooth + For E-UTRA Band 7 mode;
TM36	:	Operate in Bluetooth + For E-UTRA Band 8 mode;
TM37	:	Operate in Bluetooth + For E-UTRA Band 20 mode;
TM38	:	Operate in Bluetooth + For E-UTRA Band 28 mode;
TM39	:	Operate in Bluetooth + For E-UTRA Band 38 mode;
TM40	:	Operate in Bluetooth + For E-UTRA Band 40 mode;
TM41	:	Operate in 2.4G WIFI + GSM 900 mode mode;
TM42	:	Operate in 2.4G WIFI + GPRS 900 mode;
TM43	:	Operate in 2.4G WIFI + EGPRS 900 mode;
TM44	:	Operate in 2.4G WIFI + DCS 1800 mode;
TM45	:	Operate in 2.4G WIFI + GPRS 1800 mode;
TM46	:	Operate in 2.4G WIFI + EGPRS 1800 mode;
TM47	:	Operate in 2.4G WIFI + WCDMA For band I mode;
TM48	:	Operate in 2.4G WIFI + HSUPA For band I mode;
TM49	:	Operate in 2.4G WIFI + HSDPA For band I mode;
TM50	:	Operate in 2.4G WIFI + WCDMA For band VIII mode;



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM51	:	Operate in 2.4G WIFI + HSUPA For band VIII mode;
TM52	:	Operate in 2.4G WIFI + HSDPA For band VIII mode;
TM53	:	Operate in 2.4G WIFI + For E-UTRA Band 1 mode;
TM54	:	Operate in 2.4G WIFI + For E-UTRA Band 3 mode;
TM55	:	Operate in 2.4G WIFI + For E-UTRA Band 7 mode;
TM56	:	Operate in 2.4G WIFI + For E-UTRA Band 8 mode;
TM57	:	Operate in 2.4G WIFI + For E-UTRA Band 20 mode;
TM58	:	Operate in 2.4G WIFI + For E-UTRA Band 28 mode;
TM59	:	Operate in 2.4G WIFI + For E-UTRA Band 38 mode;
TM60	:	Operate in 2.4G WIFI + For E-UTRA Band 40 mode;
TM61	:	Operate in 5.2G WIFI + GSM 900 mode mode;
TM62	:	Operate in 5.2G WIFI + GPRS 900 mode;
TM63	:	Operate in 5.2G WIFI + EGPRS 900 mode;
TM64	:	Operate in 5.2G WIFI + DCS 1800 mode;
TM65	:	Operate in 5.2G WIFI + GPRS 1800 mode;
TM66	:	Operate in 5.2G WIFI + EGPRS 1800 mode;
TM67	:	Operate in 5.2G WIFI + WCDMA For band I mode;
TM68	:	Operate in 5.2G WIFI + HSUPA For band I mode;
TM69	:	Operate in 5.2G WIFI + HSDPA For band I mode;
TM70	:	Operate in 5.2G WIFI + WCDMA For band VIII mode;
TM71	:	Operate in 5.2G WIFI + HSUPA For band VIII mode;
TM72	:	Operate in 5.2G WIFI + HSDPA For band VIII mode;
TM73	:	Operate in 5.2G WIFI + For E-UTRA Band 1 mode;
TM74	:	Operate in 5.2G WIFI + For E-UTRA Band 3 mode;
TM74	:	Operate in 5.2G WIFI + For E-UTRA Band 7 mode;
TM75	:	Operate in 5.2G WIFI + For E-UTRA Band 8 mode;
TM76	:	Operate in 5.2G WIFI + For E-UTRA Band 20 mode;
TM77	:	Operate in 5.2G WIFI + For E-UTRA Band 28 mode;
TM78	:	Operate in 5.2G WIFI + For E-UTRA Band 38 mode;
TM79	:	Operate in 5.2G WIFI + For E-UTRA Band 40 mode;
TM80	:	Operate in 5.8G WIFI + GSM 900 mode mode;
TM81	:	Operate in 5.8G WIFI + GPRS 900 mode;
TM82	:	Operate in 5.8G WIFI + EGPRS 900 mode;
TM83	:	Operate in 5.8G WIFI + DCS 1800 mode;
TM84	:	Operate in 5.8G WIFI + GPRS 1800 mode;
TM85	:	Operate in 5.8G WIFI + EGPRS 1800 mode;
TM86	:	Operate in 5.8G WIFI + WCDMA For band I mode;
TM87	:	Operate in 5.8G WIFI + HSUPA For band I mode;
TM88	:	Operate in 5.8G WIFI + HSDPA For band I mode;
TM89	:	Operate in 5.8G WIFI + WCDMA For band VIII mode;
TM90	:	Operate in 5.8G WIFI + HSUPA For band VIII mode;
TM91	:	Operate in 5.8G WIFI + HSDPA For band VIII mode;
TM92	:	Operate in 5.8G WIFI + For E-UTRA Band 1 mode;
TM93	:	Operate in 5.8G WIFI + For E-UTRA Band 3 mode;
TM94	:	Operate in 5.8G WIFI + For E-UTRA Band 7 mode;
TM95	:	Operate in 5.8G WIFI + For E-UTRA Band 8 mode;
TM96	:	Operate in 5.8G WIFI + For E-UTRA Band 20 mode;
TM97	:	Operate in 5.8G WIFI + For E-UTRA Band 28 mode;
TM98	:	Operate in 5.8G WIFI + For E-UTRA Band 38 mode;
TM99	:	Operate in 5.8G WIFI + For E-UTRA Band 40 mode;
TM100	:	Operate in Bluetooth mode;
TM101	:	Operate in 2.4G WIFI mode;



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM102	:	Operate in 5.2G WIFI mode;
TM103	:	Operate in 5.8G WIFI mode;
TM104	:	Operate in GPS Receiver mode
TM105	:	Operate in GLONASS Receiver mode
TM106	:	Operate in Galileo Receiver mode
TM107	:	Operate in BDS Receiver mode
TM108	:	Operate in SBAS Receiver mode
TM109	:	Idle mode
Note: 1. All test modes were tested, but we only recorded the worst case in this report.		







## 2. SUMMARY OF TEST RESULTS

Rule	Description of Test Items	Result
§7.1	Reference to clause 8.4 of ETSI EN 301 489-1 Conducted Emission (AC mains input/output port)	Compliant
§7.1	Reference to clause 8.3 of ETSI EN 301 489-1 Conducted Emission (DC power input/output port)	N/A*
§7.1	Reference to clause 8.7 of ETSI EN 301 489-1 Conducted Emission (Wired network port)	N/A*
§7.1	Reference to clause 8.2 of ETSI EN 301 489-1 Radiated Emission (Enclosure of ancillary equipment)	Compliant
§7.1	Reference to clause 8.5 of ETSI EN 301 489-1 Harmonic current emissions (AC mains input port)	N/A*
§7.1	Reference to clause 8.6 of ETSI EN 301 489-1 Voltage fluctuations and flicker (AC mains input port)	Compliant
§7.2	Reference to clause 9.3 of ETSI EN 301 489-1 Electrostatic discharge (Enclosure port) (EN 61000-4-2)	Compliant
§7.2	Reference to clause 9.2 of ETSI EN 301 489-1 RF electromagnetic field (80MHz to 6000MHz) (Enclosure port) (EN 61000-4-3)	Compliant
§7.2	Reference to clause 9.4 of ETSI EN 301 489-1 Fast transients common mode (signal, wired network and control ports, DC and AC power ports) (EN 61000-4-4)	Compliant
§7.2	Reference to clause 9.8 of ETSI EN 301 489-1 Surges, line to line and line to ground (AC mains power input ports, wired network ports) (EN 61000-4-5)	Compliant
§7.2	Reference to clause 9.5 of ETSI EN 301 489-1 RF common mode 0.15MHz to 80MHz (signal, wired network and control ports, DC and AC power ports) (EN 61000-4-6)	Compliant
§7.2	Reference to clause 9.6 of ETSI EN 301 489-1 Transients and surges in the vehicular environment (ISO 7637-2)	N/A*
§7.2	Reference to clause 9.7 of ETSI EN 301 489-1 Voltage dips and interruptions (AC mains power input ports) (EN 61000-4-11)	Compliant





### 3. TEST RESULTS

#### 3.1. Line Conducted Emission


##### 3.1.1 Conducted Emission Limit

**Relevant Standard(s):** ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 55032:2015/A11:2020  
Class B

Limits for Line Conducted Emission		
Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

##### 3.1.2 Test Configuration

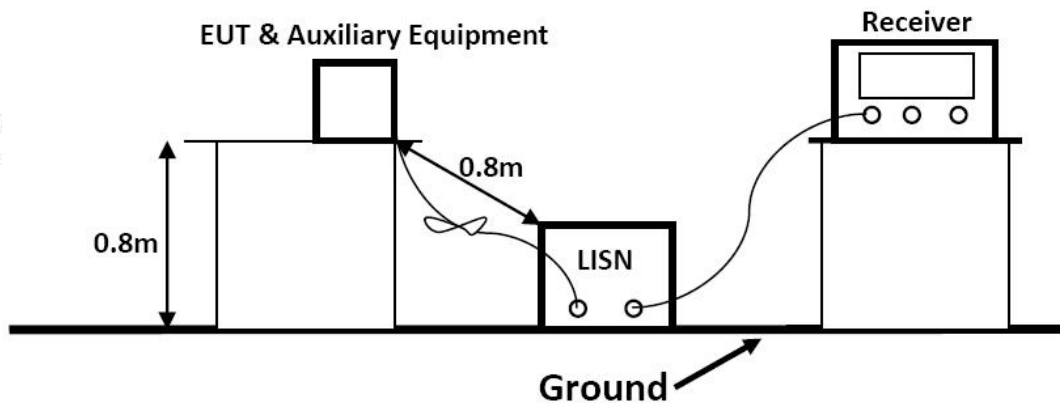

The setup of EUT is according with per ETSI EN 301 489-1 measurement procedure. The specification used was with the ETSI EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The EUT received charging power from the charger which received power through a LISN supplying power of AC 230V/50Hz.





### 3.1.3 EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	150KHz ~ 30MHz
(IF)RBW	9kHz

All data was recorded in the Quasi-peak and average detection mode.

### 3.1.4 Test Procedure

Power on the EUT, the EUT begins to work. Make sure the EUT operates normally during the test.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### 3.1.5 Test Results

PASS

Please refer to Appendix A.1 for Emission and Immunity test results.





### 3.2. Conducted Emission (Wired Network Port)


#### 3.2.1 Conducted Emission Limit(Wired Network Port)

Limits for asymmetric mode conducted emissions				
Frequency (MHz)	Class B voltage limits (dB $\mu$ V)		Class B current limits (dB $\mu$ A)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	84.0~74.0	74.0~64.0	40.0~30.0	30.0~20.0
0.50 ~ 30.00	74.0	64.0	30.0	20.0

NOTE 1-The limits decrease linearly with the logarithm of the frequency in the range 0,15 MHz to 0,5 MHz.

NOTE 2-The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 $\Omega$  to the telecommunication port under test (conversion factor is  $20 \log_{10} 150 / I = 44 \text{ dB}$ ).

#### 3.2.2 Test Configuration

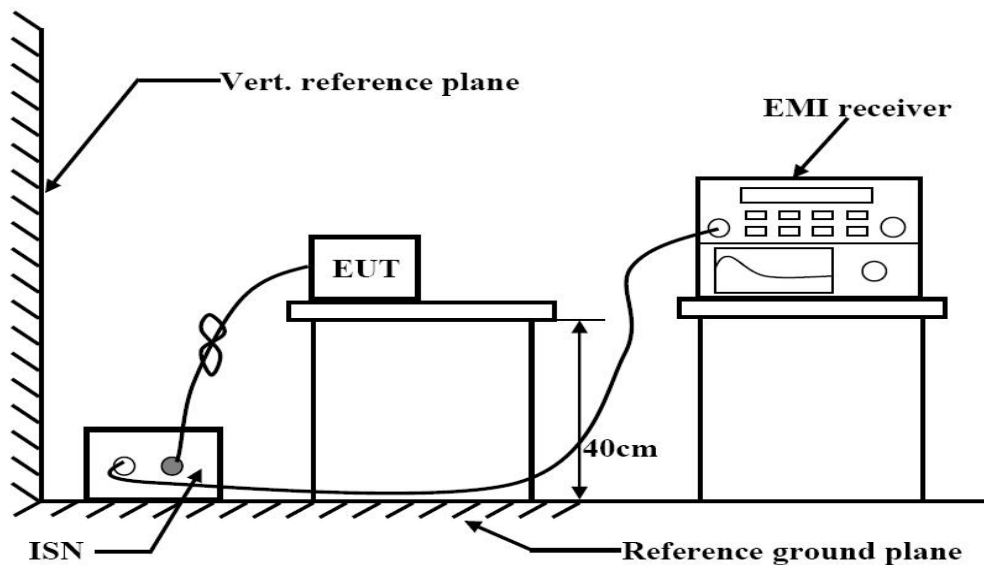

#### 3.2.3 EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	150KHz ~ 30MHz
(IF)RBW	9kHz

All data was recorded in the Quasi-peak and average detection mode.

#### 3.2.4 Test Procedure

Please refer to ETSI EN 301 489-1 Clause 8.7.2 and EN 55032 Clause 6 for the measurement methods.

#### 3.2.5 Test Results

Not applicable.





### 3.3. Radiated Disturbance

#### 3.3.1 Radiated Emission Limit

**Relevant Standard(s):** ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 55032:2015/A11:2020  
Class B

Limits for Radiated Disturbance Below 1GHz			
Frequency (MHz)	Facility	Distance (Meters)	Field Strengths Limit (dB $\mu$ V/m)
30 ~ 230	FAR	3	42-35
230 ~ 1000	FAR	3	42
***Note: (1) The smaller limit shall apply at the combination point between two frequency bands. (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.			
Limits for Radiated Disturbance Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
***Note: The lower limit applies at the transition frequency.			

Limits for Radiated Disturbance Below 1GHz (For FM Receivers)			
Frequency (MHz)	Distance (Meters)	Class B Limit (dBμV/m)	
		Fundamental	Harmonics
30 ~ 230	3	60	52
230 ~ 300	3		52
300 ~ 1000	3		56
***Note: These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the LO. Signals at all other frequencies shall be compliant with the limits given in above Table.			
Limits for Radiated Disturbance Above 1GHz (For FM Receivers)			
Frequency (MHz)	Distance (Meters)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
***Note: The lower limit applies at the transition frequency.			







### 3.3.2 Test Configuration

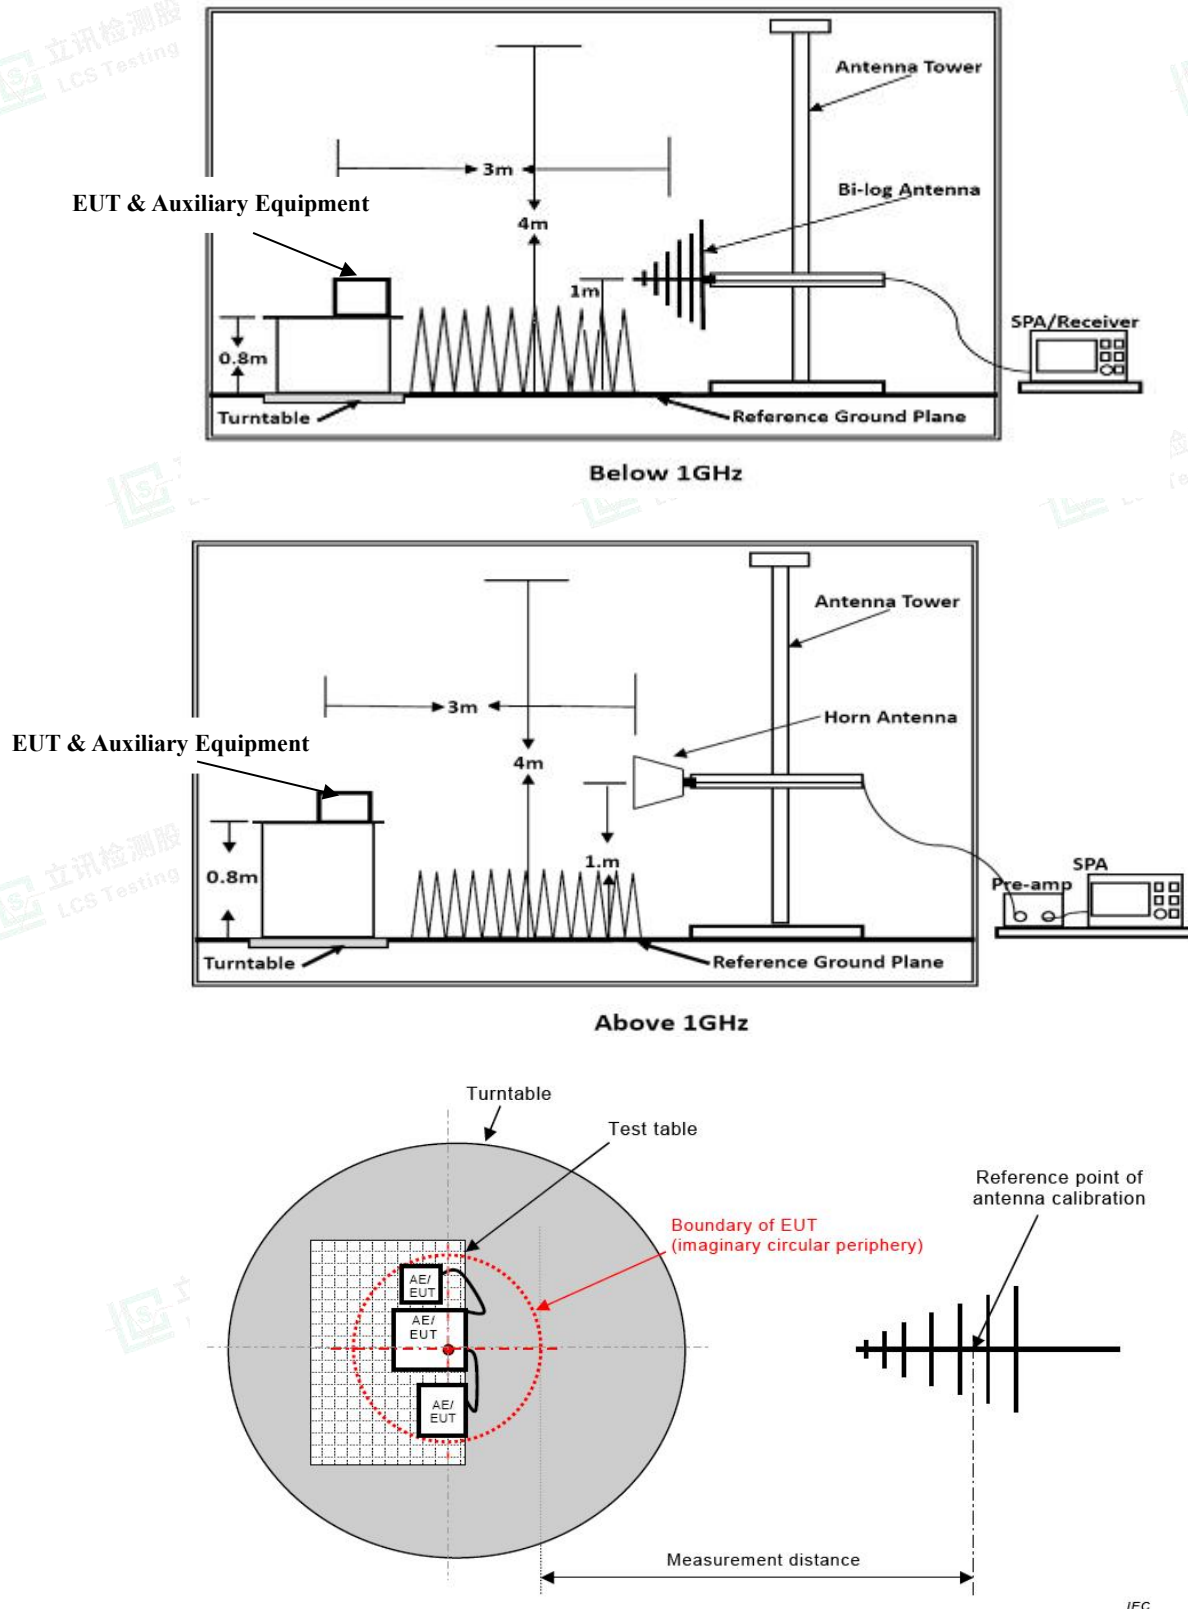


Figure C.1 – Measurement distance

#### Test Setup for FM Receiver




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

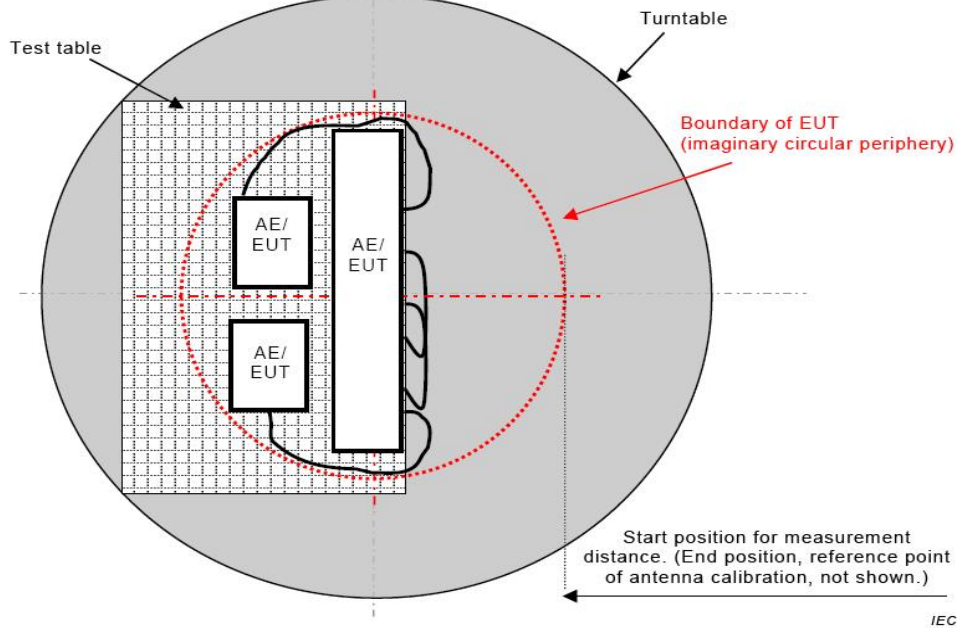

**Figure C.2 – Boundary of EUT, Local AE and associated cabling**

### Test Setup for FM Receiver

#### 3.3.3 Test Procedure

The test method shall be in accordance with CENELEC EN 55032 [1], annex A.3.

#### 3.3.4 Test Results

PASS


Please refer to Appendix A.3 for Emission and Immunity test results.





### 3.4. Harmonic Current Emissions

#### 3.4.1 Test Configuration

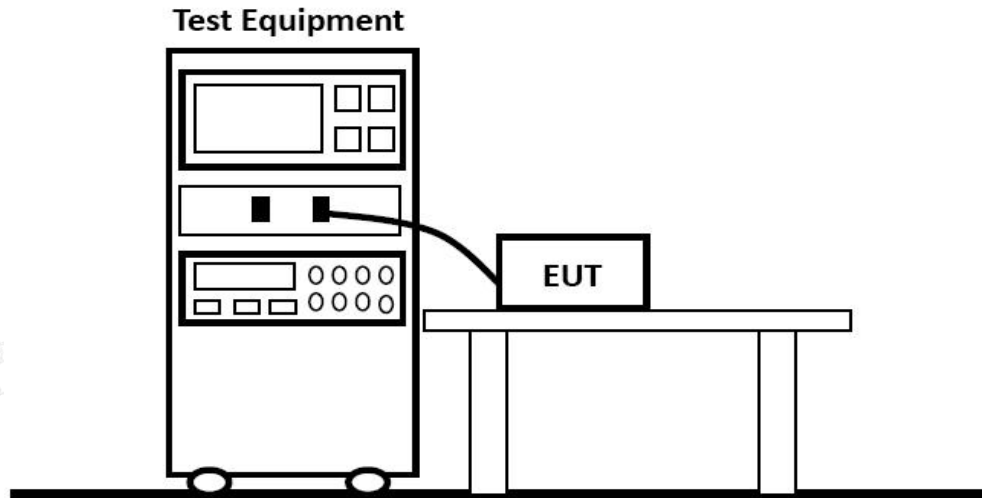

#### 3.4.2 Test Standard

According to ETSI EN 301 489-1 V2.2.3 (2019-11) & EN 61000-3-2:2014

#### 3.4.3 Test Results

N/A


Please refer to Appendix A.4 for Emission and Immunity test results.





### 3.5. Voltage Fluctuation and Flicker

#### 3.5.1 Test Configuration

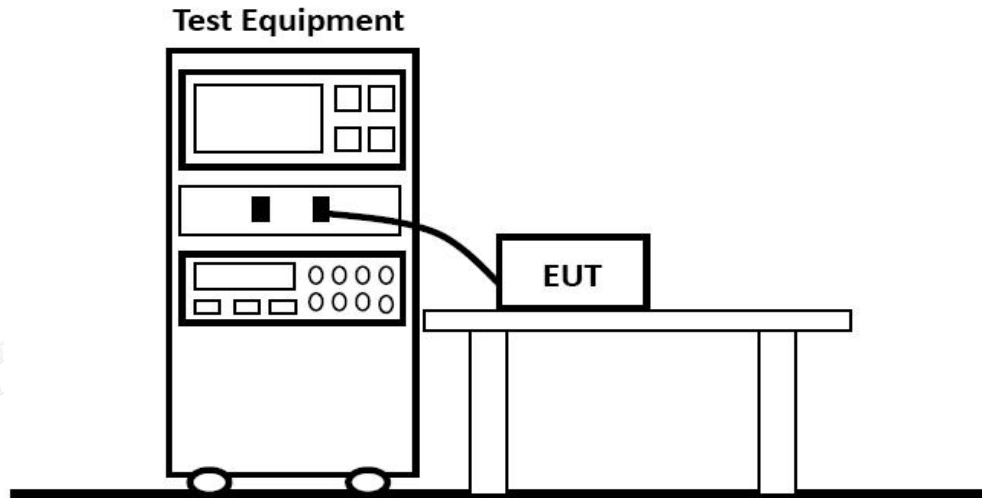

#### 3.5.2 Test Standard

According to ETSI EN 301 489-1 V2.2.3 (2019-11) & EN 61000-3-3:2013

#### 3.5.3 Test Results

PASS


Please refer to Appendix A.5 for Emission and Immunity test results.





### 3.6. RF Electromagnetic Field (80 MHz - 6000 MHz)

#### 3.6.1 Test Configuration

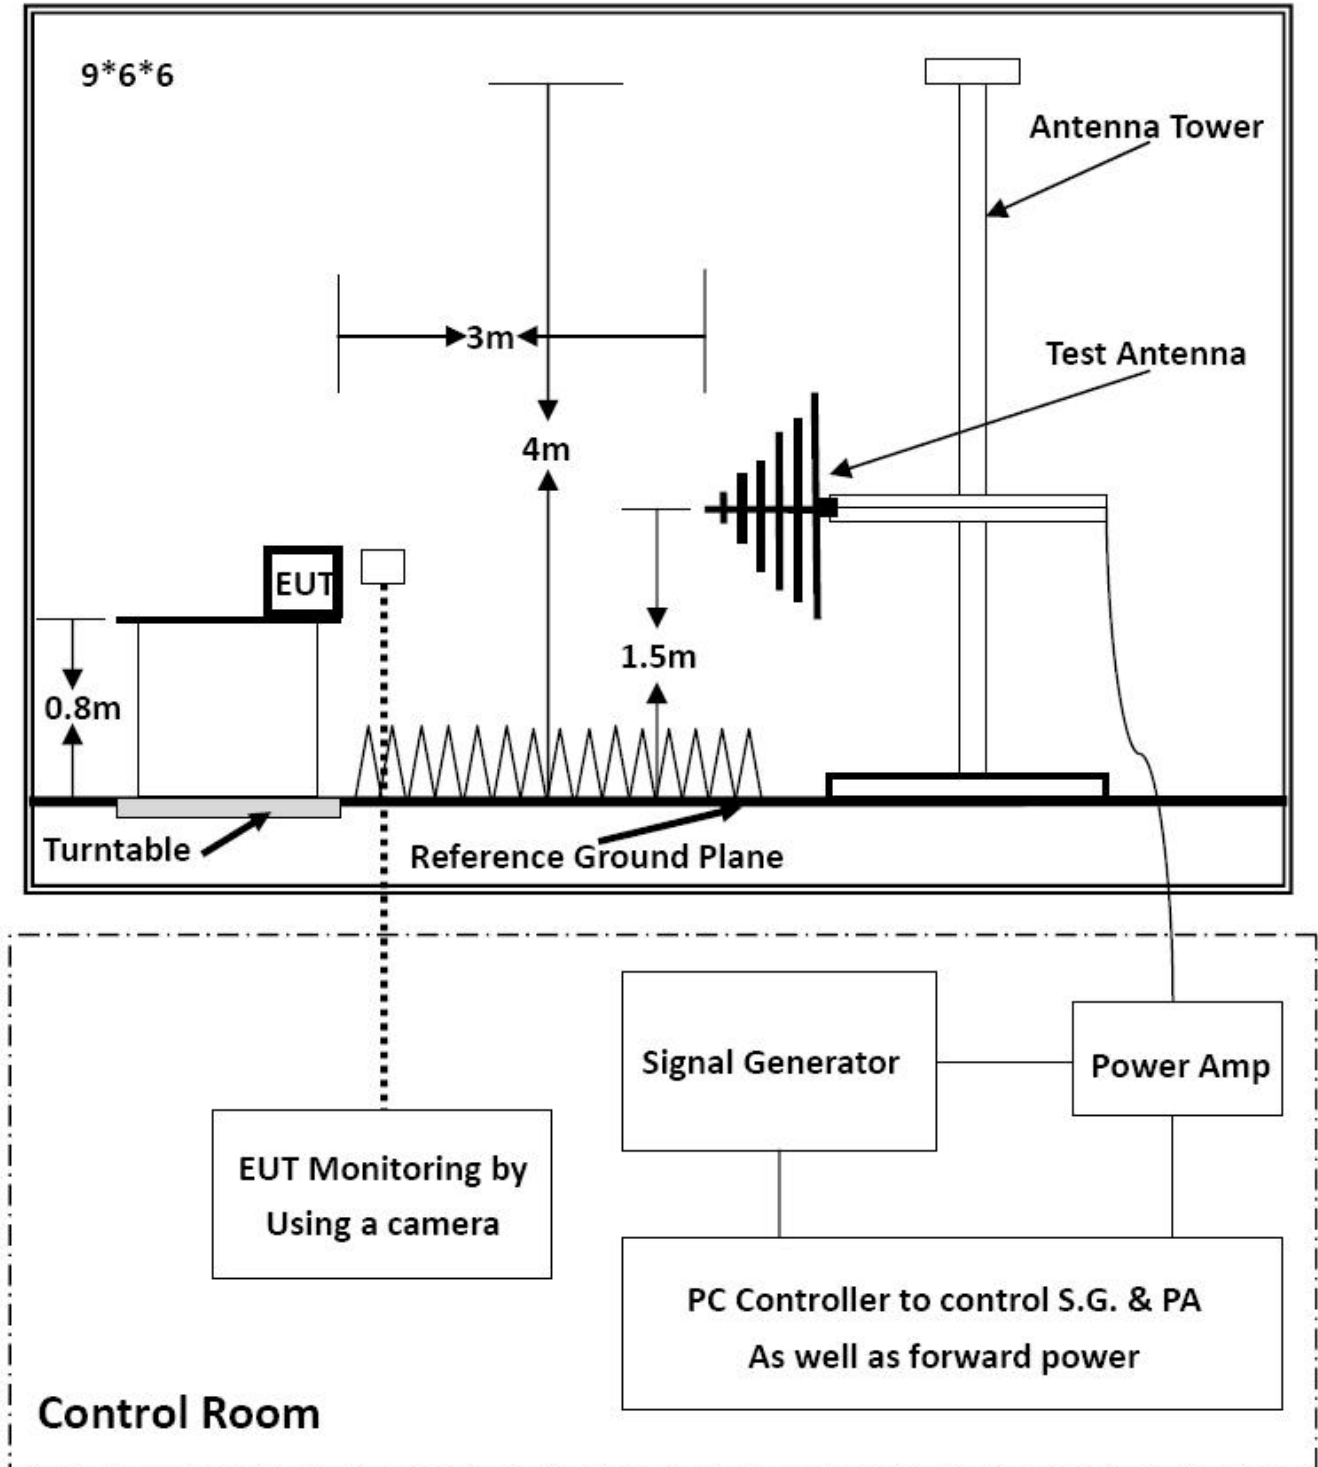

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





### 3.6.2 Test Standard

ETSI EN 301 489-1, ETSI EN 301 489-3, ETSI EN 301 489-17, ETSI EN 301 489-19, ETSI EN 301 489-52 (EN 61000-4-3: 2006+A2: 2010)

Test level 2 at 3V/m.

### 3.6.3 Severity Level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	Special
Performance Criterion: <b>A</b>	

### 3.6.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

Condition of Test	Remark
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Unmodulated
Scanning Frequency	80-6000MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	3 Sec.

### 3.6.5 Test Results


PASS

Please refer to Appendix A.6 for Emission and Immunity test results.



### 3.7. Electrostatic Discharge

#### 3.7.1 Test Configuration

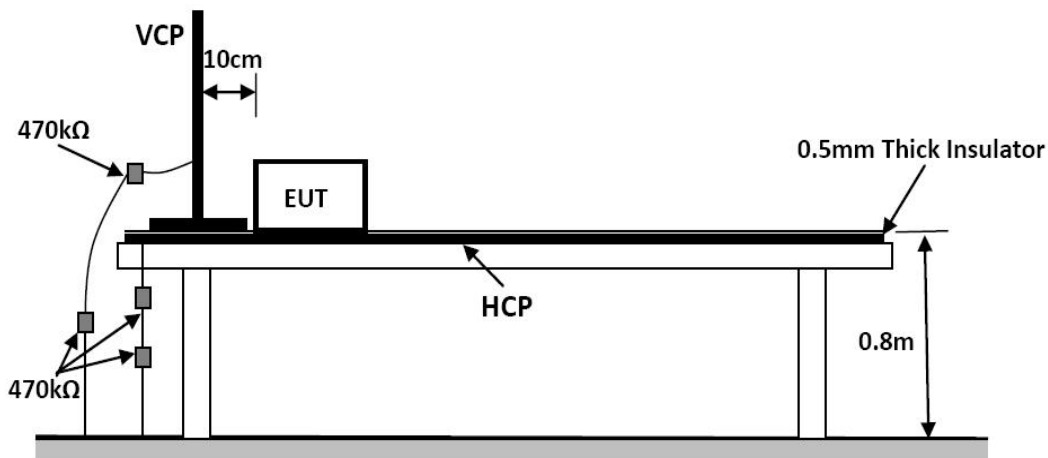

EN 61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.5 by 1.0-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

#### 3.7.2 Test Procedure

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-2: 2009

Test level 3 for Air Discharge at  $\pm 8$  kV

Test level 2 for Contact Discharge at  $\pm 4$  kV

##### 3.7.2.1 Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

##### 3.7.2.2 Contact Discharge

All the procedure shall be same as Section 3.7.2.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

##### 3.7.2.3 Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





#### 3.7.2.4 Indirect Discharge For Vertical Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

#### 3.7.3 Test Results

PASS


Please refer to Appendix A.7 for Emission and Immunity test results.





### 3.8. Electrical Fast Transient Immunity

#### 3.8.1 Test Configuration

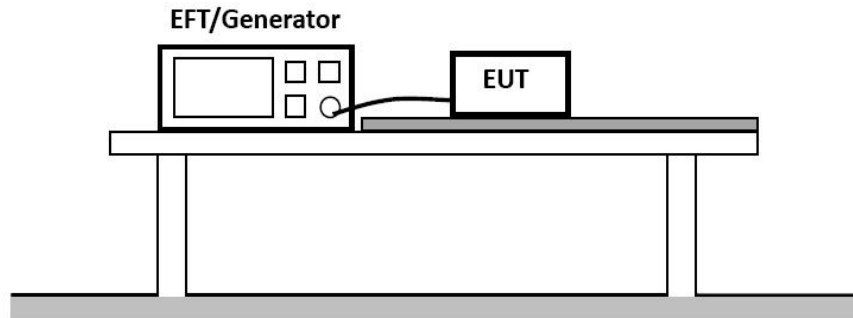

#### 3.8.2 Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN61000-4-4: 2012

Test level 2 at 1 kV

Test Level		
Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special
Performance Criterion: B		

#### 3.8.3 Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

##### 3.8.3.1 For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

##### 3.8.3.2 For signal lines and control lines ports: No I/O ports. It's unnecessary to test.

##### 3.8.3.3 For DC output line ports: It's unnecessary to test.

#### 3.8.4 Test Results

PASS

Please refer to Appendix A.8 for Emission and Immunity test results.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

### 3.9. RF Common Mode

### 3.9.1 Test Configuration

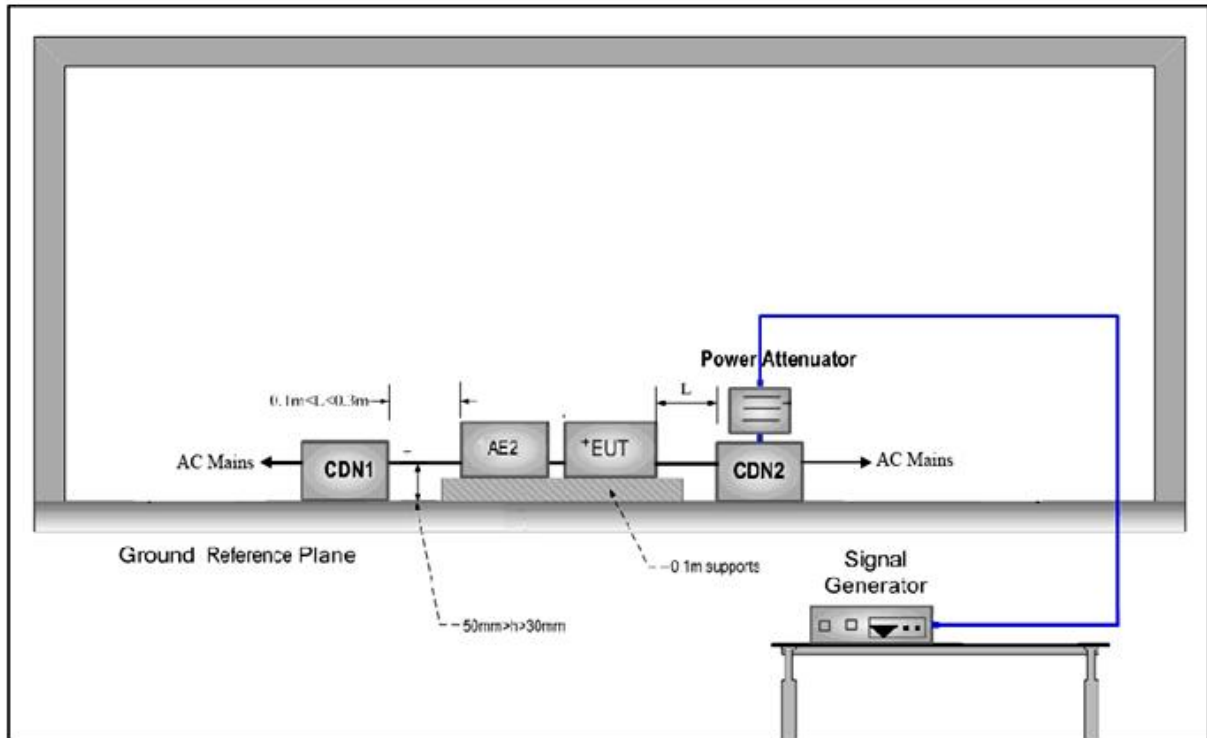

### 3.9.2 Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN 61000-4-6: 2014

Test level: 3V (r.m.s.) for 0.15MHz ~ 10MHz; 3V (r.m.s.) to 1V (r.m.s.) for 10MHz ~ 30MHz;

1V (r.m.s.) for 30MHz ~ 80MHz

Modulation type: AM

Modulation depth: 80%

Modulation signal: 1 kHz

Test Level	
Level	Voltage Level (r.m.s.) (V)
1	1
2	3
3	10
X	Special

Performance Criterion: A



Shenzhen LCS Compliance Testing Laboratory Ltd.

Shenzhen EES Compliance Testing Laboratory Ltd.  
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: [webmaster@lcs-cert.com](mailto:webmaster@lcs-cert.com) | Web: [www.lcs-cert.com](http://www.lcs-cert.com)

Scan code to check authenticity





### 3.9.3 Test Procedure

3.9.3.1 Let the EUT work in test mode and test it.

3.9.3.2 The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50mm (where possible).

3.9.3.3 The disturbance signal described below is injected to EUT through CDN.

3.9.3.4 The EUT operates within its operational mode(s) under intended climatic conditions after power on.

3.9.3.5 The frequency range is swept from 150kHz to 10MHz using 3V signal level, 10MHz to 30MHz using 3V to 1V signal level, 30MHz to 80MHz using 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

3.9.3.6 The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

3.9.3.7 Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

### 3.9.4 Test Results

PASS


Please refer to Appendix A.9 for Emission and Immunity test results.





### 3.10. Surges, Line to Line and Line to Ground

#### 3.10.1 Test Configuration

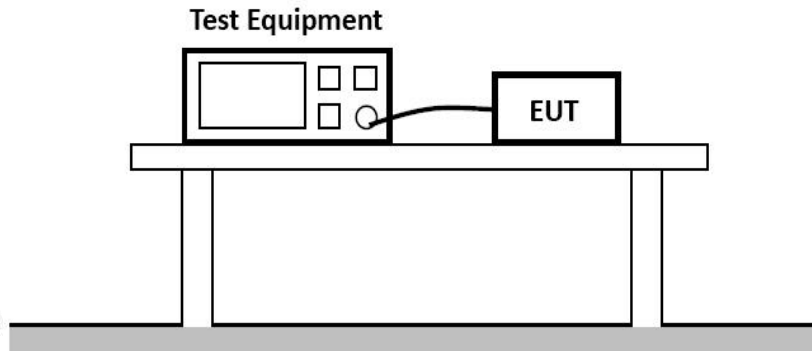

#### 3.10.2 Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-5: 2014+A1:2017

L-N: Test level 2 at 1 kV

L-PE, N-PE Test Level 3 at 2kV

Test Level		
Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special
Performance Criterion: B		

#### 3.10.3 Test Procedure

3.10.3.1 For line to line coupling mode, provide a 0.5 kV 1.2/50us voltage surge (at open-circuit condition).

3.10.3.2 At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

3.10.3.3 Different phase angles are done individually.

3.10.3.4 Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

#### 3.10.4 Test Results

PASS

Please refer to Appendix A.10 for Emission and Immunity test results.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 3.11. Voltage Dips/Interruptions Immunity Test

#### 3.11.1 Test Configuration

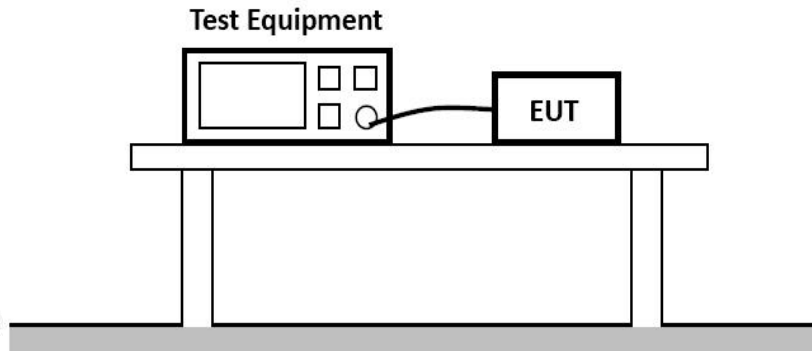

#### 3.11.2 Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN 61000-4-11: 2004+A1:2017

Test levels and Performance Criterion

Test Level		
Voltage Reduction %U <sub>T</sub>	Voltage Dips %U <sub>T</sub>	Duration (in Period)
100	0	0.5
100	0	1
30	70	5
Voltage Reduction %U <sub>T</sub>	Voltage Dips %U <sub>T</sub>	Duration (in Period)
100	0	250
Performance Criterion: B&C		

#### 3.11.3 Test Procedure

3.11.3.1 The interruption is introduced at selected phase angles with specified duration.

3.11.3.2 Record any degradation of performance.

#### 3.11.4 Test Results

PASS

Please refer to Appendix A.11 for Emission and Immunity test results.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 4. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST

### 4.1. Performance criteria for Continuous phenomena applied to Transmitter (CT)

For equipment of type II or type III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

### 4.2. Performance criteria for Transient phenomena applied to Transmitter (TT)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

### 4.3. Performance criteria for Continuous phenomena applied to Receiver (CR)

For equipment of type II or III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

### 4.4. Performance criteria for Transient phenomena applied to Receiver (TR)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.



**Performance criteria for ETSI EN 301 489-3 V2.3.2 (2023-01)****1) Introduction**

The performance criteria are used to make an assessment whether a radio equipment passes or fails immunity tests.

Only the performance criteria specified in the present document or in ETSI EN 301 489-1 [1] where referenced shall apply.

The provisions of ETSI EN 301 489-1 [1] clause 6 shall apply, together with clauses 6.2 and 6.3 of the present document.

**2) Continuous and non-continuous operation**

Latency is the time delay between the initiation and the completion of operation of the EUT. Correct functioning requires completing the relevant operation within the maximum latency time.

Where the maximum latency is specified in the applicable harmonised radio standard (in the wanted performance criterion, or an acknowledge requirement), that value shall be used.

Where this is not the case, then the maximum latency is that required by the intended use of the EUT.

**3) Operating modes**

Where the EUT has more than one mode of operation (see clause 4.4.1), an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in all modes to confirm there are no such unintentional responses.

**Performance criteria for ETSI EN 301 489-17 V3.3.1 (2024-09)**

Criteria	During test	After test (i.e. as a result of the application of the test)
A	Shall operate as intended. (See note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

NOTE: Operate as intended during the test shall be considered as:

- For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.
- For equipment that does not support a PER or a FER, (e.g. audio equipment and equipment transmitting sporadic messages) the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## Performance criteria for ETSI EN 301 489-19 V2.2.1 (2022-09)

### 1) Introduction

Only the performance criteria specified in the present document or in ETSI EN 301 489-1 [1] where referenced shall apply.

The equipment shall meet the minimum performance criteria as specified in clauses 6.1 and 6.2 as appropriate.

For the purpose of the present document two categories of performance criteria apply:

- Performance criteria for continuous phenomena.
- Performance criteria for transient phenomena.

### 2) Performance criteria for Continuous phenomena

During the test, the equipment shall operate as intended, e.g. not unintentionally change its operating state and not unintentionally change critical stored data. After the test, the equipment shall operate as intended, e.g. have no loss of function and have no loss of critical stored data.

### 3) Performance criteria for Transient phenomena

After the test, functions shall be self-recoverable and the equipment shall operate as intended and the equipment shall have no loss of critical stored data.

## Performance criteria for ETSI EN 301 489-52 V1.3.1 (2024-11)

### 1) Performance criteria for Continuous phenomena applied to Transmitters (CT)

With a link established, during the test, the uplink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check).

NOTE: When there is a high-level background noise present, the filter bandwidth may be reduced down to a minimum of 40 Hz.

In idle mode, the transmitter shall not operate unintentionally.

At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or critical stored data, and the communication link shall have been maintained.

### 2) Performance criteria for Continuous phenomena applied to Receivers (CR)

During the test, the RXQUAL of the downlink shall not exceed the value of three, measured during each individual exposure in the test sequence.

In the case of narrow band responses, the procedure in clause 4.4.1 shall be followed.

During the test, the downlink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check).

NOTE: When there is a high-level background noise present, the filter bandwidth may be reduced down to a minimum of 40 Hz.

At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or critical stored data, and the communication link shall have been maintained.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5. LIST OF MEASURING EQUIPMENT

### LINE CONDUCTED EMISSION

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	Farad	EZ	/	N/A	N/A
2	EMI Test Receiver	R&S	ESR3	102312	2025-03-06	2026-03-05
3	Artificial Mains	R&S	ENV216	101288	2025-05-22	2026-05-21
4	Pulse Limiter	R&S	ESH3-Z2	102750-NB	2025-05-22	2026-05-21
5	Impedance Stabilization Network	TESEQ	ISN T800	45130	2024-10-11	2025-10-10
6	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

### RADIATED DISTURBANCE

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	Farad	EZ	/	N/A	N/A
2	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2022-08-17	2025-08-16
3	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
4	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2024-08-03	2027-08-02
5	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2024-07-13	2027-07-12
6	EMI Test Receiver	R&S	ESPI	101940	2025-05-22	2026-05-21
7	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2024-10-08	2025-10-07
8	High-frequency amplifier	JS Denki Pte	PA0118-43	JSPA21009	2024-10-08	2025-10-07
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2024-10-08	2025-10-07
10	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2025-05-22	2026-05-21
11	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

### VOLTAGE FLUCTUATION AND FLICKER/HARMONIC CURRENT EMISSIONS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	HARMONICS&FLICKER MEASUREMENT SYSTEM	EVERFINE	HFM-3000	P630850CD1411116	2025-03-06	2026-03-05
2	HARMONICS&FLICKER TESTING POWER SOURCE	EVERFINE	HFS-4000	P624486CD1411124	2025-03-06	2026-03-05
3	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

### RF ELECTROMAGNETIC FIELD

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	RS Test Software	Tonscend	/	/	N/A	N/A
2	MXG Vector Signal Generator	Agilent	E4438C	MY42081396(6G)	2024-10-08	2025-10-07
3	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2022-08-17	2025-08-16
4	RF POWER AMPLIFIER	OPHIR	5225R	1052	2025-05-22	2026-05-21
5	RF POWER AMPLIFIER	OPHIR	5273F	1019	2025-05-22	2026-05-21
6	RF POWER AMPLIFIER	SKET	HAP_0306G-50W	/	2025-05-22	2026-05-21
7	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	2023-07-14	2026-07-13
8	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-482	2024-07-20	2027-07-19
9	RS Electric field probe	narda	EP601	611WX80208	2024-06-25	2025-06-24
10	Sound Level meter	BK Precision	735	7350087310010020	2025-05-22	2026-05-21



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
11	Audio Analyzer	R&S	UPV	1146.2003K02-101 721-UW	2024-10-08	2025-10-07
12	Mouse Simulation	Bruel & Kjaer	4227	A0304216	2025-05-22	2026-05-21
13	Ear Simulation and supply	Bruel & Kjaer	2669.4182.5 935	A0305284	2025-05-22	2026-05-21
14	Acoustical Calibrators	Bruel & Kjaer	4231	A0304215	2025-05-22	2026-05-21
15	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

## ELECTROSTATIC DISCHARGE

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	emtest/AMETEK	esd NX30.1	P2411285438	2025-05-26	2026-05-25
2	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

## ELECTRICAL FAST TRANSIENT IMMUNITY

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Immunity Simulative Generator	EM TEST	UCS500-M4	0101-34	2025-05-22	2026-05-21
2	Capacitive coupling clamp	3CTEST	EFTC	EC0441098	2025-05-22	2026-05-21
3	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

## RF COMMON MODE

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Simulator	FRANKONIA	CIT-10/75	A126A1195	2025-05-22	2026-05-21
2	CDN	FRANKONIA	CDN-M2+M3	A2210177	2025-05-22	2026-05-21
3	6dB Attenuator	FRANKONIA	DAM25W	1172040	2025-05-22	2026-05-21
4	Electromagnetic coupling injection clamp	ZHINAN	ZN23203	14017	2025-05-22	2026-05-21
5	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

## SURGES, LINE TO LINE AND LINE TO GROUND

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Immunity Simulative Generator	EM TEST	UCS500-M4	0101-34	2025-05-22	2026-05-21
2	Communication wave lightning generator	HTEC	HTSG 70	181701	2024-10-08	2025-10-07
3	Symmetrical data line coupling network	HTEC	HCN 8	182701	2024-10-08	2025-10-07
4	Data line decoupling network	HTEC	HDEC 8	182702	2024-10-08	2025-10-07
5	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

## VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Three phase power supply fault simulator	HTEC	HPFS 2003P	234711	2025-01-07	2026-01-06
2	Programmable AC fault power supply	HTEC	HV3P200T	234710	2025-01-07	2026-01-06
3	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-05-22	2026-05-21

Note: N/A means no calibration requirement



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 6. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix B for Photographs of Test Setup\_EMC

## 7. PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix C for Photographs of The EUT.

-----THE END OF REPORT-----

